

Red Hat Hybrid Cloud Console 1-latest

Integrating the Red Hat Hybrid Cloud Console with third-party applications

Configuring integrations between third-party tools and the Red Hat Hybrid Cloud Console

Last Updated: 2026-07-01

Red Hat Hybrid Cloud Console 1-latest Integrating the Red Hat Hybrid Cloud Console with third-party applications

Configuring integrations between third-party tools and the Red Hat Hybrid Cloud Console

Legal Notice

Copyright © Red Hat.

Except as otherwise noted below, the text of and illustrations in this documentation are licensed by Red Hat under the Creative Commons Attribution–Share Alike 3.0 Unported license . If you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, the Red Hat logo, JBoss, Hibernate, and RHCE are trademarks or registered trademarks of Red Hat, LLC. or its subsidiaries in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

XFS is a trademark or registered trademark of Hewlett Packard Enterprise Development LP or its subsidiaries in the United States and other countries.

The OpenStack ® Word Mark and OpenStack logo are trademarks or registered trademarks of the Linux Foundation, used under license.

All other trademarks are the property of their respective owners.

Abstract

You can configure Red Hat Hybrid Cloud Console notifications to integrate with third-party applications.

Table of Contents

PREFACE 4

CHAPTER 1. PREREQUISITES 5

CHAPTER 2. INTEGRATING COMMUNICATIONS APPLICATIONS WITH THE HYBRID CLOUD CONSOLE . 6
2.1. INTEGRATING MICROSOFT TEAMS WITH THE HYBRID CLOUD CONSOLE 6
2.1.1. Contacting support 6
2.1.2. Configuring incoming webhooks in Microsoft Teams 6
2.1.3. Configuring the Microsoft Teams integration in the Red Hat Hybrid Cloud Console 7
2.1.4. Creating the behavior group for the Microsoft Teams integration 9
2.2. INTEGRATING GOOGLE CHAT WITH THE RED HAT HYBRID CLOUD CONSOLE 10
2.2.1. Contacting support 11
2.2.2. Configuring incoming webhooks in Google Chat 11
2.2.3. Configuring the Google Chat integration in the Red Hat Hybrid Cloud Console 11
2.2.4. Creating the behavior group for the Google Chat integration 13
2.3. INTEGRATING SLACK WITH THE HYBRID CLOUD CONSOLE 14
2.3.1. Contacting support 14
2.3.2. Configuring incoming webhooks in Slack 15
2.3.3. Configuring the Slack integration in the Red Hat Hybrid Cloud Console 16
2.3.4. Creating the behavior group for the Slack integration 18

CHAPTER 3. INTEGRATING REPORTING AND AUTOMATION APPLICATIONS WITH THE HYBRID CLOUD CONSOLE 21
3.1. INSTALLING AND CONFIGURING THE RED HAT INSIGHTS (RED HAT LIGHTSPEED) APPLICATION FOR SPLUNK 21
3.1.1. Contacting support 21
3.1.2. Installing the Red Hat Insights (Red Hat Lightspeed) application for Splunk 21
3.1.3. Enabling the HEC token 28
3.1.4. Manually configuring a Notifications administrator group in your Hybrid Cloud Console account 29
3.1.5. Manually configuring a Splunk integration 30
3.1.6. Updating the Red Hat Insights application for Splunk 31
3.2. INTEGRATING SERVICENOW WITH THE RED HAT HYBRID CLOUD CONSOLE 33
3.2.1. Contacting support 33
3.2.2. Installing and configuring the ServiceNow Flow Templates for Red Hat Lightspeed application 33
3.3. INTEGRATING EVENT-DRIVEN ANSIBLE WITH THE RED HAT HYBRID CLOUD CONSOLE 36
3.3.1. Contacting support 36
3.3.2. Configuring Event-Driven Ansible 2.5 for integration with the Red Hat Hybrid Cloud Console 36
3.3.3. Creating the behavior group for the Event-Driven Ansible integration 39
3.4. INTEGRATING PAGERDUTY WITH THE RED HAT HYBRID CLOUD CONSOLE 40
3.4.1. Contacting support 40
3.4.2. Creating a PagerDuty service 41
3.4.3. Generating an integration key for an existing PagerDuty service 42
3.4.4. Adding a PagerDuty account as an integration 42
3.4.5. Creating the behavior group for the PagerDuty integration 44

CHAPTER 4. CONFIGURING A WEBHOOK INTEGRATION WITH THE HYBRID CLOUD CONSOLE 46
4.1. CONTACTING SUPPORT 46
4.2. CONFIGURING A WEBHOOK INTEGRATION WITH THE HYBRID CLOUD CONSOLE 46
4.3. CREATING THE BEHAVIOR GROUP FOR A WEBHOOK INTEGRATION 48

APPENDIX A. TROUBLESHOOTING HYBRID CLOUD CONSOLE INTEGRATIONS 50
A.1. TROUBLESHOOTING CONNECTION ISSUES BETWEEN THIRD-PARTY INTEGRATIONS AND RED HAT LIGHTSPEED 50

A.2. TROUBLESHOOTING HYBRID CLOUD CONSOLE INTEGRATION WITH SPLUNK 50
A.2.1. Splunk does not receive event notifications from the Hybrid Cloud Console 50
A.2.2. Cannot click links in the Events table in Splunk when using real-time search 51
A.3. TROUBLESHOOTING HYBRID CLOUD CONSOLE INTEGRATION WITH SERVICENOW 51

PREFACE

You can integrate some public clouds and third-party applications with the Hybrid Cloud Console. For information about integrating public clouds, see *Configuring cloud integrations for Red Hat services* .

You can integrate the Red Hat Hybrid Cloud Console with Splunk, ServiceNow, Slack, Event-Driven Ansible, Microsoft Teams, Google Chat, and more applications to route event-triggered notifications to those third-party applications. Integrating third-party applications expands the scope of notifications beyond emails and messages, so that you can view and manage Hybrid Cloud Console events from your preferred platform dashboard or communications tool.

To learn more about notifications, see *Configuring notifications on the Red Hat Hybrid Cloud Console* .

CHAPTER 1. PREREQUISITES

- You have Organization Administrator or Notifications administrator permissions for the Hybrid Cloud Console.
- You have the required configuration permissions for each third-party application that you want to integrate with the Hybrid Cloud Console.

CHAPTER 2. INTEGRATING COMMUNICATIONS APPLICATIONS WITH THE HYBRID CLOUD CONSOLE

Receive event notifications in your preferred communications application by connecting the Hybrid Cloud Console with Microsoft Teams, Google Chat, or Slack.

2.1. INTEGRATING MICROSOFT TEAMS WITH THE HYBRID CLOUD CONSOLE

You can configure the Red Hat Hybrid Cloud Console to send event notifications to all users on a new or existing channel in Microsoft Teams. The Microsoft Teams integration supports events from all services in the Hybrid Cloud Console. The Microsoft Teams integration uses incoming webhooks to receive event data.

2.1.1. Contacting support

If you have any issues with integrating the Hybrid Cloud Console with Microsoft Teams, contact Red Hat for support. To open a Red Hat support case directly from the Hybrid Cloud Console:

1. Click **Help** (the **?** icon) to open the help panel.
2. Select the **My support cases** tab.
3. Click **Open a support case** and add information about the issue.

Microsoft will not provide troubleshooting. The Hybrid Cloud Console integration with Microsoft Teams is fully supported by Red Hat.

2.1.2. Configuring incoming webhooks in Microsoft Teams

You can configure incoming webhooks in Microsoft Teams to receive event notifications from the Red Hat Hybrid Cloud Console in a Microsoft Teams channel.



IMPORTANT

The Microsoft Teams integration workflow now uses incoming webhooks with the Adaptive Card format. If you have an existing Microsoft Teams integration configured with the Hybrid Cloud Console, you must re-configure it using the new workflow described in this section before the end of 2025. For more information about incoming webhooks and Adaptive Cards, see Create Incoming Webhooks in the Microsoft Teams documentation.

Prerequisites

- You have administrator permissions for Microsoft Teams.
- You have Organization Administrator or Notifications administrator permissions for the Hybrid Cloud Console.

Procedure

1. In Microsoft Teams, find the **Workflows** app.


2. From the **Workflows** home page, click **Select a trigger** to open a drop-down list, then select **Build with Power Automate to see more triggers** from the list.
3. Click **Go To Power Automate**.
4. Configure the trigger:
    a. Enter *webhook* in the search bar.
    b. From the **Triggers** list, select the trigger for **When a Teams webhook request is received**
    c. For **Who can trigger the flow**, select *Anyone* from the drop-down list.
5. Click the **New step** button.
6. Configure the action:
    a. Enter *card* in the search bar for **Choose an operation**
    b. From the **Actions** list, select **Post card in a chat or channel**
    c. For **Post as**, ensure *Flow bot* is selected.
    d. For **Post in**, select *Channel*. Selecting *Channel* reveals more options.
    e. For **Team**, select the team you want to send event notifications to.
    f. For **Channel**, select the channel you want to send event notifications to.
    g. For **Adaptive Card**, click the list to open a dialog. Select **Adaptive Card** in the dialog under **Dynamic content**.
7. Click **Save**.
8. Copy the webhook URL:
    a. Click the trigger area (**When a Teams webhook request is received**) to expand the information.
    b. Refresh your screen if needed to build and display the **HTTP POST URL**.
    c. Copy the HTTP POST URL to configure the integration in the Hybrid Cloud Console.

2.1.3. Configuring the Microsoft Teams integration in the Red Hat Hybrid Cloud Console

After you configure Microsoft Teams for integration with the Hybrid Cloud Console, add the Microsoft Teams incoming webhook URL in the Hybrid Cloud Console so you can receive notifications about events from your Red Hat services in Microsoft Teams.

Prerequisites

- You are logged in to the Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions. For more information about setting up Notifications administrator permissions, see Configure User Access to manage notifications in the notifications documentation.



NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- You have the incoming webhook URL from Microsoft Teams.

Procedure

1. In the Hybrid Cloud Console, navigate to Settings > Integrations.
2. Click the **Communications** tab.
3. Click **Add integration**.
4. Select **Microsoft Office Teams** as the integration type, and then click **Next**.
5. In the **Integration name** field, enter a name for your integration (for example, *console-teams*).
6. Paste the incoming webhook URL (HTTP POST URL) that you copied from Microsoft Teams into the **Endpoint URL** field.
7. Click **Next**.
8. Optional: Associate events with the integration. Doing this automatically creates a behavior group.



NOTE

You can skip this step and associate the event types later.

   a. Select a product family, for example **OpenShift**, **Red Hat Enterprise Linux**, or **Console**.
   b. Select the event types you would like your integration to react to.

9. Click the **Integrations** tab.
10. Click **Add Integration**:
   a. In the **Integration name** field, enter a name for your integration (for example, *console-teams*).
   b. Select **Microsoft Teams** from the **Type** drop-down list.
   c. Paste the incoming webhook URL that you copied from Microsoft Teams into the **Endpoint URL** field.
   d. Click **Save** to enable the integration.
   Your Microsoft Teams integration is now listed on the **Integrations** > **Communications** page. Under **Last connection attempt**, the status is **Ready** to show the connection can accept notifications from the console.
11. To enable the integration, review the integration details and click **Submit**.

12. Refresh the **Integrations** page to show the Microsoft Teams integration in the **Integrations** > **Communications** list. Under **Last connection attempt**, the status is **Ready** to show the connection can accept notifications from the Hybrid Cloud Console.

Verification

Create a test notification to confirm you have correctly connected Microsoft Teams to the Hybrid Cloud Console:

1. Next to your Microsoft Teams integration on the **Integrations** > **Communications** page, click the options icon (⋮) and click **Test**.
2. In the **Integration Test** screen, enter a message and click **Send**. If you leave the field empty, the Hybrid Cloud Console sends a default message.
3. Open your Microsoft Teams channel and check for the message sent from the Hybrid Cloud Console.
4. In the Hybrid Cloud Console, go to **Notifications** > **Event Log** and check that the **Integration: Microsoft Teams** event is listed with a green label.

Additional resources

- Configure User Access to manage notifications

2.1.4. Creating the behavior group for the Microsoft Teams integration

A behavior group defines which notifications will be sent to external services such as Microsoft Teams when a specific event is received by the notifications service. You can link events from any Red Hat Hybrid Cloud Console service to your behavior group. For more information about behavior groups, see Configuring Hybrid Cloud Console notification behavior groups .

Prerequisites

- You are logged in to the Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions.



NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- The Microsoft Teams integration is configured. For information about configuring Microsoft Teams integration, see Section 2.1.2, “Configuring incoming webhooks in Microsoft Teams” .

Procedure

1. In the Hybrid Cloud Console, navigate to Settings > Notifications.
2. Under **Notifications**, select **Configure Events**.
3. Select the application bundle tab you want to configure event notification behavior for: **Red Hat Enterprise Linux**, **Console**, or **OpenShift**.
4. Click the **Behavior Groups** tab.

5. Click **Create new group** to open the **Create behavior group** wizard.
6. Type a name for the behavior group and click **Next**.
7. In the **Actions and Recipients** step, select **Integration: Microsoft Teams** from the **Actions** drop-down list.
8. From the **Recipient** drop-down list, select the name of the integration you created (for example, *console-teams*) and click **Next**.
9. In the **Associate event types** step, select one or more events for which you want to send notifications (for example, **Policies: Policy triggered**) and click **Next**.
10. Review your behavior group settings and click **Finish**. The new behavior group appears on the **Notifications** > **Configure Events** page in the **Behavior Groups** tab.

Verification

1. Create an event that will trigger a Hybrid Cloud Console notification. For example, run **insights-client** on a system that will trigger a policy event.
2. Wait a few minutes, and then navigate to Microsoft Teams.
3. Select the channel that you configured from the left menu. If the setup process succeeded, the page displays a notification from the Hybrid Cloud Console. The notification contains the name of the host that triggered the event and a link to that host, as well as the number of events and a link that opens the corresponding Hybrid Cloud Console service.
4. In the Hybrid Cloud Console, go to **Settings** > **Notifications** > **Event Log** and check for an event that shows the label **Integration: Microsoft Teams**.
   - If the label is green, the notification succeeded.
   - If the label is red, verify that the incoming webhook connector was properly created in Microsoft Teams, and that the correct incoming webhook URL is added in the Hybrid Cloud Console integration configuration.



NOTE

See Troubleshooting notification failures in the notifications documentation for more details.

Additional resources

- Create Incoming Webhooks
- Webhooks and Connectors
- Adaptive Cards
- Troubleshooting Hybrid Cloud Console integrations

2.2. INTEGRATING GOOGLE CHAT WITH THE RED HAT HYBRID CLOUD CONSOLE

You can configure the Red Hat Hybrid Cloud Console to send event notifications to a new or existing Google space in Google Chat. The Google Chat integration supports events from all Hybrid Cloud Console services.

The integration with the Hybrid Cloud Console notifications service uses incoming webhooks to receive event data. Each Red Hat account configures how and who can receive these events, with the ability to perform actions depending on the event type.

2.2.1. Contacting support

If you have any issues with the Hybrid Cloud Console integration with Google Chat, contact Red Hat for support. To open a Red Hat support case directly from the Hybrid Cloud Console:

1. Click **Help** (the **?** icon) to open the help panel.
2. Select the **My support cases** tab.
3. Click **Open a support case** and add information about the issue.

Google will not provide troubleshooting. The Hybrid Cloud Console integration with Google Chat is fully supported by Red Hat.

2.2.2. Configuring incoming webhooks in Google Chat

In Google spaces, create a new webhook to connect with the Hybrid Cloud Console.

Prerequisites

- You have a new or existing Google space in Google Chat.

Procedure

1. In your Google space, click the arrow on the space name to open the dropdown menu:
   a. Select **Apps & Integrations**.
   b. Click **Webhooks**.
2. Enter the following information in the **Incoming webhooks** dialog:
   a. Enter a name for the integration (for example, *Engineering Google Chat*).
   b. Optional: To add an avatar for the notifications, enter a URL to an image.
   c. Click **Save** to generate the webhook URL.
   d. Copy the webhook URL to use for configuration in the Hybrid Cloud Console.

Additional resources

- Send messages to Google Chat with incoming webhooks

2.2.3. Configuring the Google Chat integration in the Red Hat Hybrid Cloud Console

Create a new integration in the Hybrid Cloud Console using the webhook URL from Google Chat.

Prerequisites

- You are logged in to the Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions. For more information about setting up Notifications administrator permissions, see Configure User Access to manage notifications in the notifications documentation.




NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- You have a Google Chat incoming webhook.

Procedure

1. In the Hybrid Cloud Console, navigate to Settings > Integrations.
2. Select the **Communications** tab.
3. Click **Add integration**.
4. Select **Google Chat** as the integration type, and then click **Next**.
5. In the **Integration name** field, enter a name for your integration (for example, *console-gchat*).
6. Paste the incoming webhook URL that you copied from your Google space into the **Endpoint URL** field, and click **Next**.
7. Optional: Associate events with the integration. Doing this automatically creates a behavior group.



NOTE

You can skip this step and associate the event types later.

   a. Select a product family, for example **OpenShift**, **Red Hat Enterprise Linux**, or **Console**.

   b. Select the event types you would like your integration to react to.

8. To enable the integration, review the integration details and click **Submit**.
9. Refresh the **Integrations** page to show the Google Chat integration in the **Integrations** > **Communications** list. Under **Last connection attempt**, the status is **Ready** to show the connection can accept notifications from the Hybrid Cloud Console.

Verification

Create a test notification to confirm you have successfully connected Google Chat to the Hybrid Cloud Console:

1. Next to your Google Chat integration on the **Integrations** > **Communications** page, click the options icon (⋮) and click **Test**.

2. In the **Integration Test** screen, enter a message and click **Send**. If you leave the field empty, the Hybrid Cloud Console sends a default message.
3. Open your Google space and check for the message sent from the Hybrid Cloud Console.
4. In the Hybrid Cloud Console, go to **Notifications** > **Event Log** and check that the **Integration: Google Chat** event is listed with a green label.

Additional resources

- Configure User Access to manage notifications

2.2.4. Creating the behavior group for the Google Chat integration

A behavior group defines which notifications will be sent to external services such as Google Chat when a specific event is received by the notifications service. You can link events from any Red Hat Hybrid Cloud Console service to your behavior group.

Prerequisites

- You are logged in to the Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions.



NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- You have configured the Google Chat integration.


Procedure

1. In the Hybrid Cloud Console, navigate to Settings > Notifications.
2. Under **Notifications**, select **Configure Events**.
3. Select the application bundle tab you want to configure event notification behavior for: **Red Hat Enterprise Linux**, **Console**, or **OpenShift**.
4. Click the **Behavior Groups** tab.
5. Click **Create new group** to open the **Create behavior group** wizard.
6. Type a name for the behavior group and click **Next**.
7. In the **Actions and Recipients** step, select **Integration: Google Chat** from the **Actions** drop-down list.
8. From the **Recipient** drop-down list, select the name of the integration you created (for example, *console-gchat*) and click **Next**.
9. In the **Associate event types** step, select one or more events for which you want to send notifications (for example, **Policies: Policy triggered**) and click **Next**.

10. Review your behavior group settings and click **Finish**. The new behavior group is listed on the **Notifications** page.

Verification

1. Create an event that will trigger a Hybrid Cloud Console notification. For example, run **insights-client** on a system that will trigger a policy event.
2. Wait a few minutes, and then navigate to Google Chat.
3. In your Google Space, check for notifications from the Hybrid Cloud Console.
4. In the Hybrid Cloud Console, go to **Settings** > **Notifications** > **Event Log** and check for an event that shows the label **Integration: Google Chat**.
   - If the label is green, the notification succeeded.
   - If the label is red, the integration might need to be adjusted.
5. If the integration is not working as expected, verify that the incoming webhook connector was properly created in Google Chat, and that the correct incoming webhook URL is added in the Hybrid Cloud Console integration configuration.



NOTE

See Troubleshooting notification failures in the notifications documentation for more details.

Additional resources

- Troubleshooting Hybrid Cloud Console integrations
- Google Chat documentation about incoming webhooks
- Configuring Hybrid Cloud Console notification behavior groups

2.3. INTEGRATING SLACK WITH THE HYBRID CLOUD CONSOLE

You can configure the Hybrid Cloud Console to send event notifications to a Slack channel or directly to a user. The Slack integration supports events from all Hybrid Cloud Console services.



NOTE

The Slack integration in this example is configured for Red Hat Enterprise Linux. The integration also works with Red Hat OpenShift and Hybrid Cloud Console events.

The Slack integration uses incoming webhooks to receive event data.

2.3.1. Contacting support

If you have any issues with the Hybrid Cloud Console integration with Slack, contact Red Hat for support. Slack will not provide troubleshooting. The Hybrid Cloud Console integration with Slack is fully supported by Red Hat.

To open a Red Hat support case directly from the Hybrid Cloud Console:

1. Click **Help** (the **?** icon) to open the help panel.
2. Select the **My support cases** tab.
3. Click **Open a support case** and add information about the issue.

2.3.2. Configuring incoming webhooks in Slack

To prepare Slack for integration with the Hybrid Cloud Console, you must configure incoming webhooks in Slack.

Prerequisites

- You have owner or admin permissions to the Slack instance where you want to add incoming webhooks.
- You have App Manager permissions to add Slack apps to a channel.
- You have a Slack channel or user to receive notifications.

Procedure

1. Create a Slack app:
   a. Go to the Slack API web page and click the **Create your Slack app** button. This opens the **Create an app** dialog.
   b. Select **From scratch** to use the Slack configuration UI to create your app.
   c. Enter a name for your app and select the workspace where you want to receive notifications.



NOTE

If you see a message that administrator approval is required, you can request approval in the next step.

   d. Click **Create App** to finish creating the Slack app.
2. Enable incoming webhooks:
   a. Under the **Features** heading in the navigation panel, click **Incoming Webhooks**.
   b. Toggle the **Activate Incoming Webhooks** switch to **On**.
   c. Click the **Request to Add New Webhook** button. If required, enter a message to your administrators to grant access to your app and click **Submit Request**. A success message confirms you have configured this correctly.
3. Create an incoming webhook:
   a. Under **Settings** in the navigation panel, click **Install App**.
   b. In the **Install App** section, click the **Install to *workspace*** button.

c. Select the channel where you want your Slack app to post notifications, or select a user to send notifications to as direct messages.

d. Click **Allow** to save changes.

4. Optional: Configure how your Hybrid Cloud Console notifications appear in Slack:

a. Under **Settings** in the navigation panel, click **Basic Information**.

b. Scroll down to **Display Information**.

c. Edit your app name, description, icon, and background color as desired.

d. Click **Save Changes**.

5. Copy the webhook URL:

a. Under **Features**, click **Incoming Webhooks**.

b. Click the **Copy** button next to the webhook URL. You will use the URL to set up the integration in the Hybrid Cloud Console in Section 2.3.3, "Configuring the Slack integration in the Red Hat Hybrid Cloud Console".

Verification

- Open the Slack channel or user you selected during configuration, and check for a message confirming you have added the integration.

Additional resources

- Sending messages using incoming webhooks
- Build a workflow: Create a workflow that starts outside of Slack
- Managing app approvals in Enterprise Grid workspaces
- Slack Help Center

2.3.3. Configuring the Slack integration in the Red Hat Hybrid Cloud Console

After you have configured an incoming webhook in Slack, you can configure the Hybrid Cloud Console to send event notifications to the Slack channel or user you configured.

Prerequisites

- You are logged in to the Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions. For more information about setting up Notifications administrator permissions, see Configure User Access to manage notifications in the notifications documentation.

Procedure

1. If necessary, go to the Slack API web page and copy the webhook URL that you configured.



NOTE

See Section 2.3.2, "Configuring incoming webhooks in Slack" for the steps to create a Slack webhook URL.

2. In the Hybrid Cloud Console, navigate to Settings > Integrations.
3. Select the **Communications** tab.
4. Click **Add integration**.
5. Select **Slack** as the integration type and click **Next**.
6. Enter a name for the integration (for example, *My Slack notifications*).
7. Paste the Slack webhook URL that you copied from Slack into the **Workspace URL** field and click **Next**.
8. Optional: Associate events with the integration. Doing this automatically creates a behavior group.



NOTE

You can skip this step and associate the event types later.

   a. Select a product family, for example **OpenShift**, **Red Hat Enterprise Linux**, or **Console**.
   b. Select the event types you want your integration to react to and click **Next**.

9. To enable the integration, review the integration details and click **Submit**.
10. Refresh the **Integrations** page to show the Slack integration in the **Integrations** > **Communications** list. Under **Last connection attempt**, the status is **Ready** to show the connection can accept notifications from the Hybrid Cloud Console.

Verification

Create a test notification to confirm you have successfully connected Slack to the Hybrid Cloud Console:

1. Next to your Slack integration on the **Integrations** > **Communications** page, click the options icon (⋮) and click **Test**.
2. In the **Integration Test** screen, enter a message and click **Send**. If you leave the field empty, the Hybrid Cloud Console sends a default message.
3. Open the Slack channel you configured and check for the message sent from the Hybrid Cloud Console.
4. In the Hybrid Cloud Console, go to **Notifications** > **Event Log** and check that the **Integration: Slack** event is listed with a green label.

Additional resources

- Configure User Access to manage notifications

2.3.4. Creating the behavior group for the Slack integration

A behavior group defines which notifications will be sent to external services such as Slack when a specific event is received by the notifications service. You can link events from any Red Hat Hybrid Cloud Console service to your behavior group.

Prerequisites

- You are logged in to the Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions.




NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- You have configured the Slack integration.

Procedure

1. In the Hybrid Cloud Console, navigate to Settings > Notifications.
2. Under **Notifications**, select **Configure Events**.
3. Select the application bundle tab you want to configure event notification behavior for: **Red Hat Enterprise Linux**, **Console**, or **OpenShift**.
4. Click the **Behavior Groups** tab.
5. Click **Create new group** to open the **Create behavior group** wizard.
6. Enter a name for the behavior group and click **Next**.
7. In the **Actions and Recipients** step, select **Integration: Slack** from the **Actions** drop-down list.
8. From the **Recipient** drop-down list, select the name of the integration you created (for example, *My Slack notifications*) and click **Next**.

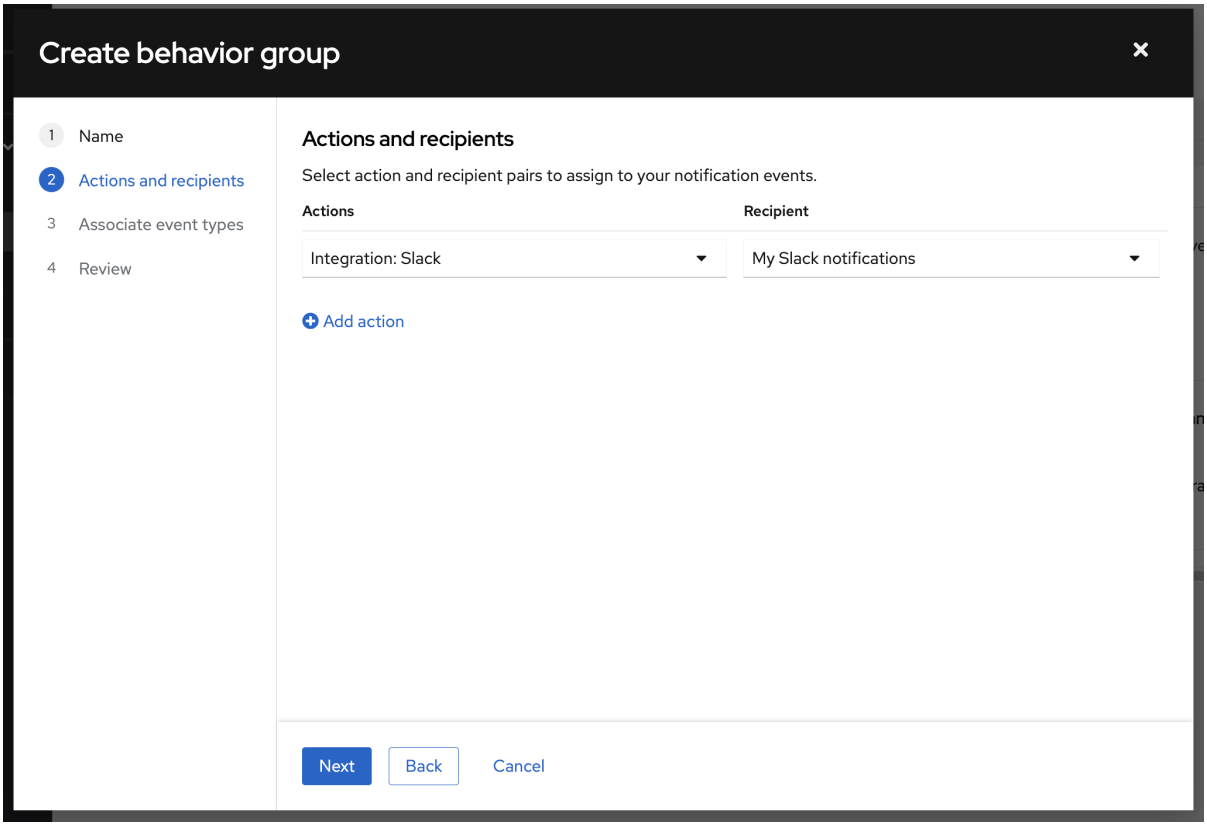

9. In the **Associate event types** step, select one or more events for which you want to send notifications (for example, **Policies: Policy triggered**) and click **Next**.


10. Review your behavior group settings and click **Finish**. The new behavior group appears on the **Notifications** > **Configure Events** page in the **Behavior Groups** tab.



NOTE

You can create and edit multiple behavior groups to include any additional platforms that the notifications service supports.

11. Select **Settings** > **Integrations** and click the **Communications** tab. When the Slack integration is ready to send events to Slack, the **Last connection attempt** column shows **Ready**. If the notification reached Slack successfully, the **Last connection attempt** column shows **Success**.

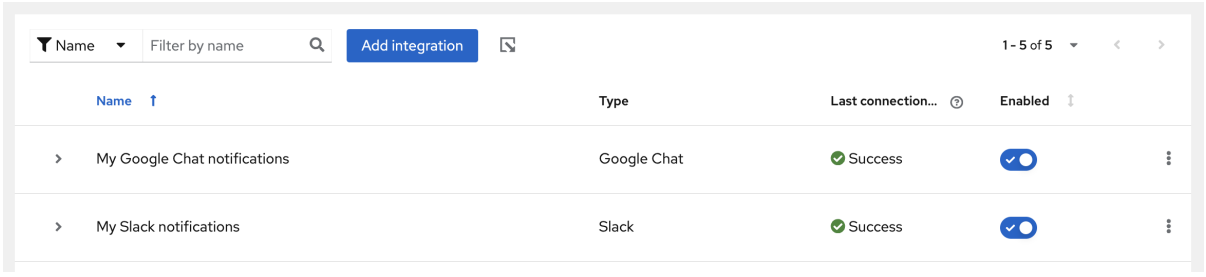

Verification

1. Create an event that will trigger a Hybrid Cloud Console notification. For example, run **insights-client** on a system that will trigger a policy event.

2. Wait a few minutes, and then navigate to Slack.

3. In your Slack channel, check for notifications from the Hybrid Cloud Console.

4. In the Hybrid Cloud Console, go to **Settings** > **Notifications** > **Event Log** and check for an event that shows the label **Integration: Slack**.
    - If the label is green, the notification succeeded.
    - If the label is red, the integration might need to be adjusted.
5. If the integration is not working as expected, verify that the incoming webhook connector was properly created in Slack, and that the correct incoming webhook URL is added in the Hybrid Cloud Console integration configuration.



NOTE

See Troubleshooting notification failures in the notifications documentation for more details.

Additional resources

- Sending messages using incoming webhooks
- Configuring Hybrid Cloud Console notification behavior groups
- Troubleshooting Hybrid Cloud Console integrations

CHAPTER 3. INTEGRATING REPORTING AND AUTOMATION APPLICATIONS WITH THE HYBRID CLOUD CONSOLE

Receive and manage event notifications where you manage other sources of data by connecting the Hybrid Cloud Console with Splunk, ServiceNow, Event-Driven Ansible, or PagerDuty.

3.1. INSTALLING AND CONFIGURING THE RED HAT INSIGHTS (RED HAT LIGHTSPEED) APPLICATION FOR SPLUNK

The Red Hat Insights (Red Hat Lightspeed) application for Splunk forwards selected Hybrid Cloud Console events to Splunk. The application seamlessly integrates with the Hybrid Cloud Console, so that you can focus on handling the data on the Splunk application side in the same way that you manage other sources of data. After the integration has been configured, you can view and manage Hybrid Cloud Console notifications from the Splunk dashboard without having to open the Red Hat Hybrid Cloud Console.

3.1.1. Contacting support

If you have any issues with the Red Hat Insights application for Splunk, contact Red Hat for support. To open a Red Hat support case directly from the Hybrid Cloud Console:

1. Click **Help** (the **?** icon) to open the help panel.
2. Select the **My support cases** tab.
3. Click **Open a support case** and add information about the issue.


Splunk will not provide troubleshooting. The Red Hat Insights application for Splunk is fully supported by Red Hat.

3.1.2. Installing the Red Hat Insights (Red Hat Lightspeed) application for Splunk

Install and configure the Red Hat Insights (Red Hat Lightspeed) application for Splunk to integrate Splunk with the Hybrid Cloud Console so that Splunk can receive event notifications from the Hybrid Cloud Console. The setup automation performs the following tasks:

- Creates a user group with the Notifications administrator role using Organization Administrator permissions. You can also create the user group manually. For more information about manual configuration, see Manually configuring a Notifications administrator group in your Hybrid Cloud Console account.
- Uses the Splunk HEC URL and HEC token to create a new integration called SPLUNK_AUTOMATION, with the integration type Splunk.
- Creates a new behavior group called SPLUNK_AUTOMATION_GROUP on the RHEL bundle. The group includes an action to send notifications to the SPLUNK_AUTOMATION Splunk integration.
- Assigns the new behavior group SPLUNK_AUTOMATION_GROUP to all Hybrid Cloud Console services. This forwards the events from all services to Splunk. Currently, the behavior group forwards events from the Advisor, Policies, Drift, Compliance, Malware Detection, Patch, and Vulnerability services.

When Splunk begins to receive notifications from the Hybrid Cloud Console, the Red Hat Insights application for Splunk dashboard shows event activity. Each number contains a hyperlink to the Hybrid Cloud Console.

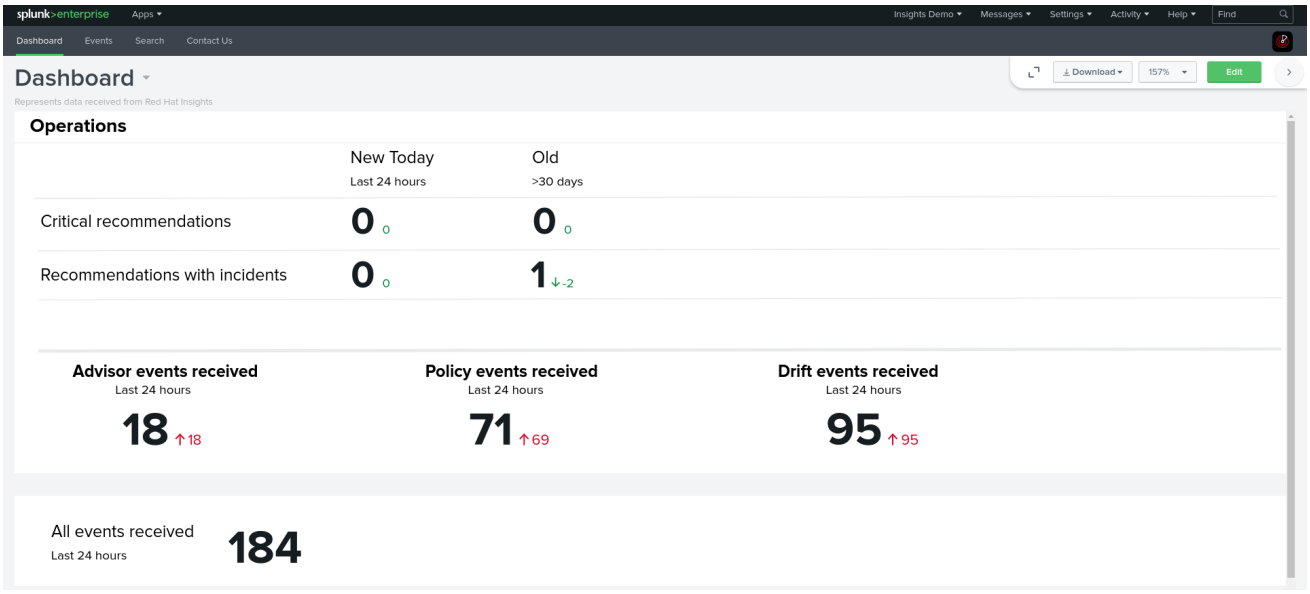


Prerequisites

- You have Organization Administrator permissions for the Hybrid Cloud Console.
- You have Splunk login credentials:
  - To install applications on Splunk Cloud Platform, you must have the Splunk Cloud Administrator **sc-admin** role.
  - To install applications on Splunk Enterprise, you must have the **admin** role. For more information about creating the **admin** role, see Create secure administration credentials in the Splunk documentation.
- Popup blockers are disabled in your browser.

Procedure

1. Install the Red Hat Insights (Red Hat Lightspeed) application for Splunk:
   a. Log in to Splunk.
   b. On the home page, click **Find more apps** under the **Apps** heading on the left of the screen. The **Browse More Apps** page opens.
   c. Enter **Red Hat Insights** in the filter box and then press the Enter key.
   d. Select **Red Hat Insights** and then click **Install**.
   e. Confirm or enter your Splunk username and password and then click **Agree and Install**. When the installation process completes, the **Complete** dialog box opens.
2. Set up the Red Hat Insights application for Splunk:
   a. In the **Complete** dialog box, click **Open the App**. The **App configuration** page opens.

b. Click **Continue to app setup page** The **Set up integration with Red Hat Insights**page opens. The page includes the HTTP Event Collector (HEC) name and default index fields.

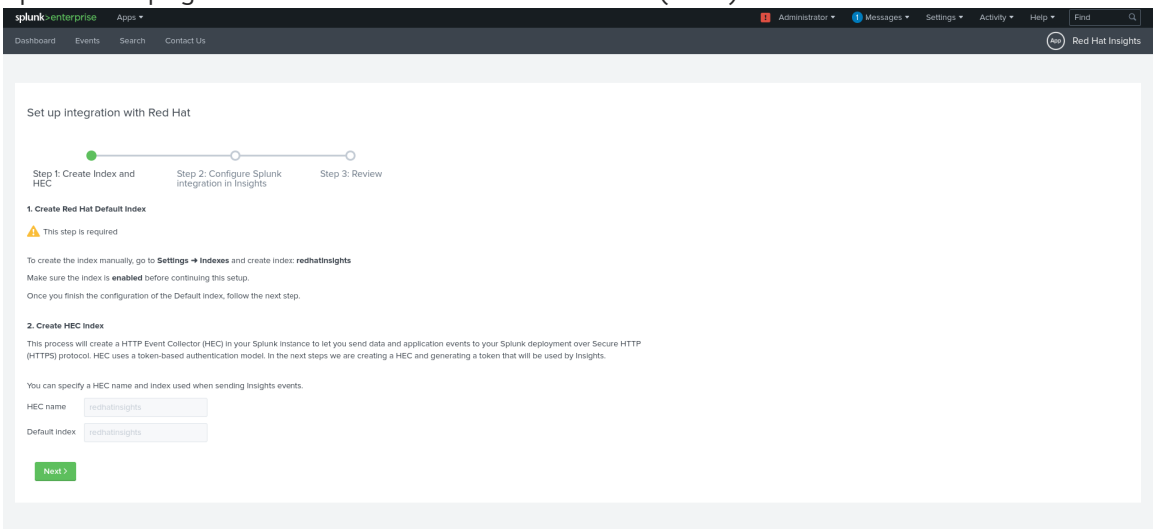

c. Under **Create Red Hat Default Index**, click **Settings > Index**. The **Indexes** page opens in a new tab.

d. On the **Indexes** page, click **New Index**.

e. Type a name for the index in the **Name** field (for example, **redhatinsights**).

f. Enter values in the **Max raw data size** and **Searchable retention (days)** field.


g. Click **Save**. The index you created appears in the **Indexes** list. It is enabled by default.

h. On the first Splunk screen, on the **Set up integration with Red Hat**page, type the name for the HEC in the HEC name field (for example, **redhatinsights**).

i. Type the name of the index you just created in the **Default** index field (for example, **redhatinsights**) and then click **Next**.

j. Click **Review** and then click **Submit**. The HEC name that you created appears in the **HEC Name** field.

k. Click **Next** to create the HEC URL and HEC Token.

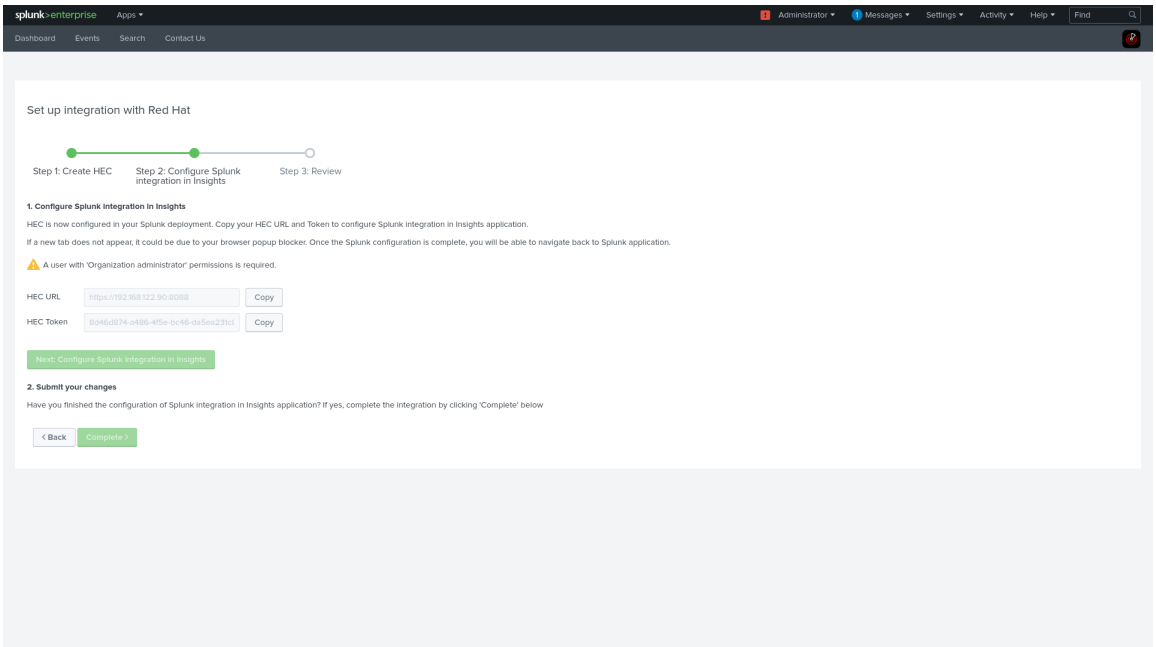

3. Configure Splunk integration in Red Hat Insights (Red Hat Lightspeed):

   a. Click **Copy** to copy the HEC URL value in Splunk Enterprise.

   b. Click **Next: Configure Splunk integration in Red Hat Insights** The Hybrid Cloud Console opens in a new browser tab.

   NOTE

   The **Next: Configure Splunk integration in Red Hat Insights** button is disabled until you click the **Copy** button for either the HEC URL or HEC token.

   c. In the Hybrid Cloud Console, navigate to **Settings** > **Integrations**.

   d. Click the **Reporting & Automation** tab.

   e. Click **Add Integration**.

   f. Click **Splunk** and then click **Next**.

   g. Enter a name for the integration (for example, **SPLUNK_INTEGRATION**).

   h. Paste the HEC URL value into the **Endpoint URL** field.


   i. Enter the Splunk HTTP event collector token in the **Secret token** field.

   NOTE

   If the new tab for the console does not open, disable the popup blocker in your browser.

   j. Add the port, if needed. The default port for Splunk Cloud Platform is 443. The default port for Splunk Enterprise and Splunk Cloud free trial is 8088.

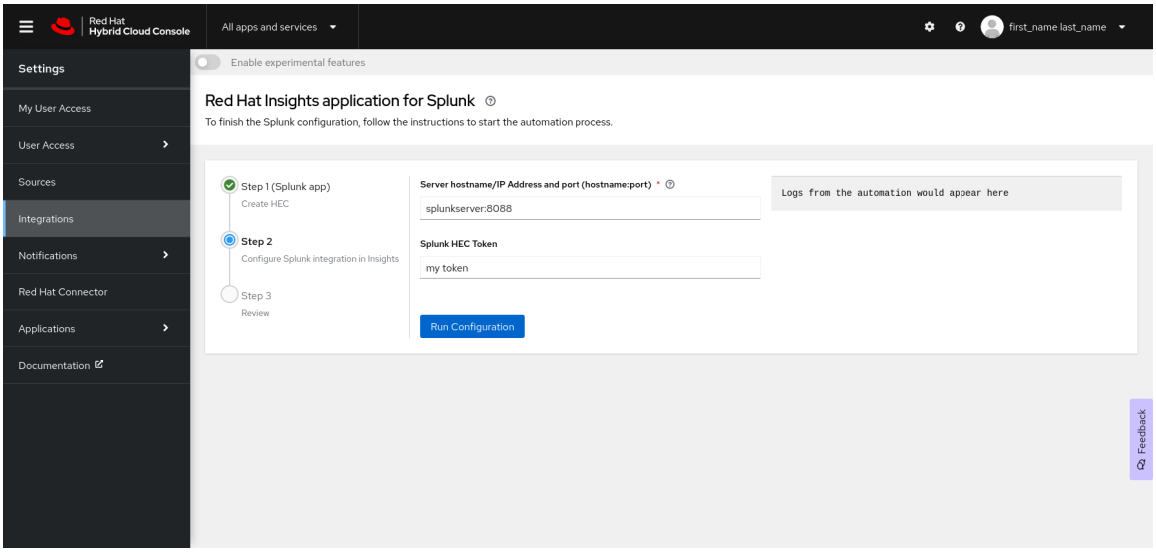

   k. Optional: If you are using Splunk Cloud, edit the HEC URL that you pasted into the **Splunk HEC URL** field on the **Integrations** page to match the Splunk Cloud format:

      - Use the following format for Splunk Cloud Platform on all clouds except Google Cloud:

> <protocol>://http-inputs-<host>.splunkcloud.com:<port>

- Use the following format for Splunk Cloud Platform on Google Cloud:

> <protocol>://http-inputs.<host>.splunkcloud.com:<port>

Replace the following placeholders:

- **protocol**: Either **http** or **https**.
- **host**: The name of the Splunk Cloud Platform instance that runs the HEC, followed by the domain **.splunkcloud.com**.
- **port**: The HEC port number (443 by default on Splunk Cloud Platform instances). Examples:
- Splunk Cloud Platform on GCP using JSON:

> https://http-inputs.myhost.splunkcloud.com:443


- Splunk Cloud free trial on AWS using raw events:

> https://http-inputs-otherhost.splunkcloud.com:443


4. Complete the setup process:

a. Copy the **HEC Token** value in Splunk and paste it into the **Splunk HEC Token** field in on the Hybrid Cloud Console **Integrations** page.

b. In the Hybrid Cloud Console, click **Run configuration**. The Hybrid Cloud Console sets up the integration, creates the behavior group, and associates Hybrid Cloud Console events to the behavior group. The status message section on the right side of the page shows the status of each of these actions.

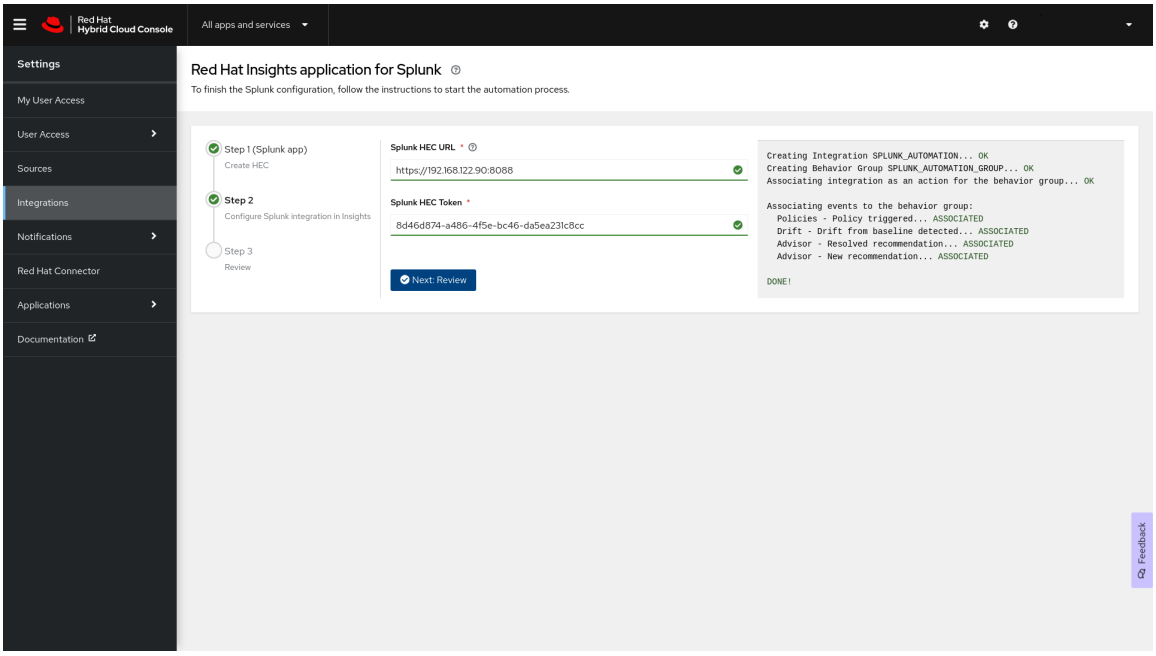


c. When the setup completes successfully, click **Next: Review**. The application returns the message **Splunk integration in Insights completed**.

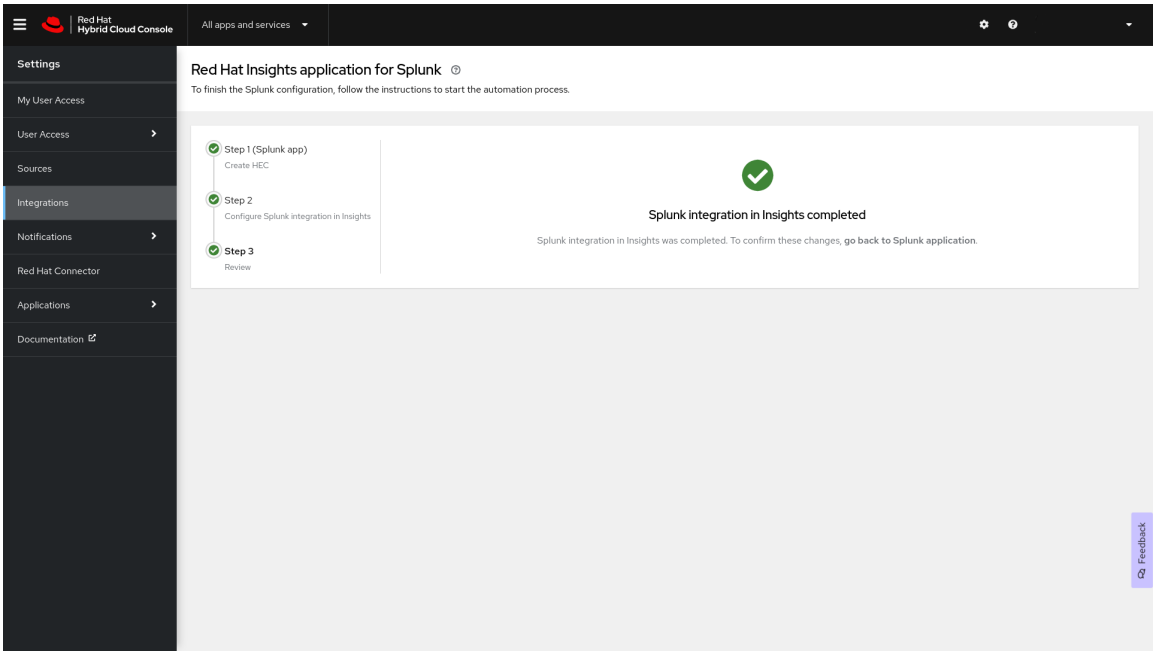


d. Click **Go back to the Splunk application** This redirects you to the **Set up integration with Red Hat** screen in Splunk.

e. Click **Finish set up** to complete the setup in Splunk.

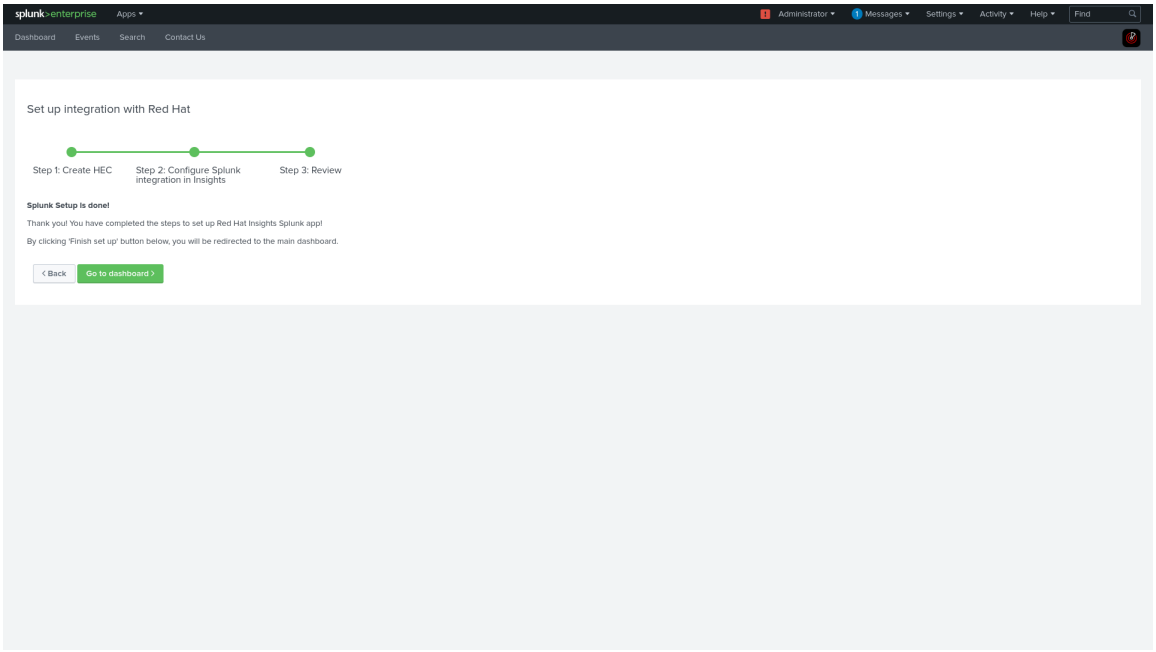

f. Click **Go to dashboard** to be redirected to your Splunk dashboard.

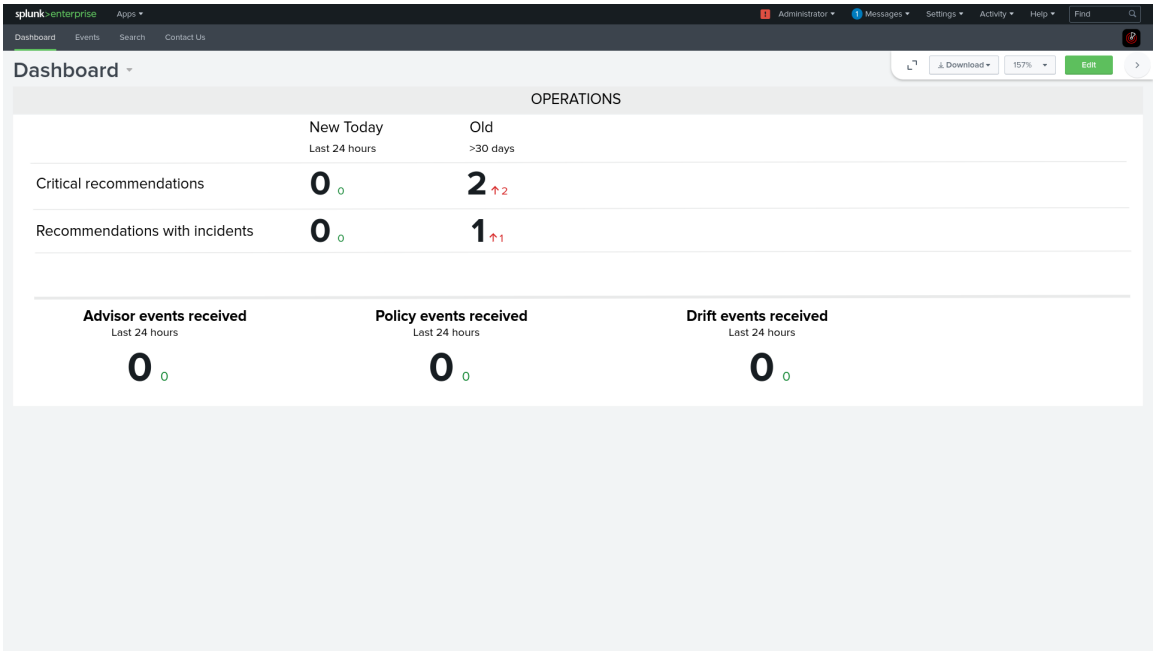




NOTE

If the integration configuration fails during the Red Hat Insights application setup process, contact Red Hat support.

5. To view a list of Hybrid Cloud Console events on the Splunk dashboard, click the **Events** tab. Each event is hyperlinked to the Hybrid Cloud Console.

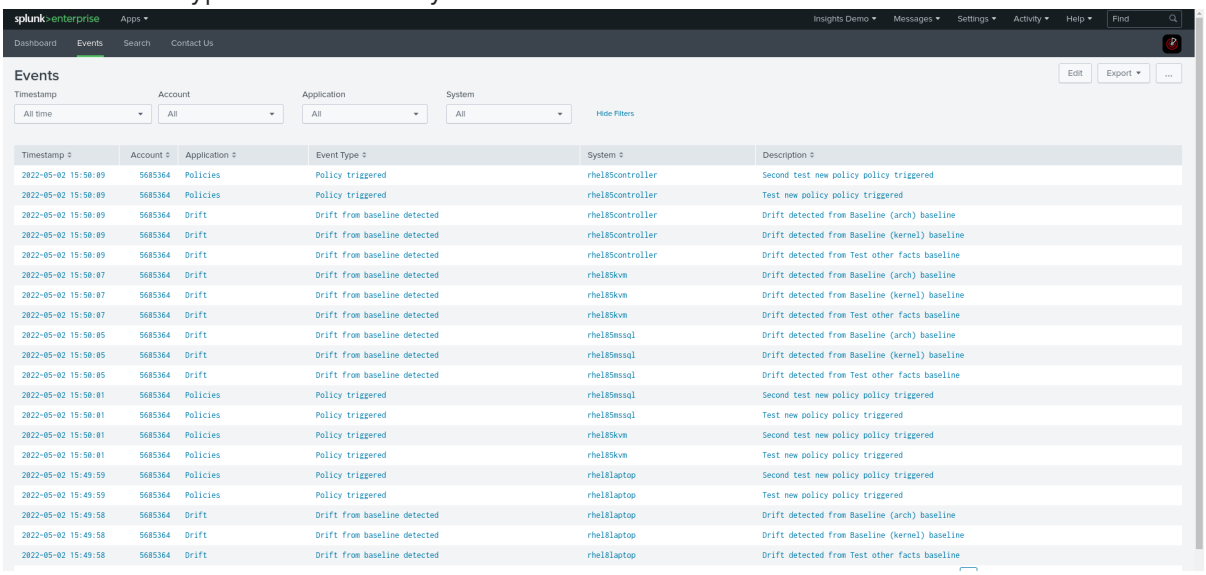

Additional resources

- Splunk Enterprise
- Install apps on your Splunk Cloud deployment
- Configure HTTP Event Collector on Splunk Enterprise
- Configure HTTP Event Collector on Splunk Cloud Platform
- Configure User Access to manage notifications

- Configure notifications on the Red Hat Hybrid Cloud Console
- Manually configuring a Notifications administrator group in your Hybrid Cloud Console account

3.1.3. Enabling the HEC token


Before Splunk can receive Hybrid Cloud Console events, you must enable the HEC token. For more information about the HEC token in Splunk Cloud, see Configure HTTP Event Collector on Splunk Cloud Platform in the Splunk documentation.

Prerequisites


- You have Organization Administrator permissions for the Hybrid Cloud Console.
- You have Splunk login credentials:
  - On Splunk Cloud Platform, you must have the Splunk Cloud Administrator **sc-admin** role.
  - On Splunk Enterprise, you must have the **admin** role. For more information about creating the **admin** role, see Create secure administration credentials in the Splunk documentation.

Procedure


1. From the Splunk home page, navigate to **Settings**.
2. Select **Data Inputs**, and then select **HTTP Event Collector**. The HTTP Event Collector page shows the HEC, its Token value, the corresponding index that you selected during setup, and the status of the HEC.

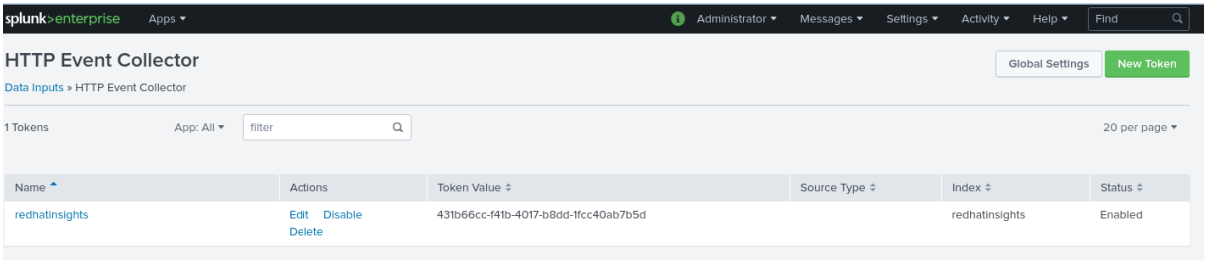

3. Click **Global Settings** in the upper right corner of the page. The Edit Global Settings dialog box displays.

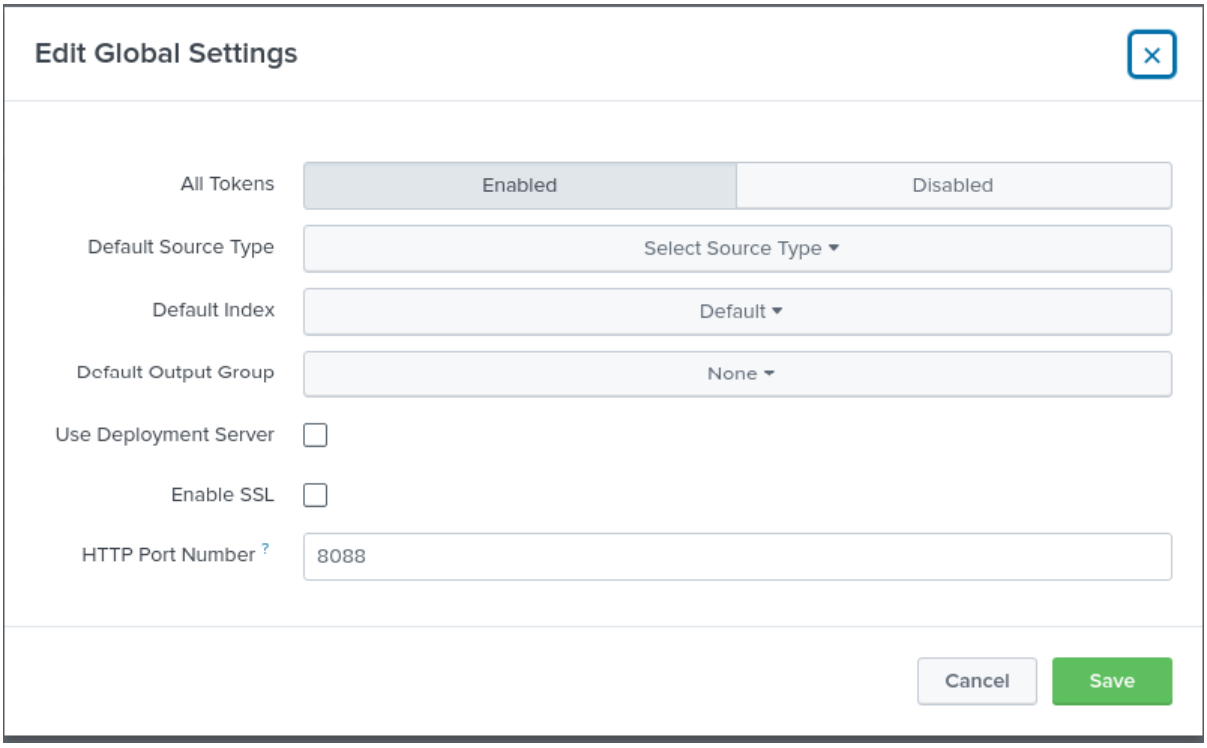

4. Select **Enabled**. This enables the HEC token that was automatically created during the setup process.



NOTE

The HEC token uses a default HTTP port number of 8088. If you are using a different port (such as port 443 for Splunk Cloud), you must update your Hybrid Cloud Console Splunk integration to match.

Additional resources

- Configure HTTP Event Collector on Splunk Cloud Platform
- Set up and use HTTP Event Collector on Splunk Enterprise

3.1.4. Manually configuring a Notifications administrator group in your Hybrid Cloud Console account

The Red Hat Insights (Red Hat Lightspeed) application for Splunk automated installation and setup process automatically configures a Notifications administrator role and group in your Hybrid Cloud Console account. However, you can create the Notifications administrator manually.

Prerequisites

- You are logged in to the Hybrid Cloud Console with the Organization Administrator role.



NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

Procedure

1. Click **Settings** > **Identity & Access Management**
2. Under **Identity & Access Management**, expand **User Access** if necessary, and select **Groups**.
3. Click **Create group**. The **Name and description** page appears.
4. Enter a name for the group (for example, **splunknotifgroup**), enter a description, and then click **Next**. The **Add roles** page opens.
5. To add the Notifications administrator role, enter **notif** in the search box.
6. Select **Notifications administrator** from the search results list, and then click **Next**. The **Add Members** page opens.
7. Select the users to add to this group. You can use the search box to search for specific names.
8. Click **Next**. The **Review Details** page opens.
9. Review the information, and then click **Submit** to create the group.
10. Click **Exit**. The **Groups** page opens.

Verification

1. Enter the new group name in the search box.
2. Click the group name. The page for the group opens.
3. On the **Roles** tab, verify that the group has the **Notifications administrator** role.
4. Click the **Members** tab and verify that the group includes the correct members.

3.1.5. Manually configuring a Splunk integration

The Red Hat Insights (Red Hat Lightspeed) application for Splunk automated installation and setup process automatically configures Splunk integration to your Hybrid Cloud Console account. Use this procedure if you want to configure the integration manually.

Prerequisites

- You have an HTTP Event Collector (HEC) URL from Splunk Cloud or Splunk Enterprise.
- You have the HEC token value from Splunk Cloud or Splunk Enterprise.
- You are logged in to the Hybrid Cloud Console with the Notifications administrator role.



NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- Your Splunk instance has an SSL certificate that is signed by a globally trusted certificate authority (CA).

- Your Splunk instance must be accessible to the Red Hat IP addresses listed in Troubleshooting connection issues between third-party integrations and Red Hat Lightspeed.

Procedure

1. In the Hybrid Cloud Console, navigate to Settings > Integrations.
2. Select the **Reporting & Automation** tab.
3. Click **Add integration**.
4. Select **Splunk** as the integration type, and then click **Next**.
5. Enter a name for your new integration in the **Integration name** field (for example, **redhat_splunk**).
6. In the **Endpoint URL** field, add your Splunk HEC endpoint URL:
   a. For Splunk Enterprise, Splunk uses port 8088 by default. For example: **https://<splunk-endpoint>:8088**
   b. For Splunk Cloud, Splunk uses port 443. For more information about Splunk Cloud on AWS or GCP, see Send data to HTTP Event Collector .

   NOTE

   The service automatically adds **<endpoint>** (the **http** path). You do not need to include it in the form input for the Endpoint URL.

   The following examples show endpoint URLs with the correct port numbers for Splunk platforms.

   - On premise (Splunk Enterprise): **https://splunk.company.com:8088**
   - Splunk Cloud (on AWS): **https://http-inputs-mycompany.splunkcloud.com:443**
   - Splunk Cloud (on GCP): **https://http-inputs.mycompany.splunkcloud.com:443**
7. In the **Secret token** field, add the Splunk HEC token value.
8. Click **Next**.
9. Review the integration details and click **Submit**.

3.1.6. Updating the Red Hat Insights application for Splunk

To update the Red Hat Insights (Red Hat Lightspeed) application for Splunk, the procedure is similar to the steps required for the initial installation. These steps ensure the application is properly set up with your environment after the update.



NOTE

Updating the Red Hat Insights application does not trigger a Splunk restart. Additionally, no system restart is required as part of this process.

Prerequisites

- You have Organization Administrator permissions for the Hybrid Cloud Console.
- You have Splunk login credentials:
  - To install applications on Splunk Cloud Platform, you must have the Splunk Cloud Administrator **sc-admin** role.
  - To install applications on Splunk Enterprise, you must have the **admin** role. For more information about creating the **admin** role, see Create secure administration credentials in the Splunk documentation.
  - You have a Splunkbase account.
- You have the Red Hat Insights application installed on Splunk.
- Popup blockers are disabled in your browser.

Procedure

1. From the Splunk dashboard, click **Apps** > **Manage Apps** to view a list of apps.
2. Locate the Red Hat Insights application, and then click the **Splunkbase** link under the **App Origin** column.
3. Log in to Splunkbase. The Red Hat Insights application page opens.
4. Click the **Download** button to download the Red Hat Insights application *.tgz* file.
5. Return to the Splunk dashboard and click **Apps** > **Manage Apps**.
6. Click the **Install App From File** button to open the installation dialog.
7. In the installation dialog, click **Browse** and then select the Red Hat Insights application *.tgz* file you downloaded.
8. Select the **Upgrade app** checkbox to confirm you want to overwrite the previous version of the Red Hat Insights application.
9. Click **Upload**.

Verification

When the upload is complete, a success banner displays to confirm that the app has been upgraded.

Additional resources

- Configure HTTP Event Collector on Splunk Cloud Platform
- Send data to HTTP Event Collector
- Set up and use HTTP Event Collector on Splunk Enterprise
- Splunk
- Splunkbase

- Troubleshooting Hybrid Cloud Console integrations

3.2. INTEGRATING SERVICENOW WITH THE RED HAT HYBRID CLOUD CONSOLE

The ServiceNow Flow Templates for Red Hat Lightspeed application integrates with Red Hat Lightspeed services. The templates provide ServiceNow flows for creating incidents out of found vulnerabilities, performance, system configuration recommendation, and other risks. The application includes a sample flow that you can edit to customize it for your organization.

This application forwards selected Hybrid Cloud Console events to ServiceNow. The Flow Templates for Red Hat Lightspeed application seamlessly integrates with the Hybrid Cloud Console so that you can focus on handling the data on the ServiceNow application side in the same way you manage other sources of data.

You can use the Flow Templates for Red Hat Lightspeed application to handle events from the following Hybrid Cloud Console services:

- Advisor
- Vulnerability
- Any additional Red Hat Hybrid Cloud Console events that you might have configured

3.2.1. Contacting support

If you have any issues with the Red Hat Lightspeed application for ServiceNow, contact Red Hat for support. To open a Red Hat support case directly from the Hybrid Cloud Console:

1. Click **Help** (the **?** icon) to open the help panel.
2. Select the **My support cases** tab.
3. Click **Open a support case** and add information about the issue.

ServiceNow will not provide troubleshooting. The Red Hat Lightspeed application for ServiceNow is fully supported by Red Hat.

3.2.2. Installing and configuring the ServiceNow Flow Templates for Red Hat Lightspeed application

You can use the Flow Templates for Red Hat Lightspeed application to integrate ServiceNow with the Hybrid Cloud Console to create ServiceNow flows from triggered events in the Hybrid Cloud Console. To integrate ServiceNow with Red Hat Hybrid Cloud Console, you must install the ServiceNow IntegrationHub Enterprise Pack Installer plugin. After the plugin and the application are configured, event data flows from the Hybrid Cloud Console to your ServiceNow instance. A ServiceNow REST API asynchronous trigger receiver is used within the application flow.

For information about configuring notifications after you have integrated ServiceNow with the Hybrid Cloud Console, see *Configuring notifications on the Red Hat Hybrid Cloud Console* .

Prerequisites

- You have Organization Administrator permissions for the Hybrid Cloud Console.

- Notifications administrator permissions are configured in User Access.
- You have a Red Hat subscription and you can access the Red Hat Hybrid Cloud Console.
- Popup blockers are disabled in your browser.
- ServiceNow IntegrationHub Enterprise Pack Installer plugin is installed. If it is not installed, request the plugin from ServiceNow.
- You have access to the following ServiceNow roles:
  - **admin**
  - **x_rhtpp_rh_webhook.rest**
  - **sn_appclient.app_client_company_installer** (can only install applications that match the instance company), or **sn_appclient.app_client_user**.
- In ServiceNow you have incident (write) access for table permissions.
- You are using the San Diego or later release of ServiceNow.

Procedure

1. Log in to your ServiceNow instance.
2. Navigate to the ServiceNow Store home page and install or update the Flow Templates:
   - Install the Flow Templates for Red Hat Lightspeed application from the ServiceNow Store (or as an Update Set).
     a. Create a new user with User ID **rh_insights_integration**.
     b. Check **Internal Integration User** for the user you just created.
     c. Ensure that the user is Active.
     d. Assign role **x_rhtpp_rh_webhook.rest** to the user.
     e. Generate a password for the user. Copy this information for use during the setup process.



NOTE

For information about installing an application that you purchased from the ServiceNow Store to make it available on your instance, see Install a ServiceNow Store Application

3. Open the Hybrid Cloud Console in a new browser window or tab.
4. Navigate to **Settings** > **Integrations**, select the **Reporting & Automation** tab, and complete the following steps:
   a. Click **Add integration**.
   b. Select **ServiceNow** as the integration type, and then click **Next**.

c. Enter a name for the integration, such as *ServiceNow integration*.

d. Provide the **Endpoint URL** and replace **<instance.servicenow.com>** with your ServiceNow instance:
https://<instance.servicenow.com>/api/x_rhtpp_rh_webhook/flow_templates_for_red_hat_insights

e. The checkbox to Enable SSL is checked by default.

f. In the **Secret token** field, paste the generated password of the **rh_insights_integration** user that you created in ServiceNow.

5. Optional: Associate events with the integration. Doing this automatically creates a behavior group.



NOTE

You can skip this step and associate the event types later.

a. Select a product family, for example **OpenShift**, **Red Hat Enterprise Linux**, or **Console**.

b. Select the event types you would like your integration to react to.


6. To enable the integration, review the integration details and click **Submit**.

7. Refresh the **Integrations** page to show the ServiceNow integration in the **Integrations > Reporting & Automation** list. Under **Last connection attempt**, the status is **Ready** to show the connection can accept notifications from the Hybrid Cloud Console.

Verification

- To confirm that the application has been configured successfully, view the event log on the Red Hat Hybrid Cloud Console, and view **Flow Executions** on your ServiceNow instance (**Process Automation > Flow Administration > Today's Executions**).

Note that events are generated on certain conditions (for example, when a system configured with Red Hat Lightspeed checks in). If no events appear in ServiceNow, check the Event log to see whether any events matching the conditions have occurred.



NOTE

If the integration configuration fails during the Red Hat Lightspeed setup process, contact Red Hat support.

Additional resources

- ServiceNow Flow Designer
- ServiceNow Store
- Install a ServiceNow Store Application
- Configuring notifications on the Red Hat Hybrid Cloud Console
- Troubleshooting Hybrid Cloud Console integrations

3.3. INTEGRATING EVENT-DRIVEN ANSIBLE WITH THE RED HAT HYBRID CLOUD CONSOLE

You can use Event-Driven Ansible to take advantage of Hybrid Cloud Console capabilities such as Red Hat Lightspeed to continuously analyze your inventory for potential issues and recommendations. Event-Driven Ansible connects sources of events with corresponding actions through rules.

The integration with the Hybrid Cloud Console notifications service uses Event-Driven Ansible to trigger actions. Each account configures how and who can receive these events, with the ability to perform actions depending on the event type.

3.3.1. Contacting support

If you have any issues with the Hybrid Cloud Console integration with Event-Driven Ansible, contact Red Hat for support. To open a Red Hat support case directly from the Hybrid Cloud Console:

1. Click **Help** (the **?** icon) to open the help panel.
2. Select the **My support cases** tab.
3. Click **Open a support case** and add information about the issue.

3.3.2. Configuring Event-Driven Ansible 2.5 for integration with the Red Hat Hybrid Cloud Console

You can configure Event-Driven Ansible 2.5 to receive event notifications from the Red Hat Hybrid Cloud Console or a third-party application.

Prerequisites

- You have an environment with Ansible Automation Platform and Event-Driven Ansible 2.5 installed.
- You have Organization Administrator or Notifications administrator permissions for the Hybrid Cloud Console.
- You have a Github repository that contains at least one rulebook that uses the Red Hat Lightspeed EDA collection as a source. For examples, see Event-Driven Ansible for Red Hat Insights.

Procedure

1. In your Ansible Automation Platform 2.5 environment, navigate to **Automation Decisions** > **Infrastructure** > **Credentials**.
2. On the **Credentials** page, click **Create credential**.
3. On the **Create credential** page, enter a name for the credential, for example **Red Hat Lightspeed**.
4. Select the **Organization** type, and then select **Token Event Stream** under **Credential type**.
5. Enter a token and copy it. The token value is used for token authentication between the Hybrid Cloud Console and your Ansible Automation Platform with Event-Driven Ansible.



NOTE

The token value can be any random string of characters, including uppercase or lowercase letters, numbers, and symbols. You can find token generators on the web.

6. Enter **X-Insight-Token** under **HTTP Header Key**.
7. Click **Save credential**.
8. Navigate to **Automation Decisions** > **Event Streams** and click **Create event stream**
9. On the **Create event stream** page, enter a name for the event stream, for example **Red Hat Lightspeed event stream**.
10. Select your organization under **Organization**.
11. Select **Token Event Stream** under **Event stream type**.
12. Select the credential that you created, for example **Red Hat Lightspeed**.
13. Click **Create event stream**
14. On the **Details** tab of your event stream page, copy the event stream endpoint URL. This URL is used when setting up your Event-Driven Ansible integration in the Hybrid Cloud Console.
15. Import an Ansible rulebook from your Github repository:
    a. To create an Ansible project, navigate to **Red Hat Ansible Automation Platform** > **Automation Decisions** > **Projects**.
    b. On the **Create project** page, enter a name for the project, for example **Red Hat Lightspeed**.
    c. Under **Source control URL**, paste the URL for the Github repository that contains your Red Hat Lightspeed rulebook and then click **Create project**.
    d. To activate your Red Hat Lightspeed rulebook, navigate to **Red Hat Ansible Automation Platform** > **Automation Decisions** > **Rulebook Activations** and click **Create rulebook activation**.
    e. Enter a name for your activation, for example **Red Hat Lightspeed rulebook**.
    f. Under **Organization**, select your organization.
    g. Under **Project**, select **Red Hat Lightspeed**.
    h. Under **Rulebook**, select a rulebook from the list.
    i. Select the gear icon next to **Event streams** and select the event stream that you created.
    j. Under **Descision enviroment**, select **Default Decision Environment** and then click **Create rulebook activation**. The rulebook page appears.
    k. Wait for the activation status to change to **Running**.
16. In the Hybrid Cloud Console, navigate to Settings > Integrations.

17. Select the **Reporting & Automation** tab.
18. Click **Add integration**.
19. Select **Event-Driven Ansible** as the integration type, and then click **Next**.
20. In the **Integration name** field, enter a name for your integration (for example, *My EDA Integration*).
21. Enter the event stream URL that you copied earlier into the **Endpoint URL** field. This is the endpoint that points to the Event-Driven Ansible listener. This endpoint URL must be accessible for the Hybrid Cloud Console to send HTTP POST events. You might need to configure your network access or firewall, or both, to accept HTTP POST events from the Hybrid Cloud Console.
22. Enter the secret token that you created earlier.



NOTE

A secret token is essential for protecting the data sent to the integration endpoint and should always be used when integrating the Hybrid Cloud Console with third-party applications.

23. Click **Next**.
24. Review the integration details, and then click **Submit** to enable the integration.
Your Event-Driven Ansible integration is now listed on the **Integrations** > **Reporting & Automation** page. Under **Last connection attempt**, the status is **Ready** to show the connection can accept notifications from the console.

Verification

Create a test notification to confirm you have correctly connected Event-Driven Ansible to the Hybrid Cloud Console:

1. Next to your Event-Driven Ansible integration on the **Integrations** > **Reporting & Automation** page, click the options icon (⋮) and click **Test**.
2. In the **Integration Test** screen, enter a message and click **Send**. If you leave the field empty, the Hybrid Cloud Console sends a default message.
3. In Ansible Automation Platform with Event-Driven Ansible, navigate to **Automation Decisions** > **Event Streams**.
4. On the **Details** tab of your event stream, confirm that the number under **Events received** has increased.
5. In the Hybrid Cloud Console, go to **Notifications** > **Event Log** and check that the **Integration: Event-Driven Ansible** event is listed with a green label.

Next steps

- For more Event-Driven Ansible configuration information and examples of Red Hat Lightspeed rulebooks, see the **Documentation** tab in the **insights_eda** collection available from the Ansible Automation Hub Collections page.

Additional resources

- Configure User Access to manage notifications

3.3.3. Creating the behavior group for the Event-Driven Ansible integration

A behavior group defines which notifications will be sent to external services such as Event-Driven Ansible when a specific event is received by the notifications service. You can link events from any Red Hat Hybrid Cloud Console service to your behavior group.

Prerequisites

- You are logged in to the Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions.



NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- The Event-Driven Ansible integration with the Hybrid Cloud Console is configured as described in Section 3.3.2, "Configuring Event-Driven Ansible 2.5 for integration with the Red Hat Hybrid Cloud Console".


Procedure

1. In the Hybrid Cloud Console, navigate to Settings > Notifications.
2. Under **Notifications**, select **Configure Events**.
3. Select the application bundle tab you want to configure event notification behavior for: **Red Hat Enterprise Linux**, **Console**, or **OpenShift**.
4. Click the **Behavior Groups** tab.
5. Click **Create new group** to open the **Create behavior group** wizard.
6. Type a name for the behavior group and click **Next**.
7. In the **Actions and Recipients** step, select **Integration: Event-Driven Ansible** from the **Actions** drop-down list.
8. From the **Recipient** drop-down list, select the name of the integration you created (for example, *My EDA Listener*) and click **Next**.
9. In the **Associate event types** step, select one or more events for which you want to send notifications (for example, **Advisor: New recommendation**) and click **Next**.
10. Review your behavior group settings and click **Finish**. The new behavior group appears on the **Notifications** page.

Verification

1. Create an event that will trigger a Hybrid Cloud Console notification. For example, you can run the **insights client** command on a registered system to trigger a new recommendation event from Advisor.

2. To validate that the Hybrid Cloud Console integration was successful, in the Hybrid Cloud Console, go to **Settings** > **Notifications** > **Event Log** and check that the last event that you triggered shows the label **Integrations: Event-Driven Ansible**.

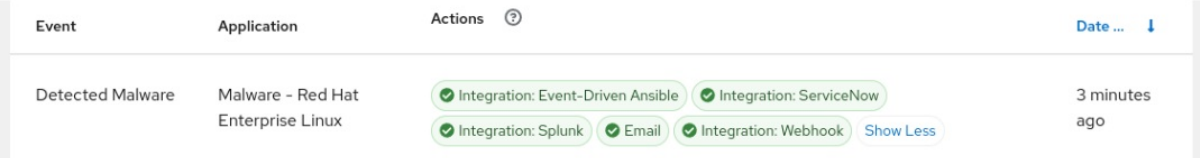

   - If the label is green, the notification succeeded.
   - If the label is red, verify that the stream has been properly created and exposed in Event-Driven Ansible, and that the correct stream URL is configured in the Hybrid Cloud Console integration configuration.



NOTE

See Troubleshooting notification failures in the notifications documentation for more details.

Additional resources

- Using automation decisions
- Configuring Hybrid Cloud Console notification behavior groups
- Red Hat Insights Collection for Event-Driven Ansible
- Using Red Hat Insights as a source of events for Event-Driven Ansible automation
- Troubleshooting Hybrid Cloud Console integrations

3.4. INTEGRATING PAGERDUTY WITH THE RED HAT HYBRID CLOUD CONSOLE

You can configure the Red Hat Hybrid Cloud Console to send event notifications to a PagerDuty service. The PagerDuty integration supports events from all Hybrid Cloud Console services. When an issue in the Hybrid Cloud Console is detected, PagerDuty automatically notifies the appropriate team members through phone calls, SMS, emails, or push notifications. PagerDuty uses scheduling to ensure team members are alerted only during their designated times. You can create escalation policies to escalate an issue to another team member if the first on-call team member does not respond to the alert. PagerDuty also provides incident management features for a coordinated response to resolve issues.

3.4.1. Contacting support

If you have any issues with the Hybrid Cloud Console integration with PagerDuty, contact Red Hat for support. To open a Red Hat support case directly from the Hybrid Cloud Console:


1. Click **Help** (the **?** icon) to open the help panel.

2. Select the **My support cases** tab.
3. Click **Open a support case** and add information about the issue.

PagerDuty will not provide troubleshooting. The Hybrid Cloud Console integration with PagerDuty is fully supported by Red Hat.

3.4.2. Creating a PagerDuty service

Create a PagerDuty service that you will integrate with the Hybrid Cloud Console so that your organization will receive notifications about the Hybrid Cloud Console.



NOTE

If you already have a PagerDuty service that you want to integrate with the Hybrid Cloud Console, see Section 3.4.3, "Generating an integration key for an existing PagerDuty service".

Prerequisites

- You are logged in to PagerDuty.
- At least one PagerDuty team exists.

Procedure

1. On the PagerDuty home page, click **Services**.
2. Click **New Service**. The **Create a Service** wizard opens.
3. Enter a name and description for the new service, for example *Red Hat PagerDuty Service* , and then click **Next**.
4. Either select an existing escalation policy, or generate a new one, and then click **Next**.
5. On the **Reduce Noise** screen, make any desired selection and then click **Next**.
6. On the **Create a Service** screen, select the **Events API V2** integration and then click **Create Service**.
7. If necessary, on the **Integrations** page, click the arrow next to **Events API V2** to expand the panel.
8. Copy the integration key next to **Events API v2 Overview**. You will use this key to integrate the service with the Hybrid Cloud Console.

Next steps

- To integrate your PagerDuty service with the Hybrid Cloud Console, see Section 3.4.4, "Adding a PagerDuty account as an integration".

Additional resources

- Create a PagerDuty Service

3.4.3. Generating an integration key for an existing PagerDuty service

You can add an integration key to an existing PagerDuty service so that you can integrate the service with the Hybrid Cloud Console. After you integrate the service, the Hybrid Cloud Console will send notifications to that PagerDuty service.



NOTE

For information about creating a new PagerDuty service to integrate with the Hybrid Cloud Console, see Section 3.4.2, "Creating a PagerDuty service" .

Prerequisites

- You are logged in to PagerDuty.
- At least one PagerDuty service exists.
- At least one PagerDuty team exists.

Procedure

1. On the PagerDuty home page, click **Services**.
2. Select the service that you want to generate the integration key for.
3. Select the **Integrations** tab and click **Add another integration**.
4. On the **Add Integrations** screen, select the **Events API V2** integration and then click **Add**.
5. If necessary, click the arrow next to **Events API V2** to expand the panel.
6. Copy the integration key next to **Events API v2 Overview**. You will use this key to integrate the service with the Hybrid Cloud Console.

Next steps

- To integrate your PagerDuty service with the Hybrid Cloud Console, see Section 3.4.4, "Adding a PagerDuty account as an integration".

Additional resources


- Add Integrations to an Existing Service

3.4.4. Adding a PagerDuty account as an integration

You can connect your PagerDuty account to the Red Hat Hybrid Cloud Console as an integration so that the Hybrid Cloud Console sends event notifications to a PagerDuty service through phone calls, SMS, emails, or push notifications.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions.




NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- You have a PagerDuty integration key. For information about generating an integration key, see one of the following sections:
  - Section 3.4.2, "Creating a PagerDuty service"
  - Section 3.4.3, "Generating an integration key for an existing PagerDuty service"

Procedure

1. Go to Settings > Integrations.
2. Select the **Reporting & Automation** tab.
3. Click **Add integration** to open the **Add integration** wizard. If this is the first integration you are adding, skip this step.
4. Select **PagerDuty**, and then click **Next**.
5. Enter a descriptive name for the integration, for example, *PagerDuty Integration*.
6. Enter the integration key for the PagerDuty account you are integrating. See Section 3.4.2, "Creating a PagerDuty service" for information about creating an integration key.
7. Specify an alert severity.
8. Click **Next**.
9. Optional: Associate events with the integration. Doing this automatically creates a behavior group.



NOTE

You can skip this step and associate the event types later.

   a. Select a product family, for example **OpenShift**, **Red Hat Enterprise Linux**, or **Console**.
   b. Select the event types you would like your integration to react to.

10. To enable the integration, review the integration details and click **Submit**.
11. Refresh the **Integrations** page to show the PagerDuty integration in the **Integrations > Reporting & Automation** list. Under **Last connection attempt**, the status is **Ready** to show the connection can accept notifications from the Hybrid Cloud Console.

Verification

Create a test notification to confirm you have correctly connected PagerDuty to the Hybrid Cloud Console:

1. Go to the **Integrations** page, and select the **Reporting & Automation** tab.

2. Confirm that your PagerDuty integration is listed and the status is **Ready**.
3. Next to your PagerDuty integration, click the options icon (⋮) and click **Test**.
4. In the **Integration Test** screen, enter a message and click **Send**. If you leave the field empty, the Hybrid Cloud Console sends a default message.
5. Open your PagerDuty instance and check for the message sent from the Hybrid Cloud Console.
6. In the Hybrid Cloud Console, go to **Notifications** > **Event Log** and check that the **Integration: PagerDuty** event is listed with a green label.

Additional resources


- Configure User Access to manage notifications

3.4.5. Creating the behavior group for the PagerDuty integration

A behavior group defines which notifications will be sent to external services such as PagerDuty when a specific event is received by the notifications service. You can link events from any Red Hat Hybrid Cloud Console service to your behavior group.

Prerequisites

- You are logged in to the Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions.



NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- You have configured the PagerDuty integration.

Procedure

1. In the Hybrid Cloud Console, navigate to Settings > Notifications.
2. Under **Notifications**, select **Configure Events**.
3. Select the application bundle tab you want to configure event notification behavior for: **Red Hat Enterprise Linux**, **Console**, or **OpenShift**.
4. Click the **Behavior Groups** tab.
5. Click **Create new group** to open the **Create behavior group** wizard.
6. Type a name for the behavior group and click **Next**.
7. In the **Actions and Recipients** step, select **Integration: PagerDuty** from the **Actions** drop-down list.
8. From the **Recipient** drop-down list, select the name of the integration you created (for example, *PagerDuty Integration*) and click **Next**.

9. In the **Associate event types** step, select one or more events for which you want to send notifications (for example, **Policies: Policy triggered**) and click **Next**.

10. Review your behavior group settings and click **Finish**. The new behavior group is listed on the **Notifications** page.

Verification

1. Create an event that will trigger a Hybrid Cloud Console notification. For example, run **insights-client** on a system that will trigger a policy event.

2. Wait a few minutes, and then navigate to PagerDuty.


3. In your PagerDuty account, check for notifications from the Hybrid Cloud Console.

4. In the Hybrid Cloud Console, go to **Settings** > **Notifications** > **Event Log** and check for an event that shows the label **Integration: PagerDuty**.

   - If the label is green, the notification succeeded.

   - If the label is red, the integration might need to be adjusted.

5. If the integration is not working as expected, verify that the Events API v2 integration key was properly created in PagerDuty, and that the correct incoming integration key is added in the Hybrid Cloud Console integration configuration.



NOTE

See Troubleshooting notification failures in the notifications documentation for more details.

CHAPTER 4. CONFIGURING A WEBHOOK INTEGRATION WITH THE HYBRID CLOUD CONSOLE

For third-party applications that do not have a native Hybrid Cloud Console integration available, you can use the webhook integration type to receive event notifications from the Hybrid Cloud Console in your chosen application. Webhook integrations support events from all Hybrid Cloud Console services.

Third-party applications can be configured to allow inbound data requests by exposing webhooks and using them to listen for incoming events. The Hybrid Cloud Console integrations service uses this functionality to send events and associated data from each service.

You can configure the Hybrid Cloud Console notifications service to send POST messages to those third-party application webhook endpoints. For example, you can configure the Hybrid Cloud Console to automatically forward events triggered when a new Advisor recommendation is found. The event and its data are sent as an HTTP POST message to the third-party application on its incoming webhook endpoint.

After you configure the endpoints in the notifications service, you can subscribe to a stream of Hybrid Cloud Console events and automatically forward that stream to the webhooks of your choice. Each event contains additional metadata, which you can use to process the event, for example, to perform specific actions or trigger responses, as part of your operational workflow. You configure the implementation and data handling within your application.

4.1. CONTACTING SUPPORT

If you have any issues with integrating the Hybrid Cloud Console with webhooks, contact Red Hat for support. To open a Red Hat support case directly from the Hybrid Cloud Console:

1. Click **Help** (the **?** icon) to open the help panel.
2. Select the **My support cases** tab.
3. Click **Open a support case** and add information about the issue.

Additional resources

- Configuring notifications on the Red Hat Hybrid Cloud Console
- Troubleshooting Hybrid Cloud Console integrations

4.2. CONFIGURING A WEBHOOK INTEGRATION WITH THE HYBRID CLOUD CONSOLE

For third-party applications that do not have a native Hybrid Cloud Console integration available, configure a webhook integration to receive event notifications from the Hybrid Cloud Console in your chosen application.

Prerequisites

- You have configured a webhook in your third-party application.
- You have Organization Administrator or Notifications administrator permissions for the Hybrid Cloud Console.

Procedure


1. In the Hybrid Cloud Console, navigate to Settings > Integrations.
2. Click the **Webhooks** tab.
3. Click **Add integration**.
4. In the **Integration name** field, enter a name for your integration.
5. Paste the webhook URL from your third-party application into the **Endpoint URL** field.
6. Optional: Enter a **Secret token** if one is configured.



NOTE

A secret token is essential for protecting the data sent to the integration endpoint and should always be used when integrating the Hybrid Cloud Console with third-party applications.

7. Click **Next**.
8. Optional: Associate events with the integration. Doing this automatically creates a behavior group.



NOTE

You can skip this step and associate the event types later.

   a. Select a product family, for example **OpenShift**, **Red Hat Enterprise Linux**, or **Console**.

   b. Select the event types you would like your integration to react to.

9. To enable the integration, review the integration details and click **Submit**.
10. Refresh the **Integrations** page to show the webhook integration in the **Integrations** > **Webhooks** list. Under **Last connection attempt**, the status is **Ready** to show the connection can accept notifications from the Hybrid Cloud Console.

Verification

Create a test notification to confirm you have correctly connected your application to the Hybrid Cloud Console:

1. Next to your integration on the **Integrations** > **Webhooks** page, click the options icon (⋮) and then click **Test**.
2. In the **Integration Test** screen, enter a message and click **Send**. If you leave the field empty, the Hybrid Cloud Console sends a default message.
3. Open your third-party application and check for the message sent from the Hybrid Cloud Console.
4. In the Hybrid Cloud Console, go to **Notifications** > **Event Log** and check that the **Integration: Webhook** event is listed with a green label.

Additional resources


- Configure User Access to manage notifications

4.3. CREATING THE BEHAVIOR GROUP FOR A WEBHOOK INTEGRATION

A behavior group defines which notifications will be sent to external services when a specific event is received by the notifications service. You can link events from any Red Hat Hybrid Cloud Console service to your behavior group. For more information about behavior groups, see Configuring Hybrid Cloud Console notification behavior groups.

Prerequisites

- You are logged in to the Hybrid Cloud Console as an Organization Administrator or as a user with Notifications administrator permissions.



NOTE

You cannot log in to the Hybrid Cloud Console with your email address unless your email address is the same as your Red Hat login. For more information, see Finding your login.

- A webhook integration is configured. For configuration steps, see Section 4.2, "Configuring a webhook integration with the Hybrid Cloud Console".

Procedure

1. In the Hybrid Cloud Console, navigate to Settings > Notifications.
2. Under **Notifications**, select **Configure Events**.
3. Select the application bundle tab you want to configure event notification behavior for: **Red Hat Enterprise Linux**, **Console**, or **OpenShift**.
4. Click the **Behavior Groups** tab.
5. Click **Create new group** to open the **Create behavior group** wizard.
6. Type a name for the behavior group and click **Next**.
7. In the **Actions and Recipients** step, select **Integration: Webhook** from the **Actions** drop-down list.
8. From the **Recipient** drop-down list, select the name of the webhook integration you created and click **Next**.
9. In the **Associate event types** step, select one or more events for which you want to send notifications (for example, **Policies: Policy triggered**) and click **Next**.
10. Review your behavior group settings and click **Finish**. The new behavior group appears on the **Notifications** > **Configure Events** page in the **Behavior Groups** tab.

Verification

1. Create an event that will trigger a Hybrid Cloud Console notification. For example, run **insights-client** on a system that will trigger a policy event.
2. Wait a few minutes, and then navigate to your third-party application to check for a notification.
3. In the Hybrid Cloud Console, go to **Settings** > **Notifications** > **Event Log** and check for an event that shows the label **Integration: Webhook**.
    - If the label is green, the notification succeeded.
    - If the label is red, verify that the incoming webhook connector was properly created in your application, and that the correct incoming webhook URL is added in the Hybrid Cloud Console integration configuration.



NOTE


See Troubleshooting notification failures in the notifications documentation for more details.

Next steps

- For webhook configuration examples, see these articles in the Red Hat blog:
    - Exploring Red Hat Insights integration with Jira Software
    - Configuring Hybrid Cloud Console to forward notifications events to a Jira webhook trigger
    - Integrate Red Hat Insights into your existing operational workflow

APPENDIX A. TROUBLESHOOTING HYBRID CLOUD CONSOLE INTEGRATIONS

If you experience issues while integrating a third-party application with the Hybrid Cloud Console, review the following troubleshooting solutions.



NOTE

Notifications for Red Hat Lightspeed services are triggered based on service-specific criteria. For more details about Red Hat Lightspeed events, see Understanding Red Hat Insights Events and Notifications in the Hybrid Cloud Console.

A.1. TROUBLESHOOTING CONNECTION ISSUES BETWEEN THIRD-PARTY INTEGRATIONS AND RED HAT LIGHTSPEED

If you experience connection issues between your third-party application and Red Hat Lightspeed, ensure that your third-party application accepts incoming requests from the following Red Hat IP addresses:

- **23.20.194.86**
- **23.22.242.238**
- **34.192.36.110**
- **44.217.190.178**
- **54.147.218.140**
- **54.205.249.13**

Depending on your network configuration, you may need to modify your firewall configurations to permit inbound connections from Red Hat Lightspeed.

For the most up-to-date list of IP addresses, see IP allowlist for Red Hat Hybrid Cloud Console and Red Hat Lightspeed notifications and integrations.

A.2. TROUBLESHOOTING HYBRID CLOUD CONSOLE INTEGRATION WITH SPLUNK

Review the following issues if your Hybrid Cloud Console integration with Splunk is not working as expected:

A.2.1. Splunk does not receive event notifications from the Hybrid Cloud Console

Configuration errors in the Splunk environment can result in Splunk not receiving event notifications from the Hybrid Cloud Console.

- In Splunk, make sure that the HTTP Event Collector (HEC) is enabled under **Global Settings**. See Enabling the HEC token.
- Make sure that the default index is **redhatinsights**.

- Make sure the firewall allows for incoming requests on the configured Splunk HEC port (default for Splunk Enterprise is 8088, and default for Splunk Cloud is 443). If you are using AWS for your instance, allow any of the ports Splunk might need. For more information, refer to Splunk Phantom ports and endpoints.

For more information about configuring Splunk HEC ports, see Splunk Phantom ports and endpoints.

A.2.2. Cannot click links in the Events table in Splunk when using real-time search

In Splunk, if you select a relative value from the **Timestamp** field in the **Events** table, you can then click any displayed event in the table to display a new tab with information about the affected system or policy.

However, if you select a real-time value from the **Timestamp** field, the displayed events do not respond when clicked. This is a limitation in Splunk. Splunk recommends that you avoid clicking real-time events to view event details.

A.3. TROUBLESHOOTING HYBRID CLOUD CONSOLE INTEGRATION WITH SERVICENOW

If ServiceNow is not receiving events from the Red Hat Hybrid Cloud Console, verify the configuration:

- Ensure that the integration in the Red Hat Hybrid Cloud Console is enabled and has type **ServiceNow**.
- Ensure that the integration in the Red Hat Hybrid Cloud Console has a correct URL. The URL should start with **https://<instance.servicenow.com>/api/x_rhtpp_rh_webhook/flow_templates_for_red_hat_insights**.
- Ensure that the **x_rhtpp_rh_webhook.rest** user role is defined in ServiceNow. Otherwise, notifications from the Hybrid Cloud Console will not work even if the application has been installed correctly.
- Ensure that the **rh_insights_integration** ServiceNow user exists, is active, and has the **x_rhtpp_rh_webhook.rest** role assigned.
- If necessary, reset the password for the **rh_insights_integration** ServiceNow user, and reset the user password in the integration on the Red Hat Hybrid Cloud Console.

Additional resources

- Troubleshooting notification failures