

Red Hat Lightspeed 1-latest

Red Hat Lightspeed remediations guide with FedRAMP

Fixing issues on Red Hat Enterprise Linux systems by using remediation plans

Last Updated: 2026-09-02

Red Hat Lightspeed 1-latest Red Hat Lightspeed remediations guide with FedRAMP

Fixing issues on Red Hat Enterprise Linux systems by using remediation plans

Legal Notice

Copyright © Red Hat.

Except as otherwise noted below, the text of and illustrations in this documentation are licensed by Red Hat under the Creative Commons Attribution–Share Alike 3.0 Unported license . If you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, the Red Hat logo, JBoss, Hibernate, and RHCE are trademarks or registered trademarks of Red Hat, LLC. or its subsidiaries in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

XFS is a trademark or registered trademark of Hewlett Packard Enterprise Development LP or its subsidiaries in the United States and other countries.

The OpenStack ® Word Mark and OpenStack logo are trademarks or registered trademarks of the Linux Foundation, used under license.

All other trademarks are the property of their respective owners.

Abstract

Create and execute remediation plans to remediate issues on any system registered with Red Hat Lightspeed with FedRAMP®.

Table of Contents

CHAPTER 1. REMEDIATIONS OVERVIEW 3
1.1. ABOUT REMEDIATIONS 3
1.2. REMEDIATION TYPES 3
1.3. RED HAT LIGHTSPEED REMEDIATIONS WORKFLOW 3
1.4. PREREQUISITES FOR REMEDIATIONS 4
1.5. MANAGE USER PERMISSIONS FOR RED HAT LIGHTSPEED SERVICES 4
1.5.1. User Access overview 4
1.5.2. Predefined groups in User Access 5
1.5.3. Predefined roles assigned to groups 5
1.5.4. Check your permissions 6
1.5.5. Configure user permissions 7
1.5.6. User Access roles for permissions to create and execute remediation plans 7

CHAPTER 2. USE TOKEN-BASED SERVICE ACCOUNTS WITH REMEDIATION PLANS 9
2.1. SERVICE ACCOUNTS FOR REMEDIATIONS 9
2.2. CONFIGURE THE SERVICE ACCOUNT 9
2.3. CONFIGURE CREDENTIALS IN THE ANSIBLE AUTOMATION PLATFORM 10
2.4. VIEW THE REMEDIATION PLANS ASSOCIATED WITH THE SERVICE ACCOUNT 11

CHAPTER 3. CREATE A REMEDIATION PLAN IN RED HAT LIGHTSPEED 12
3.1. REMEDIATION PLANS IN RED HAT LIGHTSPEED 12
3.2. CREATE A REMEDIATION PLAN FOR AN ADVISOR SERVICE RECOMMENDATION 12
3.3. CREATE A REMEDIATION PLAN FOR A CVE VULNERABILITY ON RHEL SYSTEMS 14
3.4. REMEDIATE CVES WITH SECURITY RULES THAT HAVE RECOMMENDED AND ALTERNATE RESOLUTION OPTIONS 15

CHAPTER 4. VIEW AND MANAGE YOUR REMEDIATION PLANS 18
4.1. VIEW REMEDIATION PLANS 18
4.1.1. About Remediation plans table view 18
4.1.2. Customize the remediation plan table 18
4.1.3. Remediation plan details 19
4.2. DOWNLOAD REMEDIATION PLANS 19
4.3. DELETE REMEDIATION PLANS 20
4.4. RENAME A REMEDIATION PLAN 20
4.5. CONFIGURE THE ACTIONS IN A REMEDIATION PLAN 20
4.5.1. Add a new recommendation action to an existing remediation plan 21
4.5.2. Remove a remedial action from a remediation plan 21
4.5.3. Add systems to an existing remediation plan 22
4.5.4. Remove a system from a remediation plan 23
4.6. REMEDIATION PLAN RETENTION POLICY OVERVIEW 23
4.6.1. Remediation plan retention policy 23
4.6.2. Configure the remediation plan retention policy 24
4.7. MONITOR REMEDIATION STATUS 25
4.8. ADDITIONAL RESOURCES 25

CHAPTER 1. REMEDIATIONS OVERVIEW

After identifying the highest remediation priorities in your Red Hat Enterprise Linux (RHEL) infrastructure, you can create remediation plans to fix those issues.

1.1. ABOUT REMEDIATIONS

Remediations enables you to address **advisor recommendations**, **content advisories**, **vulnerability CVEs**, and **failed compliance rules found by Red Hat Lightspeed** on your connected RHEL systems.

You can remediate a single issue or a related group of issues by using a pathway in Red Hat Lightspeed. Pathways group multiple advisor recommendations under common actions for better efficiency.

For some issues, Red Hat Lightspeed provides several different remediation paths.

When you create a remediation plan, Red Hat Lightspeed generates an Ansible Playbook to implement the required remediation actions and apply any required patches on affected systems in your RHEL infrastructure.

Some issues require a manual fix and cannot be resolved by creating a remediation plan. You can determine whether it is possible to remediate a problem with an Ansible Playbook by checking the **Remediation type** value of the issue or recommendation.

Additional resources

- Remediating pathways

1.2. REMEDIATION TYPES

In Red Hat Lightspeed, an issue or recommendation for remediation can be either **Manual** or **Playbook**.


- **Manual:** Red Hat Lightspeed provides the manual remediation steps needed to fix or address all issues and recommendations, including whether the system requires a reboot for the remediation to take effect.
- **Playbook:** For many issues, Red Hat Lightspeed also provides a pre-built remediation playbook that automates the required resolution steps. You can download the playbook and run it externally in your Ansible Playbooks environment.

1.3. RED HAT LIGHTSPEED REMEDIATIONS WORKFLOW

You can use the following outline of a remediations workflow to design how you create and execute a remediation plan.

- **Choose an issue or recommendation**
- Choose an issue or recommendation that Red Hat Lightspeed has detected on one or more of your RHEL systems.
- **Review the recommended resolution path**
- Determine which versions of RHEL are affected and whether or not a playbook is available. You can only create a remediation plan in Red Hat Lightspeed if a pre-built playbook exists.
- **Decide which RHEL systems to remediate**

- After you review the recommended resolution steps and determine if a playbook is available to remediate the issue, choose which systems to include in the plan.



IMPORTANT

To create a remediation plan for a group of systems, all systems in a group must be running the same RHEL major and minor versions. This ensures that the Red Hat Lightspeed-generated playbook resolution is compatible.

- **Create a remediation plan**

- The wizard in the Red Hat Lightspeed UI can help you create a remediation plan that you can access from the advisor, compliance, vulnerability, and patch service pages.
  To start the wizard and create a remediation plan, click **Plan remediation** after you select at least one system and one issue or recommendation for remediation. You can also create a remediation plan from the details page of a system, if Red Hat Lightspeed has detected issues that impact the system.

1.4. PREREQUISITES FOR REMEDIATIONS

To create and execute remediation plans, you need a **subscription** and the appropriate **user access role**.

Subscription

Red Hat Lightspeed is included with every RHEL subscription. No additional subscriptions are required to use Red Hat Lightspeed remediation features.

User access role

By default, all Red Hat Lightspeed users automatically have access to read, create, and manage remediation plans.

1.5. MANAGE USER PERMISSIONS FOR RED HAT LIGHTSPEED SERVICES

Manage user permissions to control access to Red Hat Lightspeed applications. Use the User Access feature to apply role-based access control (RBAC). Red Hat provides predefined groups and roles to help Organization Administrators manage user permissions.

1.5.1. User Access overview

You can simplify access management in the Red Hat Hybrid Cloud Console by using role-based access control (RBAC). The User Access feature assigns specific permissions to roles instead of individual users, which are then inherited when roles are assigned to user groups.

You can also create custom groups and roles to provide more fine-tuned control over specific features of Red Hat Lightspeed to suit the needs of your organization.

If you are an Organization Administrator, you can use the User Access feature under **Identity & Access Management → User Access** in the Hybrid Cloud Console to:

- Control user permissions and organize roles.

- Create groups that include roles and their corresponding permissions.

- Assign users to these groups, allowing them to inherit the permissions associated with their group's roles.

All users on your account have access to most of the data in Red Hat Lightspeed.

Additional resources


- User Access in the Hybrid Cloud Console
- User Access Configuration Guide for Role-based Access Control (RBAC) with FedRAMP

1.5.2. Predefined groups in User Access

The two predefined groups available in User Access, **Default access** and **Default admin access** provide different baseline privilege levels for users in your organization. You can also create custom groups to align permissions with specific personas, job functions, or teams in your organization.

The Default access group

By default, the **Default access** group is assigned many granular predefined roles, so that group members have basic visibility. Because all users in your organization are members of the **Default access** group, they inherit all permissions assigned to that group. The **Default access** group is automatically updated by Red Hat.



IMPORTANT

If your Organization Administrator modifies the **Default access** group, the group is automatically renamed to **Custom default access**. Once converted, this group is no longer automatically updated by Red Hat.

The Default admin access group

The **Default admin access** group contains only users who have Organization Administrator permissions. This group is automatically maintained, and users and roles in this group cannot be changed.

The **Default admin access** group includes many (but not all) predefined roles that provide update and delete permissions. The roles in this group usually include **administrator** in their names.

TIP

To view the roles included in the **Default access** or **Default admin access** group, log in to the Hybrid Cloud Console, navigate to **Groups** in User Access, and select the group.

Additional resources

- User Access groups

1.5.3. Predefined roles assigned to groups

Understand how predefined roles in Red Hat Hybrid Cloud Console bundle permissions across multiple Red Hat Lightspeed applications to align with common user personas. Use predefined roles to reduce administrative effort, or create custom roles for more fine-tuned control over specific features.

The predefined roles are a starting point to help you control and manage user permissions. You can then use these roles to create custom roles that are tailored to your specific use cases and organization. For

example, you can use the predefined granular roles to create custom roles that provide more fine-tuned control over specific features of Red Hat Lightspeed.

TIP

Across the Red Hat Lightspeed product documentation, the **Prerequisites** section for each procedure lists which predefined roles provide the permissions needed to use the features in that procedure. For example, if a procedure requires permissions to create and view remediations, the **Prerequisites** section for that procedure lists the *Remediations user* or other valid role as a recommended predefined role to use for that procedure.

Additional resources

- Predefined User Access roles

1.5.4. Check your permissions

Verify your current permissions and the roles or groups assigned to you in the Red Hat Hybrid Cloud Console. Check your permissions to troubleshoot access issues or understand your level of access to Red Hat Lightspeed applications.



NOTE

Only users with the Organization Administrator role can view the permissions of other users in the User Access settings and manage user permissions to Red Hat Lightspeed services. For more information, see the *Configure user permissions* section.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console.

Procedure

1. Click the **Settings** icon (⚙), then navigate to **Settings → Identity & Access Management→ My User Access**.
2. If you try to access Red Hat Lightspeed features and see a message that you do not have permission to perform this action, contact your Organization Administrator or a user with the **User Access administrator** role to request the permissions required to access those features and complete the actions you want to perform.

Verification

All of the applications that you have permissions to access are listed on this page and are grouped by product, for example, RHEL, OpenShift Container Platform, and Ansible Automation Platform.


You can also filter your permissions by application, for example, by advisor, cost management, inventory, and remediations.

Additional resources

- User Access Configuration Guide for Role-based Access Control (RBAC) with FedRAMP
- Procedures for configuring User Access

1.5.5. Configure user permissions

If you are an Organization Administrator, you can view and manage user permissions for all users in your organization. Control access to Red Hat Lightspeed and other Red Hat Hybrid Cloud Console services through the User Access interface.



IMPORTANT

If you are not an Organization Administrator, you are unable to complete this task. However, you can check your own permissions for different applications by navigating to **Settings → Identity & Access Management→ My User Access**. Contact your Organization Administrator to request more permissions.

Prerequisites

- You have logged in to the Red Hat Hybrid Cloud Console as an Organization Administrator, or you have the required administrator User Access role permissions.

Procedure

1. Click the **Settings** icon (⚙), then navigate to **Settings → Identity & Access Management→ User Access**.

Verification

From here, you can create and manage:

- **Settings → Identity & Access Management→ User Access → Roles** to determine permissions to Red Hat Lightspeed services and features
- **Settings → Identity & Access Management→ User Access → Groups** to include one or more roles to align with a specific persona, job function, or team in your organization
- **Settings → Identity & Access Management→ User Access → Users** and their assignment to groups to inherit permissions from the roles assigned to those groups

Additional resources

- User Access Configuration Guide for Role-based Access Control (RBAC) with FedRAMP
- Procedures for configuring User Access

1.5.6. User Access roles for permissions to create and execute remediation plans

Understand the predefined roles that control permissions to view, create, and execute remediation plans on your RHEL systems. Use these role definitions to assign appropriate permissions to users based on their responsibilities.

To remediate issues on your RHEL systems, become familiar with the roles that provide the required access permissions for creating, managing, and executing remediation plans in Red Hat Lightspeed.

The following User Access roles provide standard or enhanced access to remediation features in Red Hat Lightspeed:

Table 1.1. Permissions provided by the User Access roles

User Access role	Grants permissions to ...	Included in the Default access group
Remediations administrator	• Do everything that a **Remediations user** can do. • Execute remediation plans on connected remote host systems from within Red Hat Lightspeed.	
Remediations user	• View existing remediation plans. • Create a remediation plan. • Delete a remediation plan.	X

The Remediations user role enables standard or enhanced access to remediations features in Red Hat Lightspeed. The Remediations user role is included in the **Default access** group and permits access to view existing remediation plans and to create new plans. Remediations users cannot execute remediation plans on systems.

For more information about user access and permissions, see User Access Configuration Guide for Role-based Access Control (RBAC) with FedRAMP.

CHAPTER 2. USE TOKEN-BASED SERVICE ACCOUNTS WITH REMEDIATION PLANS

If you use Ansible Automation Platform to view, download, and execute remediation plans, you can configure a token-based service account for use with both Red Hat Lightspeed and Ansible Automation Platform. This configuration provides a more secure, scalable, and automation-friendly integration.

In addition, you can view the remediation plans associated with the service account in both Red Hat Lightspeed and Ansible Automation Platform.

2.1. SERVICE ACCOUNTS FOR REMEDIATIONS

After you set up the service account and configure User Access in Red Hat Lightspeed, the service account can securely access all remediation plans connected to that service account. You can also view, download, and execute playbooks for remediations from within Ansible Automation Platform.



NOTE

Token-based service accounts replace Basic Authentication, which is no longer supported for connecting to the Red Hat Hybrid Cloud Console and Red Hat Lightspeed APIs.

Additional resources

- Support for token-based authentication via Service Account for Red Hat Lightspeed (Insights) in Ansible Automation Platform
- Integrate with Red Hat Lightspeed (formerly Insights)
- Setting up Red Hat Lightspeed Remediations

2.2. CONFIGURE THE SERVICE ACCOUNT


You can create a new token-based service account in the Red Hat Hybrid Cloud Console to integrate with both Red Hat Lightspeed and Ansible Automation Platform, or you can select an existing service account.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as an Organization Administrator.

Procedure

1. In the Red Hat Hybrid Cloud Console, navigate to Red Hat Hybrid Cloud Console > the **Settings** icon (⚙) > Service Accounts.
2. Create a token-based service account, or select an existing service account. For more information about creating service accounts, see Creating a service account .



IMPORTANT

If you create a new service account, ensure that you save the Client ID and Client secret to a safe location. If you select an existing service account, ensure that you have access to the Client ID and Client secret.

3. Create a User Access group to associate to the service account, or assign the service account to an existing group that has the required permissions. For more information about creating User Access groups, see Managing group access with roles and members .

4. Assign the following permissions to the group, if the group does not already have them. For more information about how to add roles and permissions to a User Access group, see Adding a role to a group.

    - **inventory:hosts:read** (included in the Inventory Hosts viewer role)
    - **patch:*:read** (included in the Patch viewer role)
    - **remediations:remediation:read** and **playbook-dispatcher:run:read** (included in the Remediations User role)
    + For more information about assigning a service account to a User Access group, see Adding service accounts to a User Access group .

    + NOTE: If your organization uses Workspaces, ensure that your User Access group has the necessary permissions for full visibility into your inventory in AAP. For more information about workspaces, see Workspaces.

Additional resources

- Creating and managing a service account
- Support for token-based authentication via Service Account for Red Hat Lightspeed (Insights) in Ansible Automation Platform
- Managing group access with roles and members
- Adding service accounts to a User Access group
- Workspaces

2.3. CONFIGURE CREDENTIALS IN THE ANSIBLE AUTOMATION PLATFORM

After you configure the service account and User Access in the Red Hat Hybrid Cloud Console, you can create credentials in Ansible Automation Platform.

Prerequisites

- The Client ID and Client secret for the service account, which you obtained when you created or selected a service account in the Red Hat Hybrid Cloud Console.
- Access to the Ansible Automation Platform (AAP) interface.

Procedure

1. Create a new credential in AAP. The **Create credential** screen displays. For more information about how to create and configure credentials in AAP, see Creating Red Hat Insights credentials.
2. In the **Credential Type** drop-down menu, select **Insights** as the credential type.
3. Paste the Client ID and Client secret for the service account into the corresponding fields in the **Type Details** section.
4. Click **Create credential**.

Additional resources

- Creating and managing a service account
- Creating Red Hat Insights credentials

2.4. VIEW THE REMEDIATION PLANS ASSOCIATED WITH THE SERVICE ACCOUNT

After you set up the service account in both Red Hat Lightspeed and Ansible Automation Platform, you can view the remediation plans associated with the service account in Red Hat Lightspeed.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as an Organization Administrator.

Procedure

- In the Red Hat Hybrid Cloud Console, navigate to Automation Toolkit > Remediation Plans. The remediation plans associated with the service account display in the Remediation Plan table.

Additional resources

- Viewing remediation plans

CHAPTER 3. CREATE A REMEDIATION PLAN IN RED HAT LIGHTSPEED

To fix issues that Red Hat Lightspeed identifies for a system or group of RHEL systems in your organization, create a remediation plan.

3.1. REMEDIATION PLANS IN RED HAT LIGHTSPEED

You can create a remediation plan to fix one or more issues identified by Red Hat Lightspeed for a system or group of RHEL systems in your organization.


To create a remediation plan in Red Hat Lightspeed, you need to do the following:

1. Find an issue to resolve
2. Review the recommended remediation steps
3. Select the systems to remediate

You can create a remediation plan to address recommendations and issues found by the following services of Red Hat Lightspeed:

- advisor
- compliance
- vulnerability
- patch

The workflow to create a remediation plan is similar for all services in Red Hat Lightspeed that support remediations.



IMPORTANT

For Red Hat recommended solutions that can only be resolved by applying a manual remediation, the advisor recommendation displays a **Remediation type** value of **Manual**.

You can create a remediation plan for any Red Hat Lightspeed recommendations or remedial actions that have a **Remediation type** value of **Playbook**.

When you create a remediation plan, Red Hat Lightspeed generates an Ansible Playbook that enables the required remediation actions and reboot instructions on the selected host systems.

Additional resources

- Remediations overview

3.2. CREATE A REMEDIATION PLAN FOR AN ADVISOR SERVICE RECOMMENDATION

You can create a remediation plan to address advisor service recommendations.

The advisor service assesses and monitors the health of your Red Hat Lightspeed infrastructure and provides recommendations to address availability, stability, performance, and security issues. Red Hat Lightspeed detects the systems in your infrastructure that are impacted and provides a set of recommended actions that can help you prioritize and plan how to remediate your systems.

For more information about the Red Hat Lightspeed advisor service, see Assessing RHEL configuration issues using the Red Hat Lightspeed advisor service with FedRAMP.

To create a remediation plan that addresses a recommendation generated by the Red Hat Lightspeed advisor service, complete the following procedure.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with the **Remediations user** role.

Procedure


1. Choose a Red Hat Lightspeed advisor service recommendation to remediate:
   a. Navigate to Operations > Advisor > Recommendations.
   b. Review the **Recommendations** table to see which recommendations are applicable for your systems and whether they have a playbook already created.
   c. Use the search and filtering function in the table to sort the items by **Remediation type**.



IMPORTANT

Look for recommendations that have a **Remediation type** of **Playbook**. You cannot create a remediation plan if the **Remediation type** is set to **Manual**.

   d. Click the recommendation name. The full details of the recommendation are displayed, and a list of impacted systems is displayed on the lower part of the page.
2. Select which systems to include in the remediation plan:
   a. Scroll to view all of the registered RHEL systems that are impacted by the recommendation.
   b. Find the systems to include. If needed, use the search and filter functions in the table. For example, you can use the filtering options to list the affected systems by version.



IMPORTANT

To create a remediation plan for a group of systems, all systems in a group must be running the same RHEL major and minor versions. This ensures that the Red Hat Lightspeed-generated playbook resolution is compatible.

   c. Select at least one system to include in a remediation plan by clicking the checkbox to the left of the system ID.
3. Create the plan:
   a. Click **Plan remediation**.

b. Enter a new plan name in the **Plan name** field or start typing to select an existing plan.

c. Click **Create plan** for a new plan or **Update plan** for an existing plan.

Verification

1. Navigate to Automation Toolkit > Remediation Plans.
2. Search for your remediation plan in the table and click its name to open the plan.

3.3. CREATE A REMEDIATION PLAN FOR A CVE VULNERABILITY ON RHEL SYSTEMS

You can create a remediation plan in the Red Hat Lightspeed vulnerability service. When you create a remediation plan, Red Hat Lightspeed uses Ansible Playbooks to remediate or mitigate CVE vulnerabilities on your systems and apply any required patches.

The Red Hat Lightspeed advisor service analyzes and detects which systems in your organization are affected by known problems.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with the **Remediations user** role.

Procedure

1. Navigate to the Security > Vulnerability > CVEs page.
2. Set the filters as needed and select a CVE.
3. Scroll down to view all of the affected systems. Use the filtering options to list the affected systems by version.
4. Select systems to include in a remediation plan by clicking the box to the left of the system ID.



IMPORTANT

To create a remediation plan for a group of systems, all systems in a group must be running the same RHEL major and minor versions. This ensures that the Red Hat Lightspeed-generated playbook resolution is compatible.

5. Click **Plan remediation**.
6. Choose whether to add the remediations to an existing or new remediation plan, and then do one of the following actions, and then click **Next**:
   - Click **Add to existing playbook**, and then select a remediation plan from the list presented.
   - Click **Create new playbook**, and enter a name for the playbook.
7. Review the systems to include in the remediation plan, then click **Next**.



NOTE

Only affected systems can be selected and included in a remediation plan.

8. Review the information under the remediation review summary.

    a. If a reboot is required to fix the issue or risk, all systems in the remediation plan are automatically rebooted. If you prefer to reboot manually after the plan has been executed, toggle the **Auto-reboot** button accordingly.

    b. Click **Submit**.

Verification

1. Navigate to Automation Toolkit > Remediation Plans.
2. Search for your remediation plan. You should see the plan that you created showing in the list.

3.4. REMEDIATE CVES WITH SECURITY RULES THAT HAVE RECOMMENDED AND ALTERNATE RESOLUTION OPTIONS

Most CVEs in Red Hat Lightspeed have one remediation option for you to use to resolve an issue. Remediating a CVE with security rules might include more than one resolution from which to choose.

For example, you might have a recommended action to take, and one or more alternate resolutions. The workflow to create remediation plans for CVEs that have one or more resolution options is similar to the remediation steps in the advisor service.


For more information about security rules, see Security rules and Filtering lists of systems exposed to security rules in *Assessing and monitoring security vulnerabilities on RHEL systems with FedRAMP*

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with the **Remediations user** role.


Procedure

1. Navigate to **Security > Vulnerability > CVEs**
2. Set filters if needed (for example, filter to see **CVEs with security rules** to focus on issues that have elevated risk associated with them). Or, click the CVEs with security rules tile on the dashbar.

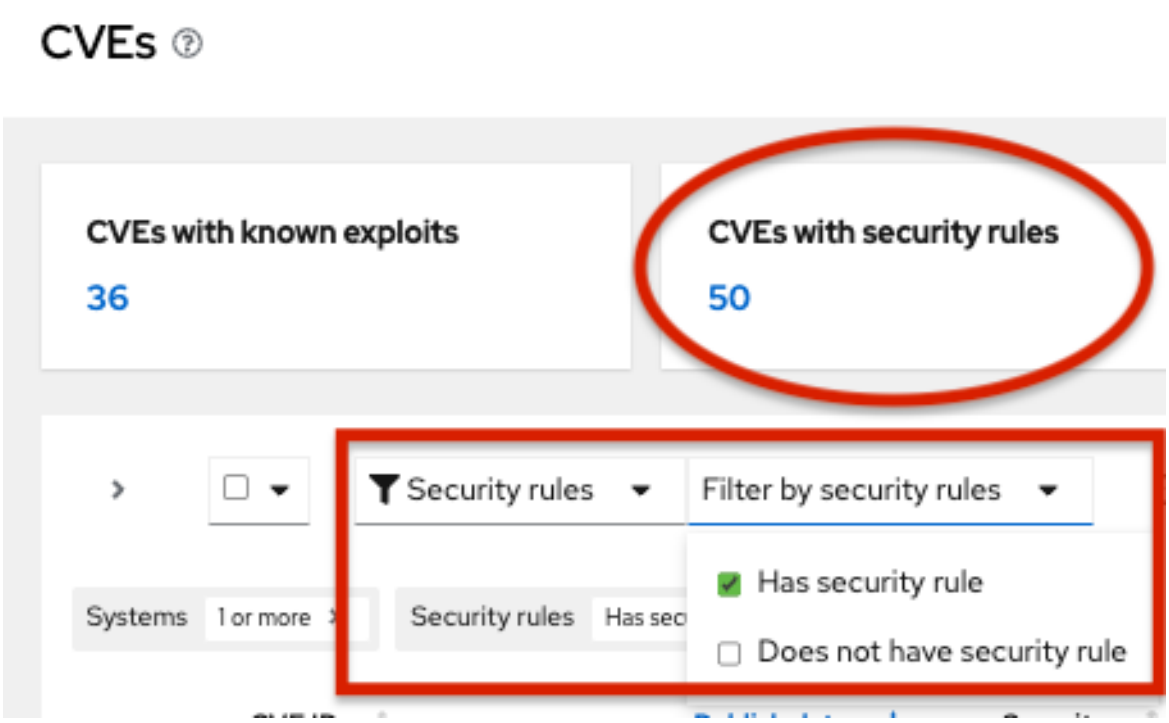

3. Click a CVE in the list.

4. Scroll to view affected systems and select the systems to include in a remediation plan. Click the box to the left of each system ID on the **Review systems** page. Selecting at least one system activates the **Plan remediation** button.



NOTE

Recommended: Include systems of the same RHEL major or minor version by filtering the list of affected systems.

5. Click **Plan remediation**.

6. Decide whether to add the selected remediations to an existing or new remediation plan by taking one of the following actions:

   - Click **Add to existing playbook** and select the required playbook from the dropdown list.
   - Click **Create new playbook**, and add a playbook name.

7. Click **Next**. The systems impacted by the CVE are listed. Review the systems to include in the playbook and clear the checkbox beside any systems that you do not want to include.



NOTE

Only impacted systems can be selected and included in a remediation plan.

8. Click **Next** to see the **Review and edit actions** page, which shows you options to remediate the CVE. The number of items to remediate can vary. You also see additional information (that you can expand and collapse) about the CVE, such as:

   - **Action:** Shows the CVE ID.

- **Resolution:** Displays the recommended resolution for the CVE and also confirms whether you have alternate resolution options.
- **Reboot required:** Confirms whether you must reboot your systems.
- **Systems:** Confirms the number of systems you are remediating.

9. On the **Review and edit actions** page, choose one of two options to finish creating your remediation plan and to generate the Ansible Playbook:
   - **Option 1:** To review all of the recommended and alternative remediation options available (and choose one of those options):
     a. Select **Review and/or change the resolution steps for this 1 action** or similar based on your actual options.
     b. Click **Next**.
     c. On the **Choose action: <CVE information>** page, click a tile to select your preferred remediation option. The bottom edge of the tile highlights when selected. The recommended solution is highlighted by default.
     d. Click **Next**.
   - **Option 2:** To accept all recommended remediations:
     a. Choose **Accept all recommended resolution steps for all actions**
     b. Click **Next**.
10. On the final **Remediation review** pane, review the summary of your remediation plan and use the back button to make changes to the actions or resolution options if required. When you are satisfied with the plan, click **Submit**.



NOTE

If a reboot is required to fix the issue or risk, all systems in the remediation plan are automatically rebooted. If you prefer to reboot manually after the plan has been executed, toggle the **Auto-reboot** button accordingly.

Verification

A notification confirming the total number of remediation actions and other information about your remediation plan is displayed.


Next steps

To view your remediation plan:

1. Navigate to **Automation Toolkit > Remediation Plans**
2. Search for your remediation plan.

CHAPTER 4. VIEW AND MANAGE YOUR REMEDIATION PLANS

Red Hat Lightspeed provides a central location under Automation Toolkit > Remediation Plans to help you find, view the full details of, and manage the remediation plans that have been created for your organization. You can also download, delete, or modify your remediation plans from the main **Remediation Plans** page.



IMPORTANT

You cannot create a remediation plan from Automation Toolkit > Remediation Plans. To create a new remediation plan, you must use the Red Hat Lightspeed service that generated the recommendation and its underlying Ansible Playbook, such as the advisor, compliance, or vulnerability service.

4.1. VIEW REMEDIATION PLANS

The **Remediation Plan** view provides a comprehensive overview of all of the remediation plans that you created for your organization in Red Hat Lightspeed.

4.1.1. About Remediation plans table view

You can access a table listing of all your remediation plans by navigating to the **Automation Toolkit** page and selecting **Remediation Plans**.

The table view in Remediation Plans provides a quick overview of all remediation plans.

You can search, sort, and filter the list of all of the remediation plans for your organization. For example, filter the table to show only specific remediation plans based on status.

By default, the columns in the table contain the following information:

Name
: The name of the remediation plan.

Actions
: The number of actions that run when the remediation plan is executed.

Systems
: The number of systems that the remediation plan is selected to run on.

Expiration
: Time remaining until the remediation plan is automatically deleted due to inactivity.

Created
: The date and time when the remediation plan was created.

Last Modified
: The date and time when the remediation plan was last modified.

4.1.2. Customize the remediation plan table

You can customize the **Remediation Plan** table to suit your needs. You can add or remove columns and sort the table by any column.

Procedure

1. Navigate to Automation Toolkit > Remediation Plans.
2. Click the options icon (⋮) beside the **Download** button and select **Manage columns** to select which columns to display in the table.
3. Click **Reset to Default** to restore the default view.

4.1.3. Remediation plan details

When you select and click a remediation plan in the table view, all of the available details about the plan are displayed across three tabs.

General

Contains two cards that display the remediation plan status and summary details:

- **Overview**: Displays the plan name, total number of actions, total number of systems included, and auto-reboot configuration.
- **Activity**: Displays date created, expiration, and last modified date. The expiration field shows the relative time remaining until the plan is automatically deleted and includes a help icon explaining the retention policy. If a plan is nearing deletion, an expiration warning alert, for example, "Expires in 6 days", displays here.

Planned remediations

Contains two tabs that display the planned remediation details:

- **Actions**: Displays a table listing the actions included in the plan.
- **Systems**: Displays a table listing the systems included in the plan.

You can also download and view the associated playbook by clicking on **Download**.

4.2. DOWNLOAD REMEDIATION PLANS

You can download the generated playbooks for each remediation plan in your organization. When you download a remediation plan, the YAML file for the underlying Ansible Playbook is saved to the preferred download directory on your local browser client.

You might need to download a remediation plan for the following reasons:

- To execute a remediation plan on your host systems by using the external Ansible Automation Platform (AAP) workflow for your organization instead of from within the Red Hat Lightspeed application.
- To view the specific plays of a remediation plan.

Procedure

1. In the Red Hat Hybrid Cloud Console, navigate to Automation Toolkit > Remediation Plans.
2. Select the checkbox next to the name of the remediation plan you want to download.
3. Complete one of the following steps:
   - To download a single remediation plan, go to the end of the row, click the options icon (⋮)

and select **Download**.

- To download multiple remediation plans in bulk, click the **Download** button at the top of the table.

Verification

A message is displayed to confirm that the download was successful. A YAML file for each of the selected remediation plans is downloaded to your local drive.

4.3. DELETE REMEDIATION PLANS

You can permanently delete remediation plans that are no longer needed.



IMPORTANT

You cannot recover a deleted remediation plan. Also, you cannot archive and restore a remediation plan from the Red Hat Lightspeed UI.

Procedure

1. In the Red Hat Hybrid Cloud Console, navigate to Automation Toolkit > Remediation Plans.
2. In the table, find the plan you want to delete.
3. At the end of the row, click the **More options** icon, and then click **Delete**.
4. When prompted, click **Delete** to confirm the permanent removal of the plan.

Verification

A message is displayed to confirm the successful deletion of the selected remediation plan.

4.4. RENAME A REMEDIATION PLAN

You can rename an existing remediation plan in your organization.

Procedure

1. In the Red Hat Hybrid Cloud Console, navigate to Automation Toolkit > Remediation Plans.
2. Select the checkbox next to the name of the remediation plan you want to rename.
3. At the end of the row, click the options icon (⋮) and select **Rename**.
4. When prompted, enter a unique title for the plan name and click **Rename**.

Verification

- A message is displayed to confirm the successful renaming of the selected remediation plan.

4.5. CONFIGURE THE ACTIONS IN A REMEDIATION PLAN

You can modify or remove an action or system from the plan, especially if the plan contains many items.

4.5.1. Add a new recommendation action to an existing remediation plan

If the Red Hat advisor or another service recommends a new remedial action for one or more systems in your organization, you can add that recommendation to an existing remediation plan.

Procedure

1. Navigate to Operations > Advisor > Recommendations.
2. In the table, use the search and filtering options to find the recommendation you want to add, and click the recommendation name.



IMPORTANT

The recommendation must have a **Remediation type** of **Playbook**. You cannot create a remediation plan if the **Remediation type** is **Manual**.

3. Select at least one impacted system to remediate, and click **Plan remediation**.
4. Select **Add to existing playbook**, and then select the remediation plan name from the list presented. Click **Next**.
5. Review the systems in the plan and clear the checkbox next to any systems that you do not want to include. Click **Next**.
6. Review the remedial actions of your plan and adjust them if necessary. When you are satisfied, click **Next**.
7. On the final **Remediation review** pane, review the summary of your remediation plan, and click **Back** to make changes, if needed.



NOTE

Auto-reboot is enabled if any of the recommended actions to remediate require a system reboot to take effect. If you prefer to reboot manually after the plan has been executed, toggle **Auto-reboot** accordingly.

8. Click **Submit**.

Verification

1. Navigate to Automation Toolkit > Remediation Plans.
2. Search for the remediation plan that you created and click the name to open the details.
3. Click **Actions** to view the remedial actions included in the plan. The recommendations that you added are listed.

4.5.2. Remove a remedial action from a remediation plan

You can remove a remedial action from a remediation plan.

Procedure

1. In the Red Hat Hybrid Cloud Console, navigate to Automation Toolkit > Remediation Plans. The remediation plans for your organization are displayed.
2. Find the remediation plan that you want to change and click the name of the remediation plan to display the details of the plan.
3. Navigate to the **Actions** tab.
4. In the table, do one of the following:
   - Select the checkbox next to the actions that you want to remove, and click **Remove** at the top of the table.
   - Find a single action to remove, go to the end of the corresponding row, and click **More options**.
5. When prompted, click **Remove**.

Verification

- A message is displayed to confirm that the action was successfully removed from the remediation plan.

4.5.3. Add systems to an existing remediation plan

You can include more systems in an existing remediation plan.



IMPORTANT

Ensure that all systems in the remediation plan are running the same RHEL major and minor versions to ensure that the resolution applied by the Red Hat Lightspeed-generated playbook is compatible.

Procedure

1. Navigate to Operations > Advisor > Recommendations.
2. Use the search and filtering options to find the recommendation in the existing plan and click the recommendation name.
3. Select the systems you want to add to the plan, and then click **Plan remediation**.
4. Select the option to **Add to existing playbook**, and then select the existing remediation plan name from the list presented. Click **Next**.
5. Review the systems in the plan, and if applicable, clear the checkbox next to any systems that you do not want to include. Click **Next**.
6. Review the remedial actions of your plan and adjust if necessary, as outlined in the section titled *Creating a remediation plan to remediate an advisor service recommendation* . Click **Next**.
7. On the final **Remediation review** pane, review the summary of your remediation plan and click **Back** to make changes if required.



NOTE

The **Auto-reboot** button is enabled if any of the recommended actions to remediate require a system reboot to take effect. If you prefer to reboot manually after the plan has been executed, toggle the **Auto-reboot** button accordingly.

8. Click **Submit**.

Verification

1. Navigate to Automation Toolkit > Remediation Plans.
2. Search for your remediation plan in the table, and click the name to open the remediation plan.
3. Click **Systems** to view a list of the systems included in the plan. The systems you added should be listed.

4.5.4. Remove a system from a remediation plan

You can remove a system from a remediation plan.

Procedure

1. In the Red Hat Hybrid Cloud Console, navigate to Automation Toolkit > Remediation Plans.
2. Find the remediation plan to remove a system from and click the name to open the details of the remediation plan.
3. Navigate to the **Planned remediations** tab and open the **Systems** tab.
4. In the table, complete one of the following steps:
   - Select the systems that you want to remove, then click **Remove** above the table.
   - Find a single system to remove, go to the end of the corresponding row, click **More options**.
5. When prompted, click **Remove**.

Verification

- A message is displayed to confirm that the system was successfully removed from the remediation plan.

4.6. REMEDIATION PLAN RETENTION POLICY OVERVIEW


Inactive remediation plans are automatically deleted after 4 months to prevent accumulation of stale plans. The expiration timer resets when plans are modified or executed. Organization Administrators can configure retention settings.

4.6.1. Remediation plan retention policy

To help you manage your active work, reduce storage requirements, and improve database performance, Red Hat Lightspeed includes an automated retention policy for remediation plans. This policy prevents the accumulation of stale and outdated plans.

By default, inactive remediation plans are automatically deleted after 4 months (120 days) of inactivity. The expiration timer resets whenever you modify or run the remediation plan.

By default, an expiration warning displays in the Red Hat Lightspeed UI 30 days before a plan is scheduled for deletion.



NOTE

System email notifications regarding impending plan deletions are out of scope for this feature. You must review the Red Hat Lightspeed user interface to monitor expiration warnings.

If you have Organization Administrator privileges, you can edit the default retention period and warning thresholds to meet your organizational compliance requirements.

4.6.2. Configure the remediation plan retention policy

By default, remediation plans are deleted after 4 months of inactivity. You can modify the default retention period and the expiration warning threshold to suit your organization's needs.

Changes to the retention policy affect all user accounts and remediation plans across your organization.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as a user with **Organization Administrator** privileges.

Procedure

1. Navigate to Automation Toolkit > Remediation Plans.
2. Click the options icon (⋮) beside the **Launch Quick Start** button and select **Edit retention policy**.
3. In the **Remediation plan retention policy** modal, click the **Retention period** drop-down menu and select the duration that an inactive remediation plan is kept before being automatically deleted. Options range from 14 days to 6 months.
4. Click the **Expiration warning** drop-down menu and select the duration to display a warning before an inactive plan is automatically deleted. Options range from 3 days to 5 months.



NOTE

The expiration warning period cannot be longer than the configured retention period.

5. Click **Save**.

Verification

- A confirmation message opens: **Remediation plan retention policy updated**

4.7. MONITOR REMEDIATION STATUS

You can view the remediation status for each remediation plan. The status information tells you the results of the latest activity and provides a summary of all activity for that remediation plan. You can also view log information.

Prerequisites

- You are logged in to the Red Hat Hybrid Cloud Console as a user who is a member of a User Access group with the **Remediations user** role.

Procedure

1. Navigate to Automation Toolkit > Remediation Plans.
2. In the table, find the plan that you want to monitor.
3. Click the name of the remediation plan to open the **Plan details and status** card on the **General tab**.

4.8. ADDITIONAL RESOURCES

- Creating a remediation plan in Lightspeed