

Spring 2023


Programming Languages

Homework 4

- This homework is a combination programming and “paper & pencil” assignment.
- Due via Brightspace on Sunday, April 30, 2023 11:59 PM Eastern Time. Due to timing considerations relating to the end of the semester, late submissions will not be accepted. **No exceptions.**
- For the Prolog questions, you should use SWI Prolog. Link is available on the course page.
- For the Java questions, you should use Java 8.
- You may collaborate and use any reference materials necessary to the extent required to understand the material. All solutions must be your own, except that you may rely upon and use Prolog code from the lecture if you wish. Homework submissions containing any answers or code copied from any other source, in part or in whole, will receive a zero score and be subject to disciplinary action.
- Please submit your homework as a zip file, `hw4-<netid>.zip`. The zip file should contain:
 - For Q1, `hw4-<netid>-Q1.pl` which should contain the reordered facts for **part (1)**.
 - For the **Prolog Rules** question (Q2), `hw4-<netid>-Q2.pl` which should contain your implementation of all of the rules. You do not need to submit queries, although we will run our queries on your solutions.
 - For Q4, `hw4-<netid>-Q4.pl` which should contain all *rules* necessary to make the solution work.
 - For Q5, submit a file `DownloadFile.java`.
 - For (Q1, Q3, Q5, Q6 and Q7), a PDF file `hw4-<netid>-sols.pdf` containing the answers to all of the “paper & pencil” questions.
- Make sure your Prolog code compiles before submitting. *If your Prolog code does not compile for any reason, it may not be graded.*

1. [10 points] **Investigating Prolog**

Consider the following hierarchy in an organization:

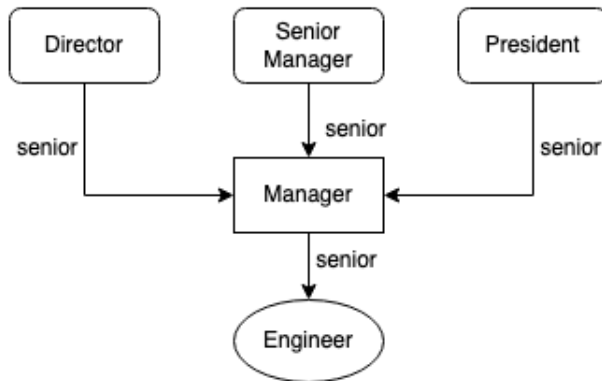

Now, consider a subset of employees in the form of Prolog facts and rules:

```
engineer(brian).
engineer(kevin).
engineer(zhane).
manager(mary).
manager(emily).
senior_manager(sarah).
president(bob).
president(jane).
```

```
senior(mary, brian).
senior(jane, emily).
senior(jane, mary).
senior(emily, kevin).
senior(emily, zhane).
```

```
president_engineer_relation(X,Y) :- president(X), senior(X,Z), senior(Z,Y), engineer(Y).
```

Note: Assume that the universe of facts is **not** complete.

1. Reorder the facts above to provide faster execution time when querying `president_engineer_relation(jane,brian)`. List the re-ordered facts and briefly explain what you changed.

```
senior(jane, emily).
senior(jane, mary).
```

Swapping the positions of these two rules would lead to faster execution.

2. Explain in your own words why the change above affects total execution time. Show evidence of the faster execution time (provide a trace for each).

Solution:

No backtracking takes place in the reordered version.

Before changing the order of the rules:

```
Call: (10) president_engineer_relation(jane, brian) ? creep
Call: (11) president(jane) ? creep
Exit: (11) president(jane) ? creep
```

```

Call: (11) senior(jane, _23252) ? creep
Exit: (11) senior(jane, emily) ? creep
Call: (11) senior(emily, brian) ? creep
Fail: (11) senior(emily, brian) ? creep
Redo: (11) senior(jane, _23252) ? creep
Exit: (11) senior(jane, mary) ? creep
Call: (11) senior(mary, brian) ? creep
Exit: (11) senior(mary, brian) ? creep
Call: (11) engineer(brian) ? creep
Exit: (11) engineer(brian) ? creep
Exit: (10) president_engineer_relation(jane, brian) ? creep

```

After changing the order of rules:

```

Call: (10) president_engineer_relation(jane, brian) ? creep
Call: (11) president(jane) ? creep
Exit: (11) president(jane) ? creep
Call: (11) senior(jane, _24822) ? creep
Exit: (11) senior(jane, mary) ? creep
Call: (11) senior(mary, brian) ? creep
Exit: (11) senior(mary, brian) ? creep
Call: (11) engineer(brian) ? creep
Exit: (11) engineer(brian) ? creep
Exit: (10) president_engineer_relation(jane, brian) ? creep

```

3. Can we define a new rule `director_engineer_relation(X, Y)` that calls into the goals presented above to correctly arrive at an answer? Why or why not?

Solution:

We can not. Consider the following rule:

```
director_engineer_relation(X, Y) :- director(X), senior(X,Z), senior(Z,Y), engineer(Y).
```

We can only define this rule if there already exists a `director(X)` rule in the database.

2. [20 points] **Prolog Rules**

Write the Prolog rules described below in a file `hw4-<netid>-Q2.pl`. All rules must be written using the subset of the Prolog language discussed in class. You may not, for example, call built-in library rules unless specifically covered in the slides. You may call your own rules while formulating other rules. You do not need to turn in queries, although you should certainly test your rules using your own queries.

1. Write a rule `remove_items(I,L,O)` in which `O` is the output list obtained by removing every occurrence of each item in List `I` from list `L`. The items in `O` should appear in the same order as `L`, only without the elements present in `I`.

Example:

```
?- remove_items([1,3],[2,6,7,7,8,3,1,1,4,3],O).  
O = [2,6,7,7,8,4]
```

2. Write a rule `my_flatten(L1,L2)` which transforms the list `L1`, whose elements could be nested lists, into a “flat” list `L2` by replacing each list with its elements.

Example:

```
?- my_flatten([a, [b, [c, d], e]], X).  
X = [a, b, c, d, e]
```

3. Write a rule `compress(L1,L2)` where all the repeated consecutive elements of the list `L1` should be replaced with a single copy of the element. The order of the elements should not be changed.

Example:

```
?- compress([a,a,a,a,b,c,c,a,a,d,e,e,e,e],X).  
X = [a,b,c,a,d,e]
```

4. Write a rule `encode(L1,L2)` where all the repeated consecutive duplicates of elements are encoded as terms `[N,E]` where `N` is the number of duplicates of the element `E`. The order of the elements should not be changed.

Example:

```
?- encode([a,a,a,a,b,c,c,a,a,d,e,e,e,e],X).  
X = [[4,a],[1,b],[2,c],[2,a],[1,d],[4,e]]
```

5. Modify the result of previous problem in such a way that if an element has no duplicates it is simply copied into the result list. Only elements with duplicates are transferred as `[N,E]` terms. Name the rule as `encode_modified`.

Example:

```
?- encode_modified([a,a,a,a,b,c,c,a,a,d,e,e,e,e],X).  
X = [[4,a],b,[2,c],[2,a],d,[4,e]]
```

6. Write a rule `rotate(L1,N,L2)` where the list `L2` is the modified version of list `L1`, with the elements rotated as `N` places to the left if `N` is a positive number, otherwise rotated as `N` places to the right. You can assume that list `L1` is never empty and $|N| < \text{length}(L1)$, where $|.$ is the absolute value operator.

Examples:

```
?- rotate([a,b,c,d,e,f,g,h],3,X).  
X = [d,e,f,g,h,a,b,c]
```

```
?- rotate([a,b,c,d,e,f,g,h],-2,X).  
X = [g,h,a,b,c,d,e,f]
```

3. [10 points] **Unification in Prolog**

For each expression below that unifies, show the bindings. For any expression that doesn't unify, explain why it doesn't. Assume that the unification operation is left-associative.

1. $a(15) \ \& \ c(15)$
Solution: Doesn't unify since a and d are different functors.
2. $53 \ \& \ X \ \& \ 76$
Solution: Doesn't unify. X can't unify with two different constants.
3. $a(X, b(3, 1, Y)) \ \& \ a(4, Y)$
Solution: CIRCLED — $X = 4$ unifies, but Y does not unify because it is contained in b.
4. $b(1, X) \ \& \ b(X, Y) \ \& \ b(Y, 1)$
Solution: Unifies $X=Y=1$
5. $a(1, X) \ \& \ b(X, Y) \ \& \ a(Y, 3)$
Solution: Doesn't unify. a and b are different functors.
6. $a(X, c(2, B, D)) \ \& \ a(4, c(A, 7, C))$
Solution: Unifies $X = 4, B = 7, A = 2, C = D$.
7. $e(c(2, D)) \ \& \ e(c(8, D))$
Solution: CIRCLED — $D = D$ unifies, but 8 does not unify with 2
8. $X \ \& \ e(f(6, 2), g(8, 1))$
Solution: X unifies with $e(. \ . \ .)$
9. $b(X, g(8, X)) \ \& \ b(f(6, 2), g(8, f(6, 2)))$
Solution: $X = f(6, 2)$
10. $a(1, b(X, Y)) \ \& \ a(Y, b(2, c(6, Z), 10))$
Solution: Does not unify because b on the left has arity 2 and b on the right has arity 3.
11. $d(c(1, 2, 1)) \ \& \ d(c(X, Y, X))$
Solution: $X = 1, Y = 2$

4. [20 points] **Make your own rules - Prolog**

Consider a list in Prolog with the following constraints:

1. Length of the list is 4.
2. Every entry in the list is a single lowercase English character between **a** to **j** (both **a** and **j** inclusive).
3. The list has a few characters in common with the following lists:
 - (a) [**i**, **j**, **f**, **b**] - DD
 - (b) [**c**, **b**, **g**, **j**] - DS
 - (c) [**d**, **g**, **j**, **e**] - DS
 - (d) [**e**, **h**, **c**, **b**] - DS
 - (e) [**b**, **c**, **d**, **h**] - DDD

Here, **D** means one character in common but at different place and **S** means one character in common in the same place.

Your task is to find the list(s) that satisfy all the above constraints using Prolog. Specifically, write a Prolog rule, `solution([A, B, C, D])` that returns the list. Here, **A** binds to the first character in the list, **B** binds to the second character and so on. If there are multiple lists satisfying the above constraints, your solutions should return all such lists.

For example: A list that satisfies the constraint 3(b) ([**c**, **b**, **g**, **j**] - DS) is [**c**, **j**, **d**, **e**]. Here, **j** is the character in common to both the lists but at different place and **c** is the character in common at the same place.

Note:

1. **Hint:** Try to formalize the constraints in the form of Prolog facts and rules.
2. The list manipulation library (<https://www.swi-prolog.org/pldoc/man?section=lists>) can help simplify your code.
3. You can make your own helper rules as well.
4. Your code must be your own work.

Solution:

The desired list is: [**d**, **h**, **b**, **j**]

The code can be found in `q4.sol.pl` file.

5. [15 points] **Java Exceptions**

Consider the following Java program:

```
import java.net.URL;
import java.io.BufferedReader;
import java.io.FileOutputStream;

public class DownloadFile {
    private static final String FILE_URL = "https://cs.nyu.edu/~av2783/pl_hw4_q5.txt";
    private static final String BKP_FILE_URL = "https://cs.nyu.edu/~av2783/pl_hw4_q5_bkp.txt";
    private static final String FILE_NAME = "pl_hw4_q5_local_copy.txt";

    public static void main(String args[]) {
        BufferedReader in = new BufferedReader(new URL(FILE_URL).openStream());
        FileOutputStream fileOutputStream = new FileOutputStream(FILE_NAME);
        byte dataBuffer[] = new byte[1024];
        int bytesRead;
        while ((bytesRead = in.read(dataBuffer, 0, 1024)) != -1) {
            fileOutputStream.write(dataBuffer, 0, bytesRead);
        }
    }
}
```

This program is supposed to read a file on a given URL and write its contents to a local file in your machine. However, it fails to compile. The reason is the absence of exception handling. Answer the following questions:

1. List all the checked exceptions that can be thrown in this program. You can find some useful information about the classes being used in the above program in the Java documentation(<https://docs.oracle.com/javase/7/docs>).
IOException, MalformedURLException, FileNotFoundException
2. Add the exception handling code in the above program so that it compiles successfully and behaves as expected at runtime.
3. Sometimes, the FILE_URL mentioned in the program is not reachable due to server error. Which exception will be thrown in this case?
IOException
4. In case the FILE_URL is unreachable, a backup URL must be used to read the file contents. Using the exception handling code of the exception in **part (3)**, add the functionality in your code from **part (2)** to read the contents from BKP_FILE_URL when FILE_URL is unreachable.

Note:

- Add answers to **parts (1) and (3)** in your solution PDF.
- Submit a single **Java** file with the final code of **part (4)**.
- If you are not able to come up with a correct solution or the code doesn't compile, please add comments at the beginning of your Java file to receive partial credit.

6. [15 points] **Virtual Functions**

This problem examines the difference between two forms of object assignment. In C++, local variables are stored on the run-time stack, while dynamically allocated data (created using the new keyword) is stored on the heap.

```
class Vehicle {
public:
    int x;
    virtual void f();
    void g();
};

class Airplane : public Vehicle {
public:
    int y;
    virtual void f();
    virtual void h();
};

void inHeap() {
    Vehicle *b1 = new Vehicle; // Allocate object on the heap
    Airplane *d1 = new Airplane; // Allocate object on the heap
    b1->x = 1;
    d1->x = 2;
    d1->y = 3;
    b1 = d1; // Assign derived class object to base class pointer
}

void onStack() {
    Vehicle b2; // Local object on the stack
    Airplane d2; // Local object on the stack
    b2.x = 4;
    d2.x = 5;
    d2.y = 6;
    b2 = d2; // Assign derived class object to base class variable
}

int main() {
    inHeap();
    onStack();
}
```

Answer the following questions:

Note: In the questions below, *vtable pointer* refers to an object's hidden vtable pointer.

1. Draw a picture of the stack, heap and vttables just before `b1=d1` is executed during the call to `inHeap`. Be sure to indicate where the **instance variables** and **vtable pointers** of the two objects are stored, and to which vtable(s) the respective **vtable pointers** point.

Solution:

Stack(inHeap): b1(points to new Vehicle()), d1(points to new Airplane())

Heap: new Vehicle() [vehicle vtable pointer stored here], new Airplane() [airplane vtable pointer stored here]

Vehicle's vtable: f() [point to Vehicle version]

Airplane's vtable: f() [points to Airplane version], h() [points to Airplane version]

2. Re-draw your diagram from (1), showing the changes that result just after the assignment **b1=d1**. Be sure to clearly indicate where **b1**'s vtable pointer points. Explain why **b1**'s vtable pointer points where it does. **Solution:**

Stack(inHeap): b1(points to new Airplane()), d1(points to new Airplane())

Heap: new Vehicle() [vehicle vtable pointer stored here], new Airplane() [airplane vtable pointer stored here]

Vehicle's vtable: f() [point to Vehicle version]

Airplane's vtable: f() [points to Airplane version], h() [points to Airplane version]

3. Draw a picture of the stack, heap and vtables just before **b2=d2** is executed during the call to **onStack**. Be sure to indicate where the **instance variables** and **vtable pointers** of the two objects are stored, and to which vtables the respective **vtable pointers** point.

Solution:

Stack(inHeap): b2(contains vtable entry pointing to vtable of vehicle), d2(contains vtable entry pointing to vtable of airplane)

Heap: nothing here

Vehicle's vtable: f() [point to Vehicle version]

Airplane's vtable: f() [points to Airplane version], h() [points to Airplane version]

4. Re-draw your diagram from (3), showing the changes that result after the assignment **b2=d2**. Be sure to clearly indicate where **b2**'s vtable pointer points. Explain why **b2**'s vtable pointer points where it does.

Solution:

Stack(inHeap): b2(contains vtable entry pointing to vtable of vehicle), d2(contains vtable entry pointing to vtable of airplane)

Heap: nothing here

Vehicle's vtable: f() [point to Vehicle version]

Airplane's vtable: f() [points to Airplane version], h() [points to Airplane version]

5. We have used the assignment statements **b1=d1** and **b2=d2**. Why are the opposite statements **d1=b1** and **d2=b2** not allowed?

Solution:

Because a Child class is a superset of Parent's class abilities. Each Airplane is a Vehicle. But the other way is not always true.

7. [10 points] **Prototype OOLs**

Consider the following code below, written in a prototype OOL:

```
var obj1;  
obj1.x = 20;  
var obj2 = clone(obj1);  
var obj3 = clone(obj2);  
var obj4 = clone(obj1);  
obj2.y = 5;  
obj4.x = 10;  
obj3.z = 30;
```

Assume that the program fragment above has executed. Answer the following:

1. What fields are contained locally to `obj1`?
Solution: x
2. What fields are contained locally to `obj2`?
Solution: y
3. What fields are contained locally to `obj3`?
Solution: z
4. What fields are contained locally to `obj4`?
Solution: x
5. To what value would `obj1.x` evaluate, if any?
Solution: 20
6. To what value would `obj2.x` evaluate, if any?
Solution: 20
7. To what value would `obj3.x` evaluate, if any?
Solution: 20
8. To what value would `obj4.x` evaluate, if any?
Solution: 10
9. To what value would `obj4.y` evaluate, if any?
Solution: nil
10. To what value would `obj2.y` evaluate, if any?
Solution: 5
11. To what value would `obj3.y` evaluate, if any?
Solution: 5
12. To what value would `obj3.z` evaluate, if any?
Solution: 30