



QIF spiking network (microscale of NMM2 PING): TI realigns spike timing, not mean rate
(black: E spikes; blue: population rate $r_E(t)$; red: TI envelope)


(a) Forced (below Hopf), TI OFF: asynchronous

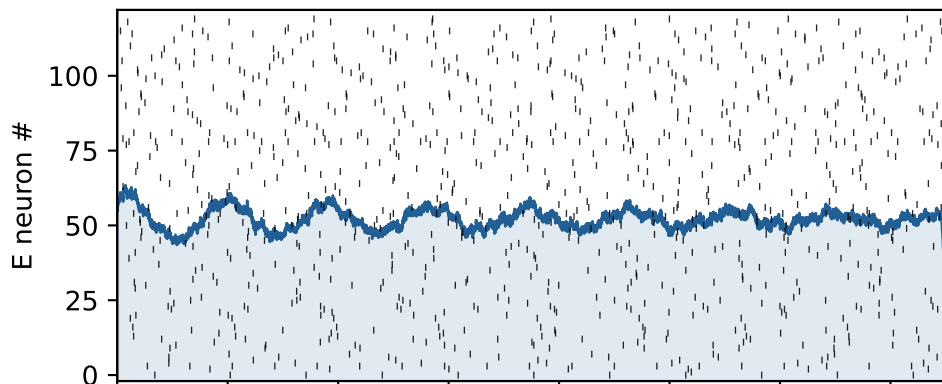

(b) Forced, TI ON ($\Delta f=55$ Hz): timing bunched

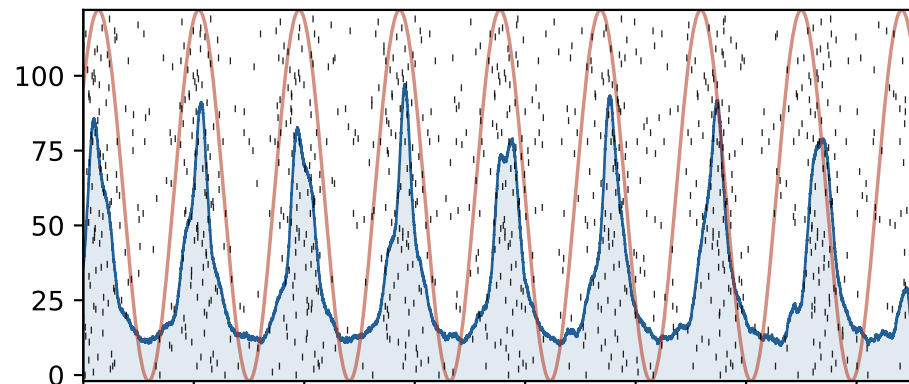

(c) Entrained (above Hopf), TI OFF: free gamma

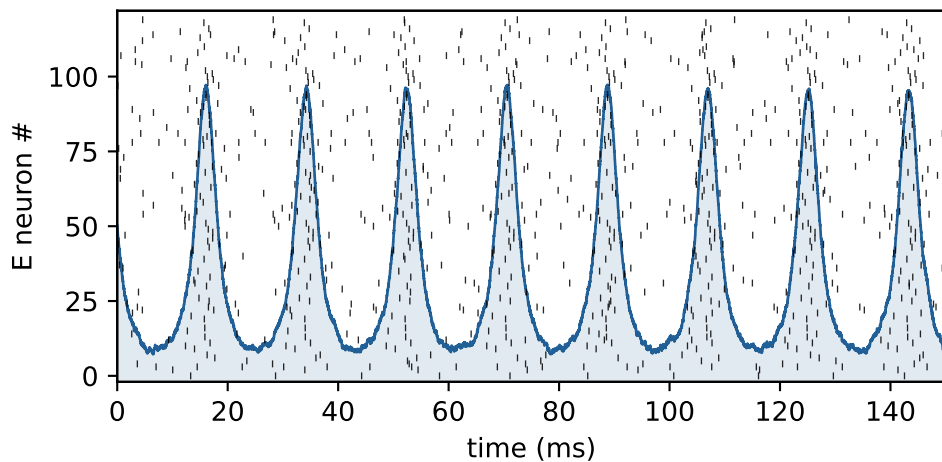

(d) Entrained, TI ON ($\Delta f=42$ Hz): re-timed to TI

