

# Contents

<b>1 Basic</b>	<b>1</b>	<b>7 Data Structure</b>	<b>26</b>
1.1 .vimrc	1	7.1 Segment tree	26
1.2 Increase Stack Size	1	7.2 Treap	26
1.3 Misc	1	7.3 Link-Cut Tree	26
1.4 check	1	7.4 Disjoint Set	27
1.5 python-related	1	7.5 Black Magic	27
1.6 java-related	2	<b>8 Others</b>	<b>27</b>
<b>2 flow</b>	<b>2</b>	8.1 SOS dp	27
2.1 ISAP	2	8.2 Find max tangent(x,y is increasing)	27
2.2 MinCostFlow	2	8.3 Exact Cover Set	28
2.3 Dinic	3	<b>1 Basic</b>	
2.4 Kuhn Munkres 最大完美二分匹配	3	<b>1.1 .vimrc</b>	
2.5 Directed MST	3	syn on	
2.6 SW min-cut (不限 S-T 的 min-cut)	4	se ai nu ru cul mouse=a	
2.7 Max flow with lower/upper bound	4	se cin et ts=2 sw=2 sts=2	
2.8 HLPPA (稠密圖 flow)	5	so \$VIMRUNTIME/mswin.vim	
2.9 Flow Method	5	colo desert	
<b>3 Math</b>	<b>5</b>	se gfn=Monospace\ 14	
3.1 FFT	5	<b>1.2 Increase Stack Size</b>	
3.2 NTT	5	//stack resize (linux)	
3.3 Fast Walsh Transform	6	#include <sys/resource.h>	
3.4 Poly operator	6	void increase_stack_size() {	
3.5 O(1)mul	7	const rlim_t ks = 64*1024*1024;	
3.6 BigInt	7	struct rlimit rl;	
3.7 Linear Recurrence	7	int res=getrlimit(RLIMIT_STACK, &rl);	
3.8 Miller Rabin	8	if(res==0){	
3.9 Faulhaber ( $\sum_{i=1}^n i^p$ )	8	if(rl.rlim_cur<ks){	
3.10Chinese Remainder	8	rl.rlim_cur=ks;	
3.11Pollard Rho	9	res=setrlimit(RLIMIT_STACK, &rl);	
3.12Josephus Problem	9	} }	
3.13Gaussian Elimination	9	<b>1.3 Misc</b>	
3.14ax+by=gcd	9	編譯參數: -std=c++14 -Wall -Wshadow (-fsanitize=	
3.15Discrete sqrt	9	undefined)	
3.16Romberg 定積分	9	//check special cases for example (n==1)	
3.17Discrete K-th sqrt	9	//check size arrays	
3.18Prefix Inverse	10	#include <random>	
3.19Roots of Polynomial 找多項式的根	10	mt19937 gen(chrono::steady_clock::now().	
3.20Primes	10	time_since_epoch().count());	
3.21Phi	11	int randint(int lb, int ub)	
3.22Result	11	{ return uniform_int_distribution<int>(lb, ub)(gen); }	
<b>4 Geometry</b>	<b>11</b>	#define SECS ((double)clock() / CLOCKS_PER_SEC)	
4.1 definition	11	struct KeyHasher {	
4.2 Intersection of 2 lines	11	size_t operator()(const Key& k) const {	
4.3 halfPlaneIntersection	12	return k.first + k.second * 100000;	
4.4 Convex Hull	12	} };	
4.5 Convex Hull 3D	12	typedef unordered_map<Key,int,KeyHasher> map_t;	
4.6 Intersection of 2 segments	12	__builtin_popcountll //換成二進位有幾個1	
4.7 Intersection of circle and segment	13	__builtin_clzll //返回左起第一個1之前0的個數	
4.8 Intersection of polygon and circle	13	__builtin_parityll //返回1的個數的奇偶性	
4.9 Intersection of 2 circles	13	__builtin_mul_overflow(a,b,&h) //回傳a*b是否溢位	
4.10Circle cover	13	<b>1.4 check</b>	
4.11Convex Hull trick	13	for ((i=0;;i++))	
4.12Tangent line of two circles	14	do	
4.13KD Tree	14	echo "\$i"	
4.14Lower Concave Hull	15	python3 gen.py > input	
4.15Min Enclosing Circle	15	./ac < input > ac.out	
4.16Min Enclosing Ball	15	./wa < input > wa.out	
4.17Minkowski sum	16	diff ac.out wa.out    break	
4.18Min dist on Cuboid	16	done	
4.19Heart of Triangle	16	<b>1.5 python-related</b>	
<b>5 Graph</b>	<b>16</b>	parser:	
5.1 DominatorTree	16	int(eval(num.replace("/", "/"))) )	
5.2 MaximumClique 最大團	16	from fractions import Fraction	
5.3 MaximalClique 極大團	17	from decimal import Decimal, getcontext	
5.4 Strongly Connected Component	17	getcontext().prec = 250 # set precision	
5.5 Dynamic MST	17		
5.6 Maximum General graph Matching	18		
5.7 Minimum General Weighted Matching	18		
5.8 Maximum General Weighted Matching	19		
5.9 Minimum Steiner Tree	20		
5.10BCC based on vertex	20		
5.11Min Mean Cycle	21		
5.12Directed Graph Min Cost Cycle	21		
5.13K-th Shortest Path	22		
5.14SPFA	22		
5.15差分約束	23		
5.16Graph Hash	23		
5.17eulerPath	23		
<b>6 String</b>	<b>23</b>		
6.1 PalTree	23		
6.2 KMP	23		
6.3 SAIS	24		
6.4 SuffixAutomata	24		
6.5 Aho-Corasick	24		
6.6 Z Value	25		
6.7 BWT	25		
6.8 ZValue Palindrome	25		
6.9 Smallest Rotation	25		
6.10Cyclic LCS	25		

```
itwo = Decimal(0.5)
two = Decimal(2)

format(x, '0.10f') # set precision
```

```
N = 200
def angle(cosT):
    """given cos(theta) in decimal return theta"""
    for i in range(N):
        cosT = ((cosT + 1) / two) ** itwo
        sinT = (1 - cosT * cosT) ** itwo
        return sinT * (2 ** N)
pi = angle(Decimal(-1))
```

## 1.6 java-related

```
import java.io.*;
import java.util.*;
import java.lang.*;
import java.math.*;

public class filename{
    static Scanner in = new Scanner(System.in);
    public static void main(String[] args) throws
        Exception {
        Scanner fin = new Scanner(new File("infile"));
        PrintWriter fout = new PrintWriter("outfile", "
            UTF-8");
        fout.println(fin.nextLine());
        fout.close();
        while (in.hasNext()) {
            String str = in.nextLine(); // getline
            String stu = in.next(); // string
        }
        System.out.println("Case #" + t);
        System.out.printf("%d\n", 7122);
        int[][] d = {{7,1,2,2},{8,7}};
        int g = Integer.parseInt("-123");

        long f = (long)d[0][2];

        List<Integer> l = new ArrayList<>();
        Random rg = new Random();
        for (int i = 9; i >= 0; --i) {
            l.add(Integer.valueOf(rg.nextInt(100) + 1));
            ;
            l.add(Integer.valueOf((int)(Math.random() *
                100) + 1));
        }
        Collections.sort(l, new Comparator<Integer>() {
            public int compare(Integer a, Integer b) {
                return a - b; }
        });
        for (int i = 0; i < l.size(); ++i)
            System.out.print(l.get(i));

        Set<String> s = new HashSet<String>(); //
            TreeSet
        s.add("jizz");
        System.out.println(s);
        System.out.println(s.contains("jizz"));

        Map<String, Integer> m = new HashMap<String,
            Integer>();
        m.put("lol", 7122);
        System.out.println(m);
        for(String key: m.keySet())
            System.out.println(key + " : " + m.get(key)
                );
        System.out.println(m.containsKey("lol"));
        System.out.println(m.containsValue(7122));

        System.out.println(Math.PI);
        System.out.println(Math.acos(-1));

        BigInteger bi = in.nextBigInteger(), bj = new
            BigInteger("-8787"), bk = BigInteger.
            valueOf(87878);
        int sgn = bi.signum(); // sign(bi)
        bi = bi.subtract(BigInteger.ONE).multiply(bj).
            divide(bj).and(bj).gcd(bj).max(bj).pow(87);
        int meow = bi.compareTo(bj); // -1 0 1
```

```
String stz = "HongLongLongLong";
BigInteger b16 = new BigInteger(stz, 16);
System.out.println(b16.toString(2));
    }
}
```

## 2 flow

### 2.1 ISAP

```
struct Maxflow {
    static const int MAXV = 20010;
    static const int INF = 1000000;
    struct Edge {
        int v, c, r;
        Edge(int _v, int _c, int _r):
            v(_v), c(_c), r(_r) {}
    };
    int s, t;
    vector<Edge> G[MAXV*2];
    int iter[MAXV*2], d[MAXV*2], gap[MAXV*2], tot;
    void init(int x) {
        tot = x+2;
        s = x+1, t = x+2;
        for(int i = 0; i <= tot; i++) {
            G[i].clear();
            iter[i] = d[i] = gap[i] = 0;
        }
    }
    void addEdge(int u, int v, int c) {
        G[u].push_back(Edge(v, c, SZ(G[v])));
        G[v].push_back(Edge(u, 0, SZ(G[u]) - 1));
    }
    int dfs(int p, int flow) {
        if(p == t) return flow;
        for(int &i = iter[p]; i < SZ(G[p]); i++) {
            Edge &e = G[p][i];
            if(e.c > 0 && d[p] == d[e.v]+1) {
                int f = dfs(e.v, min(flow, e.c));
                if(f) {
                    e.c -= f;
                    G[e.v][e.r].c += f;
                    return f;
                }
            }
        }
        if( (--gap[d[p]]) == 0) d[s] = tot;
        else {
            d[p]++;
            iter[p] = 0;
            ++gap[d[p]];
        }
        return 0;
    }
    int solve() {
        int res = 0;
        gap[0] = tot;
        for(res = 0; d[s] < tot; res += dfs(s, INF));
        return res;
    }
    void reset() {
        for(int i=0;i<=tot;i++) {
            iter[i]=d[i]=gap[i]=0;
        }
    }
} }flow;
```

### 2.2 MinCostFlow

```
struct MinCostMaxFlow{
    typedef int Tcost;
    static const int MAXV = 20010;
    static const int INFf = 1000000;
    static const Tcost INFc = 1e9;
    struct Edge{
        int v, cap;
        Tcost w;
        int rev;
        Edge(){
            Edge(int t2, int t3, Tcost t4, int t5)
                : v(t2), cap(t3), w(t4), rev(t5) {}
    };
    int V, s, t;
    vector<Edge> g[MAXV];
    void init(int n, int _s, int _t){
        V = n; s = _s; t = _t;
        for(int i = 0; i <= V; i++) g[i].clear();
    }
```

```

}
void addEdge(int a, int b, int cap, Tcost w){
    g[a].push_back(Edge(b, cap, w, (int)g[b].size()));
    g[b].push_back(Edge(a, 0, -w, (int)g[a].size()-1));
}
Tcost d[MAXV];
int id[MAXV], mom[MAXV];
bool inqu[MAXV];
queue<int> q;
pair<int,Tcost> solve(){
    int mxf = 0; Tcost mnc = 0;
    while(1){
        fill(d, d+1+V, INF);
        fill(inqu, inqu+1+V, 0);
        fill(mom, mom+1+V, -1);
        mom[s] = s;
        d[s] = 0;
        q.push(s); inqu[s] = 1;
        while(q.size()){
            int u = q.front(); q.pop();
            inqu[u] = 0;
            for(int i = 0; i < (int) g[u].size(); i++){
                Edge &e = g[u][i];
                int v = e.v;
                if(e.cap > 0 && d[v] > d[u]+e.w){
                    d[v] = d[u]+e.w;
                    mom[v] = u;
                    id[v] = i;
                    if(!inqu[v]) q.push(v), inqu[v] = 1;
                }
            }
            if(mom[t] == -1) break;
            int df = INF;
            for(int u = t; u != s; u = mom[u])
                df = min(df, g[mom[u]][id[u]].cap);
            for(int u = t; u != s; u = mom[u]){
                Edge &e = g[mom[u]][id[u]];
                e.cap -= df;
                g[e.v][e.rev].cap += df;
            }
            mxf += df;
            mnc += df*d[t];
        }
        return {mxf,mnc};
    }
} }flow;

```

### 2.3 Dinic

```

struct Dinic{
    struct Edge{ int v,f,re; };
    int n,s,t,level[MXN];
    vector<Edge> E[MXN];
    void init(int _n, int _s, int _t){
        n = _n; s = _s; t = _t;
        for (int i=0; i<n; i++) E[i].clear();
    }
    void add_edge(int u, int v, int f){
        E[u].PB({v,f,SZ(E[v])});
        E[v].PB({u,0,SZ(E[u])-1});
    }
    bool BFS(){
        for (int i=0; i<n; i++) level[i] = -1;
        queue<int> que;
        que.push(s);
        level[s] = 0;
        while (!que.empty()){
            int u = que.front(); que.pop();
            for (auto it : E[u]){
                if (it.f > 0 && level[it.v] == -1){
                    level[it.v] = level[u]+1;
                    que.push(it.v);
                }
            }
        }
        return level[t] != -1;
    }
    int DFS(int u, int nf){
        if (u == t) return nf;
        int res = 0;
        for (auto &it : E[u]){
            if (it.f > 0 && level[it.v] == level[u]+1){
                int tf = DFS(it.v, min(nf,it.f));
                res += tf; nf -= tf; it.f -= tf;
                E[it.v][it.re].f += tf;
                if (nf == 0) return res;
            }
        }
    }
}

```

```

} }
if (!res) level[u] = -1;
return res;
}
int flow(int res=0){
    while ( BFS() )
        res += DFS(s,2147483647);
    return res;
} }flow;

```

### 2.4 Kuhn Munkres 最大完美二分匹配

```

struct KM{ // max weight, for min negate the weights
    int n, mx[MXN], my[MXN], pa[MXN];
    ll g[MXN][MXN], lx[MXN], ly[MXN], sy[MXN];
    bool vx[MXN], vy[MXN];
    void init(int _n) { // 1-based
        n = _n;
        for(int i=1; i<=n; i++) fill(g[i], g[i]+n+1, 0);
    }
    void addEdge(int x, int y, ll w) {g[x][y] = w;}
    void augment(int y) {
        for(int x, z; y; y = z)
            x=pa[y], z=mx[x], my[y]=x, mx[x]=y;
    }
    void bfs(int st) {
        for(int i=1; i<=n; ++i) sy[i]=INF, vx[i]=vy[i]=0;
        queue<int> q; q.push(st);
        for(;;) {
            while(q.size()) {
                int x=q.front(); q.pop(); vx[x]=1;
                for(int y=1; y<=n; ++y) if(!vy[y]){
                    ll t = lx[x]+ly[y]-g[x][y];
                    if(t==0){
                        pa[y]=x;
                        if(!my[y]){augment(y);return;}
                        vy[y]=1, q.push(my[y]);
                    }else if(sy[y]>t) pa[y]=x,sy[y]=t;
                }
            }
            ll cut = INF;
            for(int y=1; y<=n; ++y)
                if(!vy[y]&&cut>sy[y]) cut=sy[y];
            for(int j=1; j<=n; ++j){
                if(vx[j]) lx[j] -= cut;
                if(vy[j]) ly[j] += cut;
                else sy[j] -= cut;
            }
            for(int y=1; y<=n; ++y) if(!vy[y]&&sy[y]==0){
                if(!my[y]){augment(y);return;}
                vy[y]=1, q.push(my[y]);
            }
        }
    }
    ll solve(){
        fill(mx, mx+n+1, 0); fill(my, my+n+1, 0);
        fill(ly, ly+n+1, 0); fill(lx, lx+n+1, -INF);
        for(int x=1; x<=n; ++x) for(int y=1; y<=n; ++y)
            lx[x] = max(lx[x], g[x][y]);
        for(int x=1; x<=n; ++x) bfs(x);
        ll ans = 0;
        for(int y=1; y<=n; ++y) ans += g[my[y]][y];
        return ans;
    }
} }graph;

```

### 2.5 Directed MST

```

/* Edmond's algoirthm for Directed MST
 * runs in O(VE) */
const int MAXV = 10010;
const int MAXE = 10010;
const int INF = 2147483647;
struct Edge{
    int u, v, c;
    Edge(int x=0, int y=0, int z=0) : u(x), v(y), c(z){}
};
int V, E, root;
Edge edges[MAXE];
inline int newV(){ return ++ V; }
inline void addEdge(int u, int v, int c)
{ edges[++E] = Edge(u, v, c); }
bool con[MAXV];
int mnInW[MAXV], prv[MAXV], cyc[MAXV], vis[MAXV];
inline int DMST(){
    fill(con, con+V+1, 0);
}

```

```

int r1 = 0, r2 = 0;
while(1){
    fill(mnInW, mnInW+V+1, INF);
    fill(prv, prv+V+1, -1);
    REP(i, 1, E){
        int u=edges[i].u, v=edges[i].v, c=edges[i].c;
        if(u != v && v != root && c < mnInW[v])
            mnInW[v] = c, prv[v] = u;
    }
    fill(vis, vis+V+1, -1);
    fill(cyc, cyc+V+1, -1);
    r1 = 0;
    bool jf = 0;
    REP(i, 1, V){
        if(con[i]) continue;
        if(prv[i] == -1 && i != root) return -1;
        if(prv[i] > 0) r1 += mnInW[i];
        int s;
        for(s = i; s != -1 && vis[s] == -1; s = prv[s])
            vis[s] = i;
        if(s > 0 && vis[s] == i){
            // get a cycle
            jf = 1; int v = s;
            do{
                cyc[v] = s, con[v] = 1;
                r2 += mnInW[v]; v = prv[v];
            }while(v != s);
            con[s] = 0;
        }
    }
    if(!jf) break;
    REP(i, 1, E){
        int &u = edges[i].u;
        int &v = edges[i].v;
        if(cyc[v] > 0) edges[i].c -= mnInW[edges[i].v];
        if(cyc[u] > 0) edges[i].u = cyc[edges[i].u];
        if(cyc[v] > 0) edges[i].v = cyc[edges[i].v];
        if(u == v) edges[i--] = edges[E--];
    }
    return r1+r2;
}

```

## 2.6 SW min-cut (不限 S-T 的 min-cut)

```

// global min cut
struct SW{ // O(V^3)
    int n,vst[MXN],del[MXN];
    int edge[MXN][MXN],wei[MXN];
    void init(int _n){
        n = _n; FZ(edge); FZ(del);
    }
    void addEdge(int u, int v, int w){
        edge[u][v] += w; edge[v][u] += w;
    }
    void search(int &s, int &t){
        FZ(vst); FZ(wei);
        s = t = -1;
        while(true){
            int mx=-1, cur=0;
            for(int i=0; i<n; i++){
                if(!del[i] && !vst[i] && mx<wei[i])
                    cur = i, mx = wei[i];
            }
            if(mx == -1) break;
            vst[cur] = 1;
            s = t; t = cur;
            for(int i=0; i<n; i++){
                if(!vst[i] && !del[i]) wei[i] += edge[cur][i];
            }
        }
    }
    int solve(){
        int res = 2147483647;
        for(int i=0,x,y; i<n-1; i++){
            search(x,y);
            res = min(res,wei[y]);
            del[y] = 1;
            for(int j=0; j<n; j++){
                edge[x][j] = (edge[j][x] += edge[y][j]);
            }
        }
        return res;
    }
}graph;

```

## 2.7 Max flow with lower/upper bound

```

// flow use ISAP
// Max flow with lower/upper bound on edges
// source = 1, sink = n
int in[ N ], out[ N ];
int l[ M ], r[ M ], a[ M ], b[ M ]; // 0-base, a下界, b上界
int solve(){
    flow.init( n ); // n為點的數量, m為邊的數量, 點是1-base
    for( int i = 0; i < m; i ++ ){
        in[ r[ i ] ] += a[ i ];
        out[ l[ i ] ] += a[ i ];
        flow.addEdge( l[ i ], r[ i ], b[ i ] - a[ i ] );
        // flow from l[i] to r[i] must in [a[i], b[i]]
    }
    int nd = 0;
    for( int i = 1; i <= n; i ++ ){
        if( in[ i ] < out[ i ] ){
            flow.addEdge( i, flow.t, out[ i ] - in[ i ] );
            nd += out[ i ] - in[ i ];
        }
        if( out[ i ] < in[ i ] ){
            flow.addEdge( flow.s, i, in[ i ] - out[ i ] );
        }
    }
    // original sink to source
    flow.addEdge( n, 1, INF );
    if( flow.maxflow() != nd ){
        // no solution
        return -1;
    }
    int ans = flow.G[ 1 ].back().c; // source to sink
    flow.G[ 1 ].back().c = flow.G[ n ].back().c = 0;
    // take out super source and super sink
    for( size_t i = 0; i < flow.G[ flow.s ].size(); i ++ ){
        flow.G[ flow.s ][ i ].c = 0;
        Edge &e = flow.G[ flow.s ][ i ];
        flow.G[ e.v ][ e.r ].c = 0;
    }
    for( size_t i = 0; i < flow.G[ flow.t ].size(); i ++ ){
        flow.G[ flow.t ][ i ].c = 0;
        Edge &e = flow.G[ flow.t ][ i ];
        flow.G[ e.v ][ e.r ].c = 0;
    }
    flow.addEdge( flow.s, 1, INF );
    flow.addEdge( n, flow.t, INF );
    flow.reset();
    return ans + flow.maxflow();
}

```

## 2.8 HLPPA (稠密圖 flow)

```

template <int MAXN, class T = int>
struct HLPP {
    const T INF = numeric_limits<T>::max();
    struct Edge {
        int to, rev; T f;
    };
    int n, s, t;
    vector<Edge> adj[MAXN];
    deque<int> lst[MAXN];
    vector<int> gap[MAXN];
    int ptr[MAXN];
    T ef[MAXN];
    int h[MAXN], cnt[MAXN], work, hst=0/*highest*/;
    void init(int _n, int _s, int _t) {
        n=_n+1; s=_s; t=_t;
        for(int i=0;i<n;i++) adj[i].clear();
    }
    void addEdge(int u,int v,T f,bool isDir = true){
        adj[u].push_back({v,adj[v].size(),f});
        adj[v].push_back({u,adj[u].size()-1,isDir?f:0});
    }
    void updHeight(int v, int nh) {
        work++;
        if(h[v] != n) cnt[h[v]]--;
        h[v] = nh;
        if(nh == n) return;
        cnt[nh]++, hst = nh; gap[nh].push_back(v);
        if(ef[v]>0) lst[nh].push_back(v), ptr[nh]++;
    }
    void globalRelabel() {

```

```

work = 0;
fill(h, h+n, n);
fill(cnt, cnt+n, 0);
for(int i=0; i<=hst; i++)
    lst[i].clear(), gap[i].clear(), ptr[i] = 0;
queue<int> q({t}); h[t] = 0;
while(!q.empty()) {
    int v = q.front(); q.pop();
    for(auto &e : adj[v])
        if(h[e.to] == n && adj[e.to][e.rev].f > 0)
            q.push(e.to), updHeight(e.to, h[v] + 1);
    hst = h[v];
}
}
void push(int v, Edge &e) {
    if(ef[e.to] == 0)
        lst[h[e.to]].push_back(e.to), ptr[h[e.to]]++;
    T df = min(ef[v], e.f);
    e.f -= df, adj[e.to][e.rev].f += df;
    ef[v] -= df, ef[e.to] += df;
}
void discharge(int v) {
    int nh = n;
    for(auto &e : adj[v]) {
        if(e.f > 0) {
            if(h[v] == h[e.to] + 1) {
                push(v, e);
                if(ef[v] <= 0) return;
            }
            else nh = min(nh, h[e.to] + 1);
        }
    }
    if(cnt[h[v]] > 1) updHeight(v, nh);
    else {
        for(int i = h[v]; i < n; i++) {
            for(auto j : gap[i]) updHeight(j, n);
            gap[i].clear(), ptr[i] = 0;
        }
    }
}
T solve() {
    fill(ef, ef+n, 0);
    ef[s] = INF, ef[t] = -INF;
    globalRelabel();
    for(auto &e : adj[s]) push(s, e);
    for(; hst >= 0; hst--) {
        while(!lst[hst].empty()) {
            int v=lst[hst].back(); lst[hst].pop_back();
            discharge(v);
            if(work > 4 * n) globalRelabel();
        }
    }
    return ef[t] + INF;
}
};

```

## 2.9 Flow Method

Maximize  $c^T x$  subject to  $Ax \leq b$ ,  $x \geq 0$ ;  
 with the corresponding symmetric dual problem,  
 Minimize  $b^T y$  subject to  $A^T y \geq c$ ,  $y \geq 0$ .

Maximize  $c^T x$  subject to  $Ax \leq b$ ;  
 with the corresponding asymmetric dual problem,  
 Minimize  $b^T y$  subject to  $A^T y = c$ ,  $y \geq 0$ .

Minimum vertex cover on bipartite graph =  
 Maximum matching on bipartite graph

Minimum edge cover on bipartite graph =  
 vertex number - Minimum vertex cover(Maximum matching)

Independent set on bipartite graph =  
 vertex number - Minimum vertex cover(Maximum matching)

找出最小點覆蓋，做完dinic之後，從源點dfs只走還有流量的邊，紀錄每個點有沒有被走到，左邊沒被走到的點跟右邊被走到的點就是答案

Maximum density subgraph ( $\sum W_e + \sum W_v$ ) /  $|V|$

Binary search on answer:

For a fixed  $D$ , construct a Max flow model as follow:  
 Let  $S$  be Sum of all weight( or inf)

1. from source to each node with cap =  $S$
2. For each  $(u, v, w)$  in  $E$ ,  $(u \rightarrow v, \text{cap}=w)$ ,  $(v \rightarrow u, \text{cap}=w)$
3. For each node  $v$ , from  $v$  to sink with cap =  $S + 2 * D - \text{deg}[v] - 2 * (W \text{ of } v)$

where  $\text{deg}[v] = \sum \text{weight of edge associated with } v$   
 If  $\text{maxflow} < S * |V|$ ,  $D$  is an answer.

Requiring subgraph: all vertex can be reached from source with edge whose cap  $> 0$ .

## 3 Math

### 3.1 FFT

```

// const int MAXN = 262144;
// (must be 2^k)
// before any usage, run pre_fft() first
typedef long double ld;
typedef complex<ld> cplx; //real() ,imag()
const ld PI = acos(-1);
const cplx I(0, 1);
cplx omega[MAXN+1];
void pre_fft(){
    for(int i=0; i<=MAXN; i++)
        omega[i] = exp(i * 2 * PI / MAXN * I);
}
// n must be 2^k
void fft(int n, cplx a[], bool inv=false){
    int basic = MAXN / n;
    int theta = basic;
    for (int m = n; m >= 2; m >= 1) {
        int mh = m >> 1;
        for (int i = 0; i < mh; i++) {
            cplx w = omega[inv ? MAXN-(i*theta%MAXN) : i*theta%MAXN];
            for (int j = i; j < n; j += m) {
                int k = j + mh;
                cplx x = a[j] - a[k];
                a[j] += a[k];
                a[k] = w * x;
            }
            theta = (theta * 2) % MAXN;
        }
    }
    int i = 0;
    for (int j = 1; j < n - 1; j++) {
        for (int k = n >> 1; k > (i ^= k); k >= 1);
        if (j < i) swap(a[i], a[j]);
    }
    if(inv) for (i = 0; i < n; i++) a[i] /= n;
}
cplx arr[MAXN+1];
inline void mul(int _n, ll a[], int _m, ll b[], ll ans[])
{
    int n=1, sum=_n+_m-1;
    while(n<sum)
        n<<=1;
    for(int i=0; i<n; i++)
    {
        double x=(i<_n?a[i]:0), y=(i<_m?b[i]:0);
        arr[i]=complex<double>(x+y, x-y);
    }
    fft(n, arr);
    for(int i=0; i<n; i++)
        arr[i]=arr[i]*arr[i];
    fft(n, arr, true);
    for(int i=0; i<sum; i++)
        ans[i]=(long long int)(arr[i].real()/4+0.5);
}

```

### 3.2 NTT

```

// Remember coefficient are mod P
/* p=a*2^n+1
n    2^n    p    a    root
16   65536   65537   1    3
20   1048576  7340033  7    3 */
// (must be 2^k)
template<LL P, LL root, int MAXN>
struct NTT{
    static LL bigmod(LL a, LL b) {
        LL res = 1;
        for (LL bs = a; b; b >= 1, bs = (bs * bs) % P)
            if(b&1) res=(res*bs)%P;
        return res;
    }
}

```



```

static LL inv(LL a, LL b) {
    if(a==1) return 1;
    return ((LL)(a-inv(b%a,a))*b+1)/a%b;
}
LL omega[MAXN+1];
NTT() {
    omega[0] = 1;
    LL r = bigmod(root, (P-1)/MAXN);
    for (int i=1; i<=MAXN; i++)
        omega[i] = (omega[i-1]*r)%P;
}
// n must be 2^k
void tran(int n, LL a[], bool inv_ntt=false) {
    int basic = MAXN / n, theta = basic;
    for (int m = n; m >= 2; m >= 1) {
        int mh = m >> 1;
        for (int i = 0; i < mh; i++) {
            LL w = omega[i*theta%MAXN];
            for (int j = i; j < n; j += m) {
                int k = j + mh;
                LL x = a[j] - a[k];
                if (x < 0) x += P;
                a[j] += a[k];
                if (a[j] > P) a[j] -= P;
                a[k] = (w * x) % P;
            }
        }
        theta = (theta * 2) % MAXN;
    }
    int i = 0;
    for (int j = 1; j < n - 1; j++) {
        for (int k = n >> 1; k > (i ^ k); k >= 1);
        if (j < i) swap(a[i], a[j]);
    }
    if (inv_ntt) {
        LL ni = inv(n,P);
        reverse(a+1, a+n);
        for (i = 0; i < n; i++)
            a[i] = (a[i] * ni) % P;
    }
}
};
const LL P=2013265921, root=31;
const int MAXN=4194304;
NTT<P, root, MAXN> ntt;

```

### 3.3 Fast Walsh Transform

```

/* xor convolution:
* x = (x0,x1), y = (y0,y1)
* z = (x0y0 + x1y1, x0y1 + x1y0)
* =>
* x' = (x0+x1, x0-x1), y' = (y0+y1, y0-y1)
* z' = ((x0+x1)(y0+y1), (x0-x1)(y0-y1))
* z = (1/2) * z'
* or convolution:
* x = (x0, x0+x1), inv = (x0, x1-x0) w/o final div
* and convolution:
* x = (x0+x1, x1), inv = (x0-x1, x1) w/o final div */
const int MAXN = (1<<20)+10;
inline LL inv(LL x) {
    return mypow(x, MOD-2);
}
inline void fwt(LL x[ MAXN ], int N, bool inv=0) {
    for (int d = 1; d < N; d <= 1) {
        int d2 = d<<1;
        for (int s = 0; s < N; s += d2)
            for (int i = s, j = s+d; i < s+d; i++, j++) {
                LL ta = x[i], tb = x[j];
                x[i] = ta+tb;
                x[j] = ta-tb;
                if (x[i] >= MOD) x[i] -= MOD;
                if (x[j] < 0) x[j] += MOD;
            }
    }
    if (inv)
        for (int i = 0; i < N; i++) {
            x[i] *= inv(N);
            x[i] %= MOD;
        }
}

```

### 3.4 Poly operator

```

struct PolyOp {
#define FOR(i, c) for (int i = 0; i < (c); ++i)
    NTT<P, root, MAXN> ntt;
    static int nxt2k(int x) {
        int i = 1; for (; i < x; i <= 1); return i;
    }
    // c[i]=sum{j=0~i}a[j]*b[i-j] -> c[i+j]=a[i]*b[j] (加
    // 分卷積)
    // if c[i-j]=a[i]*b[j] (減法卷積)
    // (轉換成加法卷積) -> reverse(a); c=mul(a,b);
    // reverse(c);
    void Mul(int n, LL a[], int m, LL b[], LL c[]) {
        static LL aa[MAXN], bb[MAXN];
        int N = nxt2k(n+m);
        copy(a, a+n, aa); fill(aa+n, aa+N, 0);
        copy(b, b+m, bb); fill(bb+m, bb+N, 0);
        ntt.tran(N, aa); ntt.tran(N, bb);
        FOR(i, N) c[i] = aa[i] * bb[i] % P;
        ntt.tran(N, c, 1);
    }
    void Inv(int n, LL a[], LL b[]) {
        // ab = aa^-1 = 1 mod x^(n/2)
        // (b - a^-1)^2 = 0 mod x^n
        // bb - a^-2 + 2ba^-1 = 0
        // bba - a^-1 + 2b = 0
        // bba + 2b = a^-1
        static LL tmp[MAXN];
        if (n == 1) {b[0] = ntt.inv(a[0], P); return;}
        Inv((n+1)/2, a, b);
        int N = nxt2k(n*2);
        copy(a, a+n, tmp);
        fill(tmp+n, tmp+N, 0);
        fill(b+n, b+N, 0);
        ntt.tran(N, tmp); ntt.tran(N, b);
        FOR(i, N) {
            LL t1 = (2 - b[i] * tmp[i]) % P;
            if (t1 < 0) t1 += P;
            b[i] = b[i] * t1 % P;
        }
        ntt.tran(N, b, 1);
        fill(b+n, b+N, 0);
    }
    void Div(int n, LL a[], int m, LL b[], LL d[], LL r
    []) {
        // Ra = Rb * Rd mod x^(n-m+1)
        // Rd = Ra * Rb^-1 mod
        static LL aa[MAXN], bb[MAXN], ta[MAXN], tb[MAXN];
        if (n < m) {copy(a, a+n, r); fill(r+n, r+m, 0);
            return;}
        // d: n-1 - (m-1) = n-m (n-m+1 terms)
        copy(a, a+n, aa); copy(b, b+m, bb);
        reverse(aa, aa+n); reverse(bb, bb+m);
        Inv(n-m+1, bb, tb);
        Mul(n-m+1, ta, n-m+1, tb, d);
        fill(d+n-m+1, d+n, 0); reverse(d, d+n-m+1);
        // r: m-1 - 1 = m-2 (m-1 terms)
        Mul(m, b, n-m+1, d, ta);
        FOR(i, n) {r[i] = a[i] - ta[i]; if (r[i] < 0) r[i]
            += P;}
    }
    void dx(int n, LL a[], LL b[]) { REP(i, 1, n-1) b[i]
        -1] = i * a[i] % P; }
    void Sx(int n, LL a[], LL b[]) {
        b[0] = 0;
        FOR(i, n) b[i+1] = a[i] * ntt.inv(i+1, P) % P;
    }
    void Ln(int n, LL a[], LL b[]) {
        // Integral a' a^-1 dx
        static LL a1[MAXN], a2[MAXN], b1[MAXN];
        int N = nxt2k(n*2);
        dx(n, a, a1); Inv(n, a, a2);
        Mul(n-1, a1, n, a2, b1);
        Sx(n+n-1-1, b1, b);
        fill(b+n, b+N, 0);
    }
    void Exp(int n, LL a[], LL b[]) {
        // Newton method to solve g(a(x)) = ln b(x) - a(x)
        // = 0
        // b' = b - g(b(x)) / g'(b(x))
        // b' = b (1 - ln b + a)
        static LL lnb[MAXN], c[MAXN], tmp[MAXN];
    }
}

```

```

    assert(a[0] == 0); // dont know exp(a[0]) mod P
    if (n == 1) {b[0] = 1; return;}
    Exp((n+1)/2, a, b);
    fill(b+(n+1)/2, b+n, 0);
    Ln(n, b, lnb);
    fill(c, c+n, 0); c[0] = 1;
    FOR(i, n) {
        c[i] += a[i] - lnb[i];
        if (c[i] < 0) c[i] += P;
        if (c[i] >= P) c[i] -= P;
    }
    Mul(n, b, n, c, tmp);
    copy(tmp, tmp+n, b);
}
} polyop;

```

### 3.5 O(1)mul

```

LL mul(LL x, LL y, LL mod){
    LL ret=x*y-(LL)((long double)x/mod*y)*mod;
    // LL ret=x*y-(LL)((long double)x*y/mod+0.5)*mod;
    return ret<0?ret+mod:ret;
}

```

### 3.6 BigInt

```

struct BigInt{
    static const int LEN = 60;
    static const int BIGMOD = 10000;
    int s;
    int vl, v[LEN];
    // vector<int> v;
    BigInt() : s(1) { vl = 0; }
    BigInt(long long a) {
        s = 1; vl = 0;
        if (a < 0) { s = -1; a = -a; }
        while (a) {
            push_back(a % BIGMOD);
            a /= BIGMOD;
        }
    }
    BigInt(string str) {
        s = 1; vl = 0;
        int stPos = 0, num = 0;
        if (!str.empty() && str[0] == '-') {
            stPos = 1;
            s = -1;
        }
        for (int i=SZ(str)-1, q=1; i>=stPos; i--) {
            num += (str[i] - '0') * q;
            if ((q *= 10) >= BIGMOD) {
                push_back(num);
                num = 0; q = 1;
            }
        }
        if (num) push_back(num);
        n();
    }
    int len() const {
        return vl; // return SZ(v);
    }
    bool empty() const { return len() == 0; }
    void push_back(int x) {
        v[vl++] = x; // v.PB(x);
    }
    void pop_back() {
        vl--; // v.pop_back();
    }
    int back() const {
        return v[vl-1]; // return v.back();
    }
    void n() {
        while (!empty() && !back()) pop_back();
    }
    void resize(int nl) {
        vl = nl;
        fill(v, v+vl, 0);
        // v.resize(nl);
        // fill(ALL(v), 0);
    }
    void print() const {
        if (empty()) { putchar('0'); return; }
        if (s == -1) putchar('-');
        printf("%d", back());
    }
}

```

```

    for (int i=len()-2; i>=0; i--) printf("%.4d",v[i]);
}
friend ostream& operator << (ostream& out,
    const BigInt &a) {
    if (a.empty()) { out << "0"; return out; }
    if (a.s == -1) out << "-";
    out << a.back();
    for (int i=a.len()-2; i>=0; i--) {
        char str[10];
        snprintf(str, 5, "%.4d", a.v[i]);
        out << str;
    }
    return out;
}
int cp3(const BigInt &b) const {
    if (s != b.s) return s - b.s;
    if (s == -1) return -(*this).cp3(-b);
    if (len() != b.len()) return len()-b.len(); //int
    for (int i=len()-1; i>=0; i--)
        if (v[i] != b.v[i]) return v[i]-b.v[i];
    return 0;
}
bool operator<(const BigInt &b) const
{ return cp3(b)<0; }
bool operator<=(const BigInt &b) const
{ return cp3(b)<=0; }
bool operator==(const BigInt &b) const
{ return cp3(b)==0; }
bool operator!=(const BigInt &b) const
{ return cp3(b)!=0; }
bool operator>(const BigInt &b) const
{ return cp3(b)>0; }
bool operator>=(const BigInt &b) const
{ return cp3(b)>=0; }
BigInt operator - () const {
    BigInt r = (*this);
    r.s = -r.s;
    return r;
}
BigInt operator + (const BigInt &b) const {
    if (s == -1) return -(-(*this)+(-b));
    if (b.s == -1) return (*this)-(-b);
    BigInt r;
    int nl = max(len(), b.len());
    r.resize(nl + 1);
    for (int i=0; i<nl; i++) {
        if (i < len()) r.v[i] += v[i];
        if (i < b.len()) r.v[i] += b.v[i];
        if (r.v[i] >= BIGMOD) {
            r.v[i+1] += r.v[i] / BIGMOD;
            r.v[i] %= BIGMOD;
        }
    }
    r.n();
    return r;
}
BigInt operator - (const BigInt &b) const {
    if (s == -1) return -(-(*this)-(-b));
    if (b.s == -1) return (*this)+(-b);
    if ((*this) < b) return -(b-(*this));
    BigInt r;
    r.resize(len());
    for (int i=0; i<len(); i++) {
        r.v[i] += v[i];
        if (i < b.len()) r.v[i] -= b.v[i];
        if (r.v[i] < 0) {
            r.v[i] += BIGMOD;
            r.v[i+1]--;
        }
    }
    r.n();
    return r;
}
BigInt operator * (const BigInt &b) {
    BigInt r;
    r.resize(len() + b.len() + 1);
    r.s = s * b.s;
    for (int i=0; i<len(); i++) {
        for (int j=0; j<b.len(); j++) {
            r.v[i+j] += v[i] * b.v[j];
            if (r.v[i+j] >= BIGMOD) {
                r.v[i+j+1] += r.v[i+j] / BIGMOD;
                r.v[i+j] %= BIGMOD;
            }
        }
    }
}

```

```

    r.n();
    return r;
}
Bigint operator / (const Bigint &b) {
    Bigint r;
    r.resize(max(1, len()-b.len()+1));
    int oriS = s;
    Bigint b2 = b; // b2 = abs(b)
    s = b2.s = r.s = 1;
    for (int i=r.len()-1; i>=0; i--) {
        int d=0, u=BIGMOD-1;
        while(d<u) {
            int m = (d+u+1)>>1;
            r.v[i] = m;
            if((r*b2) > (*this)) u = m-1;
            else d = m;
        }
        r.v[i] = d;
    }
    s = oriS;
    r.s = s * b.s;
    r.n();
    return r;
}
Bigint operator % (const Bigint &b) {
    return (*this)-(*this)/b*b;
}
};

```

### 3.7 Linear Recurrence

```

// Usage: linearRec({0, 1}, {1, 1}, k) //k'th fib
typedef vector<ll> Poly;
//S:前i項的值,tr:遞迴係數,k:求第k項
ll linearRec(Poly& S, Poly& tr, ll k) {
    int n = tr.size();
    auto combine = [&](Poly& a, Poly& b) {
        Poly res(n * 2 + 1);
        rep(i,0,n+1) rep(j,0,n+1)
            res[i+j]=(res[i+j] + a[i]*b[j])%mod;
        for(int i = 2*n; i > n; --i) rep(j,0,n)
            res[i-1-j]=(res[i-1-j] + res[i]*tr[j])%mod;
        res.resize(n + 1);
        return res;
    };
    Poly pol(n + 1), e(pol);
    pol[0] = e[1] = 1;
    for (++k; k; k /= 2) {
        if (k % 2) pol = combine(pol, e);
        e = combine(e, e);
    }
    ll res = 0;
    rep(i,0,n) res=(res + pol[i+1]*S[i])%mod;
    return res;
}

```

### 3.8 Miller Rabin

```

// n < 4,759,123,141      3 : 2, 7, 61
// n < 1,122,004,669,633  4 : 2, 13, 23, 1662803
// n < 3,474,749,660,383  6 : pirmes <= 13
// n < 2^64              7 :
// 2, 325, 9375, 28178, 450775, 9780504, 1795265022
// Make sure testing integer is in range [2, n-2] if
// you want to use magic.
LL magic[]={}
bool witness(LL a,LL n,LL u,int t){
    if(!a) return 0;
    LL x=mypow(a,u,n);
    for(int i=0;i<t;i++) {
        LL nx=mul(x,x,n);
        if(nx==1&&x!=1&&x!=n-1) return 1;
        x=nx;
    }
    return x!=1;
}
bool miller_rabin(LL n) {
    int s=(magic number size)
    // iterate s times of witness on n
    if(n<2) return 0;
    if(!(n&1)) return n == 2;
    ll u=n-1; int t=0;
    // n-1 = u*2^t

```

```

while(!(u&1)) u>>=1, t++;
while(s--){
    LL a=magic[s]%n;
    if(witness(a,n,u,t)) return 0;
}
return 1;
}

```

### 3.9 Faulhaber $(\sum_{i=1}^n i^p)$

```

/* faulhaber' s formula -
 * cal power sum formula of all p=1~k in O(k^2) */
#define MAXK 2500
const int mod = 1000000007;
int b[MAXK]; // bernoulli number
int inv[MAXK+1]; // inverse
int cm[MAXK+1][MAXK+1]; // combinactories
int co[MAXK][MAXK+2]; // coefficient of x^j when p=i
inline int getinv(int x) {
    int a=x,b=mod,a0=1,a1=0,b0=0,b1=1;
    while(b) {
        int q,t;
        q=a/b; t=b; b=a-b*q; a=t;
        t=b0; b0=a0-b0*q; a0=t;
        t=b1; b1=a1-b1*q; a1=t;
    }
    return a0<0?a0+mod:a0;
}
inline void pre() {
    /* combinational */
    for(int i=0;i<=MAXK;i++) {
        cm[i][0]=cm[i][i]=1;
        for(int j=1;j<i;j++)
            cm[i][j]=add(cm[i-1][j-1],cm[i-1][j]);
    }
    /* inverse */
    for(int i=1;i<=MAXK;i++) inv[i]=getinv(i);
    /* bernoulli */
    b[0]=1; b[1]=getinv(2); // with b[1] = 1/2
    for(int i=2;i<MAXK;i++) {
        if(i&1) { b[i]=0; continue; }
        b[i]=1;
        for(int j=0;j<i;j++)
            b[i]=sub(b[i],
                mul(cm[i][j],mul(b[j], inv[i-j+1])));
    }
    /* faulhaber */
    // sigma_x=1~n {x^p} =
    // 1/(p+1) * sigma_j=0~p {C(p+1,j)*Bj*n^(p-j+1)}
    for(int i=1;i<MAXK;i++) {
        co[i][0]=0;
        for(int j=0;j<=i;j++)
            co[i][i-j+1]=mul(inv[i+1], mul(cm[i+1][j], b[j]));
    }
}
/* sample usage: return f(n,p) = sigma_x=1~n (x^p) */
inline int solve(int n,int p) {
    int sol=0,m=n;
    for(int i=1;i<=p+1;i++) {
        sol=add(sol,mul(co[p][i],m));
        m = mul(m, n);
    }
    return sol;
}

```

### 3.10 Chinese Remainder

```

LL x[N],m[N];
LL CRT(LL x1, LL m1, LL x2, LL m2) {
    LL g = __gcd(m1, m2);
    if((x2 - x1) % g) return -1; // no sol
    m1 /= g; m2 /= g;
    pair<LL,LL> p = gcd(m1, m2);
    LL lcm = m1 * m2 * g;
    LL res = p.first * (x2 - x1) * m1 + x1;
    return (res % lcm + lcm) % lcm;
}
LL solve(int n){ // n>=2, be careful with no solution
    LL res=CRT(x[0],m[0],x[1],m[1]),p=m[0]/__gcd(m[0],m[1])*m[1];

```



```

for(int i=2;i<n;i++){
    res=CRT(res,p,x[i],m[i]);
    p=p/___gcd(p,m[i])*m[i];
}
return res;
}

```

### 3.11 Pollard Rho

```

// does not work when n is prime 0(n^(1/4))
LL f(LL x, LL mod){ return add(mul(x,x,mod),1,mod); }
LL pollard_rho(LL n) {
    if(!(n&1)) return 2;
    while(true){
        LL y=2, x=rand()%(n-1)+1, res=1;
        for(int sz=2; res==1; sz*=2) {
            for(int i=0; i<sz && res<=1; i++) {
                x = f(x, n);
                res = ___gcd(abs(x-y), n);
            }
            y = x;
        }
        if (res!=0 && res!=n) return res;
    }
}

```

### 3.12 Josephus Problem

```

int josephus(int n, int m){ //n人每m次
    int ans = 0;
    for (int i=1; i<=n; ++i)
        ans = (ans + m) % i;
    return ans;
}

```

### 3.13 Gaussian Elimination

```

const int GAUSS_MOD = 100000007LL;
struct GAUSS{
    int n;
    vector<vector<int>> v;
    int ppow(int a, int k){
        if(k == 0) return 1;
        if(k % 2 == 0) return ppow(a * a % GAUSS_MOD, k >> 1);
        if(k % 2 == 1) return ppow(a * a % GAUSS_MOD, k >> 1) * a % GAUSS_MOD;
    }
    vector<int> solve(){
        vector<int> ans(n);
        REP(now, 0, n){
            REP(i, now, n) if(v[now][now] == 0 && v[i][now] != 0)
                swap(v[i], v[now]); // det = -det;
            if(v[now][now] == 0) return ans;
            int inv = ppow(v[now][now], GAUSS_MOD - 2);
            REP(i, 0, n) if(i != now){
                int tmp = v[i][now] * inv % GAUSS_MOD;
                REP(j, now, n + 1) (v[i][j] += GAUSS_MOD - tmp * v[now][j] % GAUSS_MOD) %= GAUSS_MOD;
            }
        }
        REP(i, 0, n) ans[i] = v[i][n + 1] * ppow(v[i][i], GAUSS_MOD - 2) % GAUSS_MOD;
        return ans;
    }
} gs;
// gs.v.clear(), gs.v.resize(n, vector<int>(n + 1, 0));

```

### 3.14 ax+by=gcd

```

PII gcd(int a, int b){
    if(b == 0) return {1, 0};
    PII q = gcd(b, a % b);
    return {q.second, q.first - q.second * (a / b)};
}

```

### 3.15 Discrete sqrt

```

void calcH(LL &t, LL &h, const LL p) {
    LL tmp=p-1; for(t=0;(tmp&1)==0;tmp/=2) t++; h=tmp;
}
// solve equation x^2 mod p = a
bool solve(LL a, LL p, LL &x, LL &y) {
    if(p == 2) { x = y = 1; return true; }
    int p2 = p / 2, tmp = mypow(a, p2, p);
    if (tmp == p - 1) return false;
    if ((p + 1) % 4 == 0) {
        x=mypow(a,(p+1)/4,p); y=p-x; return true;
    } else {
        LL t, h, b, pb; calcH(t, h, p);
        if (t >= 2) {
            do {b = rand() % (p - 2) + 2;
                } while (mypow(b, p / 2, p) != p - 1);
            pb = mypow(b, h, p);
            int s = mypow(a, h / 2, p);
            for (int step = 2; step <= t; step++) {
                int ss = (((LL)(s * s) % p) * a) % p;
                for(int i=0;i<t-step;i++) ss=mul(ss,ss,p);
                if (ss + 1 == p) s = (s * pb) % p;
                pb = ((LL)pb * pb) % p;
            } x = ((LL)s * a) % p; y = p - x;
        } return true;
    }
}

```

### 3.16 Romberg 定積分

```

// Estimates the definite integral of
// \int_a^b f(x) dx
template<class T>
double romberg( T& f, double a, double b, double eps=1e-8){
    vector<double>t; double h=b-a,last,curr; int k=1,i=1;
    t.push_back(h*(f(a)+f(b))/2);
    do{ last=t.back(); curr=0; double x=a+h/2;
        for(int j=0;j<k;j++) curr+=f(x), x+=h;
        curr=(t[0] + h*curr)/2; double k1=4.0/3.0,k2=1.0/3.0;
        for(int j=0;j<i;j++){ double temp=k1*curr-k2*t[j];
            t[j]=curr; curr=temp; k2/=4*k1-k2; k1=k2+1;
        } t.push_back(curr); k*=2; h/=2; i++;
    }while( fabs(last-curr) > eps);
    return t.back();
}

```

### 3.17 Discrete K-th sqrt

```

/*
 * Solve x for x^P = A mod Q
 * https://arxiv.org/pdf/1111.4877.pdf
 * in O((lgQ)^2 + Q^0.25 (lgQ)^3)
 * Idea:
 * (P, Q-1) = 1 -> P^{Q-1} mod (Q-1) exists
 * x has solution iff A^{((Q-1) / P)} = 1 mod Q
 * PP | (Q-1) -> P < sqrt(Q), solve lgQ rounds of discrete log
 * else -> find a s.t. s | (Pa - 1) -> ans = A^a
 */
void gcd(LL a, LL b, LL &x, LL &y, LL &g){
    if (b == 0) {
        x = 1, y = 0, g = a;
        return;
    }
    LL tx, ty;
    gcd(b, a%b, tx, ty, g);
    x = ty;
    y = tx - ty * (a / b);
    return;
}
LL P, A, Q, g;
// x^P = A mod Q

```

```
const int X = 1e5;
```

```

LL base;
LL ae[X], aXe[X], iaXe[X];
unordered_map<LL, LL> ht;

```

```
void build(LL a) { // ord(a) = P < sqrt(Q)
```

```

base = a;
ht.clear();
ae[0] = 1;
ae[1] = a;
aXe[0] = 1;
aXe[1] = pw(a, X, Q);
iaXe[0] = 1;
iaXe[1] = pw(aXe[1], Q-2, Q);
REP(i, 2, X-1) {
    ae[i] = mul(ae[i-1], ae[1], Q);
    aXe[i] = mul(aXe[i-1], aXe[1], Q);
    iaXe[i] = mul(iaXe[i-1], iaXe[1], Q);
}
FOR(i, X) ht[ae[i]] = i;
}

LL dis_log(LL x) {
    FOR(i, X) {
        LL iaXi = iaXe[i];
        LL rst = mul(x, iaXi, Q);
        if (ht.count(rst)) {
            LL res = i*X + ht[rst];
            return res;
        }
    }
}

LL main2() {
    LL t = 0, s = Q-1;
    while (s % P == 0) {
        ++t;
        s /= P;
    }
    if (A == 0) return 0;

    if (t == 0) {
        // a^{P^{t-1} mod phi(Q)}
        LL x, y, _;
        gcd(P, Q-1, x, y, _);
        if (x < 0) {
            x = (x % (Q-1) + Q-1) % (Q-1);
        }
        LL ans = pw(A, x, Q);
        if (pw(ans, P, Q) != A) while(1);
        return ans;
    }

    // A is not P-residue
    if (pw(A, (Q-1) / P, Q) != 1) return -1;

    for (g = 2; g < Q; ++g) {
        if (pw(g, (Q-1) / P, Q) != 1)
            break;
    }
    LL alpha = 0;
    {
        LL y, _;
        gcd(P, s, alpha, y, _);
        if (alpha < 0) alpha = (alpha % (Q-1) + Q-1) % (Q-1);
    }

    if (t == 1) {
        LL ans = pw(A, alpha, Q);
        return ans;
    }

    LL a = pw(g, (Q-1) / P, Q);
    build(a);
    LL b = pw(A, add(mul(P%(Q-1), alpha, Q-1), Q-2, Q-1), Q);
    LL c = pw(g, s, Q);
    LL h = 1;

    LL e = (Q-1) / s / P; // r^{t-1}
    REP(i, 1, t-1) {
        e /= P;
        LL d = pw(b, e, Q);
        LL j = 0;
        if (d != 1) {
            j = -dis_log(d);
            if (j < 0) j = (j % (Q-1) + Q-1) % (Q-1);

```

```

    }
    b = mul(b, pw(c, mul(P%(Q-1), j, Q-1), Q), Q);
    h = mul(h, pw(c, j, Q), Q);
    c = pw(c, P, Q);
}

LL ans = mul(pw(A, alpha, Q), h, Q);

return ans;
}

```

### 3.18 Prefix Inverse

```

void solve( int m ){
    inv[ 1 ] = 1;
    for( int i = 2 ; i < m ; i ++ )
        inv[ i ] = ((LL)(m - m / i) * inv[m % i]) % m;
}

```

### 3.19 Roots of Polynomial 找多項式的根

```

const double eps = 1e-12;
const double inf = 1e+12;
double a[ 10 ], x[ 10 ]; // a[0..n](coef) must be filled
int n; // degree of polynomial must be filled
int sign( double x ){return (x < -eps)?(-1):(x>eps);}
double f(double a[], int n, double x){
    double tmp=1,sum=0;
    for(int i=0;i<=n;i++)
        { sum=sum+a[i]*tmp; tmp=tmp*x; }
    return sum;
}

double binary(double l,double r,double a[],int n){
    int sl=sign(f(a,n,l)),sr=sign(f(a,n,r));
    if(sl==0) return l; if(sr==0) return r;
    if(sl*sr>0) return inf;
    while(r-l>eps){
        double mid=(l+r)/2;
        int ss=sign(f(a,n,mid));
        if(ss==0) return mid;
        if(ss*sl>0) l=mid; else r=mid;
    }
    return l;
}

void solve(int n,double a[],double x[],int &nx){
    if(n==1){ x[1]=-a[0]/a[1]; nx=1; return; }
    double da[10], dx[10]; int ndx;
    for(int i=n;i>=1;i--) da[i-1]=a[i]*i;
    solve(n-1,da,dx,ndx);
    nx=0;
    if(ndx==0){
        double tmp=binary(-inf,inf,a,n);
        if (tmp<inf) x[++nx]=tmp;
        return;
    }
    double tmp;
    tmp=binary(-inf,dx[1],a,n);
    if(tmp<inf) x[++nx]=tmp;
    for(int i=1;i<=ndx-1;i++){
        tmp=binary(dx[i],dx[i+1],a,n);
        if(tmp<inf) x[++nx]=tmp;
    }
    tmp=binary(dx[ndx],inf,a,n);
    if(tmp<inf) x[++nx]=tmp;
} // roots are stored in x[1..nx]

```

### 3.20 Primes

```

/* 12721, 13331, 14341, 75577, 123457, 222557, 556679
* 999983, 1097774749, 1076767633, 100102021, 999997771
* 1001010013, 1000512343, 987654361, 999991231
* 999888733, 98789101, 987777733, 999991921, 1010101333
* 1010102101, 1000000000039, 100000000000037
* 2305843009213693951, 4611686018427387847
* 9223372036854775783, 18446744073709551557 */
int mu[ N ], p_tbl[ N ];
vector<int> primes;
void sieve() {
    mu[ 1 ] = p_tbl[ 1 ] = 1;
    for( int i = 2 ; i < N ; i ++ ){
        if( !p_tbl[ i ] ){

```

```

    p_tbl[ i ] = i;
    primes.push_back( i );
    mu[ i ] = -1;
}
for( int p : primes ){
    int x = i * p;
    if( x >= M ) break;
    p_tbl[ x ] = p;
    mu[ x ] = -mu[ i ];
    if( i % p == 0 ){
        mu[ x ] = 0;
        break;
    }
} } }
vector<int> factor( int x ){
    vector<int> fac{ 1 };
    while( x > 1 ){
        int fn = SZ(fac), p = p_tbl[ x ], pos = 0;
        while( x % p == 0 ){
            x /= p;
            for( int i = 0 ; i < fn ; i ++ )
                fac.PB( fac[ pos ++ ] * p );
        }
    }
    return fac;
}

```

### 3.21 Phi

```

ll phi(ll n){ // 計算小於n的數中與n互質的有幾個
    ll res = n, a=n; // O(sqrt(N))
    for(ll i=2;i*i<=a;i++){
        if(a%i==0){
            res = res/i*(i-1);
            while(a%i==0) a/=i;
        }
    }
    if(a>1) res = res/a*(a-1);
    return res;
}

```

### 3.22 Result

- Lucas' Theorem :  
For  $n, m \in \mathbb{Z}^*$  and prime  $P$ ,  $C(m, n) \bmod P = \prod(C(m_i, n_i))$  where  $m_i$  is the  $i$ -th digit of  $m$  in base  $P$ .
- Stirling approximation :  
$$n! \approx \sqrt{2\pi n} \left(\frac{n}{e}\right)^n e^{\frac{1}{12n}}$$
- Stirling Numbers(permutation  $|P| = n$  with  $k$  cycles):  
 $S(n, k) = \text{coefficient of } x^k \text{ in } \prod_{i=0}^{n-1} (x + i)$
- Stirling Numbers(Partition  $n$  elements into  $k$  non-empty set):  
$$S(n, k) = \frac{1}{k!} \sum_{j=0}^k (-1)^{k-j} \binom{k}{j} j^n$$
- Pick' s Theorem :  $A = i + b/2 - 1$   
其面積  $A$  和內部格點數目  $i$ 、邊上格點數目  $b$  的關係
- Catalan number :  $C_n = \binom{2n}{n} / (n+1)$   
$$C_n^{n+m} - C_{n+1}^{n+m} = (m+n)! \frac{n-m+1}{n+1} \quad \text{for } n \geq m$$
  
$$C_n = \frac{1}{n+1} \binom{2n}{n} = \frac{(2n)!}{(n+1)!n!}$$
  
$$C_0 = 1 \quad \text{and} \quad C_{n+1} = 2 \binom{2n+1}{n+2} C_n$$
  
$$C_0 = 1 \quad \text{and} \quad C_{n+1} = \sum_{i=0}^n C_i C_{n-i} \quad \text{for } n \geq 0$$
- Euler Characteristic:  
planar graph:  $V - E + F - C = 1$   
convex polyhedron:  $V - E + F = 2$   
 $V, E, F, C$ : number of vertices, edges, faces(regions), and components
- Kirchhoff's theorem :  
 $A_{ii} = \deg(i), A_{ij} = (i, j) \in E ? -1 : 0$ , Deleting any one row, one column, and cal the  $\det(A)$
- Polya' theorem ( $c$  為方法數,  $m$  為總數):  
$$\left( \sum_{i=1}^m c^{gcd(i, m)} \right) / m$$
- 錯排公式: ( $n$  個人中, 每個人皆不再原來位置的組合數):  
$$dp[0] = 1; dp[1] = 0;$$
  
$$dp[i] = (i-1) * (dp[i-1] + dp[i-2]);$$
- Bell 數 (有  $n$  個人, 把他們拆組的方法總數) :  
$$B_0 = 1$$
  
$$B_n = \sum_{k=0}^n s(n, k) \quad (\text{second - stirling})$$
  
$$B_{n+1} = \sum_{k=0}^n \binom{n}{k} B_k$$
- Wilson's theorem :  
$$(p-1)! \equiv -1 \pmod{p}$$

- Fermat's little theorem :  
$$a^p \equiv a \pmod{p}$$
- Euler's totient function:  
$$A^{B^C} \bmod p = \text{pow}(A, \text{pow}(B, C, p-1)) \bmod p$$
- 歐拉函數降幕公式:  
$$A^B \bmod C = A^{B \bmod \phi(C) + \phi(C)} \bmod C$$
- 6 的倍數:  
$$(a-1)^3 + (a+1)^3 + (-a)^3 + (-a)^3 = 6a$$

## 4 Geometry

### 4.1 definition

```

typedef long double ld;
const ld eps = 1e-8;
int dcmp(ld x) {
    if(abs(x) < eps) return 0;
    else return x < 0 ? -1 : 1;
}
struct Pt {
    ld x, y;
    Pt(ld _x=0, ld _y=0):x(_x), y(_y) {}

    Pt operator+(const Pt &a) const {
        return Pt(x+a.x, y+a.y);
    }
    Pt operator-(const Pt &a) const {
        return Pt(x-a.x, y-a.y);
    }
    Pt operator*(const ld &a) const {
        return Pt(x*a, y*a);
    }
    Pt operator/(const ld &a) const {
        return Pt(x/a, y/a);
    }
    ld operator*(const Pt &a) const {
        return x*a.x + y*a.y;
    }
    ld operator^(const Pt &a) const {
        return x*a.y - y*a.x;
    }
    bool operator<(const Pt &a) const {
        return x < a.x || (x == a.x && y < a.y);
        //return dcmp(x-a.x) < 0 || (dcmp(x-a.x) == 0 &&
            dcmp(y-a.y) < 0);
    }
    bool operator==(const Pt &a) const {
        return dcmp(x-a.x) == 0 && dcmp(y-a.y) == 0;
    }
};

ld norm2(const Pt &a) {
    return a*a;
}
ld norm(const Pt &a) {
    return sqrt(norm2(a));
}
Pt perp(const Pt &a) {
    return Pt(-a.y, a.x);
}
Pt rotate(const Pt &a, ld ang) {
    return Pt(a.x*cos(ang)-a.y*sin(ang), a.x*sin(ang)+a.y*cos(ang));
}

struct Line {
    Pt s, e, v; // start, end, end-start
    ld ang;
    Line(Pt _s=Pt(0, 0), Pt _e=Pt(0, 0)):s(_s), e(_e) { v = e-s; ang = atan2(v.y, v.x); }

    bool operator<(const Line &L) const {
        return ang < L.ang;
    }
};

struct Circle {
    Pt o; ld r;
    Circle(Pt _o=Pt(0, 0), ld _r=0):o(_o), r(_r) {}
};

```

## 4.2 Intersection of 2 lines

```
Pt LLIntersect(Line a, Line b) {
    Pt p1 = a.s, p2 = a.e, q1 = b.s, q2 = b.e;
    ld f1 = (p2-p1)^(q1-p1), f2 = (p2-p1)^(p1-q2), f;
    if(dcmp(f=f1+f2) == 0)
        return dcmp(f1)?Pt(NAN,NAN):Pt(INFINITY,INFINITY);
    return q1*(f2/f) + q2*(f1/f);
}
```

## 4.3 halfPlaneIntersection

```
// for point or line solution, change > to >=
bool onleft(Line L, Pt p) {
    return dcmp(L.v^(p-L.s)) > 0;
} // segment should add Counterclockwise
// assume that Lines intersect
vector<Pt> HPI(vector<Line>& L) {
    sort(L.begin(), L.end()); // sort by angle
    int n = L.size(), fir, las;
    Pt *p = new Pt[n];
    Line *q = new Line[n];
    q[fir=las=0] = L[0];
    for(int i = 1; i < n; i++) {
        while(fir < las && !onleft(L[i], p[las-1])) las--;
        while(fir < las && !onleft(L[i], p[fir])) fir++;
        q[++las] = L[i];
        if(dcmp(q[las].v^q[las-1].v) == 0) {
            las--;
            if(onleft(q[las], L[i].s)) q[las] = L[i];
        }
        if(fir < las) p[las-1] = LLIntersect(q[las-1], q[las]);
    }
    while(fir < las && !onleft(q[fir], p[las-1])) las--;
    if(las-fir <= 1) return {};
    p[las] = LLIntersect(q[las], q[fir]);
    int m = 0;
    vector<Pt> ans(las-fir+1);
    for(int i = fir; i <= las; i++) ans[m++] = p[i];
    return ans;
}
```

## 4.4 Convex Hull

```
double cross(Pt o, Pt a, Pt b){
    return (a-o) ^ (b-o);
}
vector<Pt> convex_hull(vector<Pt> pt){
    sort(pt.begin(), pt.end());
    int top=0;
    vector<Pt> stk(2*pt.size());
    for (int i=0; i<(int)pt.size(); i++){
        while (top >= 2 && cross(stk[top-2], stk[top-1], pt[i]) <= 0)
            top--;
        stk[top++] = pt[i];
    }
    for (int i=pt.size()-2, t=top+1; i>=0; i--){
        while (top >= t && cross(stk[top-2], stk[top-1], pt[i]) <= 0)
            top--;
        stk[top++] = pt[i];
    }
    stk.resize(top-1);
    return stk;
}
```

## 4.5 Convex Hull 3D

```
struct Pt{
    Pt cross(const Pt &p) const
    { return Pt(y * p.z - z * p.y, z * p.x - x * p.z, x *
        p.y - y * p.x); }
} info[N];
int mark[N][N], n, cnt;
double mix(const Pt &a, const Pt &b, const Pt &c)
{ return a * (b ^ c); }
double area(int a, int b, int c)
{ return norm((info[b] - info[a]) ^ (info[c] - info[a])) / 2; }
double volume(int a, int b, int c, int d)
```

```
{ return mix(info[b] - info[a], info[c] - info[a], info[d] - info[a]); }
struct Face{
    int a, b, c; Face(){}
    Face(int a, int b, int c): a(a), b(b), c(c) {}
    int &operator [](int k)
    { if (k == 0) return a; if (k == 1) return b; return c; }
};
vector<Face> face;
void insert(int a, int b, int c)
{ face.push_back(Face(a, b, c)); }
void add(int v) {
    vector<Face> tmp; int a, b, c; cnt++;
    for (int i = 0; i < SIZE(face); i++) {
        a = face[i][0]; b = face[i][1]; c = face[i][2];
        if(Sign(volume(v, a, b, c)) < 0)
            mark[a][b] = mark[b][a] = mark[b][c] = mark[c][b] =
                mark[c][a] = mark[a][c] = cnt;
        else tmp.push_back(face[i]);
    } face = tmp;
    for (int i = 0; i < SIZE(tmp); i++) {
        a = face[i][0]; b = face[i][1]; c = face[i][2];
        if (mark[a][b] == cnt) insert(b, a, v);
        if (mark[b][c] == cnt) insert(c, b, v);
        if (mark[c][a] == cnt) insert(a, c, v);
    }
}
int Find(){
    for (int i = 2; i < n; i++) {
        Pt ndir = (info[0] - info[i]) ^ (info[1] - info[i]);
        if (ndir == Pt()) continue; swap(info[i], info[2]);
        for (int j = i + 1; j < n; j++) if (Sign(volume(0, 1, 2, j)) != 0) {
            swap(info[j], info[3]); insert(0, 1, 2); insert(0, 2, 1); return 1;
        }
    } return 0;
}
int main() {
    for (; scanf("%d", &n) == 1; ) {
        for (int i = 0; i < n; i++) info[i].Input();
        sort(info, info + n); n = unique(info, info + n) - info;
        face.clear(); random_shuffle(info, info + n);
        if (Find()) { memset(mark, 0, sizeof(mark)); cnt = 0;
            for (int i = 3; i < n; i++) add(i); vector<Pt> Ndir;
            for (int i = 0; i < SIZE(face); ++i) {
                Pt p = (info[face[i][0]] - info[face[i][1]]) ^
                    (info[face[i][2]] - info[face[i][1]]);
                p = p / norm(p); Ndir.push_back(p);
            } sort(Ndir.begin(), Ndir.end());
            int ans = unique(Ndir.begin(), Ndir.end()) - Ndir.begin();
            printf("%d\n", ans);
        } else printf("1\n");
    }
}
double calcDist(const Pt &p, int a, int b, int c)
{ return fabs(mix(info[a] - p, info[b] - p, info[c] - p)) / area(a, b, c); }
//compute the minimal distance of center of any faces
double findDist() { //compute center of mass
    double totalWeight = 0; Pt center(.0, .0, .0);
    Pt first = info[face[0][0]];
    for (int i = 0; i < SIZE(face); ++i) {
        Pt p = (info[face[i][0]]+info[face[i][1]]+info[face[i][2]]+first)*.25;
        double weight = mix(info[face[i][0]] - first, info[face[i][1]] - first, info[face[i][2]] - first);
        totalWeight += weight; center = center + p * weight;
    }
    center = center / totalWeight;
    double res = 1e100; //compute distance
    for (int i = 0; i < SIZE(face); ++i)
        res = min(res, calcDist(center, face[i][0], face[i][1], face[i][2]));
    return res; }
}
```

## 4.6 Intersection of 2 segments

```
int ori(const Pt& o, const Pt& a, const Pt& b){
```

```

LL ret = ( a - o ) ^ ( b - o );
return (ret > 0) - (ret < 0);
}
// p1 == p2 || q1 == q2 need to be handled
bool banana( const Pt& p1 , const Pt& p2 ,
              const Pt& q1 , const Pt& q2 ){
    if( ( ( p2 - p1 ) ^ ( q2 - q1 ) ) == 0 ){ // parallel
        if( ori( p1 , p2 , q1 ) ) return false;
        return ( ( p1 - q1 ) * ( p2 - q1 ) ) <= 0 ||
                ( ( p1 - q2 ) * ( p2 - q2 ) ) <= 0 ||
                ( ( q1 - p1 ) * ( q2 - p1 ) ) <= 0 ||
                ( ( q1 - p2 ) * ( q2 - p2 ) ) <= 0;
    }
    return (ori( p1, p2, q1 ) * ori( p1, p2, q2 ) <= 0) &&
           (ori( q1, q2, p1 ) * ori( q1, q2, p2 ) <= 0);
}

```

#### 4.7 Intersection of circle and segment

```

0
bool Inter( const Pt& p1 , const Pt& p2 , Circle& cc ){
    Pt dp = p2 - p1;
    double a = dp * dp;
    double b = 2 * ( dp * ( p1 - cc.0 ) );
    double c = cc.0 * cc.0 + p1 * p1 - 2 * ( cc.0 * p1 )
        - cc.R * cc.R;
    double bb4ac = b * b - 4 * a * c;
    return !( fabs( a ) < eps or bb4ac < 0 );
}

```

## 4.8 Intersection of polygon and circle

```

ld PCIntersect(vector<Pt> v, Circle cir) {
    for(int i = 0 ; i < (int)v.size() ; ++i) v[i] = v[i]
        - cir.o;
    ld ans = 0, r = cir.r;
    int n = v.size();
    for(int i = 0 ; i < n ; ++i) {
        Pt pa = v[i], pb = v[(i+1)%n];
        if(norm(pa) < norm(pb)) swap(pa, pb);
        if(dcmp(norm(pb)) == 0) continue;
        ld s, h, theta;
        ld a = norm(pb), b = norm(pa), c = norm(pb-pa);
        ld cosB = (pb*(pb-pa))/a/c, B = acos(cosB);
        if(cosB > 1) B = 0;
        else if(cosB < -1) B = PI;
        ld cosC = (pa*pb)/a/b, C = acos(cosC);
        if(cosC > 1) C = 0;
        else if(cosC < -1) C = PI;
        if(a > r) {
            s = (C/2)*r*r;
            h = a*b*sin(C)/c;
            if(h < r && B < PI/2) s -= (acos(h/r)*r*r - h*
                sqrt(r*r-h*h));
        }
        else if(b > r) {
            theta = PI - B - asin(sin(B)/r*a);
            s = 0.5*a*r*sin(theta) + (C-theta)/2*r*r;
        }
        else s = 0.5*sin(C)*a*b;
        ans += abs(s)*dcmp(v[i]^v[(i+1)%n]);
    }
    return abs(ans);
}

```

## 4.9 Intersection of 2 circles

#### 4.10 Circle cover

```
#define N 1021
#define D long double
struct CircleCover{
    int C; Circ c[ N ]; //填入C(圓數量),c(圓陣列)
    bool g[ N ][ N ], overlap[ N ][ N ];
    // Area[i] : area covered by at least i circles
    D Area[ N ];
    void init( int _C ){ C = _C; }
    bool CCinter( Circ& a , Circ& b , Pt& p1 , Pt& p2 ){
        Pt o1 = a.O , o2 = b.O;
        D r1 = a.R , r2 = b.R;
        if( norm( o1 - o2 ) > r1 + r2 ) return false;
        if( norm( o1 - o2 ) < max(r1, r2) - min(r1, r2) )
            return true;
    }
};
```

```

d d2 = ( o1 - o2 ) * ( o1 - o2 );
D d = sqrt(d2);
if( d > r1 + r2 ) return false;
Pt u=(o1+o2)*0.5 + (o1-o2)*((r2*r2-r1*r1)/(2*d2));
D A=sqrt((r1+r2+d)*(r1-r2+d)*(r1+r2-d)*(-r1+r2+d));
Pt v=Pt( o1.Y-o2.Y , -o1.X + o2.X ) * A / (2*d2);
p1 = u + v; p2 = u - v;
return true;
}
struct Teve {
    Pt p; D ang; int add;
    Teve() {}
    Teve(Pt _a, D _b, int _c):p(_a), ang(_b), add(_c){}
    bool operator<(const Teve &a)const
    {return ang < a.ang;}
};eve[ N * 2 ];
// strict: x = 0, otherwise x = -1
bool disjunct( Circ& a, Circ &b, int x )
{return sign( norm( a.o - b.o ) - a.R - b.R ) > x;}
bool contain( Circ& a, Circ &b, int x )
{return sign( a.R - b.R - norm( a.o - b.o ) ) > x;}
bool contain(int i, int j){
    /* c[j] is non-strictly in c[i]. */
    return (sign(c[i].R - c[j].R) > 0 ||
            (sign(c[i].R - c[j].R) == 0 && i < j) ) &&
            contain(c[i], c[j], -1);
}
void solve(){
    for( int i = 0 ; i <= C + 1 ; i ++ )
        Area[ i ] = 0;
    for( int i = 0 ; i < C ; i ++ )
        for( int j = 0 ; j < C ; j ++ )
            overlap[i][j] = contain(i, j);
    for( int i = 0 ; i < C ; i ++ )
        for( int j = 0 ; j < C ; j ++ )
            g[i][j] = !(overlap[i][j] || overlap[j][i] ||
                        disjunct(c[i], c[j], -1));
    for( int i = 0 ; i < C ; i ++ ){
        int E = 0, cnt = 1;
        for( int j = 0 ; j < C ; j ++ )
            if( j != i && overlap[j][i] )
                cnt ++;
        for( int j = 0 ; j < C ; j ++ )
            if( i != j && g[i][j] ){
                Pt aa, bb;
                CCinter(c[i], c[j], aa, bb);
                D A=atan2(aa.Y - c[i].o.Y, aa.X - c[i].o.X);
                D B=atan2(bb.Y - c[i].o.Y, bb.X - c[i].o.X);
                eve[E ++] = Teve(bb, B, 1);
                eve[E ++] = Teve(aa, A, -1);
                if(B > A) cnt ++;
            }
        if( E == 0 ) Area[ cnt ] += pi * c[i].R * c[i].R;
        else{
            sort( eve , eve + E );
            eve[E] = eve[0];
            for( int j = 0 ; j < E ; j ++ ){
                cnt += eve[j].add;
                Area[cnt] += (eve[j].p ^ eve[j + 1].p) * 0.5;
                D theta = eve[j + 1].ang - eve[j].ang;
                if( theta < 0 ) theta += 2.0 * pi;
                Area[cnt] +=
                    (theta - sin(theta)) * c[i].R*c[i].R * 0.5;
            };
        }
    }
}

```

#### 4.11 Convex Hull trick

```

/* Given a convexhull, answer queries in  $O(\lg N)$ 
CH should not contain identical points, the area should
be  $> 0$ , min pair(x, y) should be listed first */
double det( const Pt& p1 , const Pt& p2 )
{ return p1.X * p2.Y - p1.Y * p2.X; }
struct Conv{
    int n;
    vector<Pt> a;
    vector<Pt> upper, lower;
    Conv(vector<Pt> _a) : a(_a){
        n = a.size();
        int ptr = 0;
        for(int i=1; i<n; ++i) if (a[ptr] < a[i]) ptr = i;
        for(int i=0; i<=ptr; ++i) lower.push_back(a[i]);
        for(int i=ptr; i<n; ++i) upper.push_back(a[i]);
    }
};

```



```

    upper.push_back(a[0]);
}
int sign( LL x ){ // fixed when changed to double
    return x < 0 ? -1 : x > 0; }
pair<LL,int> get_tang(vector<Pt> &conv, Pt vec){
    int l = 0, r = (int)conv.size() - 2;
    for( ; l + 1 < r; ){
        int mid = (l + r) / 2;
        if(sign(det(conv[mid+1]-conv[mid],vec))>0)r=mid;
        else l = mid;
    }
    return max(make_pair(det(vec, conv[r]), r),
               make_pair(det(vec, conv[0]), 0));
}
void upd_tang(const Pt &p, int id, int &i0, int &i1){
    if(det(a[i0] - p, a[id] - p) > 0) i0 = id;
    if(det(a[i1] - p, a[id] - p) < 0) i1 = id;
}
void bi_search(int l, int r, Pt p, int &i0, int &i1){
    if(l == r) return;
    upd_tang(p, l % n, i0, i1);
    int sl=sign(det(a[l % n] - p, a[(l + 1) % n] - p));
    for( ; l + 1 < r; ){
        int mid = (l + r) / 2;
        int smid=sign(det(a[mid%n]-p, a[(mid+1)%n]-p));
        if (smid == sl) l = mid;
        else r = mid;
    }
    upd_tang(p, r % n, i0, i1);
}
int bi_search(Pt u, Pt v, int l, int r) {
    int sl = sign(det(v - u, a[l % n] - u));
    for( ; l + 1 < r; ){
        int mid = (l + r) / 2;
        int smid = sign(det(v - u, a[mid % n] - u));
        if (smid == sl) l = mid;
        else r = mid;
    }
    return l % n;
}
// 1. whether a given point is inside the CH
bool contain(Pt p) {
    if (p.X < lower[0].X || p.X > lower.back().X)
        return 0;
    int id = lower_bound(lower.begin(), lower.end(), Pt
        (p.X, -INF)) - lower.begin();
    if (lower[id].X == p.X) {
        if (lower[id].Y == p.Y) return 0;
    }else if(det(lower[id-1]-p,lower[id]-p)<0)return 0;
    id = lower_bound(upper.begin(), upper.end(), Pt(p.X
        , INF), greater<Pt>()) - upper.begin();
    if (upper[id].X == p.X) {
        if (upper[id].Y < p.Y) return 0;
    }else if(det(upper[id-1]-p,upper[id]-p)<0)return 0;
    return 1;
}
// 2. Find 2 tang pts on CH of a given outside point
// return true with i0, i1 as index of tangent points
// return false if inside CH
bool get_tang(Pt p, int &i0, int &i1) {
    if (contain(p)) return false;
    i0 = i1 = 0;
    int id = lower_bound(lower.begin(), lower.end(), p)
        - lower.begin();
    bi_search(0, id, p, i0, i1);
    bi_search(id, (int)lower.size(), p, i0, i1);
    id = lower_bound(upper.begin(), upper.end(), p,
        greater<Pt>()) - upper.begin();
    bi_search((int)lower.size() - 1, (int)lower.size()
        - 1 + id, p, i0, i1);
    bi_search((int)lower.size() - 1 + id, (int)lower.
        size() - 1 + (int)upper.size(), p, i0, i1);
    return true;
}
// 3. Find tangent points of a given vector
// ret the idx of vertex has max cross value with vec
int get_tang(Pt vec){
    pair<LL, int> ret = get_tang(upper, vec);
    ret.second = (ret.second+(int)lower.size()-1)%n;
    ret = max(ret, get_tang(lower, vec));
    return ret.second;
}

```

```

// 4. Find intersection point of a given line
// return 1 and intersection is on edge (i, next(i))
// return 0 if no strictly intersection
bool get_intersection(Pt u, Pt v, int &i0, int &i1){
    int p0 = get_tang(u - v), p1 = get_tang(v - u);
    if(sign(det(v-u,a[p0]-u))*sign(det(v-u,a[p1]-u))<0){
        if (p0 > p1) swap(p0, p1);
        i0 = bi_search(u, v, p0, p1);
        i1 = bi_search(u, v, p1, p0 + n);
        return 1;
    }
    return 0;
}
}

```

#### 4.12 Tangent line of two circles

```

vector<Line> go( const Cir& c1 , const Cir& c2 , int
    sign1 ){
    // sign1 = 1 for outer tang, -1 for inter tang
    vector<Line> ret;
    double d_sq = norm2( c1.0 - c2.0 );
    if( d_sq < eps ) return ret;
    double d = sqrt( d_sq );
    Pt v = ( c2.0 - c1.0 ) / d;
    double c = ( c1.R - sign1 * c2.R ) / d;
    if( c * c > 1 ) return ret;
    double h = sqrt( max( 0.0 , 1.0 - c * c ) );
    for( int sign2 = 1 ; sign2 >= -1 ; sign2 -= 2 ){
        Pt n = { v.X * c - sign2 * h * v.Y ,
            v.Y * c + sign2 * h * v.X };
        Pt p1 = c1.0 + n * c1.R;
        Pt p2 = c2.0 + n * ( c2.R * sign1 );
        if( fabs( p1.X - p2.X ) < eps and
            fabs( p1.Y - p2.Y ) < eps )
            p2 = p1 + perp( c2.0 - c1.0 );
        ret.push_back( { p1 , p2 } );
    }
    return ret;
}

```

#### 4.13 KD Tree

```

struct KDTree{ // O(sqrtN + K)
    struct Nd{
        LL x[MXK],mn[MXK],mx[MXK];
        int id,f;
        Nd *l,*r;
    }tree[MXN],*root;
    int n,k;
    LL dis(LL a,LL b){return (a-b)*(a-b);}
    LL dis(LL a[MXK],LL b[MXK]){
        LL ret=0;
        for(int i=0;i<k;i++) ret+=dis(a[i],b[i]);
        return ret;
    }
    void init(vector<vector<LL>> &ip,int _n,int _k){
        n=_n,k=_k;
        for(int i=0;i<n;i++){
            tree[i].id=i;
            copy(ip[i].begin(),ip[i].end(),tree[i].x);
        }
        root=build(0,n-1,0);
    }
    Nd* build(int l,int r,int d){
        if(l>r) return NULL;
        if(d==k) d=0;
        int m=(l+r)>>1;
        nth_element(tree+l,tree+m,tree+r+1,[&](const Nd &a,
            const Nd &b){return a.x[d]<b.x[d];});
        tree[m].f=d;
        copy(tree[m].x,tree[m].x+k,tree[m].mn);
        copy(tree[m].x,tree[m].x+k,tree[m].mx);
        tree[m].l=build(l,m-1,d+1);
        if(tree[m].l){
            for(int i=0;i<k;i++){
                tree[m].mn[i]=min(tree[m].mn[i],tree[m].l->mn[i]);
                tree[m].mx[i]=max(tree[m].mx[i],tree[m].l->mx[i]);
            }
        }
        tree[m].r=build(m+1,r,d+1);
        if(tree[m].r){

```

```

    for(int i=0;i<k;i++){
        tree[m].mn[i]=min(tree[m].mn[i],tree[m].r->mn[i]);
        tree[m].mx[i]=max(tree[m].mx[i],tree[m].r->mx[i]);
    }
    return tree+m;
}
LL pt[MXK],md;
int mID;
bool touch(Nd *r){
    LL d=0;
    for(int i=0;i<k;i++){
        if(pt[i]<=r->mn[i]) d+=dis(pt[i],r->mn[i]);
        else if(pt[i]>=r->mx[i]) d+=dis(pt[i],r->mx[i]);
    }
    return d<md;
}
void nearest(Nd *r){
    if(!r||!touch(r)) return;
    LL td=dis(r->x,pt);
    if(td<md) md=td,mID=r->id;
    nearest(pt[r->f]<r->x[r->f]?r->l:r->r);
    nearest(pt[r->f]<r->x[r->f]?r->r:r->l);
}
pair<LL,int> query(vector<LL> &_pt,LL _md=1LL<<57){
    mID=-1,md=_md;
    copy(_pt.begin(),_pt.end(),pt);
    nearest(root);
    return {md,mID};
} }tree;

```

#### 4.14 Lower Concave Hull

```

const ll is_query = -(1LL<<62);
struct Line {
    ll m, b;
    mutable function<const Line*> succ;
    bool operator<(const Line& rhs) const {
        if (rhs.b != is_query) return m < rhs.m;
        const Line* s = succ();
        return s ? b - s->b < (s->m - m) * rhs.m : 0;
    }
}; // maintain upper hull for maximum
struct HullDynamic : public multiset<Line> {
    bool bad(iterator y) {
        auto z = next(y);
        if (y == begin()) {
            if (z == end()) return 0;
            return y->m == z->m && y->b <= z->b;
        }
        auto x = prev(y);
        if (z == end()) return y->m == x->m && y->b <= x->b;
        return (x->b-y->b)*(z->m-y->m) >=
            (y->b-z->b)*(y->m-x->m);
    }
    void insert_line(ll m, ll b) {
        auto y = insert({m, b});
        y->succ = [=]{return next(y)==end()?0:&*next(y);};
        if(bad(y)) {erase(y); return;}
        while(next(y)!=end()&&bad(next(y)))erase(next(y));
        while(y!=begin()&&bad(prev(y)))erase(prev(y));
    }
    ll eval(ll x) {
        auto l = *lower_bound((Line) {x, is_query});
        return l.m * x + l.b;
    }
};

```

#### 4.15 Min Enclosing Circle

```

struct Mec{ // return pair of center and r
    int n;
    Pt p[ MXN ], cen;
    double r2;
    void init( int _n , Pt _p[] ){
        n = _n;
        memcpy( p , _p , sizeof(Pt) * n );
    }
    double sqr(double a){ return a*a; }
    Pt center(Pt p0, Pt p1, Pt p2) {

```

```

        Pt a = p1-p0;
        Pt b = p2-p0;
        double c1=norm2( a ) * 0.5;
        double c2=norm2( b ) * 0.5;
        double d = a ^ b;
        double x = p0.X + (c1 * b.Y - c2 * a.Y) / d;
        double y = p0.Y + (a.X * c2 - b.X * c1) / d;
        return Pt(x,y);
    }
    pair<Pt,double> solve(){
        random_shuffle(p,p+n);
        r2=0;
        for (int i=0; i<n; i++){
            if (norm2(cen-p[i]) <= r2) continue;
            cen = p[i];
            r2 = 0;
            for (int j=0; j<i; j++){
                if (norm2(cen-p[j]) <= r2) continue;
                cen=Pt((p[i].X+p[j].X)/2,(p[i].Y+p[j].Y)/2);
                r2 = norm2(cen-p[j]);
                for (int k=0; k<j; k++){
                    if (norm2(cen-p[k]) <= r2) continue;
                    cen = center(p[i],p[j],p[k]);
                    r2 = norm2(cen-p[k]);
                }
            }
            return {cen,sqrt(r2)};
        }
    } }mec;

```

#### 4.16 Min Enclosing Ball

```

// Pt : { x , y , z }
#define N 202020
int n, nouter; Pt pt[ N ], outer[4], res;
double radius,tmp;
void ball() {
    Pt q[3]; double m[3][3], sol[3], L[3], det;
    int i,j; res.x = res.y = res.z = radius = 0;
    switch ( nouter ) {
        case 1: res=outer[0]; break;
        case 2: res=(outer[0]+outer[1])/2; radius=norm2(res, outer[0]); break;
        case 3:
            for (i=0; i<2; ++i) q[i]=outer[i+1]-outer[0];
            for (i=0; i<2; ++i) for(j=0; j<2; ++j) m[i][j]=(q[i] * q[j])*2;
            for (i=0; i<2; ++i) sol[i]=(q[i] * q[i]);
            if (fabs(det=m[0][0]*m[1][1]-m[0][1]*m[1][0])<eps)
                return;
            L[0]=(sol[0]*m[1][1]-sol[1]*m[0][1])/det;
            L[1]=(sol[1]*m[0][0]-sol[0]*m[1][0])/det;
            res=outer[0]+q[0]*L[0]+q[1]*L[1];
            radius=norm2(res, outer[0]);
            break;
        case 4:
            for (i=0; i<3; ++i) q[i]=outer[i+1]-outer[0], sol[i]=(q[i] * q[i]);
            for (i=0; i<3; ++i) for(j=0; j<3; ++j) m[i][j]=(q[i] * q[j])*2;
            det= m[0][0]*m[1][1]*m[2][2]
                + m[0][1]*m[1][2]*m[2][0]
                + m[0][2]*m[1][0]*m[2][1]
                - m[0][0]*m[1][2]*m[2][0]
                - m[0][1]*m[1][0]*m[2][2]
                - m[0][2]*m[1][1]*m[2][0];
            if ( fabs(det)<eps ) return;
            for (j=0; j<3; ++j) {
                for (i=0; i<3; ++i) m[i][j]=sol[i];
                L[j]=( m[0][0]*m[1][1]*m[2][2]
                    + m[0][1]*m[1][2]*m[2][0]
                    + m[0][2]*m[1][0]*m[2][1]
                    - m[0][0]*m[1][2]*m[2][0]
                    - m[0][1]*m[1][0]*m[2][2]
                    - m[0][2]*m[1][1]*m[2][0] ) / det;
                for (i=0; i<3; ++i) m[i][j]=(q[i] * q[j])*2;
            }
            res=outer[0];
            for (i=0; i<3; ++i) res = res + q[i] * L[i];
            radius=norm2(res, outer[0]);
    }
}
void minball(int n){ ball();
    if( nouter < 4 ) for( int i = 0 ; i < n ; i ++ )
        if( norm2(res, pt[i]) - radius > eps ){

```

```

    outer[ nouter ++ ] = pt[ i ]; minball(i); --
    nouter;
    if(i>0){ Pt Tt = pt[i];
        memmove(&pt[1], &pt[0], sizeof(Pt)*i); pt[0]=Tt
        ;
    }
}
double solve(){
    // n points in pt
    random_shuffle(pt, pt+n); radius=-1;
    for(int i=0;i<n;i++) if(norm2(res,pt[i])-radius>eps)
        nouter=1, outer[0]=pt[i], minball(i);
    return sqrt(radius);
}

```

#### 4.17 Minkowski sum

```

vector<Pt> minkowski(vector<Pt> p, vector<Pt> q){
    int n = p.size(), m = q.size();
    Pt c = Pt(0, 0);
    for( int i = 0; i < m; i ++ ) c = c + q[i];
    c = c / m;
    for( int i = 0; i < m; i ++ ) q[i] = q[i] - c;
    int cur = -1;
    for( int i = 0; i < m; i ++ )
        if( (q[i] ^ (p[0] - p[n-1])) > -eps)
            if( cur == -1 || (q[i] ^ (p[0] - p[n-1])) >
                (q[cur] ^ (p[0] - p[n-1])) )
                cur = i;
    vector<Pt> h;
    p.push_back(p[0]);
    for( int i = 0; i < n; i ++ )
        while( true ){
            h.push_back(p[i] + q[cur]);
            int nxt = (cur + 1 == m ? 0 : cur + 1);
            if((q[cur] ^ (p[i+1] - p[i])) < -eps) cur = nxt;
            else if( (q[nxt] ^ (p[i+1] - p[i])) >
                (q[cur] ^ (p[i+1] - p[i])) ) cur = nxt;
            else break;
        }
    for(auto &i : h) i = i + c;
    return convex_hull(h);
}

```

#### 4.18 Min dist on Cuboid

```

typedef LL T;
T r;
void turn(T i, T j, T x, T y, T z,
          T x0, T y0, T L, T W, T H) {
    if (z==0) { T R = x*x+y*y; if (R<r) r=R; return; }
    if(i>=0 && i<2) turn(i+1, j, x0+L+z, y, x0+L-x,
        x0+L, y0, H, W, L);
    if(j>=0 && j<2) turn(i, j+1, x, y0+W+z, y0+W-y,
        x0, y0+W, L, H, W);
    if(i<=0 && i>-2) turn(i-1, j, x0-z, y, x-x0,
        x0-H, y0, H, W, L);
    if(j<=0 && j>-2) turn(i, j-1, x, y0-z, y-y0,
        x0, y0-H, L, H, W);
}
T solve(T L, T W, T H,
        T x1, T y1, T z1, T x2, T y2, T z2){
    if( z1!=0 && z1!=H ){
        if( y1==0 || y1==W )
            swap(y1,z1), swap(y2,z2), swap(W,H);
        else swap(x1,z1), swap(x2,z2), swap(L,H);
    }
    if( z1==H ) z1=0, z2=H-z2;
    r=INF; turn(0,0,x2-x1,y2-y1,z2,-x1,-y1,L,W,H);
    return r;
}

```

#### 4.19 Heart of Triangle

```

Pt inCenter( Pt &a, Pt &b, Pt &c) { // 內心
    double a = norm(B-C), b = norm(C-A), c = norm(A-B);
    return (A * a + B * b + C * c) / (a + b + c);
}
Pt circumCenter( Pt &a, Pt &b, Pt &c) { // 外心
    Pt bb = b - a, cc = c - a;
    double db=norm2(bb), dc=norm2(cc), d=2*(bb ^ cc);
    return a-Pt(bb.Y*dc-cc.Y*db, cc.X*db-bb.X*dc) / d;
}

```

```

Pt othroCenter( Pt &a, Pt &b, Pt &c) { // 垂心
    Pt ba = b - a, ca = c - a, bc = b - c;
    double Y = ba.Y * ca.Y * bc.Y,
        A = ca.X * ba.Y - ba.X * ca.Y,
        x0= (Y+ca.X*ba.Y*b.X-ba.X*ca.Y*c.X) / A,
        y0= -ba.X * (x0 - c.X) / ba.Y + ca.Y;
    return Pt(x0, y0);
}

```

## 5 Graph

### 5.1 DominatorTree

```

struct DominatorTree{ // O(N)
#define REP(i,s,e) for(int i=(s);i<=(e);i++)
#define REPD(i,s,e) for(int i=(s);i>=(e);i--)
    int n, m, s;
    vector< int > g[ MAXN ], pred[ MAXN ];
    vector< int > cov[ MAXN ];
    int dfn[ MAXN ], nfd[ MAXN ], ts;
    int par[ MAXN ]; //idom[u] s到u的最後一個必經點
    int sdom[ MAXN ], idom[ MAXN ];
    int mom[ MAXN ], mn[ MAXN ];
    inline bool cmp( int u, int v )
    { return dfn[ u ] < dfn[ v ]; }
    int eval( int u ){
        if( mom[ u ] == u ) return u;
        int res = eval( mom[ u ] );
        if(cmp( sdom[ mn[ mom[ u ] ] ], sdom[ mn[ u ] ] ))
            mn[ u ] = mn[ mom[ u ] ];
        return mom[ u ] = res;
    }
    void init( int _n, int _m, int _s ){
        ts = 0; n = _n; m = _m; s = _s;
        REP( i, 1, n ) g[ i ].clear(), pred[ i ].clear();
    }
    void addEdge( int u, int v ){
        g[ u ].push_back( v );
        pred[ v ].push_back( u );
    }
    void dfs( int u ){
        ts++;
        dfn[ u ] = ts;
        nfd[ ts ] = u;
        for( int v : g[ u ] ) if( dfn[ v ] == 0 ){
            par[ v ] = u;
            dfs( v );
        }
    }
    void build(){
        REP( i, 1, n ){
            dfn[ i ] = nfd[ i ] = 0;
            cov[ i ].clear();
            mom[ i ] = mn[ i ] = sdom[ i ] = i;
        }
        dfs( s );
        REPD( i, n, 2 ){
            int u = nfd[ i ];
            if( u == 0 ) continue;
            for( int v : pred[ u ] ) if( dfn[ v ] ){
                eval( v );
                if( cmp( sdom[ mn[ v ] ], sdom[ u ] ) )
                    sdom[ u ] = sdom[ mn[ v ] ];
            }
            cov[ sdom[ u ] ].push_back( u );
            mom[ u ] = par[ u ];
            for( int w : cov[ par[ u ] ] ){
                eval( w );
                if( cmp( sdom[ mn[ w ] ], par[ u ] ) )
                    idom[ w ] = mn[ w ];
                else idom[ w ] = par[ u ];
            }
            cov[ par[ u ] ].clear();
        }
        REP( i, 2, n ){
            int u = nfd[ i ];
            if( u == 0 ) continue;
            if( idom[ u ] != sdom[ u ] )
                idom[ u ] = idom[ idom[ u ] ];
        }
    } domT;
}

```

### 5.2 MaximumClique 最大團

```

#define N 111
struct MaxClique{ // 0-base
    typedef bitset<N> Int;
    Int linkto[N] , v[N];
    int n;
    void init(int _n){
        n = _n;
        for(int i = 0 ; i < n ; i++){
            linkto[i].reset(); v[i].reset();
        }
    }
    void addEdge(int a , int b)
    { v[a][b] = v[b][a] = 1; }
    int popcount(const Int& val)
    { return val.count(); }
    int lowbit(const Int& val)
    { return val._Find_first(); }
    int ans , stk[N];
    int id[N] , di[N] , deg[N];
    Int cans;
    void maxclique(int elem_num, Int candi){
        if(elem_num > ans){
            ans = elem_num; cans.reset();
            for(int i = 0 ; i < elem_num ; i++){
                cans[id[stk[i]]] = 1;
            }
        }
        int potential = elem_num + popcount(candi);
        if(potential <= ans) return;
        int pivot = lowbit(candi);
        Int smaller_candi = candi & (~linkto[pivot]);
        while(smaller_candi.count() && potential > ans){
            int next = lowbit(smaller_candi);
            candi[next] = !candi[next];
            smaller_candi[next] = !smaller_candi[next];
            potential--;
            if(next == pivot || (smaller_candi & linkto[next]).count()){
                stk[elem_num] = next;
                maxclique(elem_num + 1, candi & linkto[next]);
            }
        }
    }
    int solve(){
        for(int i = 0 ; i < n ; i++){
            id[i] = i; deg[i] = v[i].count();
        }
        sort(id , id + n , [&](int id1, int id2){
            return deg[id1] > deg[id2]; });
        for(int i = 0 ; i < n ; i++) di[id[i]] = i;
        for(int i = 0 ; i < n ; i++){
            for(int j = 0 ; j < n ; j++){
                if(v[i][j]) linkto[di[i]][di[j]] = 1;
            }
        }
        Int cand; cand.reset();
        for(int i = 0 ; i < n ; i++) cand[i] = 1;
        ans = 1;
        cans.reset(); cans[0] = 1;
        maxclique(0, cand);
        return ans;
    }
} solver;

```

### 5.3 MaximalClique 極大團

```

#define N 80
struct MaxClique{ // 0-base
    typedef bitset<N> Int;
    Int lnk[N] , v[N];
    int n;
    void init(int _n){
        n = _n;
        for(int i = 0 ; i < n ; i++){
            lnk[i].reset(); v[i].reset();
        }
    }
    void addEdge(int a , int b)
    { v[a][b] = v[b][a] = 1; }
    int ans , stk[N], id[N] , di[N] , deg[N];
    Int cans;
    void dfs(int elem_num, Int candi, Int ex){
        if(candi.none() && ex.none()){
            cans.reset();
            for(int i = 0 ; i < elem_num ; i++){
                cans[id[stk[i]]] = 1;
            }
            ans = elem_num; // cans is a maximal clique
            return;
        }
        int pivot = (candi ^ ex)._Find_first();

```

```

        Int smaller_candi = candi & (~lnk[pivot]);
        while(smaller_candi.count()){
            int nxt = smaller_candi._Find_first();
            candi[nxt] = smaller_candi[nxt] = 0;
            ex[nxt] = 1;
            stk[elem_num] = nxt;
            dfs(elem_num+1, candi & lnk[nxt], ex & lnk[nxt]);
        }
    }
    int solve(){
        for(int i = 0 ; i < n ; i++){
            id[i] = i; deg[i] = v[i].count();
        }
        sort(id , id + n , [&](int id1, int id2){
            return deg[id1] > deg[id2]; });
        for(int i = 0 ; i < n ; i++) di[id[i]] = i;
        for(int i = 0 ; i < n ; i++){
            for(int j = 0 ; j < n ; j++){
                if(v[i][j]) lnk[di[i]][di[j]] = 1;
            }
        }
        ans = 1; cans.reset(); cans[0] = 1;
        dfs(0, Int(string(n, '1')), 0);
        return ans;
    }
} solver;

```

### 5.4 Strongly Connected Component

```

struct Scc{
    int n, nScc, vst[MXN], bln[MXN];
    vector<int> E[MXN], rE[MXN], vec;
    void init(int _n){
        n = _n;
        for (int i=0; i<MXN; i++){
            E[i].clear(), rE[i].clear();
        }
    }
    void addEdge(int u, int v){
        E[u].PB(v); rE[v].PB(u);
    }
    void DFS(int u){
        vst[u]=1;
        for (auto v : E[u]) if (!vst[v]) DFS(v);
        vec.PB(u);
    }
    void rDFS(int u){
        vst[u] = 1; bln[u] = nScc;
        for (auto v : rE[u]) if (!vst[v]) rDFS(v);
    }
    void solve(){
        nScc = 0;
        vec.clear();
        FZ(vst);
        for (int i=0; i<n; i++){
            if (!vst[i]) DFS(i);
            reverse(vec.begin(), vec.end());
            FZ(vst);
            for (auto v : vec)
                if (!vst[v]){
                    rDFS(v); nScc++;
                }
        }
    }
}

```

### 5.5 Dynamic MST

```

/* Dynamic MST O( Q lg^2 Q )
(qx[i], qy[i]) -> chg weight of edge No.qx[i] to qy[i]
delete an edge: (i, \infy)
add an edge: change from \infy to specific value */
const int SZ=M+3*MXQ;
int a[N],*tz;
int find(int xx){
    int root=xx; while(a[root]) root=a[root];
    int next; while((next=a[xx])){a[xx]=root; xx=next; }
    return root;
}
bool cmp(int aa,int bb){ return tz[aa]<tz[bb]; }
int kx[N],ky[N],kt, vd[N],id[M], app[M];
bool extra[M];
void solve(int *qx,int *qy,int Q,int n,int *x,int *y,
            int *z,int m1,long long ans){
    if(Q==1){
        for(int i=1;i<=n;i++) a[i]=0;
        z[ qx[0] ]=qy[0]; tz = z;
        for(int i=0;i<m1;i++) id[i]=i;
    }
}

```

```

    sort(id,id+m1,cmp); int ri,rj;
    for(int i=0;i<m1;i++){
        ri=find(x[id[i]]); rj=find(y[id[i]]);
        if(ri!=rj){ ans+=z[id[i]]; a[ri]=rj; }
    }
    printf("%lld\n",ans);
    return;
}
int ri,rj;
//contract
kt=0;
for(int i=1;i<=n;i++) a[i]=0;
for(int i=0;i<Q;i++){
    ri=find(x[qx[i]]); rj=find(y[qx[i]]); if(ri!=rj) a[ri]=rj;
}
int tm=0;
for(int i=0;i<m1;i++) extra[i]=true;
for(int i=0;i<Q;i++) extra[qx[i]]=false;
for(int i=0;i<m1;i++) if(extra[i]) id[tm++]=i;
tz=z; sort(id,id+tm,cmp);
for(int i=0;i<tm;i++){
    ri=find(x[id[i]]); rj=find(y[id[i]]);
    if(ri!=rj){
        a[ri]=rj; ans += z[id[i]];
        kx[kt]=x[id[i]]; ky[kt]=y[id[i]]; kt++;
    }
}
for(int i=1;i<=n;i++) a[i]=0;
for(int i=0;i<kt;i++) a[ find(kx[i]) ]=find(ky[i]);
int n2=0;
for(int i=1;i<=n;i++) if(a[i]==0)
    vd[i]=++n2;
for(int i=1;i<=n;i++) if(a[i])
    vd[i]=vd[find(i)];
int m2=0, *Nx=x+m1, *Ny=y+m1, *Nz=z+m1;
for(int i=0;i<m1;i++) app[i]=-1;
for(int i=0;i<Q;i++) if(app[qx[i]]==-1){
    Nx[m2]=vd[ x[ qx[i] ] ]; Ny[m2]=vd[ y[ qx[i] ] ];
    Nz[m2]=z[ qx[i] ];
    app[qx[i]]=m2; m2++;
}
for(int i=0;i<Q;i++){ z[ qx[i] ]=qy[i]; qx[i]=app[qx[i]]; }
for(int i=1;i<=n2;i++) a[i]=0;
for(int i=0;i<tm;i++){
    ri=find(vd[ x[id[i]] ]); rj=find(vd[ y[id[i]] ]);
    if(ri!=rj){
        a[ri]=rj; Nx[m2]=vd[ x[id[i]] ];
        Ny[m2]=vd[ y[id[i]] ]; Nz[m2]=z[id[i]]; m2++;
    }
}
int mid=Q/2;
solve(qx,qy,mid,n2,Nx,Ny,Nz,m2,ans);
solve(qx+mid,qy+mid,Q-mid,n2,Nx,Ny,Nz,m2,ans);
}
int x[SZ],y[SZ],z[SZ],qx[MXQ],qy[MXQ],n,m,Q;
void init(){
    scanf("%d",&n,&m);
    for(int i=0;i<m;i++) scanf("%d%d",&x[i],&y[i],&z[i]);
    scanf("%d",&Q);
    for(int i=0;i<Q;i++){ scanf("%d",&qx[i],&qy[i]); qx[i]--; }
}
void work(){ if(Q) solve(qx,qy,Q,n,x,y,z,m,0); }

```

## 5.6 Maximum General graph Matching

```

const int N = 514, E = (2e5) * 2;
struct Graph{
    int to[E],bro[E],head[N],e;
    int lnk[N],vis[N],stp,n;
    void init( int _n ){
        stp = 0; e = 1; n = _n;
        for( int i = 1 ; i <= n ; i ++ )
            lnk[i] = vis[i] = 0;
    }
    void add_edge(int u,int v){
        to[e]=v,bro[e]=head[u],head[u]=e++;
        to[e]=u,bro[e]=head[v],head[v]=e++;
    }
    bool dfs(int x){
        vis[x]=stp;
        for(int i=head[x];i;i=bro[i]){

```

```

            int v=to[i];
            if(!lnk[v]){
                lnk[x]=v,lnk[v]=x;
                return true;
            }else if(vis[lnk[v]]<stp){
                int w=lnk[v];
                lnk[x]=v,lnk[v]=x,lnk[w]=0;
                if(dfs(w)){
                    return true;
                }
                lnk[w]=v,lnk[v]=w,lnk[x]=0;
            }
        }
        return false;
    }
    int solve(){
        int ans = 0;
        for(int i=1;i<=n;i++)
            if(!lnk[i]){
                stp++; ans += dfs(i);
            }
        return ans;
    }
} graph;

```

## 5.7 Minimum General Weighted Matching

```

struct Graph {
    // Minimum General Weighted Matching (Perfect Match)
    static const int MXN = 105;
    int n, edge[MXN][MXN];
    int match[MXN],dis[MXN],onstk[MXN];
    vector<int> stk;
    void init(int _n) {
        n = _n;
        for( int i = 0 ; i < n ; i ++ )
            for( int j = 0 ; j < n ; j ++ )
                edge[ i ][ j ] = 0;
    }
    void add_edge(int u, int v, int w)
    { edge[u][v] = edge[v][u] = w; }
    bool SPFA(int u){
        if (onstk[u]) return true;
        stk.pb(u);
        onstk[u] = 1;
        for (int v=0; v<n; v++){
            if (u != v && match[u] != v && !onstk[v]){
                int m = match[v];
                if (dis[m] > dis[u] - edge[v][m] + edge[u][v]){
                    dis[m] = dis[u] - edge[v][m] + edge[u][v];
                    onstk[v] = 1;
                    stk.pb(v);
                    if (SPFA(m)) return true;
                }
                stk.pop_back();
                onstk[v] = 0;
            }
        }
        onstk[u] = 0;
        stk.pop_back();
        return false;
    }
    int solve() {
        // find a match
        for (int i=0; i<n; i+=2){
            match[i] = i+1;
            match[i+1] = i;
        }
        while (true){
            int found = 0;
            for( int i = 0 ; i < n ; i ++ )
                onstk[ i ] = dis[ i ] = 0;
            for (int i=0; i<n; i++){
                stk.clear();
                if (!onstk[i] && SPFA(i)){
                    found = 1;
                    while (SZ(stk)>=2){
                        int u = stk.back(); stk.pop_back();
                        int v = stk.back(); stk.pop_back();
                        match[u] = v;
                        match[v] = u;
                    }
                    if (!found) break;
                }
            }
            int ret = 0;
            for (int i=0; i<n; i++)

```



```

    ret += edge[i][match[i]];
    ret /= 2;
    return ret;
}
}graph;

```

## 5.8 Maximum General Weighted Matching

```

struct WeightGraph {
    static const int INF = INT_MAX;
    static const int N = 514;
    struct edge{
        int u,v,w; edge(){}
        edge(int ui,int vi,int wi)
            :u(ui),v(vi),w(wi){}
    };
    int n,n_x;
    edge g[N*2][N*2];
    int lab[N*2];
    int match[N*2],slack[N*2],st[N*2],pa[N*2];
    int flo_from[N*2][N+1],S[N*2],vis[N*2];
    vector<int> flo[N*2];
    queue<int> q;
    int e_delta(const edge &e){
        return lab[e.u]+lab[e.v]-g[e.u][e.v].w*2;
    }
    void update_slack(int u,int x){
        if(!slack[x]||e_delta(g[u][x])<e_delta(g[slack[x]][x]))slack[x]=u;
    }
    void set_slack(int x){
        slack[x]=0;
        for(int u=1;u<=n;++u)
            if(g[u][x].w>0&&st[u]!=x&&S[st[u]]==0)
                update_slack(u,x);
    }
    void q_push(int x){
        if(x<=n)q.push(x);
        else for(size_t i=0;i<flo[x].size();i++)
            q_push(flo[x][i]);
    }
    void set_st(int x,int b){
        st[x]=b;
        if(x>n)for(size_t i=0;i<flo[x].size();++i)
            set_st(flo[x][i],b);
    }
    int get_pr(int b,int xr){
        int pr=find(flo[b].begin(),flo[b].end(),xr)-flo[b].begin();
        if(pr%2==1){
            reverse(flo[b].begin()+1,flo[b].end());
            return (int)flo[b].size()-pr;
        }else return pr;
    }
    void set_match(int u,int v){
        match[u]=g[u][v].v;
        if(u<=n) return;
        edge e=g[u][v];
        int xr=flo_from[u][e.u],pr=get_pr(u,xr);
        for(int i=0;i<pr;++i)set_match(flo[u][i],flo[u][i^1]);
        set_match(xr,v);
        rotate(flo[u].begin(),flo[u].begin()+pr,flo[u].end());
    }
    void augment(int u,int v){
        for(;;){
            int xnv=st[match[u]];
            set_match(u,v);
            if(!xnv)return;
            set_match(xnv,st[pa[xnv]]);
            u=st[pa[xnv]],v=xnv;
        }
    }
    int get_lca(int u,int v){
        static int t=0;
        for(++t;u!=v;swap(u,v)){
            if(u==0)continue;
            if(vis[u]==t)return u;
            vis[u]=t;
            u=st[match[u]];
            if(u)u=st[pa[u]];
        }
    }

```

```

    return 0;
}
void add_blossom(int u,int lca,int v){
    int b=n+1;
    while(b<=n_x&&st[b])++b;
    if(b>n_x)++n_x;
    lab[b]=0,S[b]=0;
    match[b]=match[lca];
    flo[b].clear();
    flo[b].push_back(lca);
    for(int x=u,y;x!=lca;x=st[pa[y]])
        flo[b].push_back(x),flo[b].push_back(y=st[match[x]]),q.push(y);
    reverse(flo[b].begin()+1,flo[b].end());
    for(int x=v,y;x!=lca;x=st[pa[y]])
        flo[b].push_back(x),flo[b].push_back(y=st[match[x]]),q.push(y);
    set_st(b,b);
    for(int x=1;x<=n_x;++x)g[b][x].w=g[x][b].w=0;
    for(int x=1;x<=n;++x)flo_from[b][x]=0;
    for(size_t i=0;i<flo[b].size();++i){
        int xs=flo[b][i];
        for(int x=1;x<=n_x;++x)
            if(g[b][x].w==0||e_delta(g[xs][x])<e_delta(g[b][x]))
                g[b][x]=g[xs][x],g[x][b]=g[x][xs];
        for(int x=1;x<=n;++x)
            if(flo_from[xs][x])flo_from[b][x]=xs;
    }
    set_slack(b);
}
void expand_blossom(int b){
    for(size_t i=0;i<flo[b].size();++i)
        set_st(flo[b][i],flo[b][i]);
    int xr=flo_from[b][g[b][pa[b]].u],pr=get_pr(b,xr);
    for(int i=0;i<pr;i+=2){
        int xs=flo[b][i],xns=flo[b][i+1];
        pa[xs]=g[xns][xs].u;
        S[xs]=1,S[xns]=0;
        slack[xs]=0,set_slack(xns);
        q_push(xns);
    }
    S[xr]=1,pa[xr]=pa[b];
    for(size_t i=pr+1;i<flo[b].size();++i){
        int xs=flo[b][i];
        S[xs]=-1,set_slack(xs);
    }
    st[b]=0;
}
bool on_found_edge(const edge &e){
    int u=st[e.u],v=st[e.v];
    if(S[v]==-1){
        pa[v]=e.u,S[v]=1;
        int nu=st[match[v]];
        slack[v]=slack[nu]=0;
        S[nu]=0,q_push(nu);
    }else if(S[v]==0){
        int lca=get_lca(u,v);
        if(!lca)return augment(u,v),augment(v,u),true;
        else add_blossom(u,lca,v);
    }
    return false;
}
bool matching(){
    memset(S+1,-1,sizeof(int)*n_x);
    memset(slack+1,0,sizeof(int)*n_x);
    q=queue<int>();
    for(int x=1;x<=n_x;++x)
        if(st[x]==x&&!match[x])pa[x]=0,S[x]=0,q.push(x);
    if(q.empty())return false;
    for(;;){
        while(q.size()){
            int u=q.front();q.pop();
            if(S[st[u]]==1)continue;
            for(int v=1;v<=n;++v)
                if(g[u][v].w>0&&st[u]!=st[v]){
                    if(e_delta(g[u][v])==0){
                        if(on_found_edge(g[u][v]))return true;
                    }else update_slack(u,st[v]);
                }
        }
        int d=INF;
        for(int b=n+1;b<=n_x;++b)

```

```

    if(st[b]==b&&S[b]==1)d=min(d,lab[b]/2);
    for(int x=1;x<=n_x;++x)
        if(st[x]==x&&slack[x]){
            if(S[x]==-1)d=min(d,e_delta(g[slack[x]](x)));
            else if(S[x]==0)d=min(d,e_delta(g[slack[x]](x)
                ])/2);
        }
    for(int u=1;u<=n;++u){
        if(S[st[u]]==0){
            if(lab[u]<=d)return 0;
            lab[u]-=d;
        }else if(S[st[u]]==1)lab[u]+=d;
    }
    for(int b=n+1;b<=n_x;++b)
        if(st[b]==b){
            if(S[st[b]]==0)lab[b]+=d*2;
            else if(S[st[b]]==1)lab[b]-=d*2;
        }
    q=queue<int>();
    for(int x=1;x<=n_x;++x)
        if(st[x]==x&&slack[x]&&st[slack[x]]!=x&&e_delta
            (g[slack[x]](x))==0)
            if(on_found_edge(g[slack[x]](x)))return true;
    for(int b=n+1;b<=n_x;++b)
        if(st[b]==b&&S[b]==1&&lab[b]==0)expand_blossom(
            b);
    }
    return false;
}
pair<long long,int> solve(){
    memset(match+1,0,sizeof(int)*n);
    n_x=n;
    int n_matches=0;
    long long tot_weight=0;
    for(int u=0;u<=n;++u)st[u]=u,flo[u].clear();
    int w_max=0;
    for(int u=1;u<=n;++u)
        for(int v=1;v<=n;++v){
            flo_from[u][v]=(u==v?u:0);
            w_max=max(w_max,g[u][v].w);
        }
    for(int u=1;u<=n;++u)lab[u]=w_max;
    while(matching())n_matches++;
    for(int u=1;u<=n;++u)
        if(match[u]&&match[u]<u)
            tot_weight+=g[u][match[u]].w;
    return make_pair(tot_weight,n_matches);
}
void add_edge( int ui , int vi , int wi ){
    g[ui][vi].w = g[vi][ui].w = wi;
}
void init( int _n ){
    n = _n;
    for(int u=1;u<=n;++u)
        for(int v=1;v<=n;++v)
            g[u][v]=edge(u,v,0);
}
} graph;

```

## 5.9 Minimum Steiner Tree

```

// Minimum Steiner Tree 重要點的mst
//  $O(V^3AT + V^2 2^AT)$ 
struct SteinerTree{
#define V 33
#define T 8
#define INF 1023456789
    int n , dst[V][V] , dp[1 << T][V] , tdst[V];
    void init( int _n ){
        n = _n;
        for( int i = 0 ; i < n ; i ++ ){
            for( int j = 0 ; j < n ; j ++ )
                dst[ i ][ j ] = INF;
            dst[ i ][ i ] = 0;
        }
    }
    void add_edge( int ui , int vi , int wi ){
        dst[ ui ][ vi ] = min( dst[ ui ][ vi ] , wi );
        dst[ vi ][ ui ] = min( dst[ vi ][ ui ] , wi );
    }
    void shortest_path(){ // using spfa may faster
        for( int k = 0 ; k < n ; k ++ )
            for( int i = 0 ; i < n ; i ++ )

```

```

                for( int j = 0 ; j < n ; j ++ )
                    dst[ i ][ j ] = min( dst[ i ][ j ] ,
                        dst[ i ][ k ] + dst[ k ][ j ] );
    } // call shorest_path before solve
    int solve( const vector<int>& ter ){
        int t = (int)ter.size();
        for( int i = 0 ; i < ( 1 << t ) ; i ++ )
            for( int j = 0 ; j < n ; j ++ )
                dp[ i ][ j ] = INF;
        dp[ 0 ][ i ] = 0;
        for( int msk = 1 ; msk < ( 1 << t ) ; msk ++ ){
            if( msk == ( msk & (-msk) ) ){
                int who = __lg( msk );
                for( int i = 0 ; i < n ; i ++ )
                    dp[ msk ][ i ] = dst[ ter[ who ] ][ i ];
                continue;
            }
            for( int i = 0 ; i < n ; i ++ )
                for( int submsk = ( msk - 1 ) & msk ; submsk ;
                    submsk = ( submsk - 1 ) & msk )
                    dp[ msk ][ i ] = min( dp[ msk ][ i ] ,
                        dp[ submsk ][ i ] +
                        dp[ msk ^ submsk ][ i ] );
            for( int i = 0 ; i < n ; i ++ ){
                tdst[ i ] = INF;
                for( int j = 0 ; j < n ; j ++ )
                    tdst[ i ] = min( tdst[ i ] ,
                        dp[ msk ][ j ] + dst[ j ][ i ] );
            }
            for( int i = 0 ; i < n ; i ++ )
                dp[ msk ][ i ] = tdst[ i ];
        }
        int ans = INF;
        for( int i = 0 ; i < n ; i ++ )
            ans = min( ans , dp[ ( 1 << t ) - 1 ][ i ] );
        return ans;
    }
} solver;

```

## 5.10 BCC based on vertex

```

struct BccVertex {
    int n,nScc,step,dfn[MXN],low[MXN];
    vector<int> E[MXN],sccv[MXN];
    int top,stk[MXN];
    void init(int _n) {
        n = _n; nScc = step = 0;
        for (int i=0; i<n; i++) E[i].clear();
    }
    void addEdge(int u, int v)
    { E[u].PB(v); E[v].PB(u); }
    void DFS(int u, int f) {
        dfn[u] = low[u] = step++;
        stk[top++] = u;
        for (auto v:E[u]) {
            if (v == f) continue;
            if (dfn[v] == -1) {
                DFS(v,u);
                low[u] = min(low[u], low[v]);
                if (low[v] >= dfn[u]) {
                    int z;
                    sccv[nScc].clear();
                    do {
                        z = stk[--top];
                        sccv[nScc].PB(z);
                    } while (z != v);
                    sccv[nScc++].PB(u);
                }
            }else
                low[u] = min(low[u],dfn[v]);
        }
    }
    vector<vector<int>> solve() {
        vector<vector<int>> res;
        for (int i=0; i<n; i++)
            dfn[i] = low[i] = -1;
        for (int i=0; i<n; i++)
            if (dfn[i] == -1) {
                top = 0;
                DFS(i,i);
            }
        REP(i,nScc) res.PB(sccv[i]);
        return res;
    }
}

```

```
}
}graph;
```

## 5.11 Min Mean Cycle

```
/* minimum mean cycle O(VE) */
struct MMC{
#define E 101010
#define V 1021
#define inf 1e9
#define eps 1e-6
    struct Edge { int v,u; double c; };
    int n, m, prv[V][V], prve[V][V], vst[V];
    Edge e[E];
    vector<int> edgeID, cycle, rho;
    double d[V][V];
    void init( int _n )
    { n = _n; m = 0; }
    // WARNING: TYPE matters
    void addEdge( int vi , int ui , double ci )
    { e[ m ++ ] = { vi , ui , ci }; }
    void bellman_ford() {
        for(int i=0; i<n; i++) d[0][i]=0;
        for(int i=0; i<n; i++) {
            fill(d[i+1], d[i+1]+n, inf);
            for(int j=0; j<m; j++) {
                int v = e[j].v, u = e[j].u;
                if(d[i][v]<inf && d[i+1][u]>d[i][v]+e[j].c) {
                    d[i+1][u] = d[i][v]+e[j].c;
                    prv[i+1][u] = v;
                    prve[i+1][u] = j;
                }
            }
        }
        double solve(){
            // returns inf if no cycle, mmc otherwise
            double mmc=inf;
            int st = -1;
            bellman_ford();
            for(int i=0; i<n; i++) {
                double avg=-inf;
                for(int k=0; k<n; k++) {
                    if(d[n][i]<inf-eps) avg=max(avg,(d[n][i]-d[k][i])/(n-k));
                    else avg=max(avg,inf);
                }
                if (avg < mmc) tie(mmc, st) = tie(avg, i);
            }
            fill(vst,0); edgeID.clear(); cycle.clear(); rho.clear();
            for (int i=n; !vst[st]; st=prv[i--][st]) {
                vst[st]++;
                edgeID.PB(prve[i][st]);
                rho.PB(st);
            }
            while (vst[st] != 2) {
                if(rho.empty()) return inf;
                int v = rho.back(); rho.pop_back();
                cycle.PB(v);
                vst[v]++;
            }
            reverse(ALL(edgeID));
            edgeID.resize(SZ(cycle));
            return mmc;
        }
    } }mmc;
```

## 5.12 Directed Graph Min Cost Cycle

```
// works in O(N M)
#define INF 1000000000000000LL
#define N 5010
#define M 200010
struct edge{
    int to; LL w;
    edge(int a=0, LL b=0): to(a), w(b){}
};
struct node{
    LL d; int u, next;
    node(LL a=0, int b=0, int c=0): d(a), u(b), next(c){}
}b[M];
struct DirectedGraphMinCycle{
    vector<edge> g[N], grev[N];
    LL dp[N][N], p[N], d[N], mu;
    bool inq[N];
```

```
int n, bn, bsz, hd[N];
void b_insert(LL d, int u){
    int i = d/mu;
    if(i >= bn) return;
    b[++bsz] = node(d, u, hd[i]);
    hd[i] = bsz;
}
void init( int _n ){
    n = _n;
    for( int i = 1 ; i <= n ; i ++ )
        g[ i ].clear();
}
void addEdge( int ai , int bi , LL ci )
{ g[ai].push_back(edge(bi,ci)); }
LL solve(){
    fill(dp[0], dp[0]+n+1, 0);
    for(int i=1; i<=n; i++){
        fill(dp[i+1], dp[i+1]+n+1, INF);
        for(int j=1; j<=n; j++) if(dp[i-1][j] < INF){
            for(int k=0; k<(int)g[j].size(); k++){
                dp[i][g[j][k].to] =min(dp[i][g[j][k].to],
                    dp[i-1][j]+g[j][k].w);
            }
        }
        mu=INF; LL bunbo=1;
        for(int i=1; i<=n; i++) if(dp[n][i] < INF){
            LL a=-INF, b=1;
            for(int j=0; j<=n-1; j++) if(dp[j][i] < INF){
                if(a*(n-j) < b*(dp[n][i]-dp[j][i])){
                    a = dp[n][i]-dp[j][i];
                    b = n-j;
                }
            }
            if(mu*b > bunbo*a)
                mu = a, bunbo = b;
        }
        if(mu < 0) return -1; // negative cycle
        if(mu == INF) return INF; // no cycle
        if(mu == 0) return 0;
        for(int i=1; i<=n; i++){
            for(int j=0; j<(int)g[i].size(); j++){
                g[i][j].w *= bunbo;
            }
            memset(p, 0, sizeof(p));
            queue<int> q;
            for(int i=1; i<=n; i++){
                q.push(i);
                inq[i] = true;
            }
            while(!q.empty()){
                int i=q.front(); q.pop(); inq[i]=false;
                for(int j=0; j<(int)g[i].size(); j++){
                    if(p[g[i][j].to] > p[i]+g[i][j].w-mu){
                        p[g[i][j].to] = p[i]+g[i][j].w-mu;
                        if(!inq[g[i][j].to]){
                            q.push(g[i][j].to);
                            inq[g[i][j].to] = true;
                        }
                    }
                }
            }
            for(int i=1; i<=n; i++) grev[i].clear();
            for(int i=1; i<=n; i++){
                for(int j=0; j<(int)g[i].size(); j++){
                    g[i][j].w += p[i]-p[g[i][j].to];
                    grev[g[i][j].to].push_back(edge(i, g[i][j].w));
                }
            }
            LL mlcd = n*mu;
            for(int i=1; i<=n; i++){
                bn=mlcd/mu, bsz=0;
                memset(hd, 0, sizeof(hd));
                fill(d+i+1, d+i+1, INF);
                b_insert(d[i]=0, i);
                for(int j=0; j<=bn-1; j++) for(int k=hd[j]; k; k=
                    b[k].next){
                    int u = b[k].u;
                    LL du = b[k].d;
                    if(du > d[u]) continue;
                    for(int l=0; l<(int)g[u].size(); l++) if(g[u][l].to > i){
                        if(d[g[u][l].to] > du + g[u][l].w){
                            d[g[u][l].to] = du + g[u][l].w;
                            b_insert(d[g[u][l].to], g[u][l].to);
                        }
                    }
                }
                for(int j=0; j<(int)grev[i].size(); j++) if(grev[i][j].to > i)
                    mlcd=min(mlcd,d[grev[i][j].to] + grev[i][j].w);
            }
        }
```

```
    return mldc / bunbo;
} }graph;
```

### 5.13 K-th Shortest Path

```
// time:  $O(|E| \lg |E| + |V| \lg |V| + K)$ 
// memory:  $O(|E| \lg |E| + |V|)$ 
struct KSP{ // 1-base
    struct nd{
        int u, v; ll d;
        nd(int ui = 0, int vi = 0, ll di = INF)
        { u = ui; v = vi; d = di; }
    };
    struct heap{
        nd* edge; int dep; heap* chd[4];
    };
    static int cmp(heap* a, heap* b)
    { return a->edge->d > b->edge->d; }
    struct node{
        int v; ll d; heap* H; nd* E;
        node(){
            node(ll _d, int _v, nd* _E)
            { d = _d; v = _v; E = _E; }
            node(heap* _H, ll _d)
            { H = _H; d = _d; }
            friend bool operator<(node a, node b)
            { return a.d > b.d; }
        };
        int n, k, s, t;
        ll dst[ N ];
        nd *nxt[ N ];
        vector<nd*> g[ N ], rg[ N ];
        heap *nullNd, *head[ N ];
        void init( int _n, int _k, int _s, int _t ){
            n = _n; k = _k; s = _s; t = _t;
            for( int i = 1; i <= n; i ++ ){
                g[ i ].clear(); rg[ i ].clear();
                nxt[ i ] = NULL; head[ i ] = NULL;
                dst[ i ] = -1;
            }
        }
        void addEdge( int ui, int vi, ll di ){
            nd* e = new nd(ui, vi, di);
            g[ ui ].push_back( e );
            rg[ vi ].push_back( e );
        }
        queue<int> dfsQ;
        void dijkstra(){
            while(dfsQ.size()) dfsQ.pop();
            priority_queue<node> Q;
            Q.push(node(0, t, NULL));
            while (!Q.empty()){
                node p = Q.top(); Q.pop();
                if(dst[p.v] != -1) continue;
                dst[ p.v ] = p.d;
                nxt[ p.v ] = p.E;
                dfsQ.push( p.v );
                for(auto e: rg[ p.v ]){
                    Q.push(node(p.d + e->d, e->u, e));
                }
            }
            heap* merge(heap* curNd, heap* newNd){
                if(curNd == nullNd) return newNd;
                heap* root = new heap;
                memcpy(root, curNd, sizeof(heap));
                if(newNd->edge->d < curNd->edge->d){
                    root->edge = newNd->edge;
                    root->chd[2] = newNd->chd[2];
                    root->chd[3] = newNd->chd[3];
                    newNd->edge = curNd->edge;
                    newNd->chd[2] = curNd->chd[2];
                    newNd->chd[3] = curNd->chd[3];
                }
                if(root->chd[0]->dep < root->chd[1]->dep)
                    root->chd[0] = merge(root->chd[0], newNd);
                else
                    root->chd[1] = merge(root->chd[1], newNd);
                root->dep = max(root->chd[0]->dep, root->chd[1]->
                    dep) + 1;
                return root;
            }
            vector<heap*> V;
            void build(){
                nullNd = new heap;
```

```
                nullNd->dep = 0;
                nullNd->edge = new nd;
                fill(nullNd->chd, nullNd->chd+4, nullNd);
                while(not dfsQ.empty()){
                    int u = dfsQ.front(); dfsQ.pop();
                    if(!nxt[ u ]) head[ u ] = nullNd;
                    else head[ u ] = head[nxt[ u ]->v];
                    V.clear();
                    for( auto&& e : g[ u ] ){
                        int v = e->v;
                        if( dst[ v ] == -1 ) continue;
                        e->d += dst[ v ] - dst[ u ];
                        if( nxt[ u ] != e ){
                            heap* p = new heap;
                            fill(p->chd, p->chd+4, nullNd);
                            p->dep = 1;
                            p->edge = e;
                            V.push_back(p);
                        }
                    }
                    if(V.empty()) continue;
                    make_heap(V.begin(), V.end(), cmp);
                }
                #define L(X) ((X<<1)+1)
                #define R(X) ((X<<1)+2)
                for( size_t i = 0; i < V.size(); i ++ ){
                    if(L(i) < V.size()) V[i]->chd[2] = V[L(i)];
                    else V[i]->chd[2]=nullNd;
                    if(R(i) < V.size()) V[i]->chd[3] = V[R(i)];
                    else V[i]->chd[3]=nullNd;
                }
                head[u] = merge(head[u], V.front());
            }
        }
        vector<ll> ans;
        void first_K(){
            ans.clear();
            priority_queue<node> Q;
            if( dst[ s ] == -1 ) return;
            ans.push_back( dst[ s ] );
            if( head[s] != nullNd ){
                Q.push(node(head[s], dst[s]+head[s]->edge->d));
                for( int _ = 1; _ < k and not Q.empty(); _ ++ ){
                    node p = Q.top(); Q.pop();
                    ans.push_back( p.d );
                    if(head[ p.H->edge->v ] != nullNd){
                        q.H = head[ p.H->edge->v ];
                        q.d = p.d + q.H->edge->d;
                        Q.push(q);
                    }
                }
                for( int i = 0; i < 4; i ++ )
                    if( p.H->chd[ i ] != nullNd ){
                        q.H = p.H->chd[ i ];
                        q.d = p.d - p.H->edge->d + p.H->chd[ i ]->
                            edge->d;
                        Q.push( q );
                    }
            }
        }
        void solve(){ // ans[i] stores the i-th shortest path
            dijkstra();
            build();
            first_K(); // ans.size() might less than k
        }
    } }solver;
```

### 5.14 SPFA

```
bool spfa(){
    deque<int> dq;
    dis[0]=0;
    dq.push_back(0);
    inq[0]=1;
    while(!dq.empty()){
        int u=dq.front();
        dq.pop_front();
        inq[u]=0;
        for(auto i:edge[u]){
            if(dis[i.first]>i.second+dis[u]){
                dis[i.first]=i.second+dis[u];
                len[i.first]=len[u]+1;
                if(len[i.first]>n) return 1;
                if(inq[i.first]) continue;
                if(!dq.empty()&&dis[dq.front()]>dis[i.
                    first])
                    dq.push_front(i.first);
                else
                    dq.push_back(i.first);
            }
        }
    }
}
```

```

        inq[i.first]=1;
    } } }
    return 0;
}

```

### 5.15 差分約束

約束條件  $V_j - V_i \leq W$  邊  $V_i - > V_j$  權重為  $W \rightarrow$  bellman-ford or spfa

### 5.16 Graph Hash

$$F_t(i) = (F_{t-1}(i) \times A + \sum_{i \rightarrow j} F_{t-1}(j) \times B + \sum_{j \rightarrow i} F_{t-1}(j) \times C + D \times (i = a)) \bmod P$$

for each node i, iterate t times. t, A, B, C, D, P are hash parameter

### 5.17 eulerPath

```

#define FOR(i,a,b) for(int i=a;i<=b;i++)
int dfs_st[10000500],dfn=0;
int ans[10000500],cnt=0,num=0;
vector<int>G[1000050];
int cur[1000050];
int ind[1000050],out[1000050];
void dfs(int x){
    FOR(i,1,n)sort(G[i].begin(),G[i].end());
    dfs_st[++dfn]=x;
    memset(cur,-1,sizeof(cur));
    while(dfn>0){
        int u=dfs_st[dfn];
        int complete=1;
        for(int i=cur[u]+1;i<G[u].size();i++){
            int v=G[u][i];
            num++;
            dfs_st[++dfn]=v;
            cur[u]=i;
            complete=0;
            break;
        }
        if(complete)ans[++cnt]=u,dfn--;
    }
}
bool check(int &start){
    int l=0,r=0,mid=0;
    FOR(i,1,n){
        if(ind[i]==out[i]+1)l++;
        if(out[i]==ind[i]+1)r++;start=i;
        if(ind[i]==out[i])mid++;
    }
    if(l==1&&r==1&&mid==n-2)return true;
    l=1;
    FOR(i,1,n)if(ind[i]!=out[i])l=0;
    if(l){
        FOR(i,1,n)if(out[i]>0){
            start=i;
            break;
        }
        return true;
    }
    return false;
}
int main(){
    cin>>n>>m;
    FOR(i,1,m){
        int x,y;scanf("%d%d",&x,&y);
        G[x].push_back(y);
        ind[y]++,out[x]++;
    }
    int start=-1,ok=true;
    if(check(start)){
        dfs(start);
        if(num!=m){
            puts("What a shame!");
            return 0;
        }
        for(int i=cnt;i>=1;i--)
            printf("%d ",ans[i]);
        puts("");
    }
    else puts("What a shame!");
}

```

## 6 String

### 6.1 PalTree

```

// len[s]是對應的回文長度
// num[s]是有幾個回文後綴
// cnt[s]是這個回文字串在整個字串中的出現次數
// fail[s]是他長度次長的回文後綴，aba的fail是a
const int MXN = 1000010;
struct PalT{
    int nxt[MXN][26],fail[MXN],len[MXN];
    int tot,lst,n,state[MXN],cnt[MXN],num[MXN];
    int diff[MXN],sfail[MXN],fac[MXN],dp[MXN];
    char s[MXN]={-1};
    int newNode(int l,int f){
        len[tot]=l,fail[tot]=f,cnt[tot]=num[tot]=0;
        memset(nxt[tot],0,sizeof(nxt[tot]));
        diff[tot]=(l>0?l-len[f]:0);
        sfail[tot]=(l>0&&diff[tot]==diff[f]?sfail[f]:f);
        return tot++;
    }
    int getfail(int x){
        while(s[n-len[x]-1]!=s[n]) x=fail[x];
        return x;
    }
    int getmin(int v){
        dp[v]=fac[n-len[sfail[v]]-diff[v]];
        if(diff[v]==diff[fail[v]])
            dp[v]=min(dp[v],dp[fail[v]]);
        return dp[v]+1;
    }
    int pushC(){
        int c=s[n]-'a',np=getfail(lst);
        if(!lst==nxt[np][c]){
            lst=newNode(len[np]+2,nxt[getfail(fail[np])][c]);
            nxt[np][c]=lst; num[lst]=num[fail[lst]]+1;
        }
        fac[n]=n;
        for(int v=lst;len[v]>0;v=sfail[v])
            fac[n]=min(fac[n],getmin(v));
        return ++cnt[lst],lst;
    }
    void init(const char *_s){
        tot=lst=n=0;
        newNode(0,1),newNode(-1,1);
        for(;s[n];) s[n+1]=s[n],++n,state[n-1]=pushC();
        for(int i=tot-1;i>1;i--) cnt[fail[i]]+=cnt[i];
    }
}palt;

```

### 6.2 KMP

```

/*
len-failure[k]:
在k結尾的情況下，這個子字串可以由開頭
長度為(len-failure[k])的部分重複出現來表達

failure[k]:
failure[k]為次長相同前綴後綴
如果我們不只想求最多，而且以0-base做為考量
，那可能的長度由大到小會是
failuer[k]、failure[failuer[k]-1]
、failure[failure[failuer[k]-1]-1]..
直到有值為0為止
*/
int failure[MXN];
void KMP(string& t, string& p)
{
    if (p.size() > t.size()) return;
    for (int i=1, j=failure[0]=-1; i<p.size(); ++i)
    {
        while (j >= 0 && p[j+1] != p[i])
            j = failure[j];
        if (p[j+1] == p[i]) j++;
        failure[i] = j;
    }
    for (int i=0, j=-1; i<t.size(); ++i)
    {
        while (j >= 0 && p[j+1] != t[i])
            j = failure[j];
        if (p[j+1] == t[i]) j++;
    }
}

```



```

    if (j == p.size()-1)
    {
        cout << i - p.size() + 1 << " ";
        j = failure[j];
    } } }

```

### 6.3 SAIS

```

const int N = 300010;
struct SA{
#define REP(i,n) for ( int i=0; i<int(n); i++ )
#define REP1(i,a,b) for ( int i=(a); i<=int(b); i++ )
    bool _t[N*2];
    int _s[N*2], _sa[N*2], _c[N*2], x[N], _p[N], _q[N*2],
        hei[N], r[N];
    int operator [] (int i){ return _sa[i]; }
    void build(int *s, int n, int m){
        memcpy(_s, s, sizeof(int) * n);
        sais(_s, _sa, _p, _q, _t, _c, n, m);
        mkhei(n);
    }
    void mkhei(int n){
        REP(i,n) r[_sa[i]] = i;
        hei[0] = 0;
        REP(i,n) if(r[i]) {
            int ans = i>0 ? max(hei[r[i-1]] - 1, 0) : 0;
            while(_s[i+ans] == _s[_sa[r[i]-1]+ans]) ans++;
            hei[r[i]] = ans;
        }
    }
    void sais(int *s, int *sa, int *p, int *q, bool *t,
        int *c, int n, int z){
        bool uniq = t[n-1] = true, neq;
        int nn = 0, nmzx = -1, *nsa = sa + n, *ns = s + n,
            lst = -1;
#define MS0(x,n) memset((x),0,n*sizeof(*(x)))
#define MAGIC(XD) MS0(sa, n); \
        memcpy(x, c, sizeof(int) * z); \
        XD; \
        memcpy(x + 1, c, sizeof(int) * (z - 1)); \
        REP(i,n) if(sa[i] && !t[sa[i]-1]) sa[x[s[sa[i]
            ]-1]]++ = sa[i]-1; \
        memcpy(x, c, sizeof(int) * z); \
        for(int i = n - 1; i >= 0; i--) if(sa[i] && t[sa[i]
            ]-1]) sa[-x[s[sa[i]-1]]] = sa[i]-1;
        MS0(c, z);
        REP(i,n) uniq &= ++c[s[i]] < 2;
        REP(i,z-1) c[i+1] += c[i];
        if (uniq) { REP(i,n) sa[-c[s[i]]] = i; return; }
        for(int i = n - 2; i >= 0; i--) t[i] = (s[i]==s[i
            +1] ? t[i+1] : s[i]<s[i+1]);
        MAGIC(REP1(i,1,n-1) if(t[i] && !t[i-1]) sa[-x[s[i]
            ]]=p[q[i]-nn++]=i);
        REP(i, n) if (sa[i] && t[sa[i]] && !t[sa[i]-1]) {
            neq=lst<0?lmemcpy(s+sa[i],s+lst,(p[q[sa[i]]+1]-sa
                [i])*sizeof(int));
            ns[q[lst=sa[i]]]=nmzx+=neq;
        }
        sais(ns, nsa, p + nn, q + n, t + n, c + z, nn, nmzx
            + 1);
        MAGIC(for(int i = nn - 1; i >= 0; i--) sa[-x[s[p[
            nsa[i]]]] = p[nsa[i]]);
    }
}sa;
int H[ N ], SA[ N ];
void suffix_array(int* ip, int len) {
    // should padding a zero in the back
    // ip is int array, len is array length
    // ip[0..n-1] != 0, and ip[len] = 0
    ip[len++] = 0;
    sa.build(ip, len, 128);
    for (int i=0; i<len; i++) {
        H[i] = sa.hei[i + 1];
        SA[i] = sa._sa[i + 1];
    }
    // resulting height, sa array \in [0,len)
}

```

### 6.4 SuffixAutomata

```

// any path start from root forms a substring of S
// occurrence of P : iff SAM can run on input word P

```

```

// number of different substring : ds[1]-1
// total length of all different substring : dsl[1]
// max/min length of state i : mx[i]/mx[mom[i]]+1
// assume a run on input word P end at state i:
// number of occurrences of P : cnt[i]
// first occurrence position of P : fp[i]-lpl+1
// all position of P : fp of "dfs from i through rmom"
const int MXM = 1000010;
struct SAM{
    int tot, root, lst, mom[MXM], mx[MXM]; //ind[MXM]
    int nxt[MXM][33]; //cnt[MXM],ds[MXM],dsl[MXM],fp[MXM]
    // bool v[MXM]
    int newNode(){
        int res = ++tot;
        fill(nxt[res], nxt[res]+33, 0);
        mom[res] = mx[res] = 0; //cnt=ds=dsl=fp=v=0
        return res;
    }
    void init(){
        tot = 0;
        root = newNode();
        lst = root;
    }
    void push(int c){
        int p = lst;
        int np = newNode(); //cnt[np]=1
        mx[np] = mx[p]+1; //fp[np]=mx[np]-1
        for(; p && nxt[p][c] == 0; p = mom[p])
            nxt[p][c] = np;
        if(p == 0) mom[np] = root;
        else{
            int q = nxt[p][c];
            if(mx[p]+1 == mx[q]) mom[np] = q;
            else{
                int nq = newNode(); //fp[nq]=fp[q]
                mx[nq] = mx[p]+1;
                for(int i = 0; i < 33; i++)
                    nxt[nq][i] = nxt[q][i];
                mom[nq] = mom[q];
                mom[q] = nq;
                mom[np] = nq;
                for(; p && nxt[p][c] == q; p = mom[p])
                    nxt[p][c] = nq;
            }
        }
        lst = np;
    }
    void calc(){
        calc(root);
        iota(ind,ind+tot,1);
        sort(ind,ind+tot,&)(int i,int j){return mx[i]<mx[j]
            ;};
        for(int i=tot-1;i>=0;i--)
            cnt[mom[ind[i]]]+=cnt[ind[i]];
    }
    void calc(int x){
        v[x]=ds[x]=1;dsl[x]=0; //rmom[mom[x]].push_back(x);
        for(int i=1;i<=26;i++){
            if(nxt[x][i]){
                if(!v[nxt[x][i]]) calc(nxt[x][i]);
                ds[x]+=ds[nxt[x][i]];
                dsl[x]+=dsl[nxt[x][i]]+dsl[nxt[x][i]];
            }
        }
    }
    void push(const string& str){
        for(int i = 0; i < str.size() ; i++)
            push(str[i]-'a'+1);
    }
} sam;

```

### 6.5 Aho-Corasick

```

struct ACautomata{
    struct Node{
        int cnt,i;
        Node *go[26], *fail, *dic;
        Node (){
            cnt = 0; fail = 0; dic=0;
            memset(go,0,sizeof(go));
        }
    }pool[1048576],*root;
    int nMem,n_pattern;
    Node* new_Node(){
        pool[nMem] = Node();
    }
}

```

```

    return &pool[nMem++];
}
void init() {nMem=0;root=new_Node();n_pattern=0;}
void add(const string &str) {insert(root,str,0);}
void insert(Node *cur, const string &str, int pos){
    for(int i=pos;i<str.size();i++){
        if(!cur->go[str[i]-'a'])
            cur->go[str[i]-'a'] = new_Node();
        cur=cur->go[str[i]-'a'];
    }
    cur->cnt++; cur->i=n_pattern++;
}
void make_fail(){
    queue<Node*> que;
    que.push(root);
    while (!que.empty()){
        Node* fr=que.front(); que.pop();
        for (int i=0; i<26; i++){
            if (fr->go[i]){
                Node *ptr = fr->fail;
                while (ptr && !ptr->go[i]) ptr = ptr->fail;
                fr->go[i]->fail=ptr=(ptr?ptr->go[i]:root);
                fr->go[i]->dic=(ptr->cnt?ptr:ptr->dic);
                que.push(fr->go[i]);
            }
        }
    }
}
void query(string s){
    Node *cur=root;
    for(int i=0;i<(int)s.size();i++){
        while(cur&&!cur->go[s[i]-'a']) cur=cur->fail;
        cur=(cur?cur->go[s[i]-'a']:root);
        if(cur->i>=0) ans[cur->i]++;
        for(Node *tmp=cur->dic;tmp;tmp=tmp->dic)
            ans[tmp->i]++;
    } // ans[i] : number of occurrence of pattern i
} AC;

```

## 6.6 Z Value

```

char s[MAXN];
int len,z[MAXN];
void Z_value() { //z[i] = lcp(s[1...],s[i...])
    int i,j,left,right;
    left=right=0; z[0]=len;
    for(i=1;i<len;i++){
        j=max(min(z[i-left],right-i),0);
        for(;i+j<len&&s[i+j]==s[j];j++);
        z[i]=j;
        if(i+z[i]>right) {
            right=i+z[i];
            left=i;
        }
    }
}

```

## 6.7 BWT

```

struct BurrowsWheeler{
#define SIGMA 26
#define BASE 'a'
    vector<int> v[ SIGMA ];
    void BWT(char* ori, char* res){
        // make ori -> ori + ori
        // then build suffix array
    }
    void iBWT(char* ori, char* res){
        for( int i = 0 ; i < SIGMA ; i ++ )
            v[ i ].clear();
        int len = strlen( ori );
        for( int i = 0 ; i < len ; i ++ )
            v[ ori[i] - BASE ].push_back( i );
        vector<int> a;
        for( int i = 0 , ptr = 0 ; i < SIGMA ; i ++ )
            for( auto j : v[ i ] ){
                a.push_back( j );
                ori[ ptr ++ ] = BASE + i;
            }
        for( int i = 0 , ptr = 0 ; i < len ; i ++ ){
            res[ i ] = ori[ a[ ptr ] ];
            ptr = a[ ptr ];
        }
        res[ len ] = 0;
    }
} bwt;

```

## 6.8 ZValue Palindrome

```

void z_value_pal(char *s,int len,int *z){
    len=(len<1)+1;
    for(int i=len-1;i>=0;i--){
        s[i]=i&1?s[i>1]:'@';
        z[0]=1;
        for(int i=1,l=0,r=0;i<len;i++){
            z[i]=i<r?min(z[l+l-i],r-i):1;
            while(i-z[i]>=0&&i+z[i]<len&&s[i-z[i]]==s[i+z[i]])
                ++z[i];
            if(i+z[i]>r) l=i,r=i+z[i];
        }
    }
}

```

## 6.9 Smallest Rotation

```

//rotate(begin(s),begin(s)+minRotation(s),end(s))
int minRotation(string s) {
    int a = 0, N = s.size(); s += s;
    rep(b,0,N) rep(k,0,N) {
        if(a+k == b || s[a+k] < s[b+k])
            {b += max(0, k-1); break;}
        if(s[a+k] > s[b+k]) {a = b; break;}
    } return a;
}

```

## 6.10 Cyclic LCS

```

#define L 0
#define LU 1
#define U 2
const int mov[3][2]={0,-1, -1,-1, -1,0};
int al,bl;
char a[MAXL*2],b[MAXL*2]; // 0-indexed
int dp[MAXL*2][MAXL];
char pred[MAXL*2][MAXL];
inline int lcs_length(int r) {
    int i=r+al,j=bl,l=0;
    while(i>r) {
        char dir=pred[i][j];
        if(dir==LU) l++;
        i+=mov[dir][0];
        j+=mov[dir][1];
    }
    return l;
}
inline void reroot(int r) { // r = new base row
    int i=r,j=1;
    while(j<=bl&&pred[i][j]!=LU) j++;
    if(j>bl) return;
    pred[i][j]=L;
    while(i<2*al&&j<=bl) {
        if(pred[i+1][j]==U) {
            i++;
            pred[i][j]=L;
        } else if(j<bl&&pred[i+1][j+1]==LU) {
            i++;
            j++;
            pred[i][j]=L;
        } else {
            j++;
        }
    }
}
int cyclic_lcs() {
    // a, b, al, bl should be properly filled
    // note: a WILL be altered in process
    // -- concatenated after itself
    char tmp[MAXL];
    if(al>bl) {
        swap(al,bl);
        strcpy(tmp,a);
        strcpy(a,b);
        strcpy(b,tmp);
    }
    strcpy(tmp,a);
    strcat(a,tmp);
    // basic lcs
    for(int i=0;i<=2*al;i++) {
        dp[i][0]=0;
        pred[i][0]=U;
    }
    for(int j=0;j<=bl;j++) {
        dp[0][j]=0;
    }
}

```

```

    pred[0][j]=L;
}
for(int i=1;i<=2*a1;i++) {
    for(int j=1;j<=b1;j++) {
        if(a[i-1]==b[j-1]) dp[i][j]=dp[i-1][j-1]+1;
        else dp[i][j]=max(dp[i-1][j],dp[i][j-1]);
        if(dp[i][j-1]==dp[i][j]) pred[i][j]=L;
        else if(a[i-1]==b[j-1]) pred[i][j]=LU;
        else pred[i][j]=U;
    }
}
// do cyclic lcs
int clcs=0;
for(int i=0;i<a1;i++) {
    clcs=max(clcs,lcs_length(i));
    reroot(i+1);
}
// recover a
a[a1]='\0';
return clcs;
}

```

## 7 Data Structure

### 7.1 Segment tree

```

struct seg_tree{
    ll a[MXN],val[MXN*4],tag[MXN*4],NO_TAG=0;
    void push(int i,int l,int r){
        if(tag[i]!=NO_TAG){
            val[i]+=tag[i]; // update by tag
            if(l!=r){
                tag[cl(i)]+=tag[i]; // push
                tag[cr(i)]+=tag[i]; // push
            }
            tag[i]=NO_TAG;
        }
    }
    void pull(int i,int l,int r){
        int mid=(l+r)>>1;
        push(cl(i),l,mid);push(cr(i),mid+1,r);
        val[i]=max(val[cl(i)],val[cr(i)]); // pull
    }
    void build(int i,int l,int r){
        if(l==r){
            val[i]=a[l]; // set value
            return;
        }
        int mid=(l+r)>>1;
        build(cl(i),l,mid);build(cr(i),mid+1,r);
        pull(i,l,r);
    }
    void update(int i,int l,int r,int ql,int qr,int v){
        push(i,l,r);
        if(ql<=l&&r<=qr){
            tag[i]+=v; // update tag
            return;
        }
        int mid=(l+r)>>1;
        if(ql<=mid) update(cl(i),l,mid,ql,qr,v);
        if(qr>mid) update(cr(i),mid+1,r,ql,qr,v);
        pull(i,l,r);
    }
    ll query(int i,int l,int r,int ql,int qr){
        push(i,l,r);
        if(ql<=l&&r<=qr)
            return val[i]; // update answer
        int mid=(l+r)>>1,ret=0;
        if(ql<=mid) ret=max(ret,query(cl(i),l,mid,ql,qr));
        if(qr>mid) ret=max(ret,query(cr(i),mid+1,r,ql,qr));
        return ret;
    }
} tree;

```

### 7.2 Treap

```

struct Treap{
    int sz, val, pri, tag;
    Treap *l, *r;
    Treap( int _val ){
        val = _val; sz = 1;
        pri = rand(); l = r = NULL; tag = 0;
    }
};
void push( Treap * a ){

```

```

    if( a->tag ){
        Treap *swp = a->l; a->l = a->r; a->r = swp;
        int swp2;
        if( a->l ) a->l->tag ^= 1;
        if( a->r ) a->r->tag ^= 1;
        a->tag = 0;
    }
}
inline int Size( Treap * a ){ return a ? a->sz : 0; }
void pull( Treap * a ){
    a->sz = Size( a->l ) + Size( a->r ) + 1;
}
Treap* merge( Treap *a, Treap *b ){
    if( !a || !b ) return a ? a : b;
    if( a->pri > b->pri ){
        push( a );
        a->r = merge( a->r, b );
        pull( a );
        return a;
    }else{
        push( b );
        b->l = merge( a, b->l );
        pull( b );
        return b;
    }
}
void split_kth( Treap *t, int k, Treap*&a, Treap*&b ){
    if( !t ){ a = b = NULL; return; }
    push( t );
    if( Size( t->l ) + 1 <= k ){
        a = t;
        split_kth( t->r, k - Size( t->l ) - 1, a->r, b );
        pull( a );
    }else{
        b = t;
        split_kth( t->l, k, a, b->l );
        pull( b );
    }
}
void split_key( Treap *t, int k, Treap*&a, Treap*&b ){
    if( !t ){ a = b = NULL; return; }
    push( t );
    if( k <= t->val ){
        b = t;
        split_key( t->l, k, a, b->l );
        pull( b );
    }
    else{
        a = t;
        split_key( t->r, k, a->r, b );
        pull( a );
    }
}
}

```

### 7.3 Link-Cut Tree

```

struct Splay {
    static Splay nil, mem[MEM], *pmem;
    Splay *ch[2], *f;
    int val, rev, size;
    Splay( int _val=-1 ) : val(_val), rev(0), size(1) {
        f = ch[0] = ch[1] = &nil; }
    bool isr() { return f->ch[0] != this && f->ch[1] != this; }
    int dir() { return f->ch[0] == this ? 0 : 1; }
    void setCh( Splay *c, int d ){
        ch[d] = c;
        if( c != &nil ) c->f = this;
        pull();
    }
    void push() {
        if( !rev ) return;
        swap( ch[0], ch[1] );
        if( ch[0] != &nil ) ch[0]->rev ^= 1;
        if( ch[1] != &nil ) ch[1]->rev ^= 1;
        rev=0;
    }
    void pull() {
        size = ch[0]->size + ch[1]->size + 1;
        if( ch[0] != &nil ) ch[0]->f = this;
        if( ch[1] != &nil ) ch[1]->f = this;
    }
} Splay::nil, Splay::mem[MEM], *Splay::pmem = Splay::mem;

```

```

Splay *nil = &Splay::nil;
void rotate(Splay *x){
    Splay *p = x->f;
    int d = x->dir();
    if (!p->isr()) p->f->setCh(x, p->dir());
    else x->f = p->f;
    p->setCh(x->ch[!d], d);
    x->setCh(p, !d);
    p->pull(); x->pull();
}
vector<Splay*> splayVec;
void splay(Splay *x){
    splayVec.clear();
    for (Splay *q=x;; q=q->f){
        splayVec.push_back(q);
        if (q->isr()) break;
    }
    reverse(begin(splayVec), end(splayVec));
    for (auto it : splayVec) it->push();
    while (!x->isr()) {
        if (x->f->isr()) rotate(x);
        else if (x->dir()==x->f->dir())
            rotate(x->f), rotate(x);
        else rotate(x), rotate(x);
    }
}
int id(Splay *x) { return x - Splay::mem + 1; }
Splay* access(Splay *x){
    Splay *q = nil;
    for (;x!=nil;x=x->f){
        splay(x);
        x->setCh(q, 1);
        q = x;
    }
    return q;
}
void chroot(Splay *x){
    access(x);
    splay(x);
    x->rev ^= 1;
    x->push(); x->pull();
}
void link(Splay *x, Splay *y){
    access(x);
    splay(x);
    chroot(y);
    x->setCh(y, 1);
}
void cut_p(Splay *y) {
    access(y);
    splay(y);
    y->push();
    y->ch[0] = y->ch[0]->f = nil;
}
void cut(Splay *x, Splay *y){
    chroot(x);
    cut_p(y);
}
Splay* get_root(Splay *x) {
    access(x);
    splay(x);
    for(; x->ch[0] != nil; x = x->ch[0])
        x->push();
    splay(x);
    return x;
}
bool conn(Splay *x, Splay *y) {
    x = get_root(x);
    y = get_root(y);
    return x == y;
}
Splay* lca(Splay *x, Splay *y) {
    access(x);
    access(y);
    splay(x);
    if (x->f == nil) return x;
    else return x->f;
}

```

## 7.4 Disjoint Set

```

struct DisjointSet {

```

```

    int fa[MXN], h[MXN], top;
    struct Node {
        int x, y, fa, h;
        Node(int _x = 0, int _y = 0, int _fa = 0, int _h = 0)
            : x(_x), y(_y), fa(_fa), h(_h) {}
    } stk[MXN];
    void init(int n) {
        top = 0;
        for (int i = 1; i <= n; i++) fa[i] = i, h[i] = 0;
    }
    int find(int x) { return x == fa[x] ? x : find(fa[x]); }
    void merge(int u, int v) {
        int x = find(u), y = find(v);
        if (h[x] > h[y]) swap(x, y);
        stk[top++] = Node(x, y, fa[x], h[y]);
        if (h[x] == h[y]) h[y]++;
        fa[x] = y;
    }
    void undo(int k=1) { //undo k times
        for (int i = 0; i < k; i++) {
            Node &it = stk[--top];
            fa[it.x] = it.fa;
            h[it.y] = it.h;
        }
    }
} } }djs;

```

## 7.5 Black Magic

```

#include <bits/extc++.h>
using namespace __gnu_pbds;
typedef tree<int,null_type,less<int>,rb_tree_tag,
            tree_order_statistics_node_update> set_t;
#include <ext/pb_ds/assoc_container.hpp>
typedef cc_hash_table<int,int> umap_t;
typedef priority_queue<int> heap;
#include<ext/rope>
using namespace __gnu_cxx;
int main(){
    // Insert some entries into s.
    set_t s; s.insert(12); s.insert(505);
    // The order of the keys should be: 12, 505.
    assert(*s.find_by_order(0) == 12);
    assert(*s.find_by_order(3) == 505);
    // The order of the keys should be: 12, 505.
    assert(s.order_of_key(12) == 0);
    assert(s.order_of_key(505) == 1);
    // Erase an entry.
    s.erase(12);
    // The order of the keys should be: 505.
    assert(*s.find_by_order(0) == 505);
    // The order of the keys should be: 505.
    assert(s.order_of_key(505) == 0);

    heap h1 , h2; h1.join( h2 );

    rope<char> r[ 2 ];
    r[ 1 ] = r[ 0 ]; // persistenet
    string t = "abc";
    r[ 1 ].insert( 0 , t.c_str() );
    r[ 1 ].erase( 1 , 1 );
    cout << r[ 1 ].substr( 0 , 2 );
}

```

## 8 Others

### 8.1 SOS dp

```

for(int i = 0; i<(1<<N); ++i)
    F[i] = A[i];
for(int i = 0; i < N; ++i) for(int mask = 0; mask < (1<<N); ++mask){
    if(mask & (1<<i))
        F[mask] += F[mask^(1<<i)];
}

```

### 8.2 Find max tangent(x,y is increasing)

```

const int MAXN = 100010;
Pt sum[MAXN], pnt[MAXN], ans, calc;
inline bool cross(Pt a, Pt b, Pt c){
    return (c.y-a.y)*(c.x-b.x) > (c.x-a.x)*(c.y-b.y);
}

```

```


} // pt[0]=(0,0); pt[i]=(i,pt[i-1].y+dy[i-1]), i=1~n; dx>=1
double find_max_tan(int n,int l,LL dy[]){
    int np, st, ed, now;
    sum[0].x = sum[0].y = np = st = ed = 0;
    for (int i = 1, v; i <= n; i++){
        sum[i].x=i, sum[i].y=sum[i-1].y+dy[i-1];
        ans.x = now = 1, ans.y = -1;
        for (int i = 0; i <= n - l; i++){
            while(np>1&&cross(pnt[np-2],pnt[np-1],sum[i]))
                np--;
            if (np < now && np != 0) now = np;
            pnt[np++] = sum[i];
            while(now<np&&!cross(pnt[now-1],pnt[now],sum[i+l]))
                now++;
            calc = sum[i + l] - pnt[now - 1];
            if (ans.y * calc.x < ans.x * calc.y)
                ans = calc, st = pnt[now - 1].x, ed = i + l;
        }
    }
    return (double)(sum[ed].y-sum[st].y)/(sum[ed].x-sum[
        st].x);
}

```

```

return dfs();
}

```

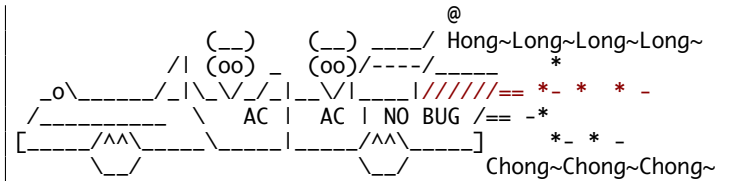

### 8.3 Exact Cover Set

```

// given n*m 0-1 matrix
// find a set of rows s.t.
// for each column, there's exactly one 1
#define N 1024 //row
#define M 1024 //column
#define NM ((N+2)*(M+2))
char A[N][M]; //n*m 0-1 matrix
int used[N]; //answer: the row used
int id[N][M];
int L[NM], R[NM], D[NM], U[NM], C[NM], S[NM], ROW[NM];
void remove(int c){
    L[R[c]]=L[c]; R[L[c]]=R[c];
    for( int i=D[c]; i!=c; i=D[i] )
        for( int j=R[i]; j!=i; j=R[j] ){
            U[D[j]]=U[j]; D[U[j]]=D[j]; S[C[j]]--;
        }
}
void resume(int c){
    for( int i=D[c]; i!=c; i=D[i] )
        for( int j=L[i]; j!=i; j=L[j] ){
            U[D[j]]=D[U[j]]=j; S[C[j]]++;
        }
    L[R[c]]=R[L[c]]=c;
}
int dfs(){
    if(R[0]==0) return 1;
    int md=100000000,c;
    for( int i=R[0]; i!=0; i=R[i] )
        if(S[i]<md){ md=S[i]; c=i; }
    if(md==0) return 0;
    remove(c);
    for( int i=D[c]; i!=c; i=D[i] ){
        used[ROW[i]]=1;
        for( int j=R[i]; j!=i; j=R[j] ) remove(C[j]);
        if(dfs()) return 1;
        for( int j=L[i]; j!=i; j=L[j] ) resume(C[j]);
        used[ROW[i]]=0;
    }
    resume(c);
    return 0;
}
int exact_cover(int n,int m){
    for( int i=0; i<=m; i++ ){
        R[i]=i+1; L[i]=i-1; U[i]=D[i]=i;
        S[i]=0; C[i]=i;
    }
    R[m]=0; L[0]=m;
    int t=m+1;
    for( int i=0; i<n; i++ ){
        int k=-1;
        for( int j=0; j<m; j++ ){
            if(!A[i][j]) continue;
            if(k===-1) L[t]=R[t]=t;
            else{ L[t]=k; R[t]=R[k]; }
            k=t; D[t]=j+1; U[t]=U[j+1];
            L[R[t]]=R[L[t]]=U[D[t]]=D[U[t]]=t;
            C[t]=j+1; S[C[t]]++; ROW[t]=i; id[i][j]=t++;
        }
    }
    for( int i=0; i<n; i++ ) used[i]=0;
}

```