DOCUMENT FLOW • Application Flow Document

Application Flow Document

Screen inventory, user journeys, decisions and alternate paths

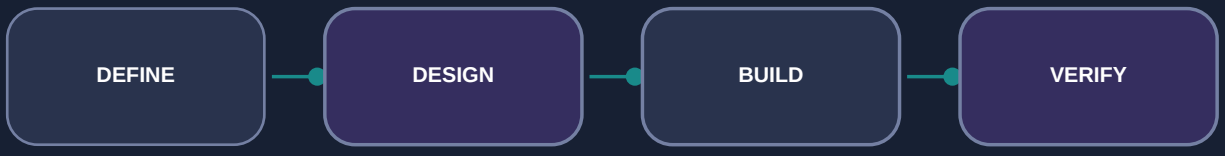

Project name: Slotwise (provisional)

Proposed stack: React + Vite + Tailwind • Node.js + Express • Vercel

Public-source clean-room plan • illustrative graphics, not product screenshots

Visual summary

Application Flow Document

PURPOSE

Connect owner setup and public booking screens with their main success and failure paths.

KEY VISUAL

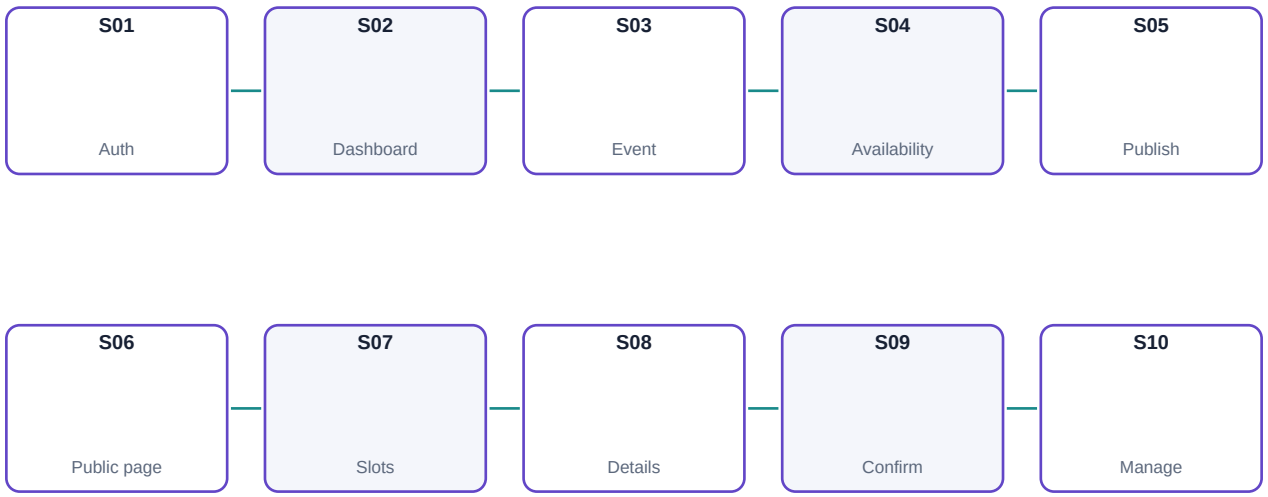

Screen IDs are shared across the documentation set.

REVIEW NOTE

Original content is retained after this summary; proposed visuals are illustrative, not real product screenshots.

DOCUMENT 03 OF 6

Application Flow Document

Navigation, role journeys, decisions and alternate paths

Project: Slotwise — provisional independent scheduling product

Reference: Calendly public website and help documentation; no private access.

Platform: Web | **Proposed frontend:** React + Vite + Tailwind CSS | **Backend:** Node.js + Express

Hosting preference: Vercel | **Database:** unresolved conflict between MongoDB preference and required PostgreSQL DDL

Inputs used / assumptions

Screen IDs S01–S11 and flow IDs F00–F03 are stable across the pack. This document contains proposed Slotwise flow diagrams and illustrative mockups; no actual screenshots of Calendly or a deployed Slotwise app were supplied.

Evidence discipline: Verified public capabilities are distinguished from design proposals and guesses. No review corpus, actual application screenshots, private account data, or production credentials were provided.

1. Flow overview

The selected slice includes owner setup, event publication, public booking and booking management. Invitees do not need accounts. Owner-only routes must enforce authorization server-side.

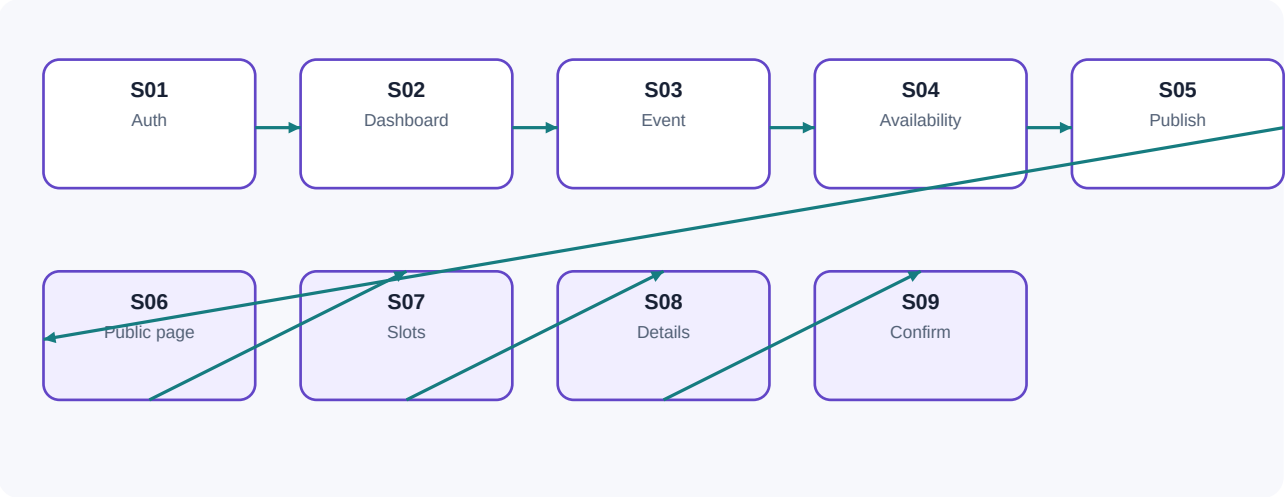

Figure 1. Simplified screen navigation. All screens are proposed and not screenshots of an existing app.

2. Screen inventory

ID	Screen	Route / access	Purpose	Key states
S01	Sign in / register	/login, /register • public	Owner account access	empty, loading, invalid, success, mobile
S02	Dashboard	/app • owner	Manage event types and appointments	empty, loading, filled, error
S03	Event editor	/app/events/new or /:id/edit • owner	Configure session	empty, dirty, saving, error
S04	Availability editor	/app/events/:id/availability • owner	Define weekly hours	empty, invalid, saving, filled
S05	Preview/publish	/app/events/:id/preview • owner	Review and publish	draft, published, saving, error
S06	Public event page	/book/:slug • public	Show session details	loading, not found, unpublished, filled
S07	Slot selector	/book/:slug/slots • public	Choose date/time	loading, no slots, selected, stale
S08	Invitee details	/book/:slug/details • public	Collect invitee information	empty, invalid, submitting, expired slot
S09	Confirmation	/booking/confirmed/:reference • public	Confirm booking	loading, success, not found
S10	Booking management	/manage/:token • token	Cancel or reschedule	valid, expired, canceled, error
S11	Owner booking list	/app/bookings • owner	Review appointments	empty, loading, filled, error

3. F00 — Registration and first setup

Screen chain: S01 → S02 → S03 → S04 → S05. The owner registers, verifies email, creates a session type, defines availability and publishes the public link.

- F00-H1: valid registration, email verification and event publication succeed.
- F00-E1: missing required event fields produce inline validation; no invalid write occurs.
- F00-N1: an unverified owner cannot publish.
- Happy-path target: 8 meaningful clicks after registration, excluding typing and email verification. This is a design target, not measured competitor parity.

4. F01 — Event type management

Screen chain: S02 → S03 → S04 → S05. Owner creates, edits, archives or publishes an event type and configures availability.

- F01-H1: create and publish a valid event.
- F01-H2: edit a published event and verify the public page reflects changes.
- F01-E1: invalid duration or availability range is rejected.
- F01-N1: cross-owner event modification is forbidden.
- Happy-path target: 5 meaningful clicks from dashboard to publication when values are ready.

5. F02 — Public booking

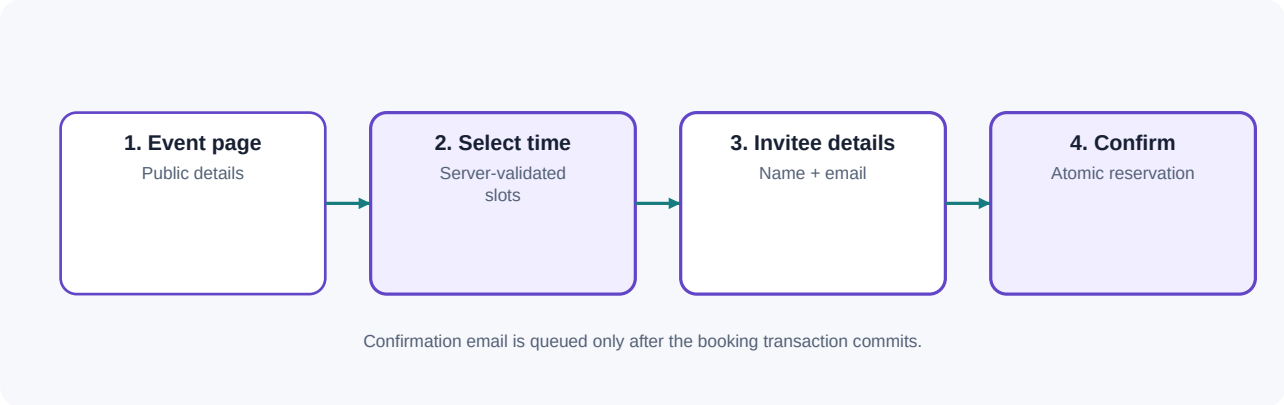

Figure 2. Public booking sequence. The database transaction is the authority for final slot availability.

- F02-H1: visitor selects a valid slot, enters details, and receives one booking confirmation.
- F02-H2: repeated idempotent request returns the existing outcome and does not duplicate the booking.
- F02-E1: slot is taken between selection and submission; system returns a conflict and offers a refresh path.
- F02-N1: invalid email, unpublished event, expired slot or malformed request is rejected.
- Happy-path target: 5 meaningful clicks from public page to confirmation, excluding typing and date scrolling.

6. F03 — Booking management

Cancellation: S09 → S10. Rescheduling: S09 → S10 → S07 → S09. The management token is scoped to one booking and must be unguessable, revocable and stored hashed.

- F03-H1: valid cancellation changes status and releases the slot.
- F03-H2: successful rescheduling reserves the new slot before releasing the old one.
- F03-E1: destination slot becomes occupied; the existing booking remains intact.
- F03-N1: invalid or expired token returns a generic denial without revealing booking details.
- Happy-path target: 3 meaningful clicks to cancel or 4 to reschedule, excluding typing and selection details.

7. Decision points and alternate paths

Decision	If yes	If no / error
Is event published?	Show public details	Show unavailable/not found page
Are slots available?	Allow date/time selection	Offer another date; explain no availability
Is slot still free at submit?	Commit booking atomically	409 conflict; refresh slots
Is invitee input valid?	Submit booking	Show field-level errors
Is management token valid?	Show permitted actions	Generic expired/invalid-token message
Is reschedule target available?	Commit new slot and release old	Preserve old booking; ask for another slot

8. Role and permission matrix

Action	Visitor	Owner	System/job
View published event	Allowed	Allowed	Allowed
View unpublished event	Denied	Own only	Internal
Create/edit event	Denied	Own only	Validates
View owner bookings	Denied	Own only	Internal
Create booking	Allowed	Can act as invitee	Validates and commits
Cancel/reschedule	Valid token only	Own booking	Validates policy
Read outbox jobs	Denied	Denied	Worker only

9. Illustrative public booking wireframe

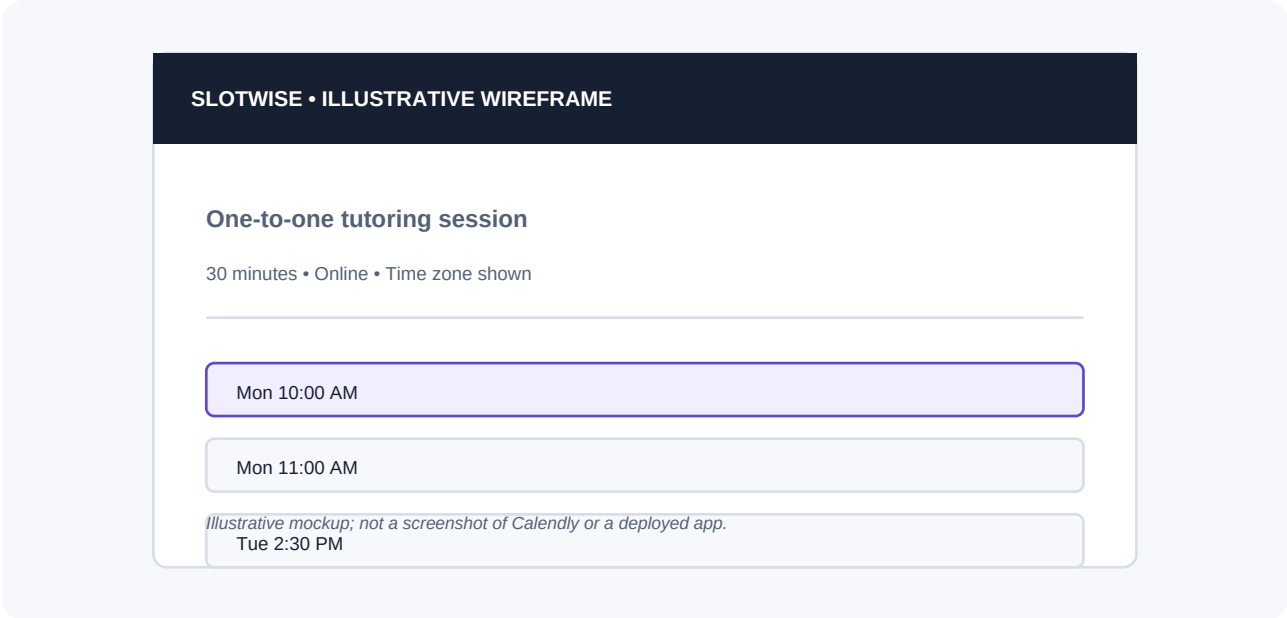

Figure 3. Original illustrative wireframe for Slotwise. This is not a screenshot of Calendly and does not imply the app is already implemented.

10. Navigation and behavior improvements

- Keep the invitee flow account-free.
- Show time zone next to selected slots and in confirmation.
- Revalidate availability immediately before booking.
- Preserve entered form values when recoverable errors occur.
- Use actionable conflict messages instead of generic failure copy.
- Move focus to errors or confirmation headings after state changes.
- Prevent owner-only routes from loading private data before authentication and authorization checks.

11. Cross-document references

Screen IDs map to the PRD feature matrix and to the implementation milestones in Document 6. API endpoints are defined in Document 2. Database entities and hard constraints are defined in Document 5. Test IDs F00-H1 through F03-H2 are used consistently throughout.