

Day-11 Task

1. Find employees with salary greater than the average salary (subquery).

The screenshot shows the Microsoft SQL Server Management Studio interface. The query editor contains the following SQL code:

```
select * from employees;  
  
select emp_name from employees where salary > (select avg(salary) from employees);
```

The query results are displayed in a table with the following columns: emp_id, emp_name, gender, salary, department, joining_date, inserted_at, relieving_date, and manager_id. The results show 8 employees, with the first 5 having salaries greater than the average salary of approximately 50,000.

emp_id	emp_name	gender	salary	department	joining_date	inserted_at	relieving_date	manager_id
1	el-bicho	M	100000.00	IT	2024-02-10	2026-07-08 18:58:11.490	2025-12-08	NULL
2	Modric	M	70000.00	Sales	2024-02-10	2026-07-08 18:58:11.490	NULL	NULL
3	Lena	F	50000.00	HR	2024-02-10	2026-07-08 18:58:11.490	NULL	NULL
4	Linkovic	F	50000.00	Finance	2024-02-10	2026-07-08 18:58:11.490	NULL	NULL
5	Conceicao	M	40000.00	Finance	2024-02-10	2026-07-08 18:58:11.490	NULL	4
6	Georgina	F	65000.00	it	2023-04-21	NULL	NULL	1
7	Speed	M	45000.00	HR	2023-04-21	NULL	NULL	3
8	Dia	F	65000.00	IT	2023-04-21	NULL	NULL	1

The status bar at the bottom indicates that the query was executed successfully, returning 20 rows.

2. Select products with price higher than the cheapest order.

The screenshot shows the Microsoft SQL Server Management Studio interface. The query editor contains the following SQL code:


```
select * from orders;  
  
select product_name from orders where price > (select min(price) from orders);
```

The query results are displayed in a table with the following columns: id, product_name, quantity, and price. The results show 5 orders, with the first 4 having prices higher than the minimum price of 50.

id	product_name	quantity	price
1	Ball	5	1000
2	Ball	1	150
3	Stumps	6	500
4	Balls	4	250
5	Armguard	10	600

The status bar at the bottom indicates that the query was executed successfully, returning 9 rows.

3. Use a subquery inside WHERE to fetch customers with orders.

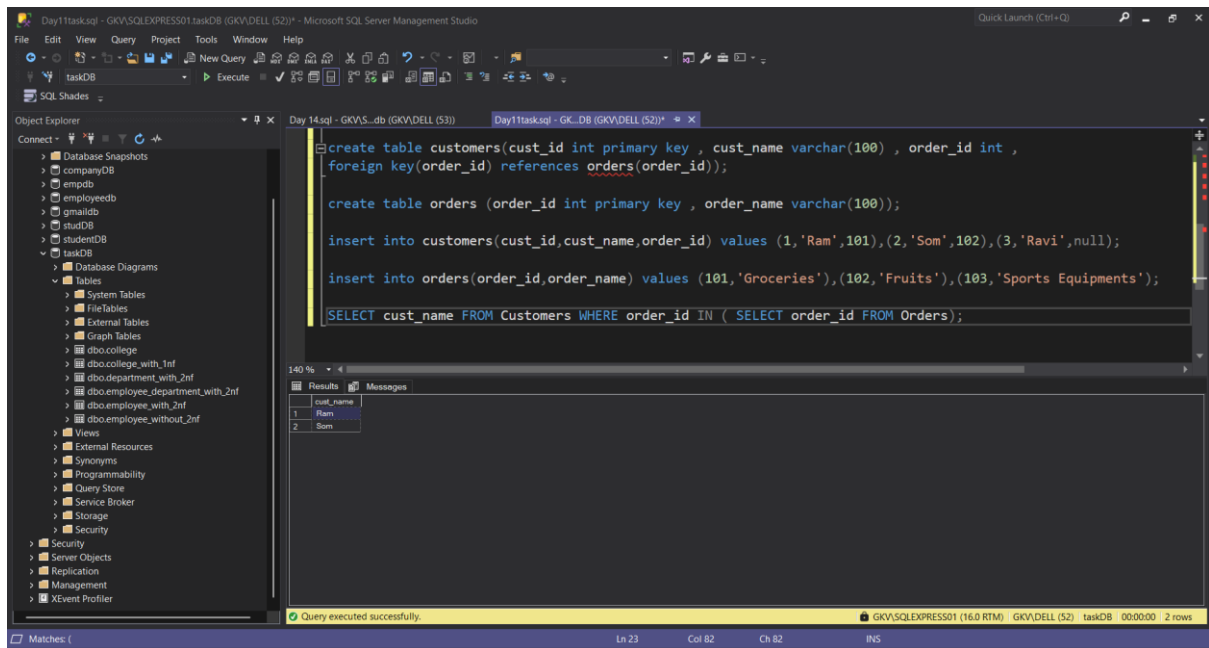

The screenshot displays the Microsoft SQL Server Enterprise Manager interface. The left pane shows the 'Object Explorer' with a tree view of the database structure, including 'taskDB' and its tables. The central pane shows a SQL query window with the following code:

```
create table customers(cust_id int primary key , cust_name varchar(100) , order_id int ,
foreign key(order_id) references orders(order_id));

create table orders (order_id int primary key , order_name varchar(100));

insert into customers(cust_id,cust_name,order_id) values (1,'Ram',101),(2,'Som',102),(3,'Ravi',null);

insert into orders(order_id,order_name) values (101,'Groceries'),(102,'Fruits'),(103,'Sports Equipments');

SELECT cust_name FROM Customers WHERE order_id IN ( SELECT order_id FROM Orders);
```

The bottom pane shows the 'Results' tab with the following data:

cust_name
1 Ram
2 Som

The status bar at the bottom indicates 'Query executed successfully.' and '2 rows'.