



# Day-7 Task


1. Create a table events (id, event\_name, event\_date).

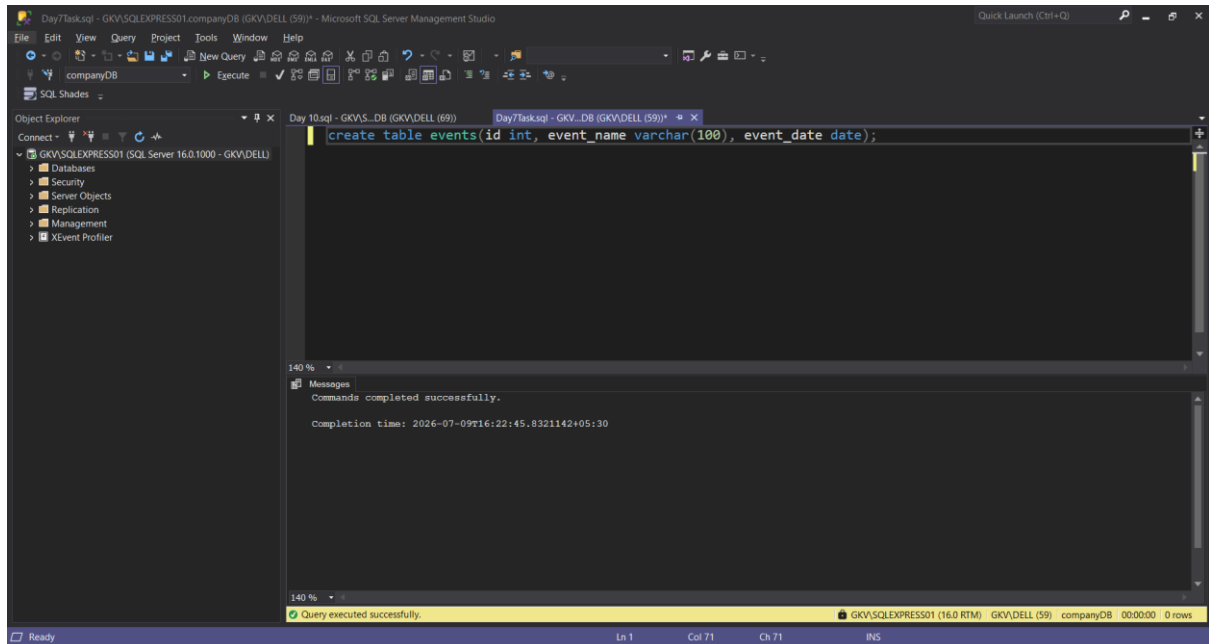


2. Insert events with different dates.

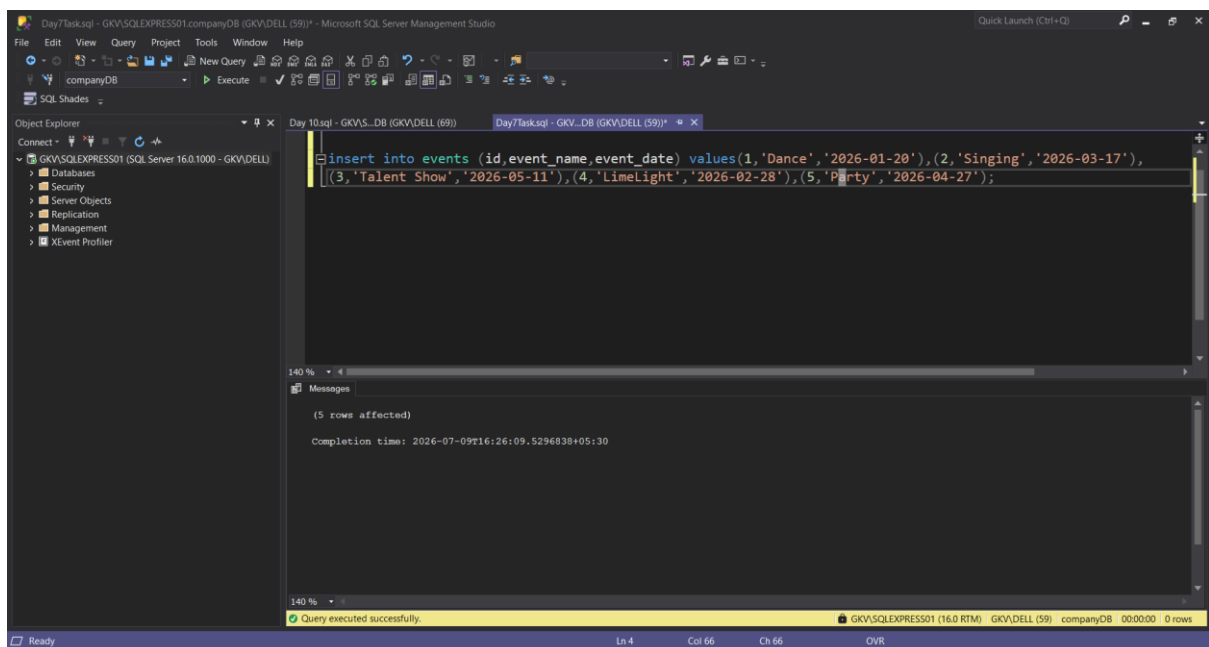


### 3. Use NOW() to display current date & time.

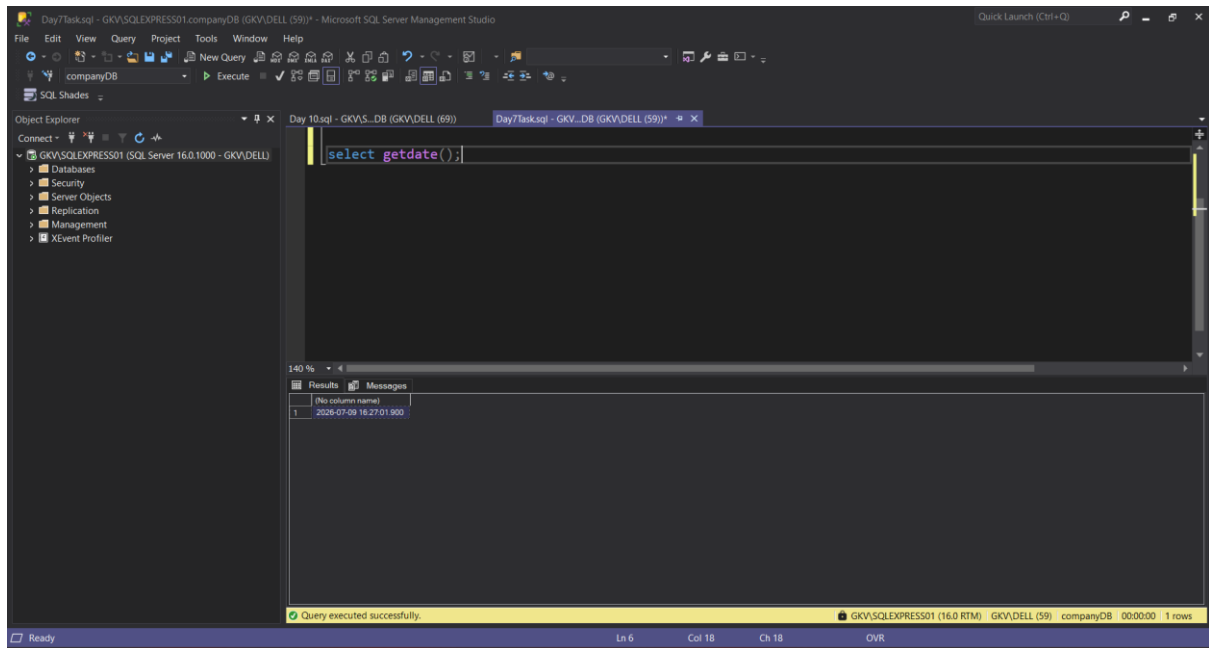

### 4. Format event\_date using DATE\_FORMAT().

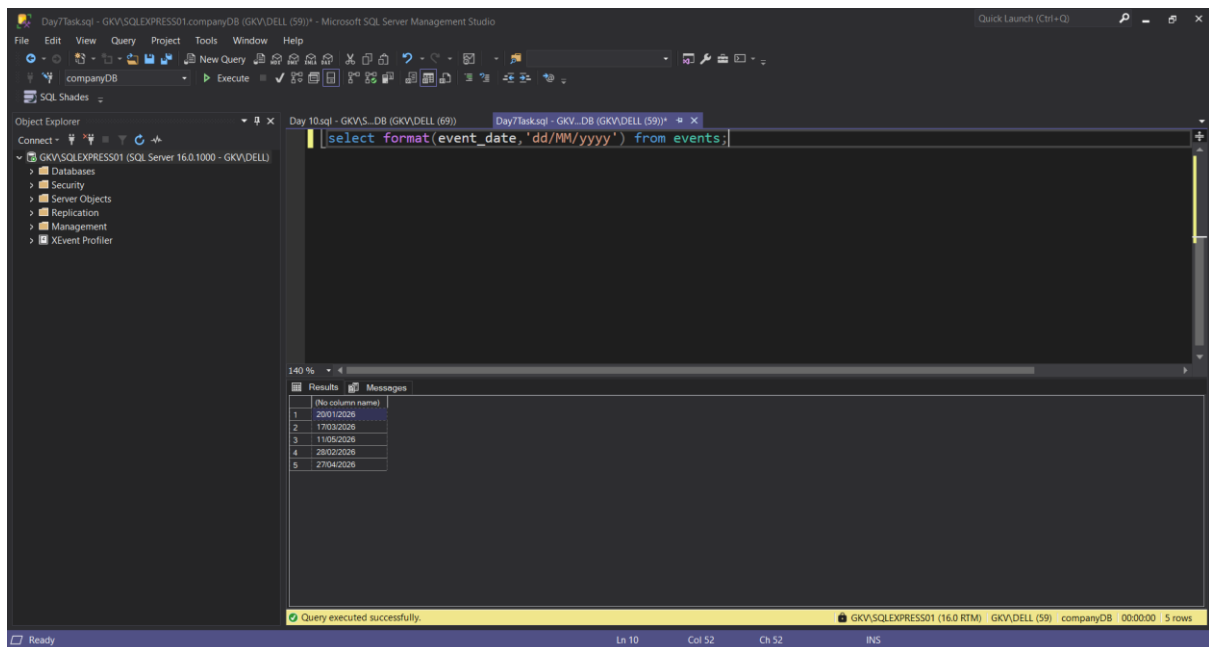

## 5. Extract YEAR and MONTH from event\_date.

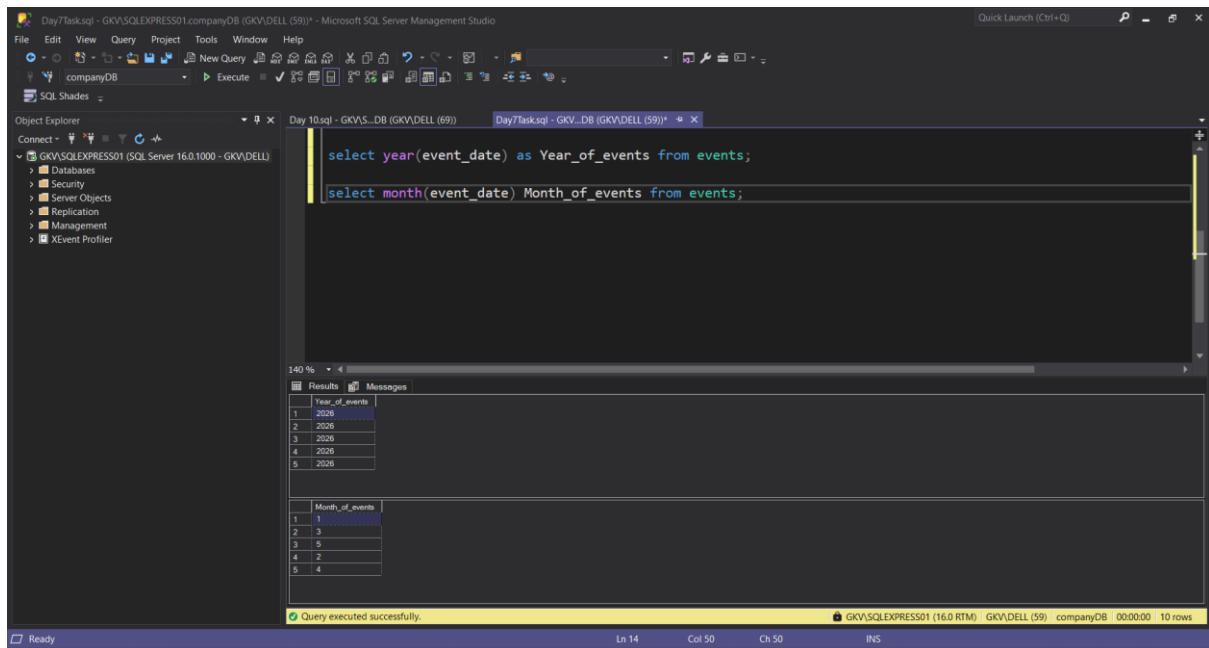

The screenshot shows the Microsoft SQL Server Management Studio interface. The query editor contains two SQL queries:

```
select year(event_date) as Year_of_events from events;  
select month(event_date) Month_of_events from events;
```

The Results pane displays the output of these queries:


| Year_of_events |
|----------------|
| 2026           |
| 2026           |
| 2026           |
| 2026           |
| 2026           |

| Month_of_events |
|-----------------|
| 1               |
| 3               |
| 5               |
| 2               |
| 4               |

The status bar at the bottom indicates "Query executed successfully." and "10 rows".

## 6. Use CONCAT() to combine event\_name and event\_date.

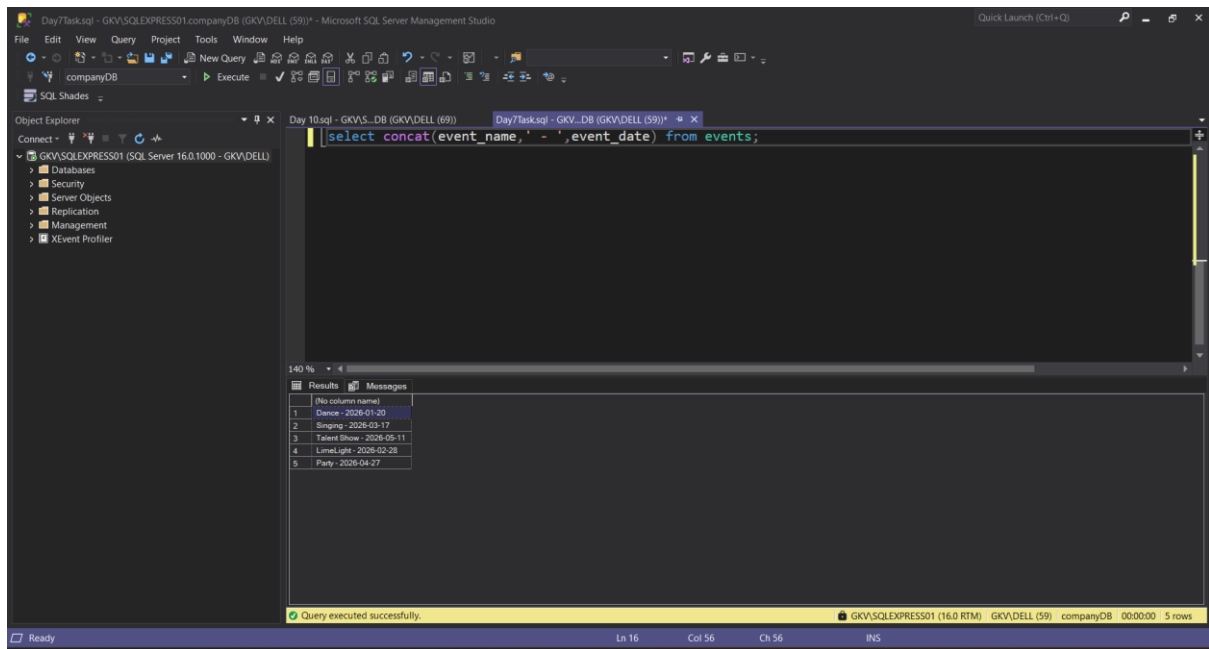

The screenshot shows the Microsoft SQL Server Management Studio interface. The query editor contains a SQL query:

```
select concat(event_name, '-', event_date) from events;
```

The Results pane displays the output of this query:

| (No column name)         |
|--------------------------|
| Dance - 2026-01-20       |
| Singing - 2026-03-17     |
| Talent Show - 2026-06-11 |
| LiveLight - 2026-02-28   |
| Party - 2026-04-27       |

The status bar at the bottom indicates "Query executed successfully." and "5 rows".