

RMeDPower2: helping design and analyses of data from repeated measures experiments

RMeDPower2: helping design and analyses of data from repeated measures experiments

Min-Gyoung Shin

Gladstone Institutes
mingyoung.shin@gladstone.ucsf.edu

Reuben Thomas

Gladstone Institutes
reuben.thomas@gladstone.ucsf.edu

Abstract

Biomedical research very often involves data generated from repeated measures experiments. RMeDPower2 is an R package that provides complete functionality to analyse data coming from repeated measures experiments, i.e., where one has repeated measures from the same biological/independent units or samples. RMeDPower2 helps test the modeling assumptions one makes, identify outlier observations, outlier units at different levels of the design, estimates statistical power or perform sample size calculations, estimate parameters of interest and also to visualize the association being tested. The functionality is limited to testing associations of one predictor (continuous or categorical, e.g., disease status or brain pathology) along with one another covariate (e.g., gender status) in the context of hierarchical or crossed experimental designs. This vignette illustrates the use of this package in multiple contexts relevant to biomedical research.

RMeDPower2 defines the experimental design for the data, probability model of the data generating distribution and necessary parameters required for sample size calculation using convenient S4 class objects. It uses these objects in one framework that brings together the functionality implemented in multiple R packages - lme4 (implementation of linear mixed effects models), influence.ME (identification of outlier units), EnvStats (identification of outlier observations), DHARMA (testing of modeling assumptions for non-normal distributions), simr (sample-size calculations) and tidyverse (data manipulation and visualization).

1 Getting started

1.1 Installing RMeDPower2

RMeDPower2 can be installed using the following commands

```
install.packages("devtools")
library(devtools)
install_github('gladstone-institutes/RMeDPower2', build_vignettes=TRUE,
```

1.2 Quick tutorial

The workflow can be accomplished in 5 main steps as described in the sections below (1.2.1-.2.5).

1.2.1 Load libraries and read input data

The first step is to load RMeDPower2 and read-in the input data as a data frame. This is accomplished by the following commands:

```
suppressPackageStartupMessages(library(RMeDPower2))
options(warn = -1)
data <- RMeDPower_data1
```

Example data has experiment, line as experience columns, classification as the condition column, and cell size as the response column.

```
knitr::kable(data[1:5,] )
```

experiment	line	classification	cell_size1	cell_size2	cell_size3	cell_size4
experiment1	cellline1	0	353.8401	353.8401	353.8401	353.8401
experiment1	cellline1	0	456.3522	456.3522	456.3522	456.3522
experiment1	cellline1	0	350.7909	350.7909	350.7909	350.7909
experiment1	cellline1	0	387.4861	387.4861	387.4861	387.4861
experiment1	cellline1	0	403.9912	403.9912	403.9912	403.9912

1.2.2 Specify design, model and power parameters

The following set of commands allows users to specify parameters for experimental design, assumed probability models and distributions, and power simulations.

1. Use a text editor to modify the template jsonfile capturing the design for the data and read in this file.

```
design <- readDesign(paste0(template_dir,"design_cell_assay.json"))
```

2. Use a text editor to modify the template jsonfile capturing the error probability model and read in this file.

```
model <- readProbabilityModel(paste0(template_dir,"prob_model.json"))
```

3. Use a text editor to modify the template jsonfile capturing the power parameters and read in this file.

```
power_param <- readPowerParams(paste0(template_dir,"power_param.json"))
```

1.2.3 Diagnose data and model

The next set of commands will allow the user to evaluate the datatype, examine if the model is appropriate and identify outliers.

1. To diagnose the data and model, test model assumptions, identify outlier observations, outlier biological/independent units.

```
diagnose_res <- diagnoseDataModel(data, design, model)
data_update. = diagnose_res$Data_updated
```

2. Modify design objects (e.g., remove outliers), model objects (e.g., change probability distribution assumption) if needed based on output of step 1 above.

```
diagnose_res_update <- diagnoseDataModel(data_update, design_update, mod
```

3. Repeat steps 1 and 2 until the models assumptions are met. For example, users can choose to remove outlier-experiments so that the distribution is close to normal.

1.2.4 Statistical power estimation

This section of code will allow the user to run sample-size calculations from the pilot input data.

```
power_res <- calculatePower(data, design, model, power_param)
```

1.2.5 Estimate parameters of interest

Once we have ran the models, the user can estimate and visualize parameters of interest in order to investigate the association between response variable and condition variables.

```
estimate_res <- getEstimatesOfInterest(data, design, model, print_plots
```

1.3 Input data

Users will have to ensure that the input data is organized in a format that will allow RMedPower2 to read in the data. The data should be structured in a table with rows representing the individual observations or responses and columns representing not only the corresponding explanatory variables but also other variables that capture the hierarchical or crossed design of how the data was generated. It is important that the columns have names or headers - these column names will be used to define the relevant S4 class objects.

For example, the next below illustrates the input data from a cellular assay where each of the 2,588 observations represents a measurement of size (cell_size2) of a single cell, from a given cell line (line) that is either from a control or disease condition (classification) and is measured in a given experimental batch (experiment).

```
## 'data.frame':   2588 obs. of  4 variables:
## $ experiment   : Factor w/ 3 levels "experiment1",...: 1 1 1 1 1 1
1 1 1 3 ...
## $ line         : Factor w/ 10 levels "cellline1","cellline10",...:
1 1 1 1 1 1 1 1 1 ...
## $ classification: Factor w/ 2 levels "0","1": 1 1 1 1 1 1 1 1 1
...
## $ cell_size2    : num  354 456 351 387 404 ...
```

1.4 Three key classes of RMedPower2

Here, users will learn how to set up parameters for experimental designs, probability and distributional assumptions, and power simulations.

1.4.1 RMeDesign S4 class

The underlying design for the data will be stored in an object (R data structure with variables) of this class. The slots of this class are:

1. `response_column`: character that is the column name in the input data table that captures the responses or individual observations. This has to be set by the user.
2. `covariate`: character that is the column name in the input data table that captures the covariate information. This will be used as a fixed effect in the mixed effects model of the data. This slot is set to NULL if there are no covariates.
3. `condition_column`: character that is the column name in the input data table that captures the predictor/independent variable information. This will be used as a fixed effect in the mixed effects model of the data. This has to be set by the user.
4. `experimental_columns`: character vector that represents the column names in the input data table that captures the experimental variables of the design. These will be used as random effects in the mixed effects model of the data. The order of the names in this character vector is important. The first element captures the top hierarchical level of the design, the second element the next level of the hierarchy and so on. The hierarchy is explicitly modeled in the specification of the mixed effects models. The hierarchy will not be modeled for variables specified in the `crossed_columns` slot (see below). This has to be set by the user.
5. `condition_is_categorical`: logical value equal to TRUE if the variable in the `condition_column` is to be considered as a categorical variable and is equal to FALSE otherwise. Defaults to TRUE.
6. `crossed_columns`: character vector that represents the column names in the input data table that are a subset of the values in `experimental_columns` representing crossed

factors. Defaults to NULL.

7. `total_column`: character that is the column name in the input table that will be used to offset values in the mixed effects models. Useful for modeling count data. Defaults to NULL.
8. `outlier_alpha`: numeric value that is the p-value threshold used to identify outlier observations. Defaults to 0.05.
9. `na_action`: character equal to *complete* or *unique*. To be used in the context where the input data has multiple responses that will each be sequentially modeled. For example, from a single set of data, a user is gathering numerous observations. Here we refer to *complete* in the scenario where the observed outliers that identified for one response will also be identified as outliers for all the other responses while *unique* refers to the situation where the outlier observations identified for one response will only be used for the model of that particular response. Defaults to *complete*.
10. `include_interaction`: Whether to include condition * covariate interaction
11. `random_slope_variable`: Variable for random slopes (typically "condition_column")
12. `covariate_is_categorical`: Specify whether the covariate variable is categorical. TRUE: Categorical, FALSE: Continuous.

To create an object of class RMeDesign, the following code is used:

```
design <- new("RMeDesign")
print(design)

## An object of class "RMeDesign"
## Slot "response_column":
## [1] "response_column"
##
## Slot "covariate":
## NULL
##
## Slot "condition_column":
## [1] "condition_column"
##
## Slot "condition_is_categorical":
## [1] TRUE
##
## Slot "experimental_columns":
## [1] "experimental_column"
##
## Slot "crossed_columns":
## NULL
##
## Slot "total_column":
## NULL
##
## Slot "outlier_alpha":
## [1] 0.05
##
## Slot "na_action":
## [1] "complete"
##
## Slot "include_interaction":
## [1] NA
##
## Slot "random_slope_variable":
## NULL
##
## Slot "covariate_is_categorical":
## [1] NA
```

In practice, for a given data set the design can be input from a jsonfile. The user can use a text editor to modify the `design_template.json` file available with the package to input the relevant information based on the column names of the input data. For example, the design for the cell size data referred to above can be read using the function `readDesign`.

```
design <- readDesign(paste0(template_dir,"design_cell_assay.json"))
print(design)
```

```
## An object of class "RMeDesign"
## Slot "response_column":
## [1] "cell_size2"
##
## Slot "covariate":
## NULL
##
## Slot "condition_column":
## [1] "classification"
##
## Slot "condition_is_categorical":
## [1] TRUE
##
## Slot "experimental_columns":
## [1] "experiment" "line"
##
## Slot "crossed_columns":
## [1] "line"
##
## Slot "total_column":
## NULL
##
## Slot "outlier_alpha":
## [1] 0.05
##
## Slot "na_action":
## [1] "complete"
##
## Slot "include_interaction":
## [1] NA
##
## Slot "random_slope_variable":
## NULL
##
## Slot "covariate_is_categorical":
## [1] NA
```

1.4.2 ProbabilityModel S4 class

The error probability distribution is specified by two slots in objects of the ProbabilityModel class.

1. `error_is_non_normal`: Is the logical value that is TRUE if the underlying probability distribution is not assumed to be Normal and is FALSE otherwise.
2. `family_p`: This character value specifies the probability distribution. Accepted values are *poisson*(=poisson(link="log")), *binomial*(=binomial(link="logit")), *binomial_log*(=binomial(link="log")), *Gamma_log*(=Gamma(link="log")), *Gamma*(=Gamma(link="inverse")), *negative_binomial*. Defaults to NULL.

```
model <- readProbabilityModel(paste0(template_dir,"prob_model.json"))
print(model)
```

```
## An object of class "ProbabilityModel"
## Slot "error_is_non_normal":
## [1] FALSE
##
## Slot "family_p":
## NULL
```

1.4.3 PowerParams S4 class

The parameters described below are necessary for sample-size estimation and are stored in the following slots of the PowerParams class.

1. `target_columns`: This describes the character vector with column names of experimental variables for which the sample-size estimation is to be performed
2. `power_curve`: This is numeric 1 or 0. 1: Power simulation over a range of sample sizes or levels. 0: Power calculation over a single sample size or a level. Defaults to 1.
3. `nsimn`: The number of simulations to estimate power. Defaults to 10.
4. `levels`: numeric 1 or 0. 1: Amplify the number of corresponding target parameter. 0:

Amplify the number of samples from the corresponding target parameter, ex) If `target_columns = c("experiment", "cell_line")` and if you want to expand the number of experiment and sample more cells from each cell line, set `levels = c(1,0)`.

5. `max_size`: Maximum levels or sample sizes to test. Default if set to `NULL` equals the current level or the current sample size x 5. ex) If `max_levels = c(10,5)`, it will test upto 10 experiments and 5 cell lines.
6. `alpha`: Type I error for sample-size estimation. Defaults to 0.05.
7. `breaks`: Levels /sample sizes of the variable to be specified along the power curve. Default if set to `NULL` equals `max(1, round((the number of current levels / 5)))`.
8. `effect_size`: If you know the effect size of your condition variable, the effect size can be provided as a parameter. Default set to `NULL`, that is, if the effect size is not provided, it will be estimated from your data.
9. `icc`: Intra-class coefficients for each of the experimental variables. Used only in the situation when `error_is_non_normal=FALSE` and when the data does not allow variance component estimation.

```
power_param <- readPowerParams(paste0(template_dir, "power_param.json"))
print(power_param)
```

```
## An object of class "PowerParams"
## Slot "target_columns":
## [1] "experiment"
##
## Slot "power_curve":
## [1] 1
##
## Slot "nsimn":
## [1] 10
##
## Slot "levels":
## [1] 1
##
## Slot "max_size":
## [1] 1
##
## Slot "alpha":
## [1] 0.05
##
## Slot "breaks":
## NULL
##
## Slot "effect_size":
## NULL
##
## Slot "icc":
## NULL
```

1.5 Three key functions of RMeDPower2

The following are main functions to be used by users to manipulate data, estimate power, and perform association analysis.

1.5.1 `diagnoseDataModel(data, design, model)` function

This set of code, tests the model assumptions by using quantile-quantile, residuals vs fitted and residuals versus predicted plots. If needed, the code also transforms the responses if feasible and identifies outlier observations and also outlier experimental units.

1.5.2 `calculatePower(data, design, model, power_param)` function


This set of code performs sample-size calculations for given experimental design/target variable.

1.5.3 `getEstimatesOfInterest(data, design, model)` function

This string estimates parameter of interest and also plots the resulting association with predictor of interest using residuals from the model that removes the effects of the modeled

experimental variables.


An overview of the anticipated usage of the functionality of this package is shown in the figure below.

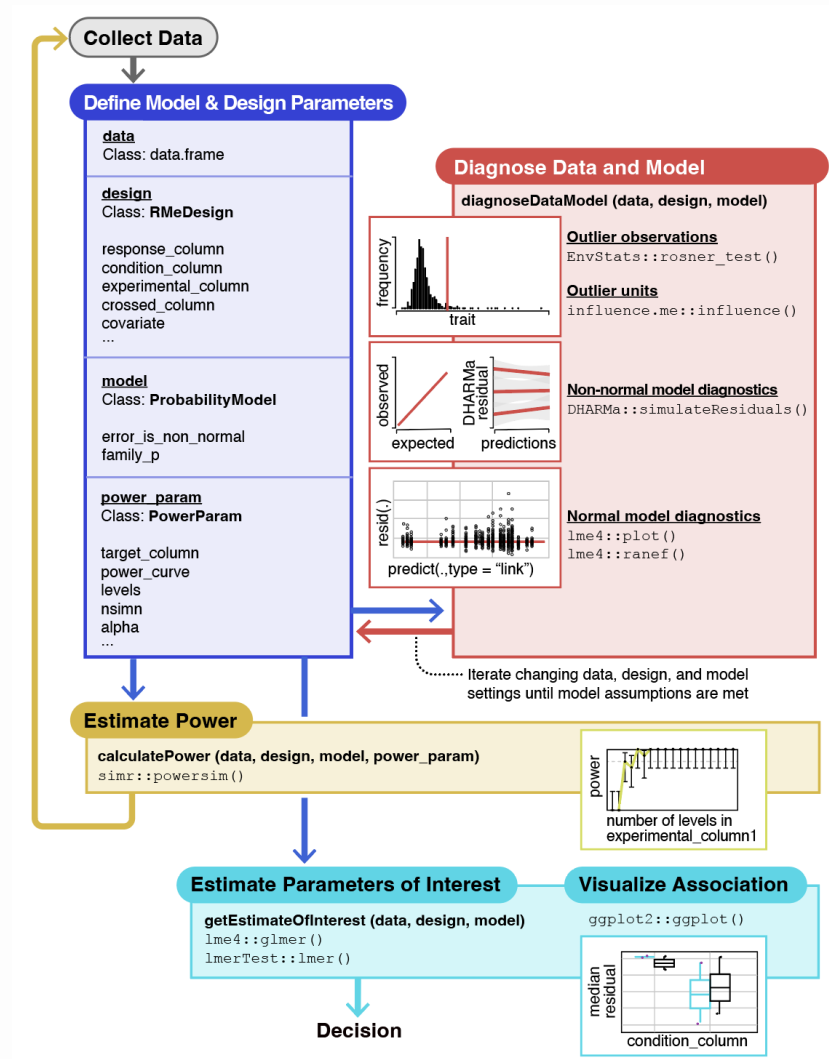

Flowchart illustrating the functionality of the package

2 Application examples

Here we illustrate the application of RMeDPower2 using data derived from a range of domains in biomedical research.

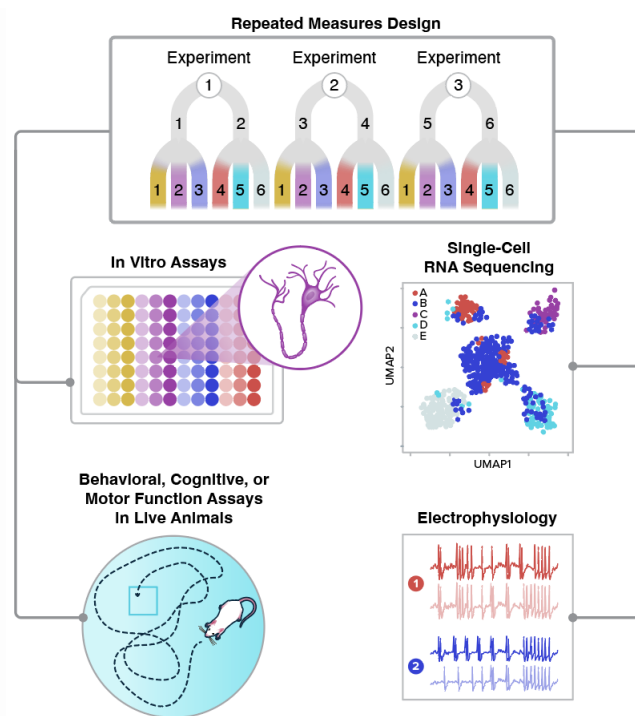

Flowchart illustrating the functionality of the package

2.1 Plate assays

iPSC lines from control and patient derived iPSCs from sALS patients were obtained through the Answer ALS (AALS) consortium³⁶. AALS is the largest repository of ALS patient samples, and contains publicly available patient-specific iPSCs and multi-OMIC data from motor neurons derived from those iPSCs—including RNA Seq, proteomics and whole genome sequence data—all of which is matched with longitudinal clinical data (<https://dataportal.answerals.org/home>)³⁶.


We used 6 control lines and 4 sALS lines and differentiated each line into motor neurons (iMNs). iMNs were transduced with a morphology marker and imaged on day ~25 using RM37-45 as previously described³⁶. Images were processed and the soma size of neurons were captured using contour ellipse⁴⁶ function adapted for use in python (<https://www.python.org/>).

The next step is to read the data and perform data distribution diagnostics, association analysis, and power simulation.

First, we will read the data from the package and json files with specified parameters:

```
data <- RMedPower_data1
design <- readDesign(paste0(template_dir,"design_cell_assay.json"))
model <- readProbabilityModel(paste0(template_dir,"prob_model.json"))
power_param <- readPowerParams(paste0(template_dir,"power_param.json"))
```

A visualization of the distribution of cell_size2 across experiments and cell-lines as box-plots and also in terms of empirical cumulative distribution plots suggests the observations have an extremely long tail. We will therefore filter out the top 5 percent of the observations to ensure the results are not skewed by these extreme observations. We also see that the observations in experiment 3 are in general lower than those in the other two experiments.

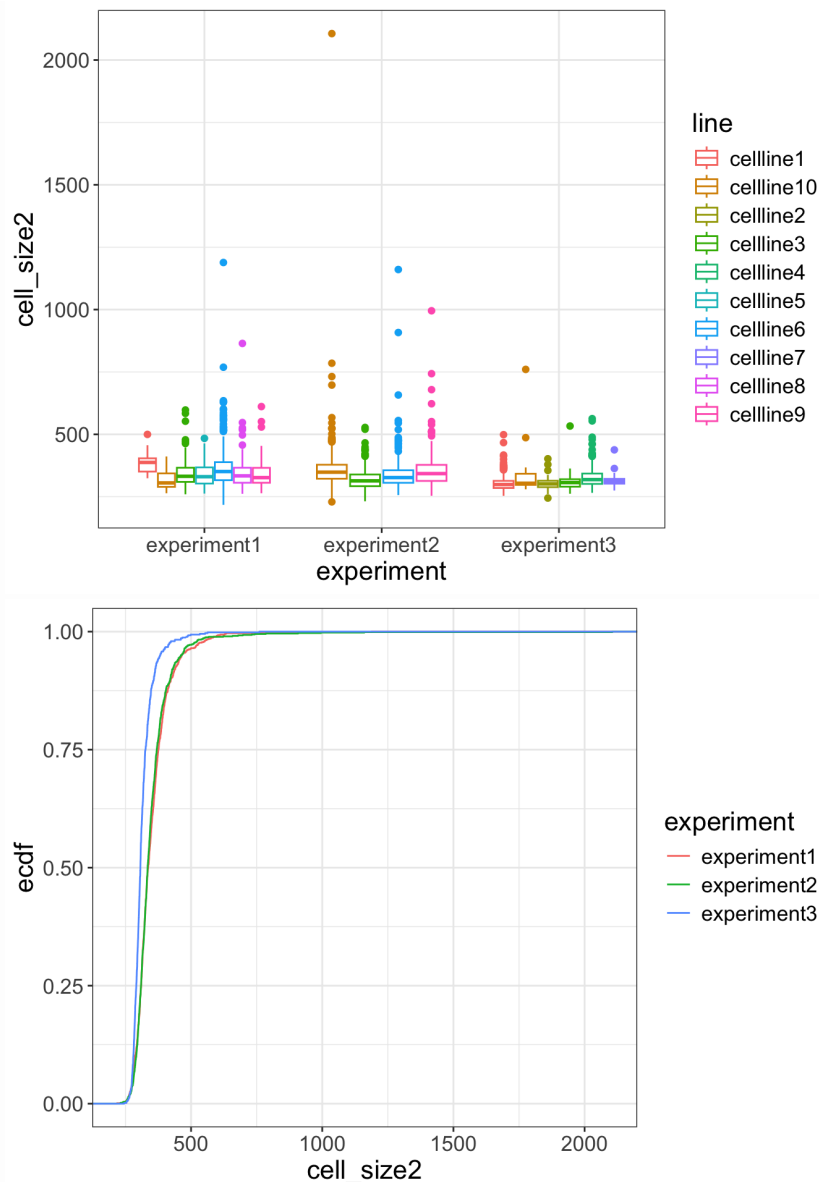

```
data %<>% filter(cell_size2 < quantile(cell_size2, 0.95))
```

We would like to estimate the difference in the mean cell-sizes across all the observations derived from all experimental batches between the ALS disease lines and the control cell lines (modeled by the *classification* variable). The first step is run diagnosis on the data and model using the 'diagnoseDataModel' function. The Q-Q plot of the residuals of the LMM model fit to the log-transformed cell-sizes suggests a better fit than the one fit to the cell sizes in the natural scale, assuming that the data generating distribution is based on the Normal distribution. Therefore, we will hereafter model the log-transformed cell sizes. The reasonably horizontal best fit lines for the residuals from this versus the fitted values, and the square-root of the absolute values of the residuals versus the fitted values, Figure 7e suggest both the LMM model assumptions of linearity and homoscedasticity are reasonable. There were no identified individual outlier observations based on the application of the Rosner's test to the distribution of the residuals in.

```
diagnose_res <- diagnoseDataModel(data, design, model)
```

The *diagnoseDataModel* function fits at least one model representing one in the natural scale of the response of interest. Additionally, if individual observations are inferred as outliers using the rosner's test applied to the residuals of the fitted model then another model is fit without these outlier observations. In addition, if the assumed probability distribution of the residuals of the model is normal then a further additional model are fit using logarithm (log)

transformed responses and another one if there are outliers in the log-transformed model fit.

To identify all the models fit to the data

```
print(diagnose_res$models)

## [1] "Natural scale" "Log scale"
```

We see that two models were fit to this data - one in the natural scale of cell size and the other in the logarithmic scale. No individual observations were identified as outliers in each of these models.

Let us look the basic QC plots for the models fit in the natural scale of the responses.

```
plot_no <- 1
plots <- diagnose_res$diagnostic_plots$natural_scale$plots
captions <- diagnose_res$diagnostic_plots$natural_scale$captions
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[i]
  plot_no <- plot_no + 1
}
```

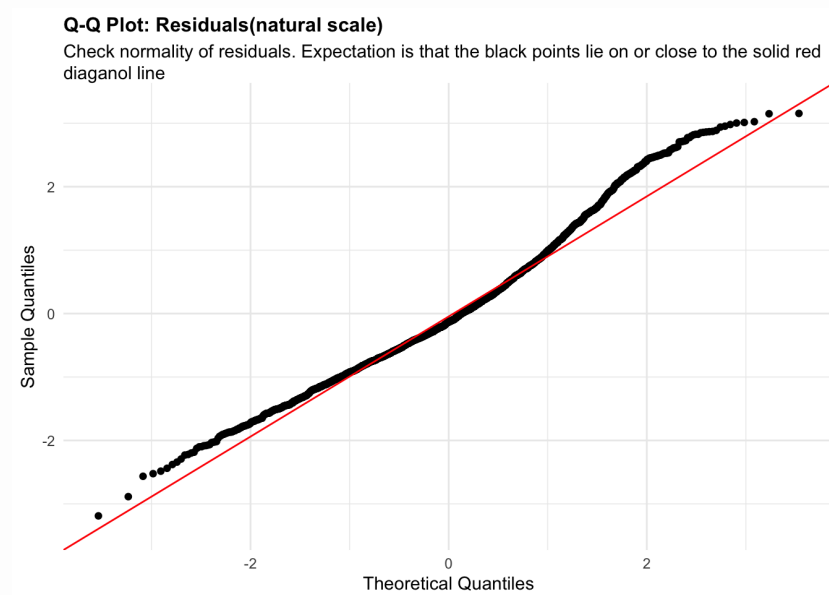


Figure 1: residuals_QQ. Check normality of residuals (natural scale). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

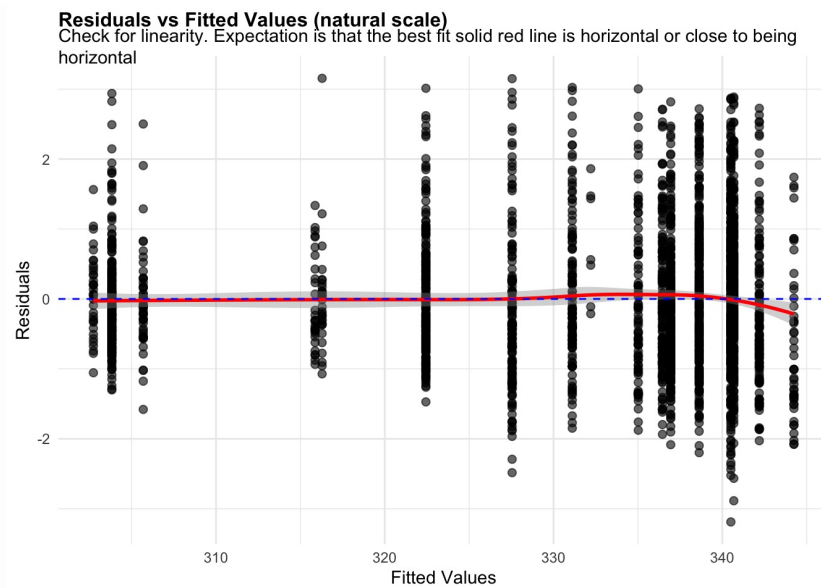


Figure 2: residuals vs fitted. Check for linearity (natural scale). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

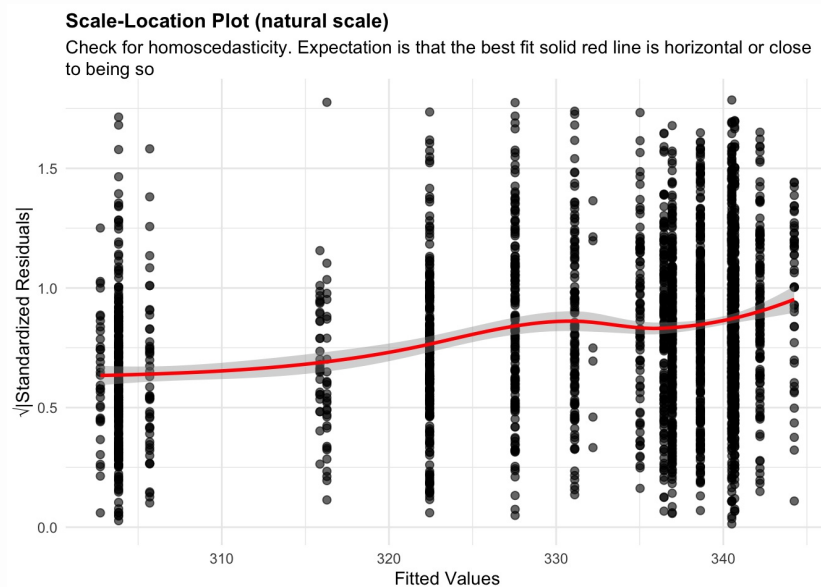


Figure 3: residuals homoscedasticity. Check for homoscedasticity (natural scale). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

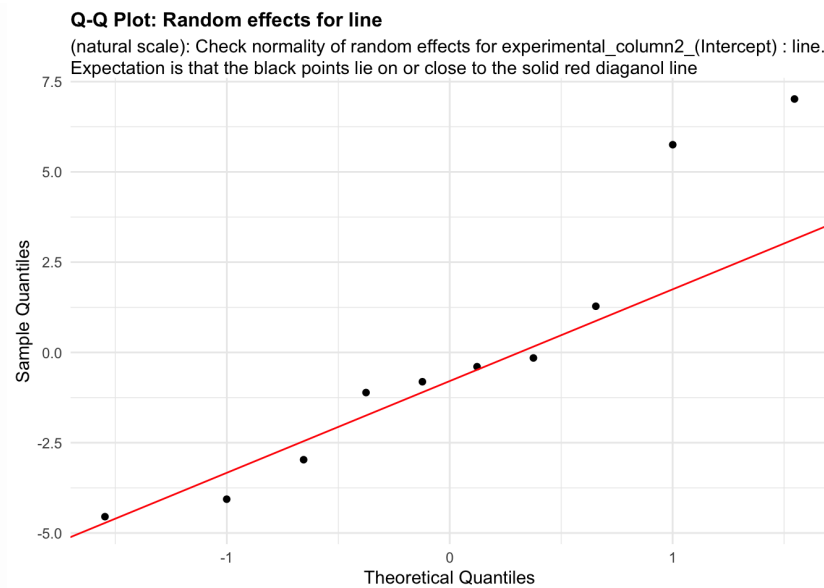


Figure 4: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (natural scale): line. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

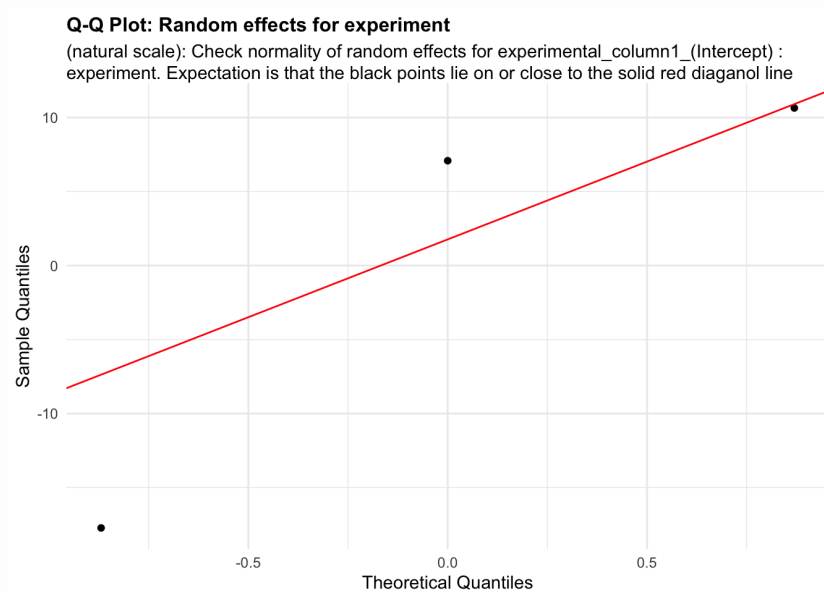


Figure 5: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (natural scale): experiment. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cat("\n\n\n")

cooks_plots <- diagnose_res$cooks_plots$natural_scale
for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

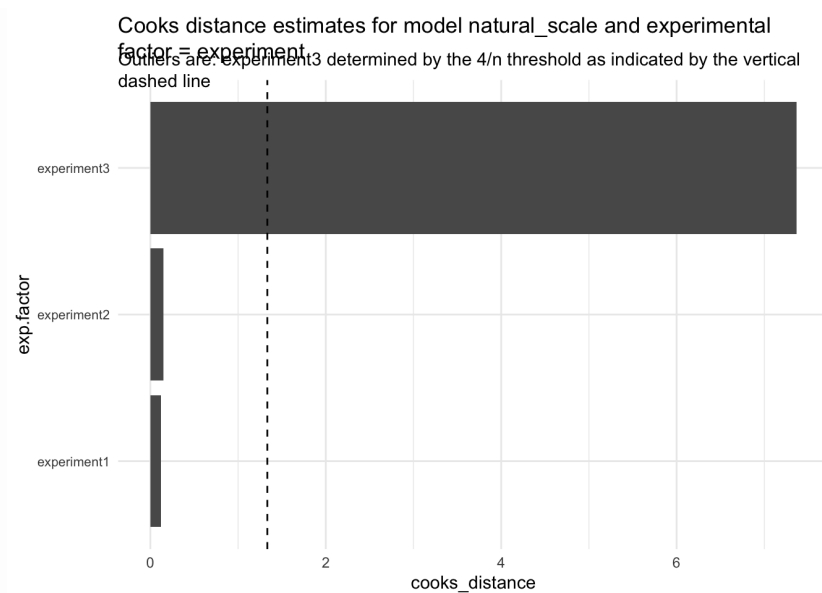


Figure 6:

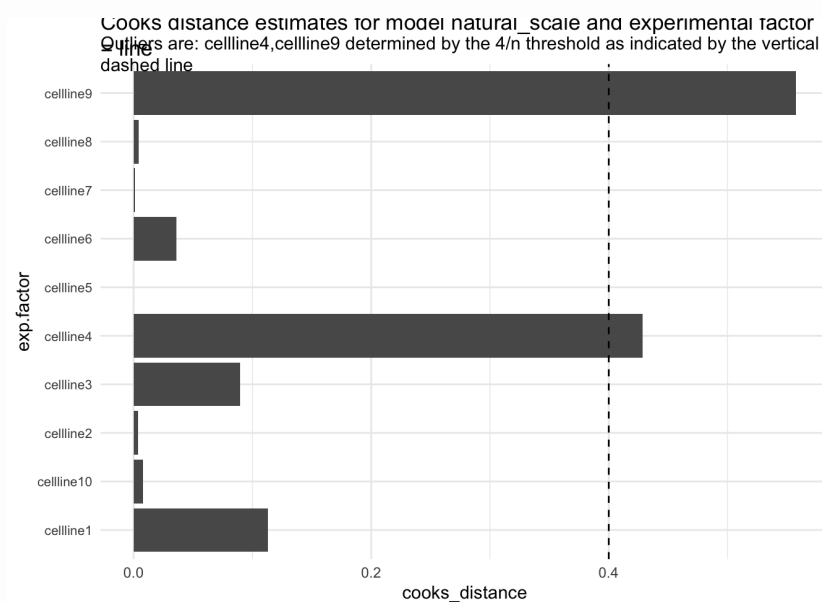


Figure 7:

```
print("Inferred outlier groups are")
[1] "Inferred outlier groups are"
print(diagnose_res$inferred_outlier_groups$natural_scale)
$experiment [1] "experiment3"
$line [1] "cellline4" "cellline9"
```

Now, let us look at the same set of QC plots for models on the log-transformed responses.

```
plots <- diagnose_res$diagnostic_plots$log_scale$plots
captions <- diagnose_res$diagnostic_plots$log_scale$captions
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[i]
  plot_no <- plot_no + 1
}
```

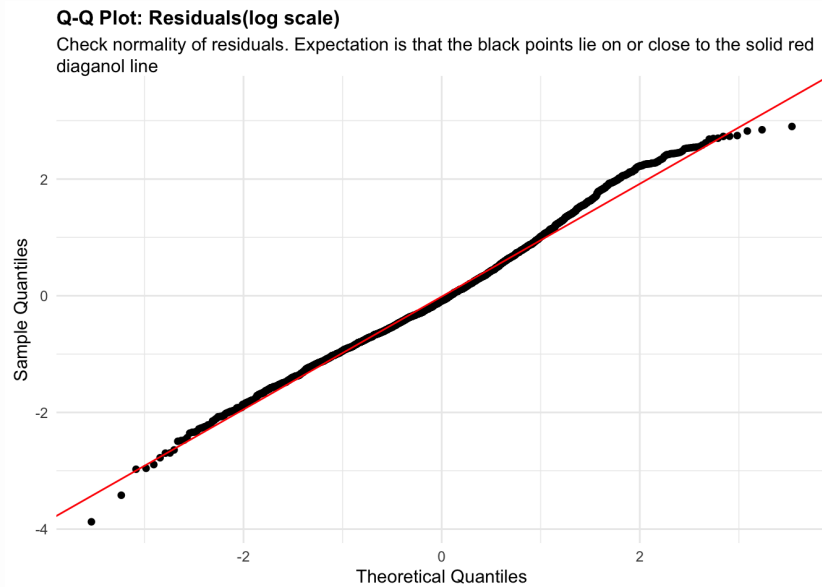


Figure 8: residuals_QQ. Check normality of residuals (log scale). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

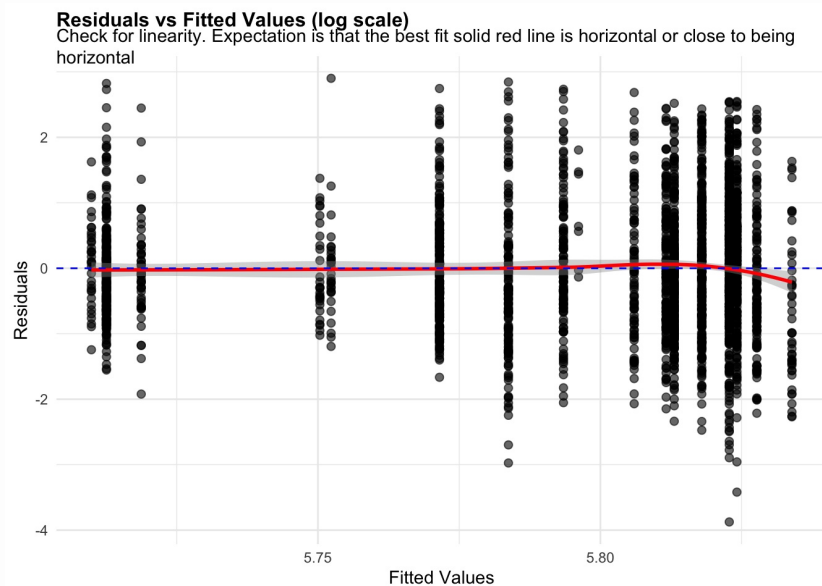


Figure 9: residuals_vs_fitted. Check for linearity (log scale). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

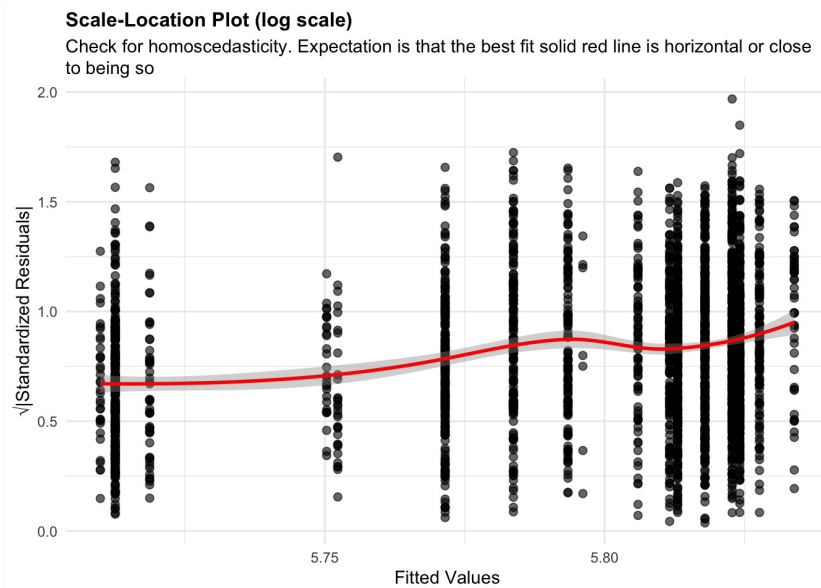


Figure 10: residuals_homoscedasticity. Check for homoscedasticity (log scale). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

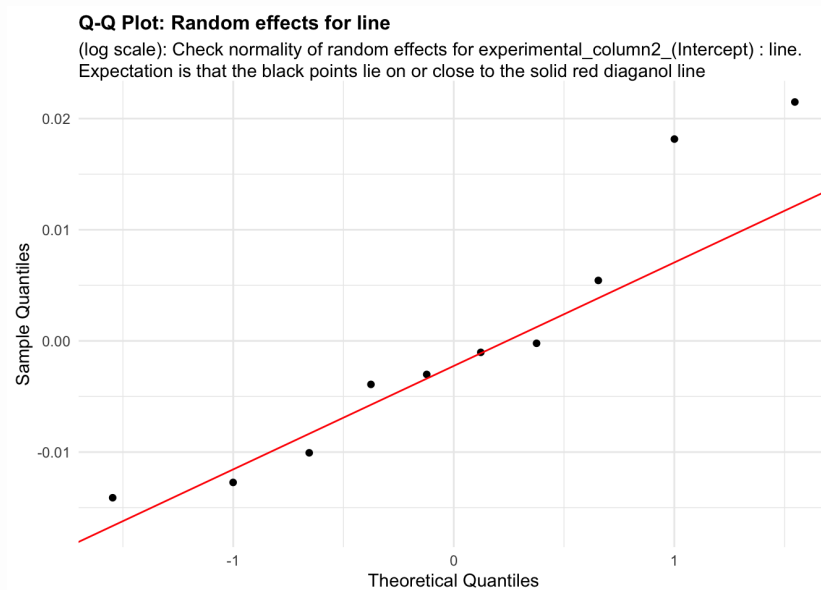


Figure 11: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (log scale): line. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

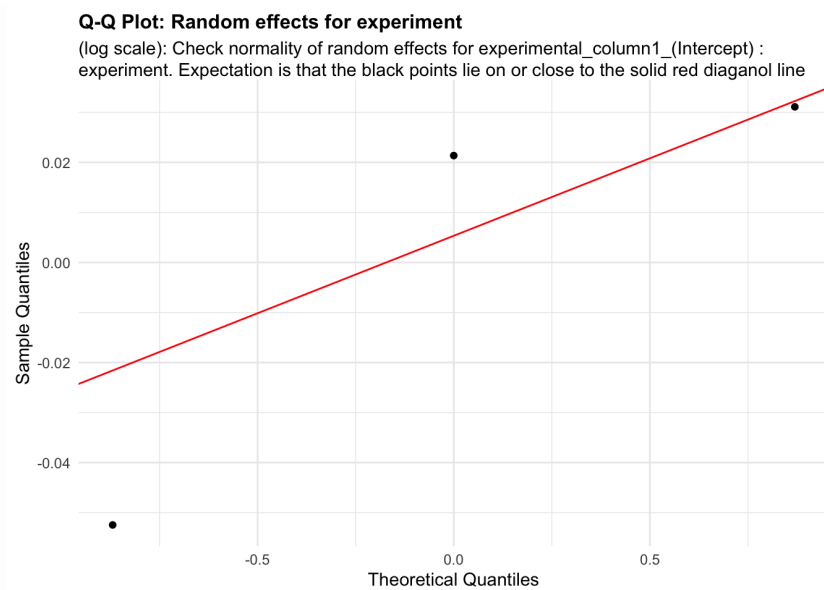


Figure 12: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (log scale): experiment. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cooks_plots <- diagnose_res$cooks_plots$log_scale
cat("\n\n\n")
for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

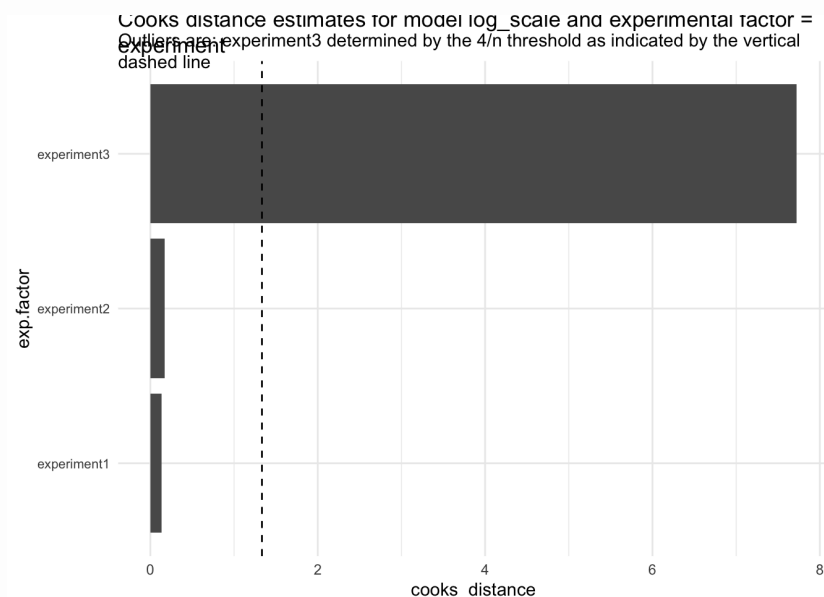


Figure 13:

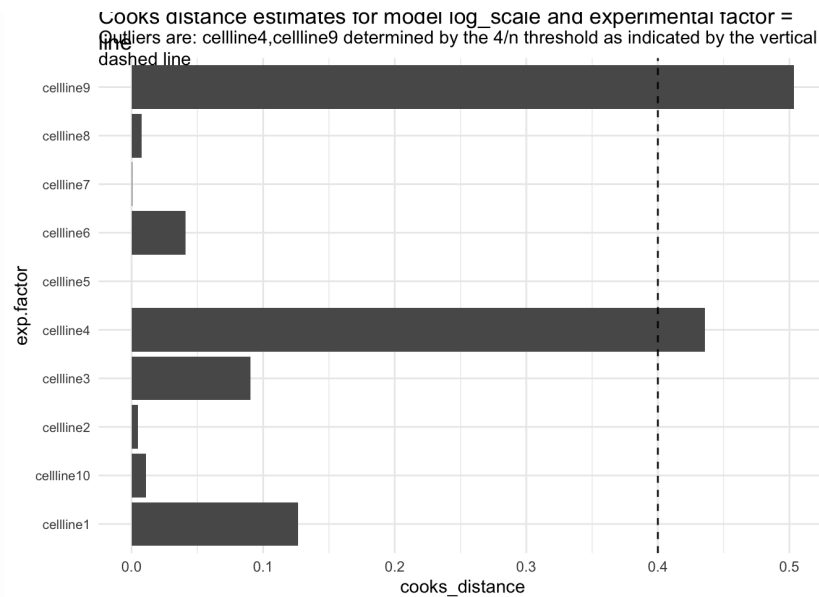


Figure 14:

```
print("Inferred outlier groups are")

[1] "Inferred outlier groups are"

print(diagnose_res$inferred_outlier_groups$natural_scale)

$experiment [1] "experiment3"

$line [1] "cellline4" "cellline9"
```

We see normality assumption is better met with the log-transformed model (Figure 6) compared to the model in the natural scale (Figure 1).

The code also outputs Cook's distance measures for each experiment and cell-line that is intended to capture how influential each of these were in determining the final parameter estimates in the LMM model.

The observations in experimental batch 3 and those for cell lines 4 and 9 were identified as outliers using a $4/n$ (where n is the number of replicates, $n=3$ for experimental batches and $n=10$ for cell-lines) threshold applied to the estimates of Cook's distance for the estimated model parameters. We will not do anything further with these estimates, given the relatively small number of experiments and cell-lines for this data. In other situations, where we have a larger number of replicates and have additional reasons to believe that the outliers are real and have nothing to do with the biology being studied (example: the microscope was not set correctly for a given experimental batch), we could decide to drop the identified outlier units.

We will use the log transformed cell_size2 data for parameter estimation using the following commands.

```
design_update <- design
data_update <- diagnose_res$Data_updated
print(colnames(data_update))

## [1] "cell_size2_logTransformed" "experiment"
## [3] "line" "classification"
## [5] "cell_size1" "cell_size2"
## [7] "cell_size3" "cell_size4"
## [9] "cell_size5" "cell_size6"

design_update@response_column <- "cell_size2_logTransformed"
estimate_res <- getEstimatesOfInterest(data_update, design_update, model
```

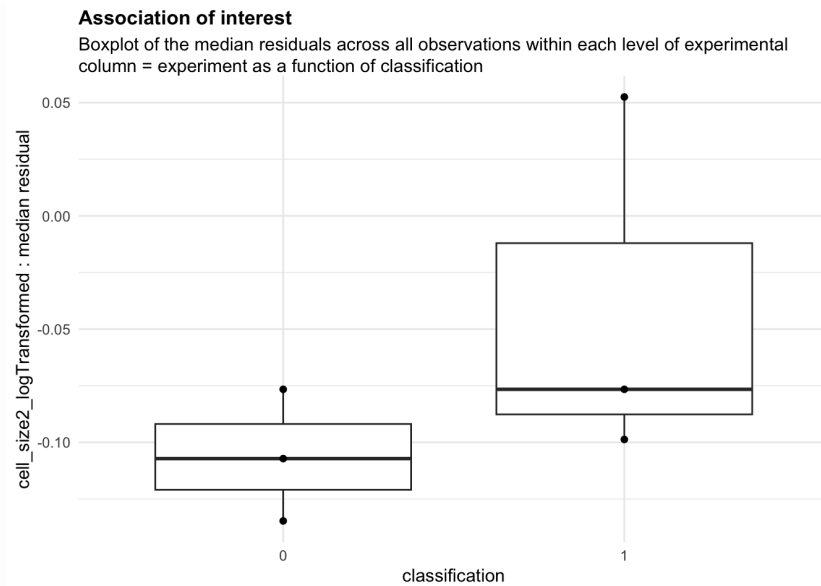


Figure 15:

The median residual boxplot shows the differences in the distribution of the response variable for the two conditions.

```
##print model summary output
print(estimate_res[[1]])

## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula: response_column ~ condition_column + (1 |
experimental_column1) +
## (1 | experimental_column2)
## Data: fixed_global_variable_data
##
## REML criterion at convergence: -3678.5
##
## Scaled residuals:
##   Min       1Q   Median       3Q      Max
## -3.8747 -0.6665 -0.0869  0.6377  2.9014
##
## Random effects:
##   Groups                Name                Variance Std.Dev.
## experimental_column2 (Intercept) 0.0002438 0.01561
## experimental_column1 (Intercept) 0.0021256 0.04610
## Residual                    0.0129115 0.11363
## Number of obs: 2458, groups: experimental_column2, 10;
experimental_column1, 3
##
## Fixed effects:
##              Estimate Std. Error    df t value Pr(>|t|)
## (Intercept)    5.77509    0.02764 2.19350  208.924  9.3e-06 ***
## condition_column1 0.03072    0.01182  8.47900   2.599   0.0302 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr)
## cndtn_clmn1 -0.171
```

As a result of linear mixed model-based association analysis, the response variable was found to be significantly associated with the condition variable with an estimate of 0.03.

We can also estimate the statistical needed to estimate the observed differences in mean perimeter across 15 experimental batches

```
power_param@max_size <- 15
power_res <- calculatePower(data_update, design_update, model, power_par
```

```
[[1]]
```

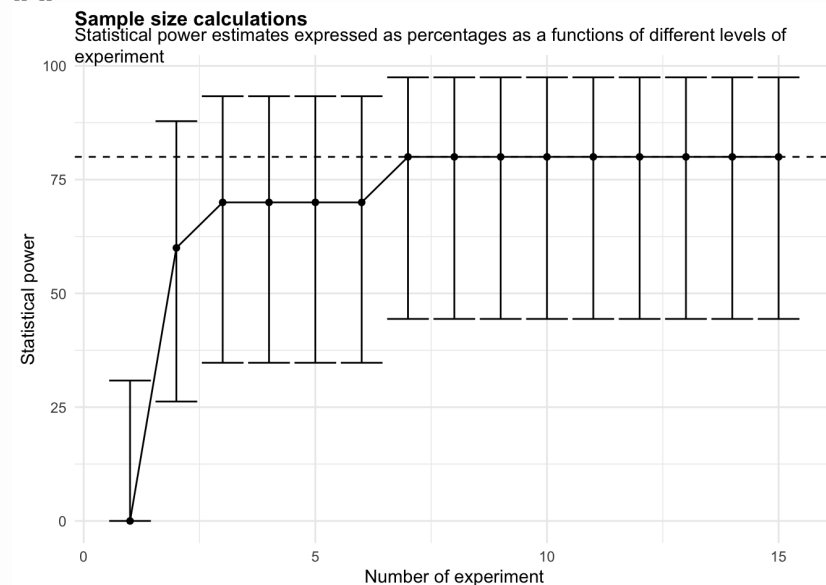


Figure 16:

The power curve shows that at least eight or more experimental batches are required to achieve a power of 80% or greater.

Accordingly, we will now load data from 8 experimental batches and estimate our parameter of interest.

```
full_data <- read.table("~/Dropbox (Gladstone)/calcPower f1000_manuscrip
##filter the top 5% of the observations
full_data %<>% filter(perim_2th_effect < quantile(perim_2th_effect, 0.95

design@response_column <- "perim_2th_effect"
design@condition_column <- "classif"
full_diag_res <- diagnoseDataModel(full_data, design, model)
full_data_update <- full_diag_res$Data_updated
full_design <- design
full_design@response_column <- "perim_2th_effect_logTransformed"
```

Note now, none of the experimental batches or the 13 cell-lines are considered outliers or unduly influencing the final parameter estimates.

```
cooks_plots <- full_diag_res$cooks_plots$log_scale
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

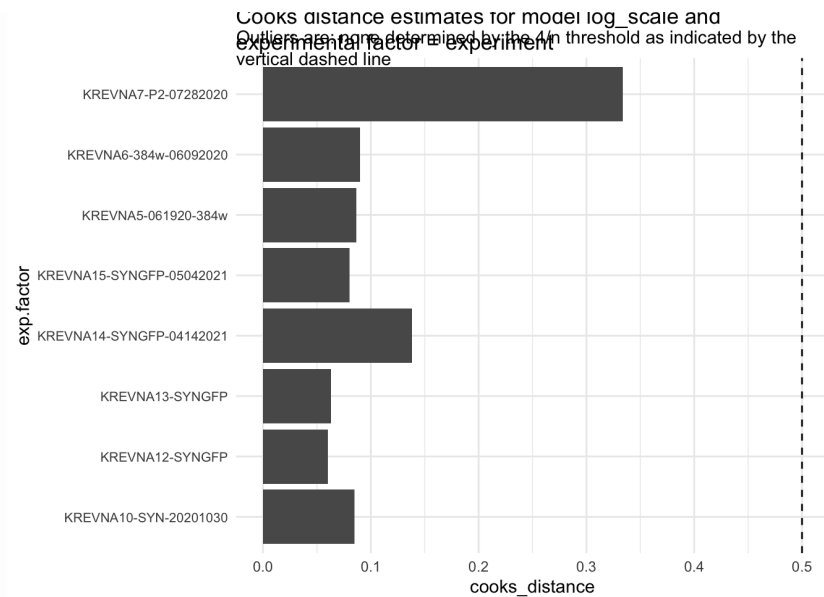


Figure 17:

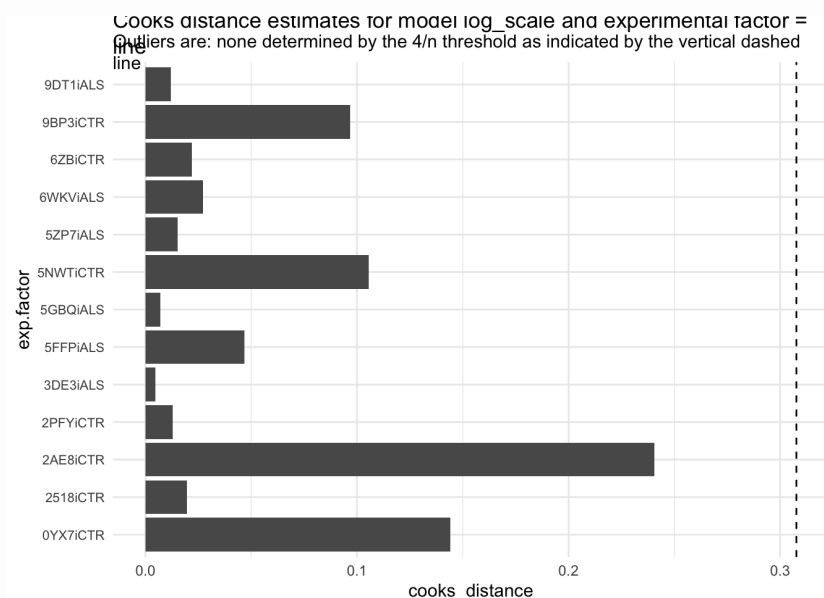


Figure 18:

```
print("Inferred outlier groups are")

[1] "Inferred outlier groups are"

print(diagnose_res$inferred_outlier_groups$natural_scale)

$experiment [1] "experiment3"

$line [1] "cellline4" "cellline9"

We derive an estimate of 0.027 as the mean difference in perimeter with an associated
significance of 0.006 using the data from 8 experimental batches.

full_res <- getEstimatesOfInterest(full_data_update, full_design, model,
print(full_res[[1]])
```

```
## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula: response_column ~ condition_column + (1 |
experimental_column1) +
## (1 | experimental_column2)
## Data: fixed_global_variable_data
##
## REML criterion at convergence: -10215.6
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -4.1653 -0.6837 -0.0505  0.6413  3.0906
##
## Random effects:
## Groups              Name                Variance Std.Dev.
## experimental_column2 (Intercept)  0.000168  0.01296
## experimental_column1 (Intercept)  0.000883  0.02971
## Residual                      0.010516  0.10255
## Number of obs: 5989, groups: experimental_column2, 13;
experimental_column1, 8
##
## Fixed effects:
##              Estimate Std. Error      df t value Pr(>|t|)
## (Intercept)    5.753966    0.011811 10.213599 487.158 <2e-16
***
## condition_column1  0.027159    0.007924 10.925415   3.427  0.0057 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr)
## cndtn_clmn1 -0.309
```

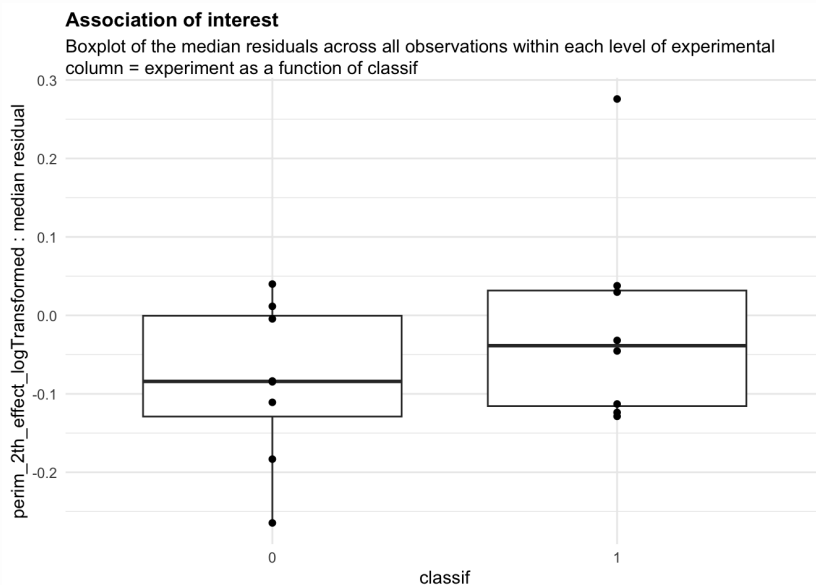


Figure 19:

2.2 Single-cell RNA-seq assays

Here we will use data derived from the single-nuclei RNA-seq experiments performed in Koutsodendris et al[. paper One of the goals in these experiments was to assess the effect of the *APOE* gene isoform on brain pathology in a mouse model of Alzheimer's Disease (AD). Specifically, the *APOE4* haplotype is a known risk factor for AD compared to those with the *APOE3* gene isoform. Koutsodendris et al., investigates the role of expression of neuronal *APOE4* expression in the development of disease pathology in the *APOE4* knock-in mouse model. The scRNA seq dataset consists of over 1000 cells derived from the hippocampus

brain region across 4 mice harboring the human *APOE4* gene knocked-in the mouse *ApoE* locus and 4 other mice (called E4-KI-Syn1-Cre) with the human *APOE4* gene also knocked-in in the same mouse. However, the *APOE4* expression in these mice is knocked out specifically in the neurons. The single cell data allowed the identification of multiple clusters or cell-types including cluster 7 representing a group of excitatory neurons.

2.2.1 Cell-type/cluster associations

One typical use of scRNA seq data is clustering analysis. First, we can ask whether the proportion of nuclei derived from APOE4-KI mice differs from the proportion of nuclei derived from APOE4-KI-Syn1-Cre mice in cluster 7. We want to examine the proportion of cells in each mouse assigned cluster 7 by testing whether there were differences in the log odds of cluster membership in cluster 7 between APOE4-KI mice and APOE4-KI-Syn1-Cre. The data consists of the number of nuclei per animal present in the cluster and also the total number of nuclei that were isolated from this animal.

2.2.1.1 Associations with genotype

The following commands load data and set parameters to specify the experimental design, distribution information, and power simulation conditions.

The first few lines of data display cell meta information.

```
template_dir <- "~/Dropbox (Gladstone)/calcPower f1000_manuscript/Final_  
data <- read.csv(paste0(template_dir, "apoe_associated_cell_proportions.  
head(data)
```

```

## sample_id      animal_model total_numbers_of_cells_per_sample
cluster_id
## 1      S10      PS19-fE4      6552
7
## 2      S11      PS19-fE4      6214
7
## 3      S12 PS19-fE4 Syn1-Cre      7873
7
## 4      S13 PS19-fE4 Syn1-Cre      6577
7
## 5      S4      PS19-fE4      16223
7
## 6      S5      PS19-fE4      12357
7
## number_of_cells_per_sample_in_cluster      Genotype Mouse_
Sex PS19 Cre
## 1      263      PS19-fE4      154      F
+ -
## 2      8      PS19-fE4      413      M
+ -
## 3      58 PS19-fE4_Syn1-Cre      305      M
+ +_-
## 4      1 PS19-fE4_Syn1-Cre      504      F
+ +_-
## 5      2139      PS19-fE4      129      F
+ -
## 6      1811      PS19-fE4      156      M
+ -
## ApoE      DOB Age_Perfused Date_Perfused Date_of_Nuc_Isolation
## 1 E4_4 10_30_19      10.3      9/7/20      9/9/21
## 2 E4_4 10_2_20      10.1      8/4/21      9/9/21
## 3 E4_4 3_19_20      10.5      1/8/21      9/9/21
## 4 E4_4 9_8_20      10.8      8/4/21      9/9/21
## 5 E4_4 12_18_19      9.9      10/16/20      9/7/21
## 6 E4_4 12_18_19      9.9      10/16/20      9/7/21
## Hippocampus_Vol_mm X._AT8_Coverage_Area X._GFAP_Coverage_Area
## 1      6.75      31.52      31.75
## 2      8.88      4.43      4.98
## 3      9.26      15.43      5.60
## 4      7.58      6.92      11.90
## 5      3.73      69.89      38.28
## 6      3.62      88.85      39.84
## X._S100B_Coverage_Area X._IBA1_Coverage_Area X._CD68_Coverage_Area
## 1      6.94      20.20      10.45
## 2      1.02      10.09      1.58
## 3      0.38      1.17      0.42
## 4      5.05      13.09      3.49
## 5      9.71      30.51      25.49
## 6      18.11      31.49      19.85
## X._MBP_Coverage_Area X._OPC_Coverage_Area
## 1      9.43      10.30
## 2      4.32      6.04
## 3      14.08      24.32
## 4      10.21      21.60
## 5      13.28      11.68
## 6      7.72      10.95

```

The following command reads parameters from json files and print corresponding objects, allowing us to check which parameters have been assigned.

```

##load the design
design <- readDesign(paste0(template_dir,"design_celltype1.json"))
design@covariate_is_categorical <- TRUE
design@include_interaction <- FALSE
print(design)

```

```

## An object of class "RMeDesign"
## Slot "response_column":
## [1] "number_of_cells_per_sample_in_cluster"
##
## Slot "covariate":
## [1] "Sex"
##
## Slot "condition_column":
## [1] "Genotype"
##
## Slot "condition_is_categorical":
## [1] TRUE
##
## Slot "experimental_columns":
## [1] "sample_id"
##
## Slot "crossed_columns":
## NULL
##
## Slot "total_column":
## [1] "total_numbers_of_cells_per_sample"
##
## Slot "outlier_alpha":
## [1] 0.05
##
## Slot "na_action":
## [1] "complete"
##
## Slot "include_interaction":
## [1] FALSE
##
## Slot "random_slope_variable":
## NULL
##
## Slot "covariate_is_categorical":
## [1] TRUE

##load the probability model
model <- readProbabilityModel(paste0(template_dir,"prob_model.json"))
print(model)

## An object of class "ProbabilityModel"
## Slot "error_is_non_normal":
## [1] TRUE
##
## Slot "family_p":
## [1] "binomial"

##load the relevant power parameters
power_param <- readPowerParams(paste0(template_dir,"power_param.json"))
print(power_param)

```

```
## An object of class "PowerParams"
## Slot "target_columns":
## [1] "sample_id"
##
## Slot "power_curve":
## [1] 1
##
## Slot "nsimn":
## [1] 10
##
## Slot "levels":
## [1] 1
##
## Slot "max_size":
## [1] 1
##
## Slot "alpha":
## [1] 0.05
##
## Slot "breaks":
## NULL
##
## Slot "effect_size":
## NULL
##
## Slot "icc":
## NULL
```

Now let's use the 'diagnoseDataModel' function to diagnose the data quality and distributional assumptions of the model.

```
diagnose_res <- diagnoseDataModel(data, design, model)
```

```
## [1] "No outlier detected from the raw Data"
## [1] "No outlier detected from the raw Data"
```

To identify all the models fit to the data. There were no outliers identified so only one model fit to natural scale is fit.

```
print(diagnose_res$models)
```

```
## [1] "Natural scale"
```

```
plots <- diagnose_res$diagnostic_plots$natural_scale$plots
captions <- diagnose_res$diagnostic_plots$natural_scale$captions
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
  }
}
```

Q-Q Plot vs. Uniform Distribution (natural scale)

Q-Q Plot for Uniform Distribution. Expectation is that the black points lie on or close to the solid red diagonal line.

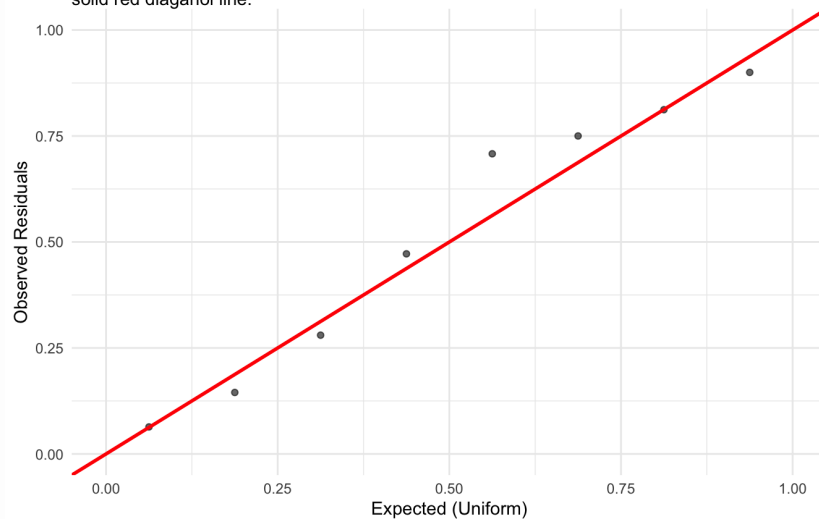


Figure 20: residuals_QQ. Q-Q Plot for Uniform Distribution. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

DHARMa Residuals vs predictions (natural scale)

Residuals vs Predicted. Expectation is that the best fit solid red line(s) is horizontal or close to being so

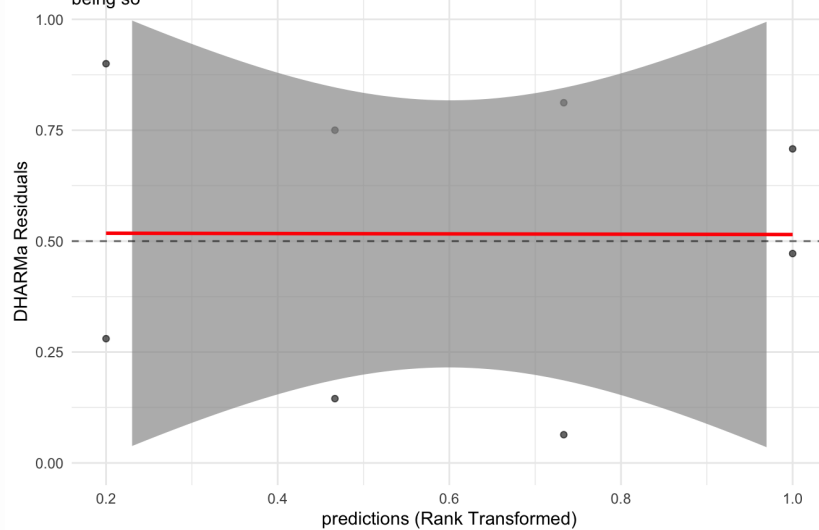


Figure 21: residuals_vs_predicted. Residuals vs Predicted Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

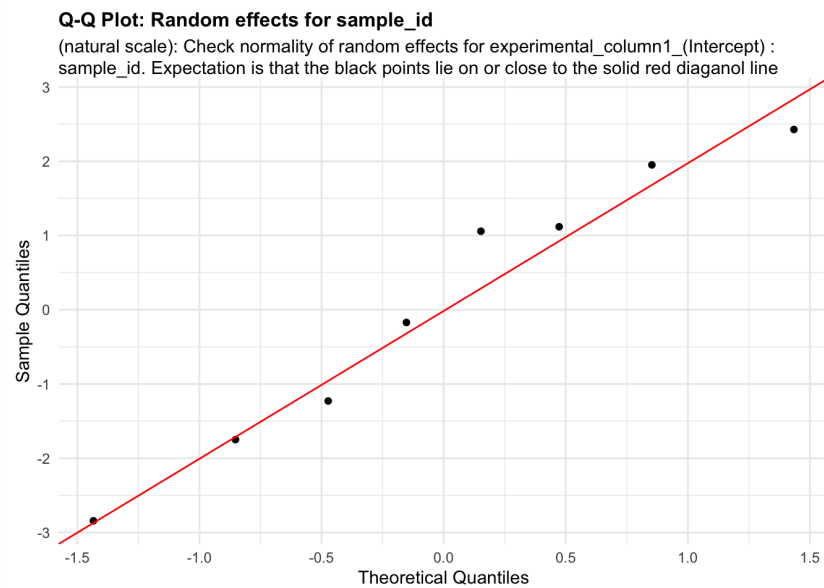


Figure 22: random_effects_QQ_1. Check normality of random effects for experimental_column1_(Intercept) (natural scale): sample_id. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cooks_plots <- diagnose_res$cooks_plots$natural_scale
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

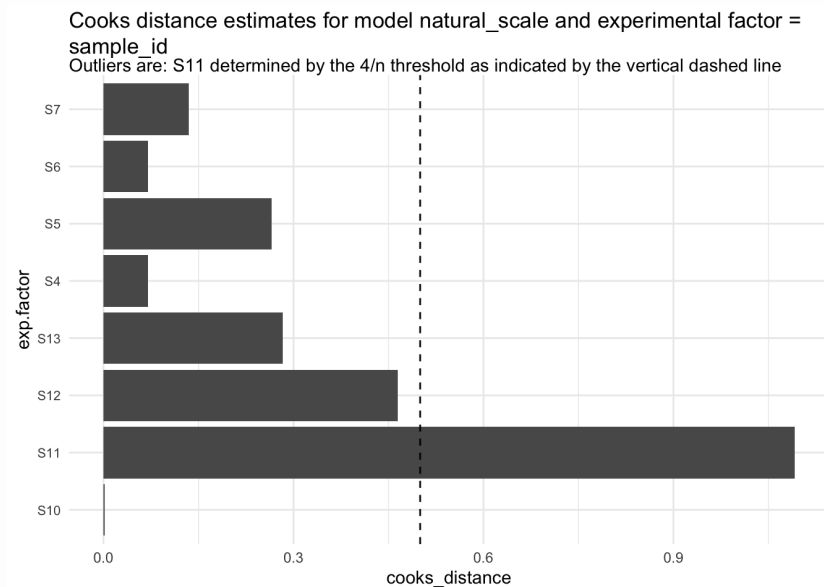


Figure 23:

```
print("Inferred outlier groups are")

[1] "Inferred outlier groups are"

print(diagnose_res$inferred_outlier_groups$natural_scale)
```

```
$sample_id[1] "S11"
```

We can now estimate differences in the log odds of cluster membership in cluster 7 between APOE4-KI mice and APOE4-KI-Syn1-Cre using the function 'getEstimatesOfInterest'.

```
estimate_res <- getEstimatesOfInterest(data, design, model, print_plots = FALSE)
print(estimate_res[[1]])
```

```
## Generalized linear mixed model fit by maximum likelihood (Laplace
## Approximation) [glmerMod]
## Family: binomial ( logit )
## Formula:
## cbind(response_column, (total_column - response_column)) ~
condition_column +
## covariate + (1 | experimental_column1)
## Data: fixed_global_variable_data
##
##          AIC          BIC      logLik -2*log(L)  df.resid
##        100.9         101.2       -46.4      92.9         4
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -0.41163 -0.28356  0.00219  0.02755  0.09292
##
## Random effects:
## Groups              Name            Variance Std.Dev.
## experimental_column1 (Intercept)  3.464      1.861
## Number of obs: 8, groups:  experimental_column1, 8
##
## Fixed effects:
##                                     Estimate Std. Error z value
## Pr(>|z|)
## (Intercept)                       -3.0030      1.1493  -2.613
## 0.00898 **
## condition_columnPS19-fE4_Syn1-Cre -3.6302      1.3514  -2.686
## 0.00723 **
## covariateM                        -0.7104      1.3482  -0.527
## 0.59823
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr) c_PS19
## c_PS19-E4_S -0.560
## covariateM  -0.582 -0.003
```

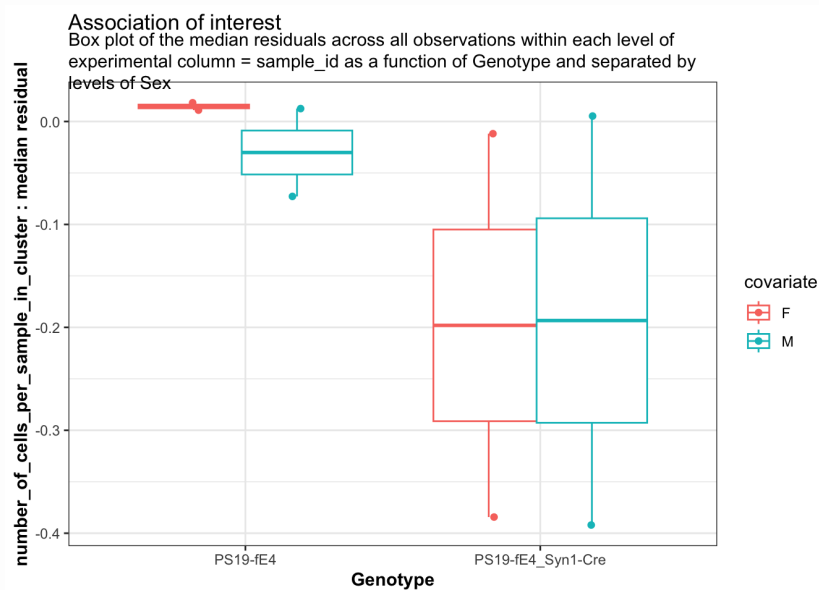


Figure 24:

And estimate whether or not statistical power we have to estimate the given observed association with varying number of mice per group.

```
print(power_param@target_columns)

## [1] "sample_id"

power_res <- calculatePower(data, design, model, power_param)

[[1]]
```

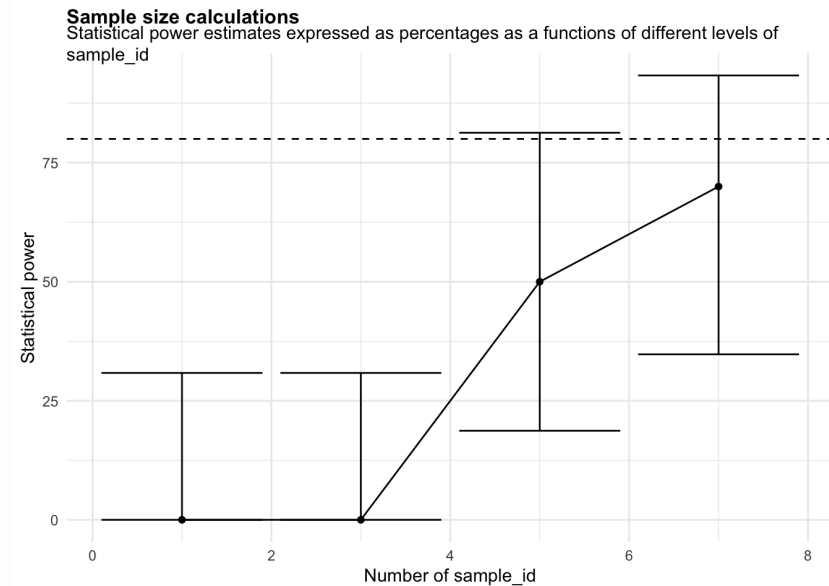


Figure 25:

Alternatively, we may believe that effect of genotype on the cluster membership may be cluster specific. Therefore we would include an interaction term in the model

```
design@include_interaction <- TRUE
```

The estimates after including the interaction term could be recovered by,

```
estimate_res_w_interaction <- getEstimatesOfInterest(data, design, model)
print(estimate_res_w_interaction[[1]])
```

```
## Generalized linear mixed model fit by maximum likelihood (Laplace
## Approximation) [glmerMod]
## Family: binomial ( logit )
## Formula:
## cbind(response_column, (total_column - response_column)) ~
condition_column *
## covariate + (1 | experimental_column1)
## Data: fixed_global_variable_data
##
##          AIC          BIC      logLik -2*log(L)  df.resid
##        102.3        102.7       -46.2      92.3         3
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -0.42015 -0.27409 -0.00398  0.03400  0.10782
##
## Random effects:
## Groups              Name            Variance Std.Dev.
## experimental_column1 (Intercept) 3.202      1.789
## Number of obs: 8, groups: experimental_column1, 8
##
## Fixed effects:
##
##                                Estimate Std. Error z
## value
## (Intercept)                    -2.530      1.266  -
1.999
## condition_columnPS19-fE4_Syn1-Cre -4.615      1.838  -
2.511
## covariateM                      -1.660      1.798  -
0.923
## condition_columnPS19-fE4_Syn1-Cre:covariateM 2.003      2.598
0.771
##
##                                Pr(>|z|)
## (Intercept)                    0.0456 *
## condition_columnPS19-fE4_Syn1-Cre 0.0120 *
## covariateM                      0.3558
## condition_columnPS19-fE4_Syn1-Cre:covariateM 0.4406
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr) cn_PS19-E4_S1-C covrtM
## cn_PS19-E4_S1-C -0.689
## covariateM      -0.704  0.486
## c_PS19-E4_S1-C  0.487 -0.706      -0.692
```

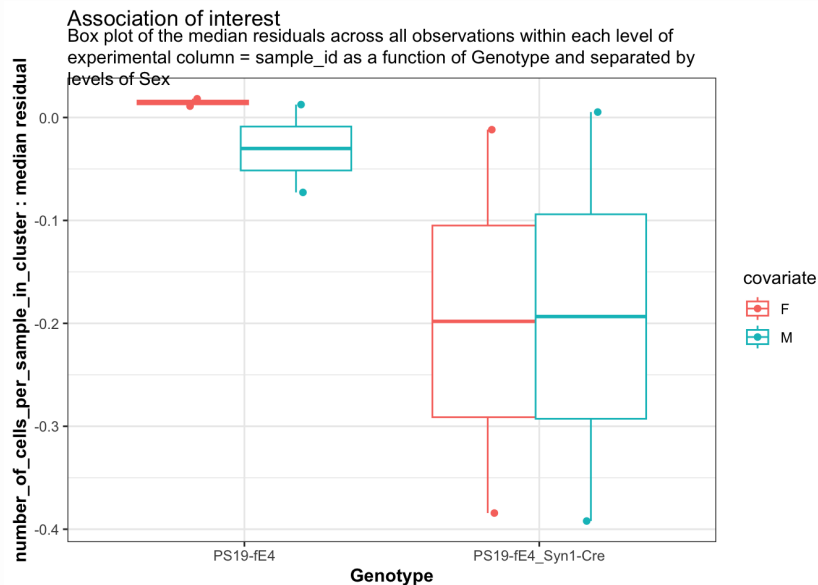


Figure 26: We don't see a significant interaction of genotype with sex given that the interaction term is not significantly different from zero (p-value = 0.446)

2.2.1.2 Associations with hippocampus volume

Next, we can first ask the question whether or not the proportion of nuclei derived from each of the mice are associated with their hippocampus volumes. Note, more neuro-degeneration is linked to smaller hippocampus volumes. More exactly, we want to test whether or not there is a change in the log odds of cluster membership in cluster 7 corresponding to a unit change in the hippocampus volume. The above data provided includes the hippocampus volume for each mouse.

```
##Associations of cell-type proportions with hippocampus volume
design@condition_column = "Hippocampus_Vol_mm"
design@condition_is_categorical = FALSE
design@experimental_columns = c("animal_model", "sample_id")
```

```
diagnose_res <- diagnoseDataModel(data, design, model)
```

```
## [1] "No outlier detected from the raw Data"
## [1] "No outlier detected from the raw Data"
## [1] "Not enough levels to perform cooks test for
experimental_column1 with the assumed binomial distribution"
```

To identify all the models fit to the data. There were outliers identified so two models were fit with and without outliers.

```
print(diagnose_res$models)
```

```
## [1] "Natural scale"
```

Let us look the basic QC plots for the models fit in the natural scale of the responses. There are only two levels for the animal model. So cooks distance estimates not generated for them.

```
plots <- diagnose_res$diagnostic_plots$natural_scale$plots
captions <- diagnose_res$diagnostic_plots$natural_scale$captions
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
}
```

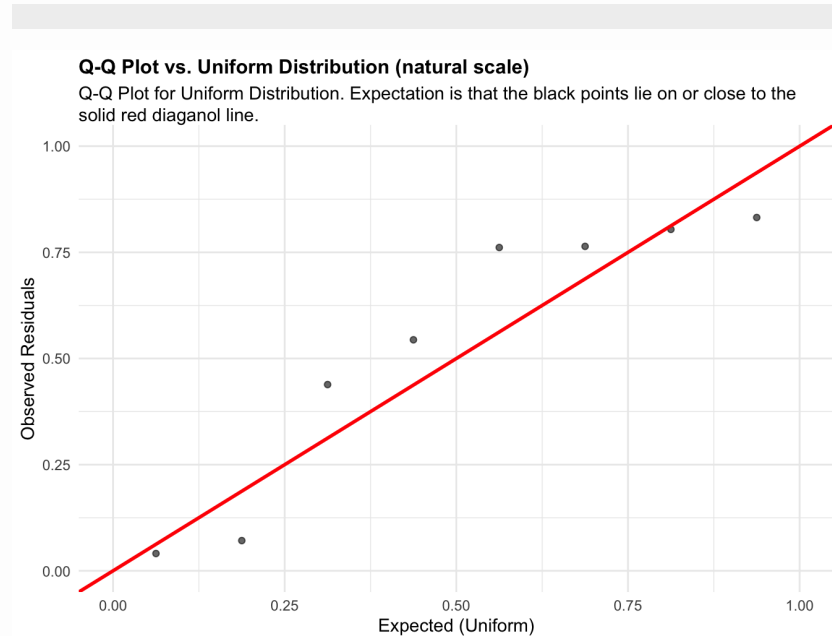


Figure 27: residuals_QQ. Q-Q Plot for Uniform Distribution. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

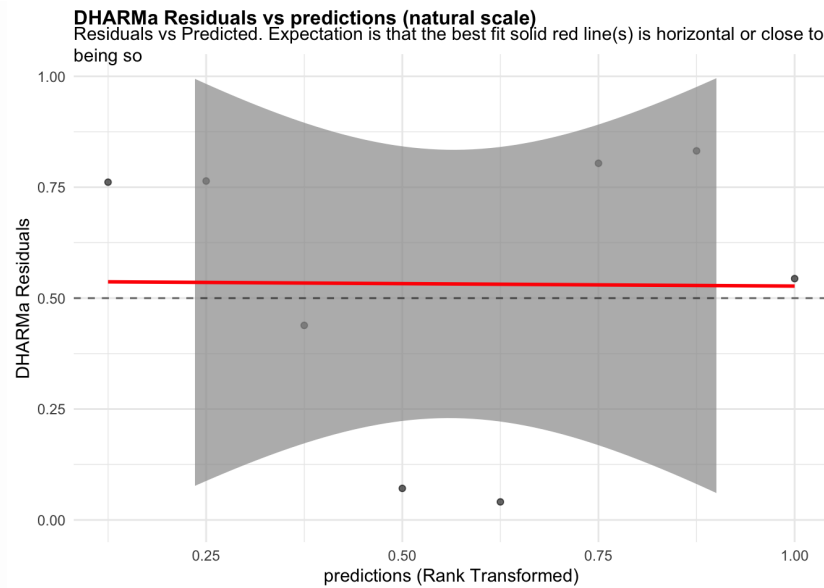


Figure 28: residuals_vs_predicted. Residuals vs Predicted Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

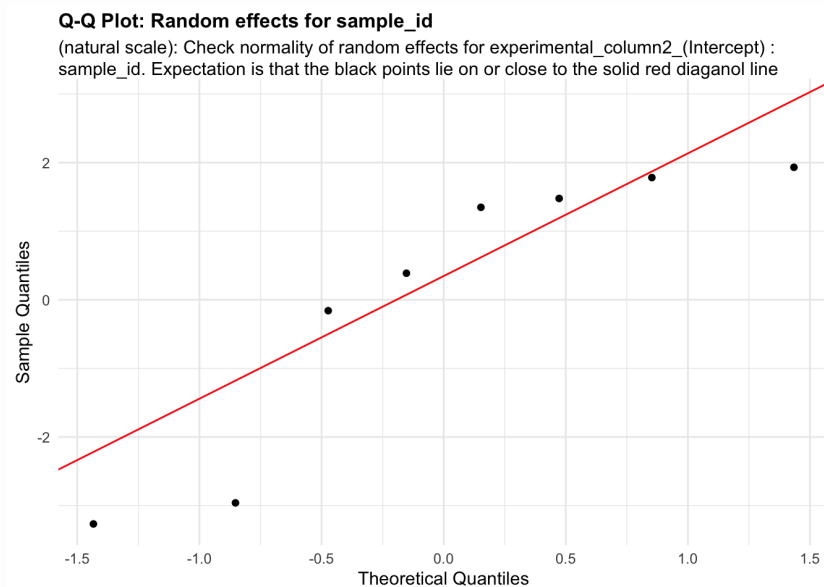


Figure 29: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (natural scale): sample_id. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

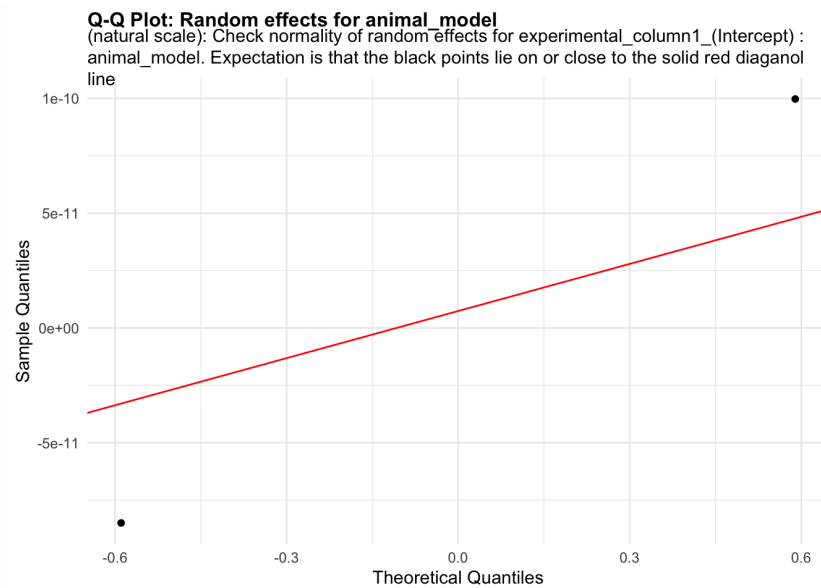


Figure 30: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (natural scale): animal_model. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cat("\n\n\n")
```

Let us also now look at the QC plots after removing the identified outliers

```
plots <- diagnose_res$diagnostic_plots$natural_scale_wo_outliers$plots
captions <- diagnose_res$diagnostic_plots$natural_scale_wo_outliers$capt

for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
  })
  cat("\n\n\n")
}
```

We can also estimate the parameter of interest - log odds ratio of cluster 7 membership per unit increase in hippocampus volume of associated mouse.

```
estimate_res <- getEstimatesOfInterest(data, design, model, print_plots =
  print(estimate_res[[1]]))
```

```
## Generalized linear mixed model fit by maximum likelihood (Laplace
## Approximation) [glmerMod]
## Family: binomial ( logit )
## Formula:
## cbind(response_column, (total_column - response_column)) ~
condition_column *
## covariate + (1 | experimental_column1) + (1 |
experimental_column2)
## Data: fixed_global_variable_data
##
##      AIC      BIC    logLik -2*log(L)  df.resid
##    107.1    107.5    -47.5     95.1        2
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -0.57240 -0.14213  0.00675  0.02990  0.06899
##
## Random effects:
## Groups              Name              Variance Std.Dev.
## experimental_column2 (Intercept) 4.304e+00 2.075e+00
## experimental_column1 (Intercept) 1.180e-10 1.086e-05
## Number of obs: 8, groups: experimental_column2, 8;
experimental_column1, 2
##
## Fixed effects:
##
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)      0.6689    3.5463   0.189   0.850
## condition_column -0.7885    0.4911  -1.605   0.108
## covariateM      -2.4380    4.8915  -0.498   0.618
## condition_column:covariateM  0.2568    0.6713   0.383   0.702
##
## Correlation of Fixed Effects:
##              (Intr) cndtn_ covrtM
## cndtn_clmn -0.955
## covariateM -0.725  0.693
## cndtn_clm:M  0.698 -0.732 -0.952
## optimizer (Nelder-Mead) convergence code: 0 (OK)
## boundary (singular) fit: see help('isSingular')
```

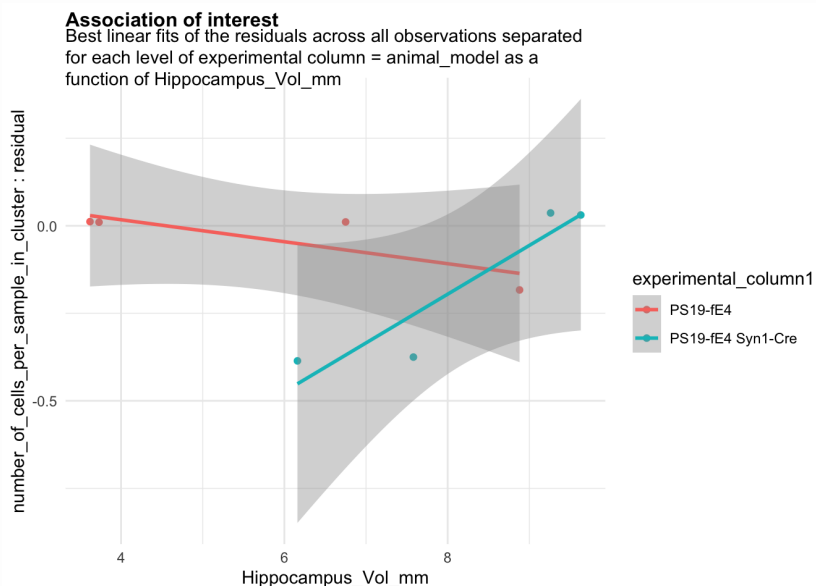


Figure 31:

And calculate the statistical power to estimate this association for different numbers of animals per group.

```
power_plots <- calculatePower(data, design, model, power_param)
```

```
[[1]]
```

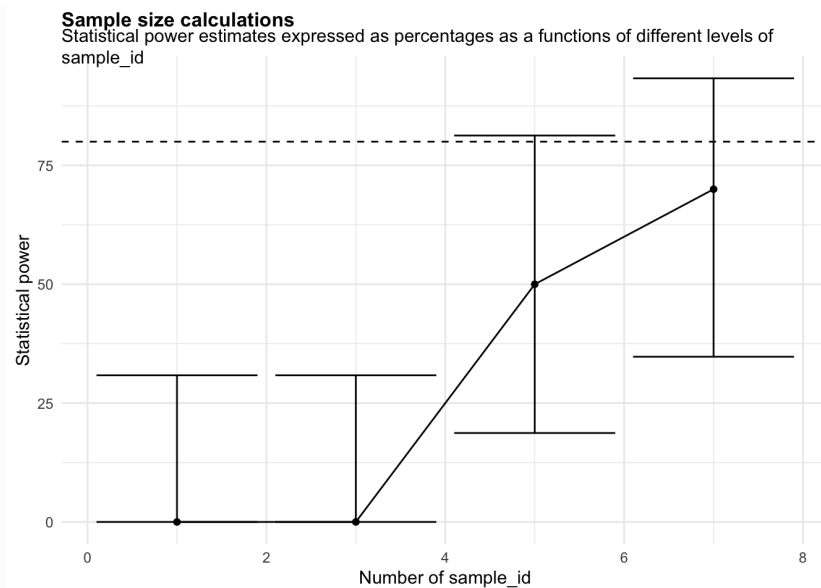


Figure 32:

2.2.2 Gene expression associations with genotype

We will now estimate the association of the expression levels of the *Snhg11* gene with genotype among cells in cluster 7 in the same data set. We will now load the raw counts for this gene and create the relevant RMeDesign, ProbabilityModel and PowerParams objects.

```
template_dir <- "~/Dropbox (Gladstone)/calcPower f1000_manuscript/Final_
data <- read.csv(paste0(template_dir, "raw_counts_Snhg11_gene_cluster_7_
# data %<>% mutate(genotype = gsub(" ", "_", genotype))
# data %>% write.csv(., paste0(template_dir, "raw_counts_Snhg11_gene_clu
head(data)
```

```

##      y      orig.ident nCount_RNA nFeature_RNA percent.mt sample_number
## 1 20 SeuratProject      2878        1716 0.03474635      S10
## 2  6 SeuratProject      9350        3682 0.05347594      S10
## 3 22 SeuratProject      2949        1735 0.03390980      S10
## 4 12 SeuratProject      4529        2494 0.04415986      S10
## 5 14 SeuratProject      3044        1866 0.03285151      S10
## 6  9 SeuratProject     10636        3957 0.03760812      S10
##  mouse_number genotype sex Cre ApoE      dob age_perfused
date_perfused
## 1      154 PS19-fE4   F   - E4/4 10/30/19      10.3
9/7/20
## 2      154 PS19-fE4   F   - E4/4 10/30/19      10.3
9/7/20
## 3      154 PS19-fE4   F   - E4/4 10/30/19      10.3
9/7/20
## 4      154 PS19-fE4   F   - E4/4 10/30/19      10.3
9/7/20
## 5      154 PS19-fE4   F   - E4/4 10/30/19      10.3
9/7/20
## 6      154 PS19-fE4   F   - E4/4 10/30/19      10.3
9/7/20
##  date_of_nuclear_isolation nCount_SCT nFeature_SCT SCT_snn_res.0.7
## 1      9/9/21      2762      1716      6
## 2      9/9/21      2910      2040      6
## 3      9/9/21      2813      1735      6
## 4      9/9/21      3253      2414      6
## 5      9/9/21      2877      1866      6
## 6      9/9/21      2675      1843      6
##  seurat_clusters orig_seurat_clusters y.samples.lib.size
library_size
## 1      7      6      2762      276
## 2      7      6      2910      291
## 3      7      6      2813      281
## 4      7      6      3253      325
## 5      7      6      2877      287
## 6      7      6      2675      267
##  constant_library_size
## 1      1
## 2      1
## 3      1
## 4      1
## 5      1
## 6      1

```

```

design <- readDesign(paste0(template_dir,"design_gene_expression.json"))
print(design)

```

```

## An object of class "RMeDesign"
## Slot "response_column":
## [1] "y"
##
## Slot "covariate":
## [1] "sex"
##
## Slot "condition_column":
## [1] "genotype"
##
## Slot "condition_is_categorical":
## [1] TRUE
##
## Slot "experimental_columns":
## [1] "sample_number"
##
## Slot "crossed_columns":
## NULL
##
## Slot "total_column":
## [1] "library_size"
##
## Slot "outlier_alpha":
## [1] 0.05
##
## Slot "na_action":
## [1] "complete"
##
## Slot "include_interaction":
## [1] NA
##
## Slot "random_slope_variable":
## NULL
##
## Slot "covariate_is_categorical":
## [1] NA

design@covariate_is_categorical <- TRUE
design@include_interaction <- FALSE

model <- readProbabilityModel(paste0(template_dir,"prob_model.json"))
print(model)

## An object of class "ProbabilityModel"
## Slot "error_is_non_normal":
## [1] TRUE
##
## Slot "family_p":
## [1] "negative_binomial"

power_param <- readPowerParams(paste0(template_dir,"power_param.json"))
print(power_param)

```

```
## An object of class "PowerParams"
## Slot "target_columns":
## [1] "sample_number"
##
## Slot "power_curve":
## [1] 1
##
## Slot "nsimn":
## [1] 10
##
## Slot "levels":
## [1] 1
##
## Slot "max_size":
## [1] 1
##
## Slot "alpha":
## [1] 0.05
##
## Slot "breaks":
## NULL
##
## Slot "effect_size":
## NULL
##
## Slot "icc":
## NULL
```

Note, we will assume the underlying probability distribution for the counts is negative binomial and will control for differences in the sequencing depths or the total reads each cell receives using `library_size`.

Diagnosis of the data and the model

```
diagnose_res <- diagnoseDataModel(data, design, model)
```

To identify all the models fit to the data. There were outliers identified so two models were fit in the natural scale.

```
print(diagnose_res$models)
```

```
## [1] "Natural scale"          "Natural scale wo outliers"
```

Let us look the basic QC plots for the models fit in the natural scale of the responses.

```
plots <- diagnose_res$diagnostic_plots$natural_scale$plots
captions <- diagnose_res$diagnostic_plots$natural_scale$captions

for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
  })
}
```

Q-Q Plot vs. Uniform Distribution (natural scale)

Q-Q Plot for Uniform Distribution. Expectation is that the black points lie on or close to the solid red diagonal line.

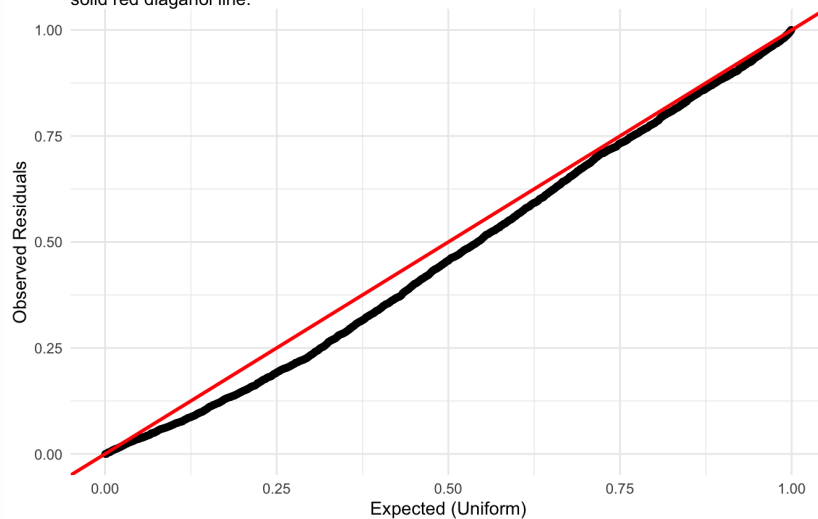


Figure 33: residuals_QQ. Q-Q Plot for Uniform Distribution. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

DHARMa Residuals vs predictions (natural scale)

Residuals vs Predicted. Expectation is that the best fit red lines at the three quartiles- 0.25, 0.50 and 0.75 - are close to the dashed horizontal lines at their respective quartiles

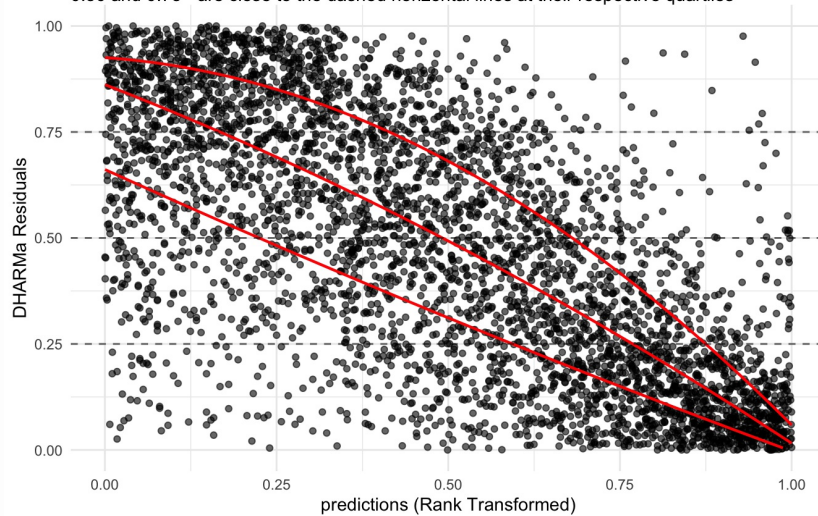


Figure 34: residuals_vs_predicted. Residuals vs Predicted Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

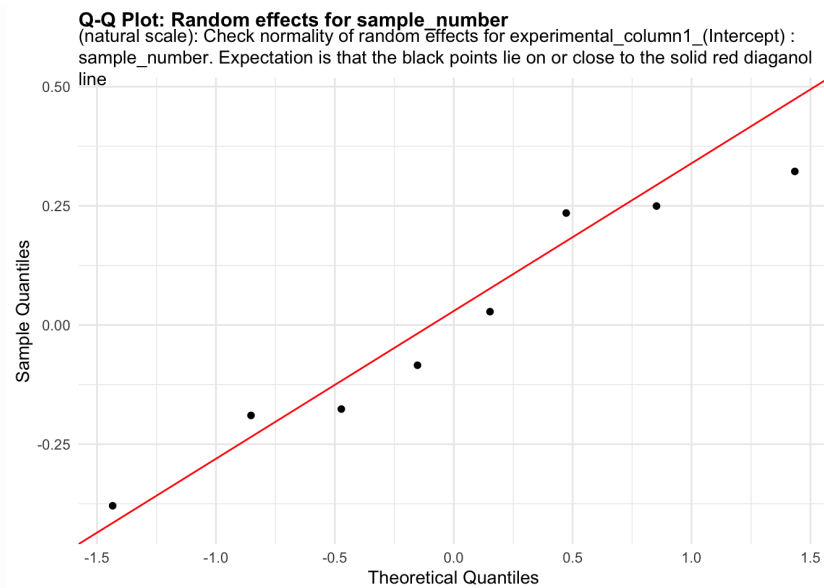


Figure 35: random_effects_QQ_1. Check normality of random effects for experimental_column1_(Intercept) (natural scale): sample_number. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

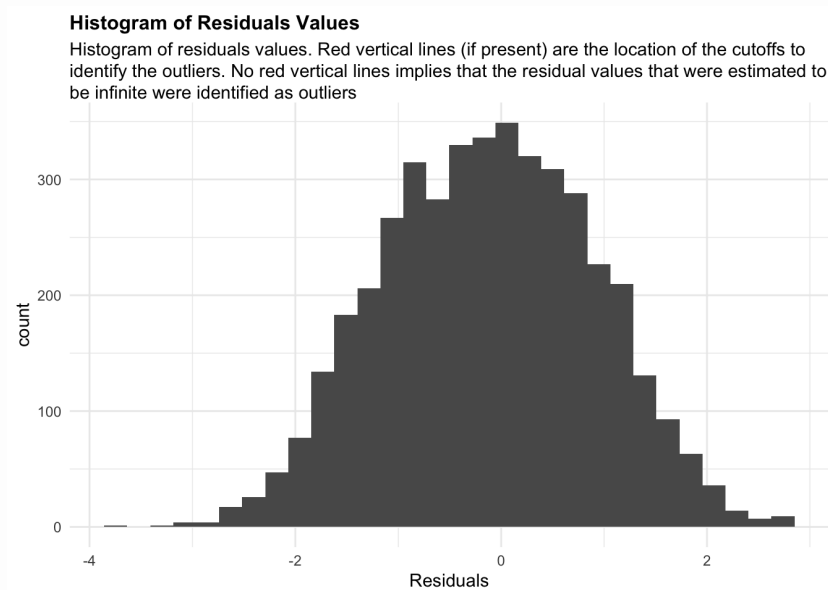


Figure 36: residuals_histogram. Histogram of residuals values. Red vertical lines (if present) are the location of the cutoffs to identify the outliers. No red vertical lines implies that the residual values that were estimated to be infinite were identified as outliers

```
cooks_plots <- diagnose_res$cooks_plots$natural_scale
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

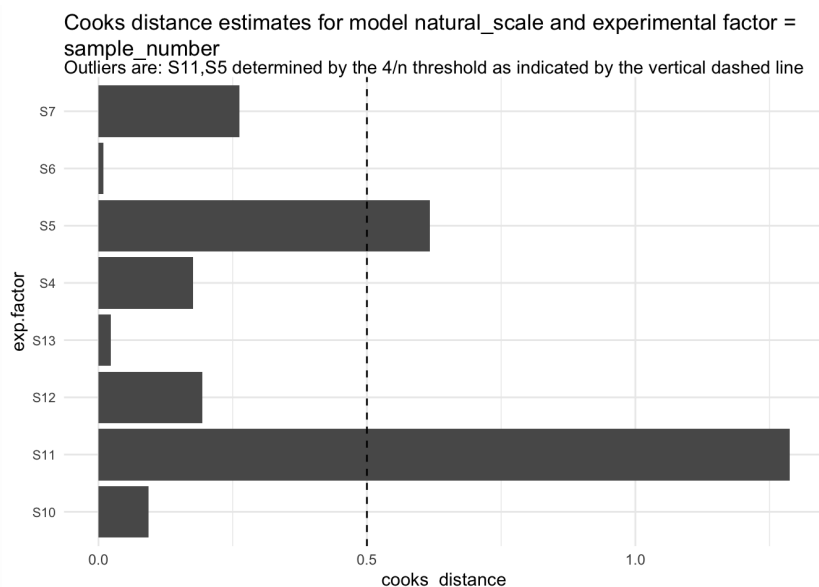


Figure 37:

```
print("Inferred outlier groups are")
```

```
[1] "Inferred outlier groups are"
```

```
print(diagnose_res$inferred_outlier_groups$natural_scale)
```

```
$sample_number [1] "S11" "S5"
```

Let us also now look at the QC plots after removing the identified outliers

```
plots <- diagnose_res$diagnostic_plots$natural_scale_wo_outliers$plots
captions <- diagnose_res$diagnostic_plots$natural_scale_wo_outliers$capt
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
}
```

Q-Q Plot vs. Uniform Distribution (natural scale wo outliers)

Q-Q Plot for Uniform Distribution. Expectation is that the black points lie on or close to the solid red diagonal line.

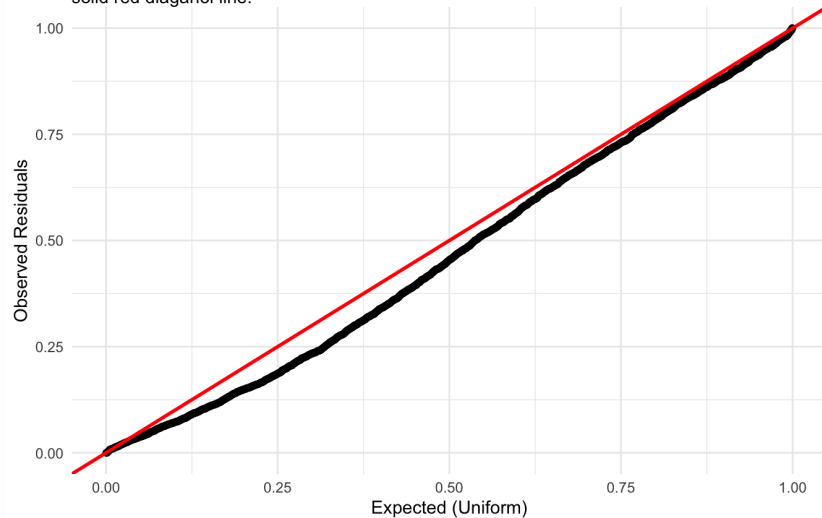


Figure 38: residuals_QQ. Q-Q Plot for Uniform Distribution. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

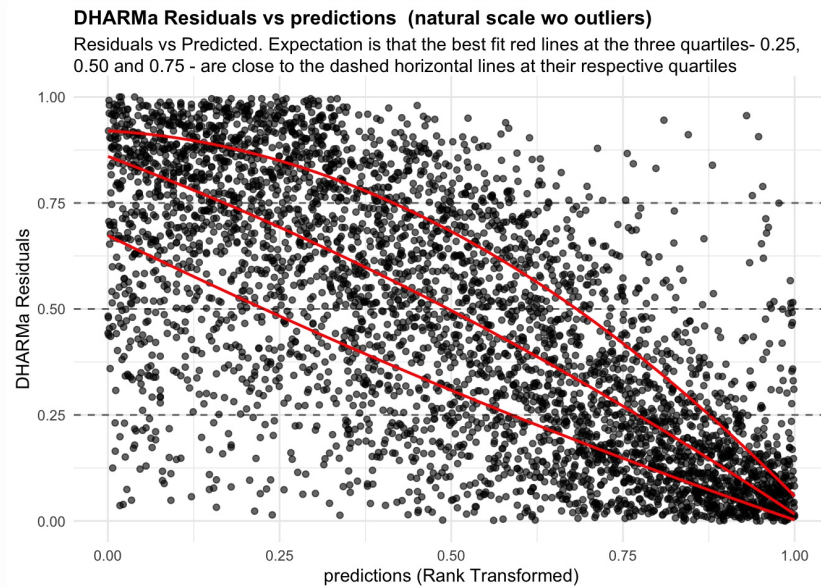


Figure 39: residuals_vs_predicted. Residuals vs Predicted Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

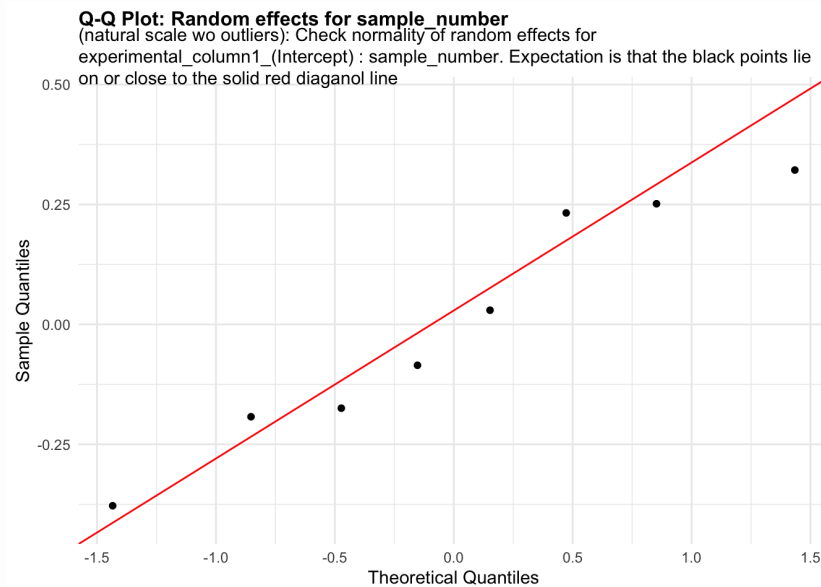


Figure 40: random_effects_QQ_1. Check normality of random effects for experimental_column1_(Intercept) (natural scale wo outliers): sample_number. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

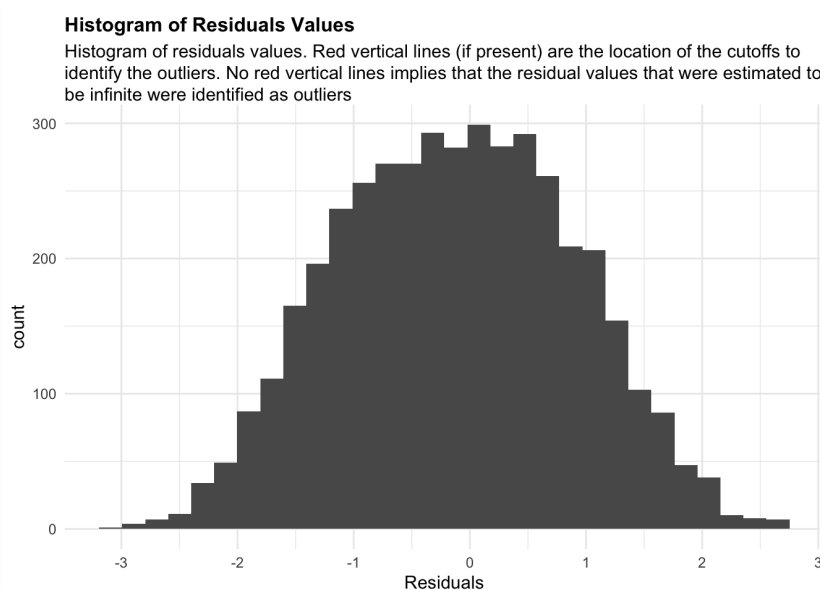


Figure 41: residuals_histogram. Histogram of residuals values. Red vertical lines (if present) are the location of the cutoffs to identify the outliers. No red vertical lines implies that the residual values that were estimated to be infinite were identified as outliers

```
cooks_plots <- diagnose_res$cooks_plots$natural_scale_wo_outliers
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

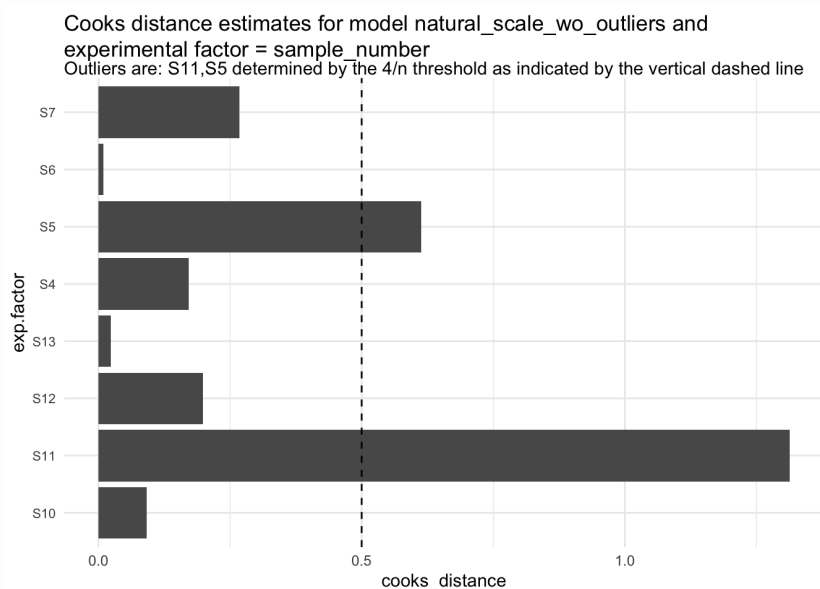


Figure 42:

```
print("Inferred outlier groups are")

[1] "Inferred outlier groups are"

print(diagnose_res$inferred_outlier_groups$natural_scale)

$sample_number [1] "S11" "S5"
```

We don't see a good fit to the assumption of negative binomial distribution based on the residual vs predicted plots suggesting that GLMM models for single cell RNA-seq data, even though they have been proposed as alternatives to dealing with the issue of pseudo-replication, are not good models to assess for differential expression.

Estimate log-fold change of the *Snhg11* gene with genotype.

```
estimate_res <- getEstimatesOfInterest(data, design, model, print_plots = FALSE)
print(estimate_res[[1]])
```

```
## Generalized linear mixed model fit by maximum likelihood (Laplace
## Approximation) [glmerMod]
## Family: Negative Binomial(4.914) ( log )
## Formula:
## response_column ~ condition_column + covariate + (1 |
## experimental_column1) +
## offset(log(total_column))
## Data: fixed_global_variable_data
##
##          AIC          BIC      logLik -2*log(L)  df.resid
## 28790.0    28821.9   -14390.0   28780.0    4297
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -1.8485 -0.7485 -0.1820  0.5882  5.4549
##
## Random effects:
##      Groups                Name         Variance Std.Dev.
## experimental_column1 (Intercept) 0.07378  0.2716
## Number of obs: 4302, groups: experimental_column1, 8
##
## Fixed effects:
##
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)      -5.1736     0.1756 -29.460   <2e-
## 16 ***
## condition_columnPS19-fE4-Syn1-Cre  0.4622     0.2280  2.027
## 0.0426 *
## covariateM              0.1356     0.2335  0.581
## 0.5616
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##      (Intr) c_PS19
## c_PS19-E4-S -0.450
## covariateM -0.588 -0.076
```

Association of interest

Box plot of the median residuals across all observations within each level of experimental column = sample_number as a function of genotype and separated by levels of sex

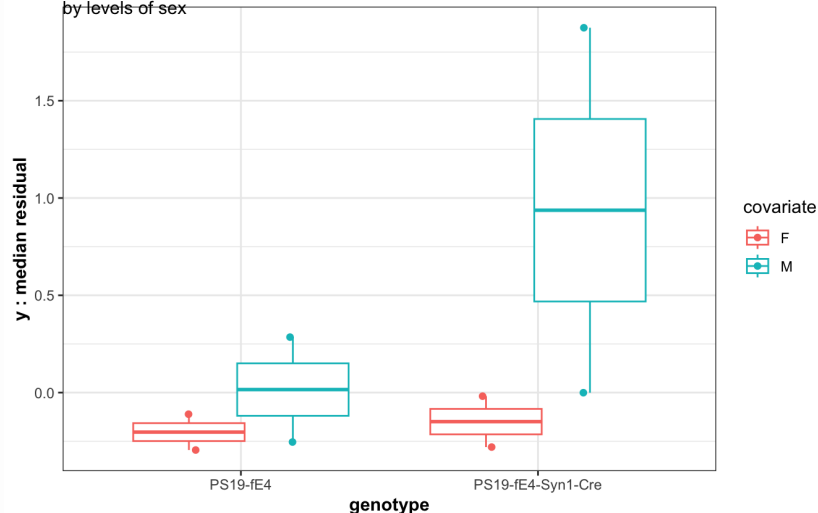


Figure 43: We can also perform a power analyses to detect a log(2) fold-change in this gene.

```
power_param@effect_size <- log(2)
power_res <- calculatePower(data, design, model, power_param)
```

```
##
## [1] "_____Effect size of the
condition_column is now 0.693147180559945"
```

```
[[1]]
```

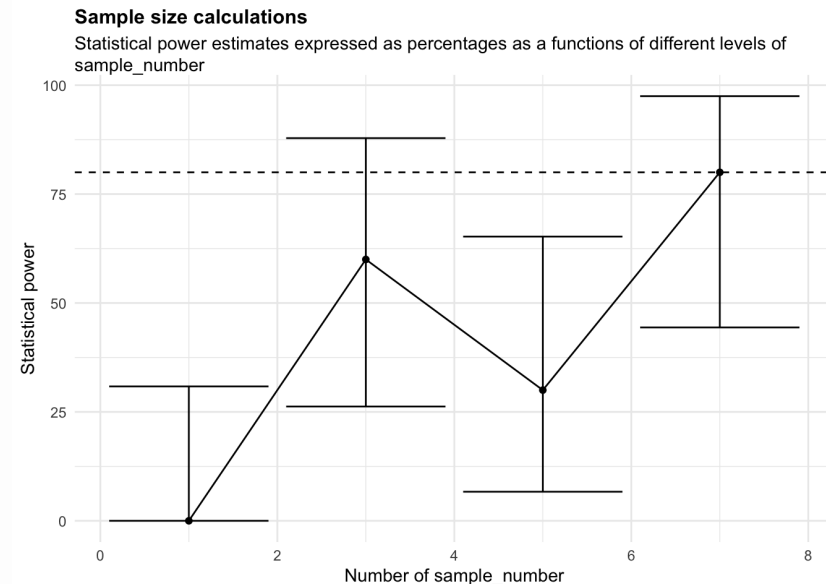


Figure 44:

2.3 Behavior assays

Morris Water Maze (MWM) is an assay used to test spatial learning in animal models of diseases like Alzheimer's disease. The time recorded by each mouse to reach a target region (in the MWM) over multiple trials denoted as latency is the response of interest. Mouse models deficient in spatial learning would demonstrate an increased latency to reach a target region (invisible platform in Figure @ref(fig:MWM)) across the learning trials.

```
template_dir <- "~/Dropbox (Gladstone)/calcPower f1000_manuscript/Final_
data <- read.csv(paste0(template_dir, "MWM_data.csv"), header = T)
# data %>% mutate(trial = sapply(Trial, function(x) gsub("LATENCY_", ""
# data %>% write.csv(paste0(template_dir, "MWM_data.csv"), row.names = F
design <- readDesign(paste0(template_dir, "design_behavior.json"))
design@covariate <- "trial"
design@covariate_is_categorical <- FALSE
design@include_interaction <- FALSE
model <- readProbabilityModel(paste0(template_dir, "prob_model.json"))
power_param <- readPowerParams(paste0(template_dir, "power_param.json"))
```

```
diagnose_res <- diagnoseDataModel(data, design, model)
```

```
## [1] "No outlier detected from the raw Data"
## [1] "No outlier detected from the raw Data"
```

To identify all the models fit to the data

```
print(diagnose_res$models)
```

```
## [1] "Natural scale"          "Log scale"              "Log scale wo
outliers"
```

We see that three models were fit to this data - one in the natural scale of cell size, other in the logarithmic scale and the last one in log scale without outliers.

Let us look the basic QC plots for the models fit in the natural scale of the responses.

```
plots <- diagnose_res$diagnostic_plots$natural_scale$plots
captions <- diagnose_res$diagnostic_plots$natural_scale$captions

for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
  }
}
```

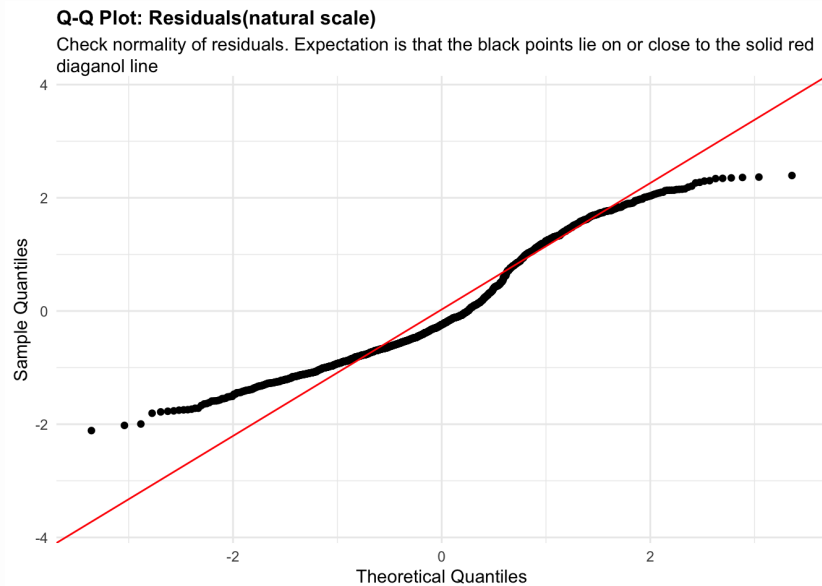


Figure 45: residuals_QQ. Check normality of residuals (natural scale). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

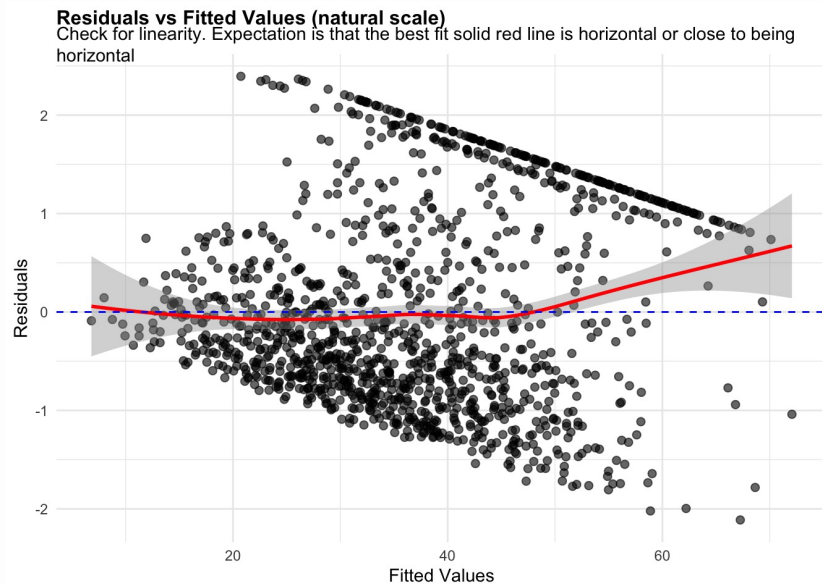


Figure 46: residuals_vs_fitted. Check for linearity (natural scale). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Scale-Location Plot (natural scale)

Check for homoscedasticity. Expectation is that the best fit solid red line is horizontal or close to being so

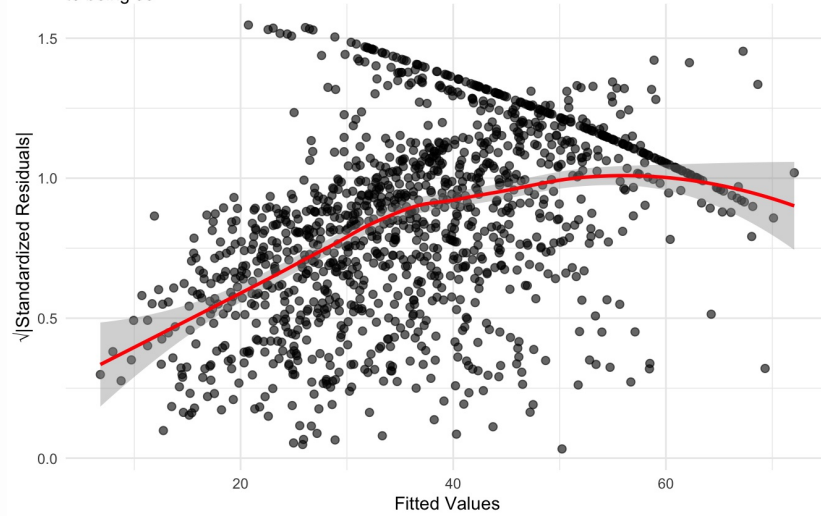


Figure 47: residuals_homoscedasticity. Check for homoscedasticity (natural scale). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Q-Q Plot: Random effects for MouseID

(natural scale): Check normality of random effects for experimental_column2_(Intercept) : MouseID. Expectation is that the black points lie on or close to the solid red diagonal line

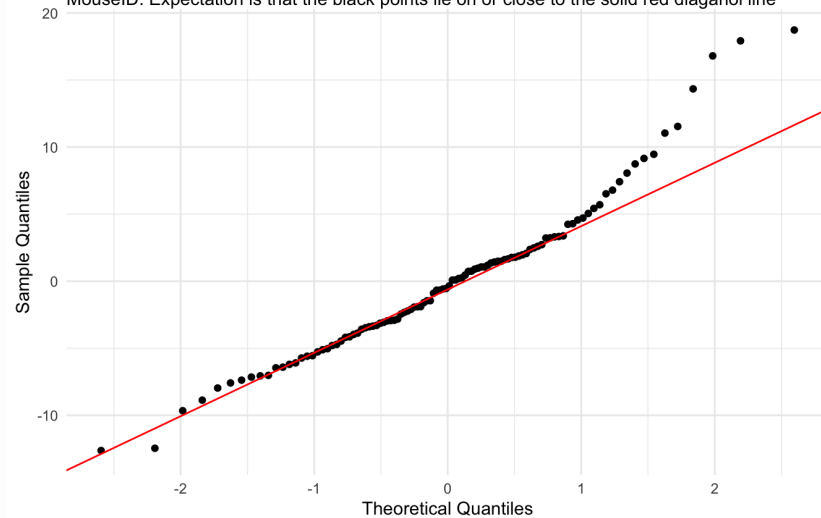


Figure 48: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (natural scale): MouseID. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

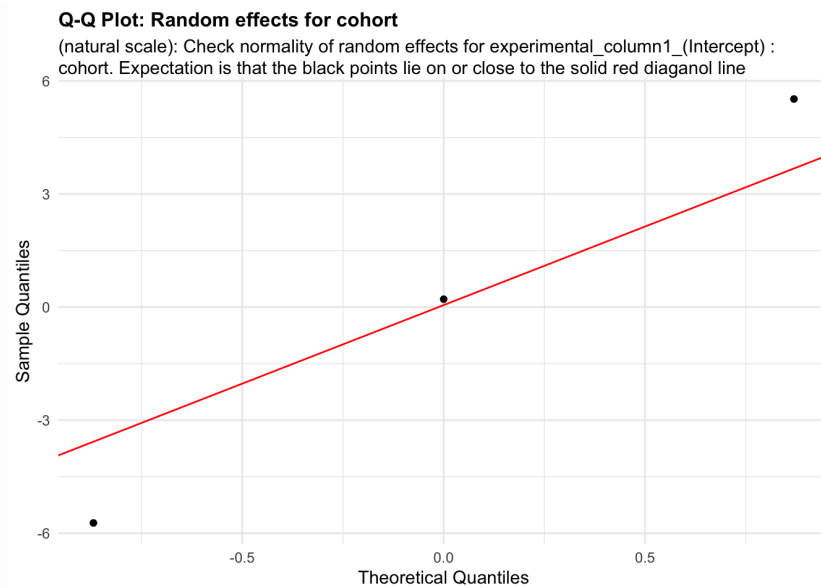


Figure 49: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (natural scale): cohort. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cooks_plots <- diagnose_res$cooks_plots$natural_scale
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

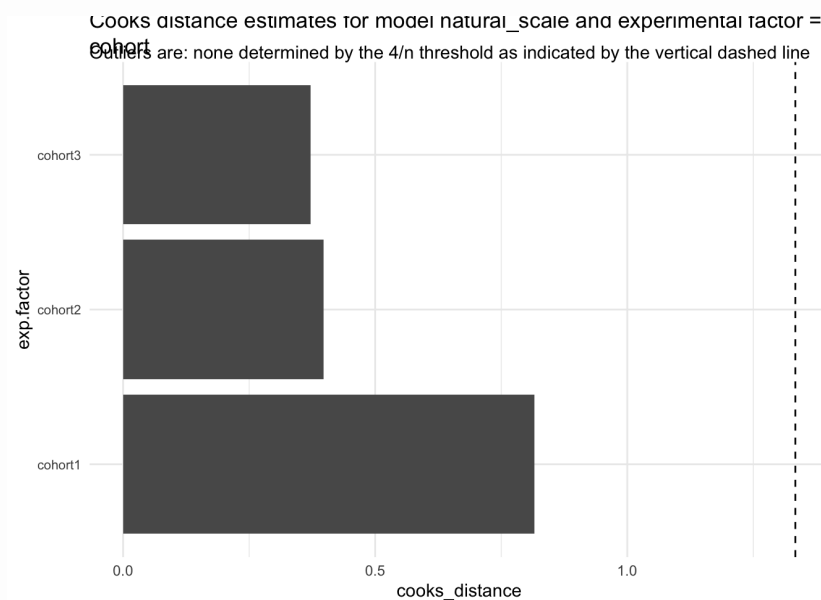


Figure 50:

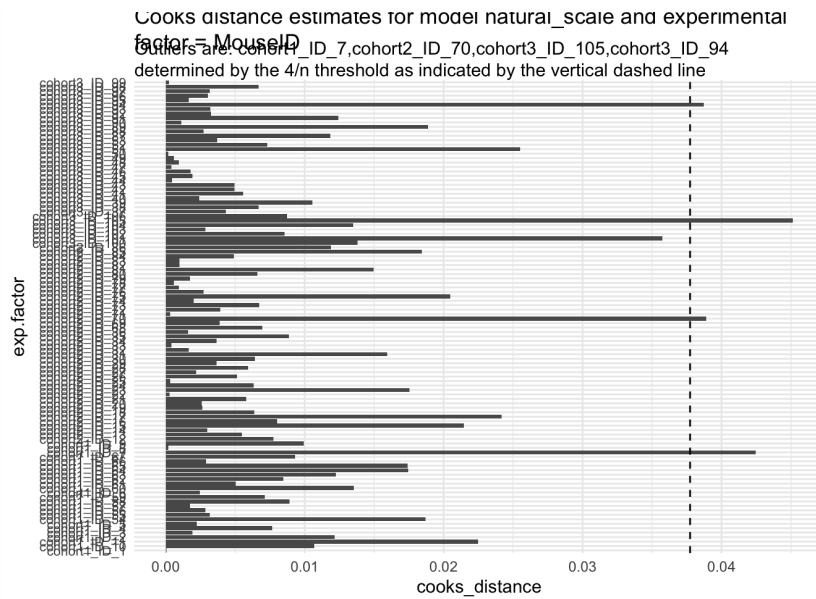


Figure 51:

```
print("Inferred outlier groups are")

[1] "Inferred outlier groups are"

print(diagnose_res$inferred_outlier_groups$natural_scale)

$cohort [1] "none"

$MouseID [1] "cohort1_ID_7" "cohort2_ID_70" "cohort3_ID_105" "cohort3_ID_94"

Now, let us look at the same set of QC plots for models on the log-transformed responses.

plots <- diagnose_res$diagnostic_plots$log_scale$plots
captions <- diagnose_res$diagnostic_plots$log_scale$captions

for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
}
```

Q-Q Plot: Residuals(log scale)

Check normality of residuals. Expectation is that the black points lie on or close to the solid red diagonal line

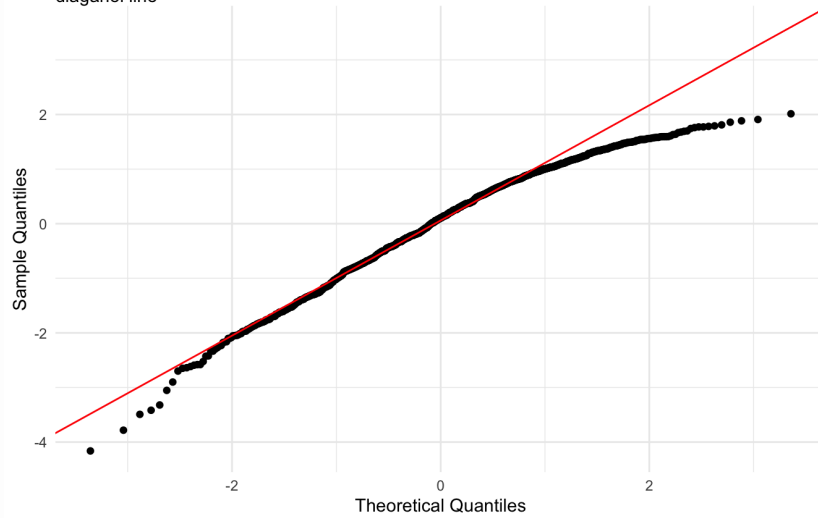


Figure 52: residuals_QQ. Check normality of residuals (log scale). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Residuals vs Fitted Values (log scale)

Check for linearity. Expectation is that the best fit solid red line is horizontal or close to being horizontal

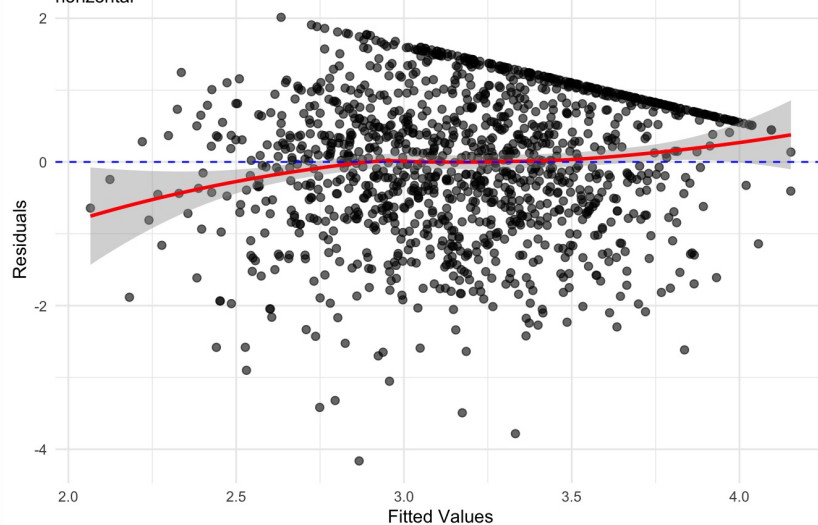


Figure 53: residuals_vs_fitted. Check for linearity (log scale). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Scale-Location Plot (log scale)

Check for homoscedasticity. Expectation is that the best fit solid red line is horizontal or close to being so

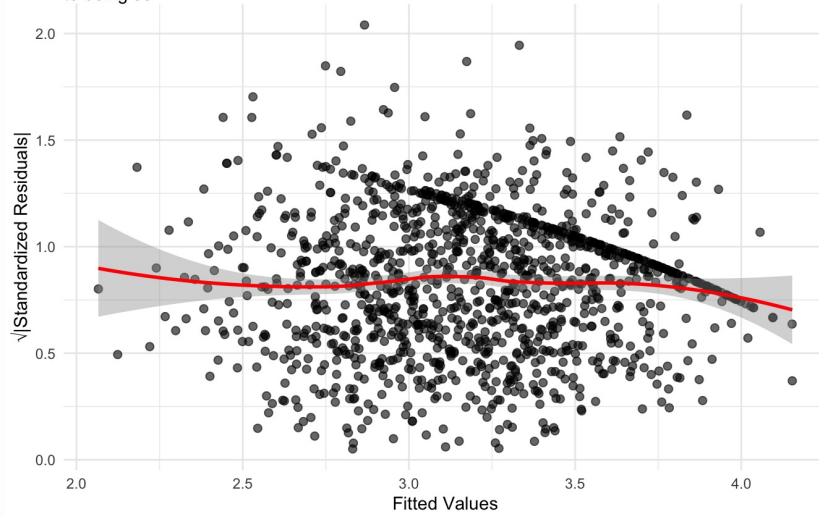


Figure 54: residuals_homoscedasticity. Check for homoscedasticity (log scale). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Q-Q Plot: Random effects for MouseID

(log scale): Check normality of random effects for experimental_column2_(Intercept) : MouseID. Expectation is that the black points lie on or close to the solid red diagonal line

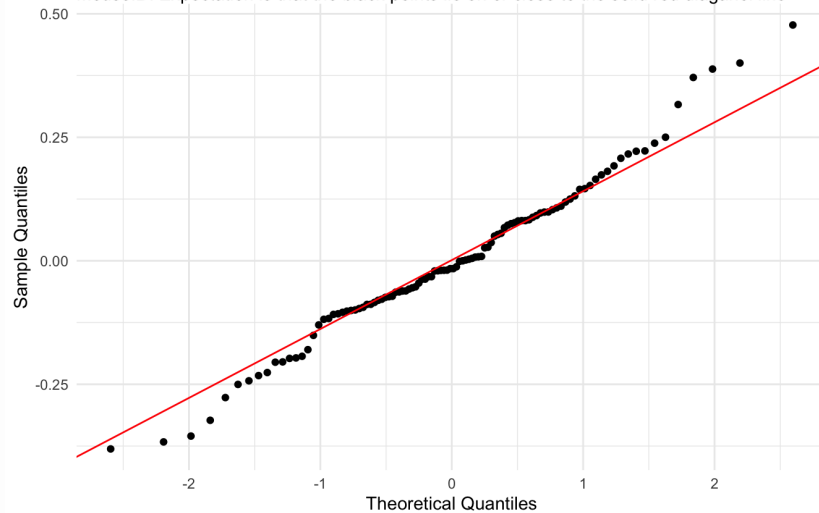


Figure 55: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (log scale): MouseID. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

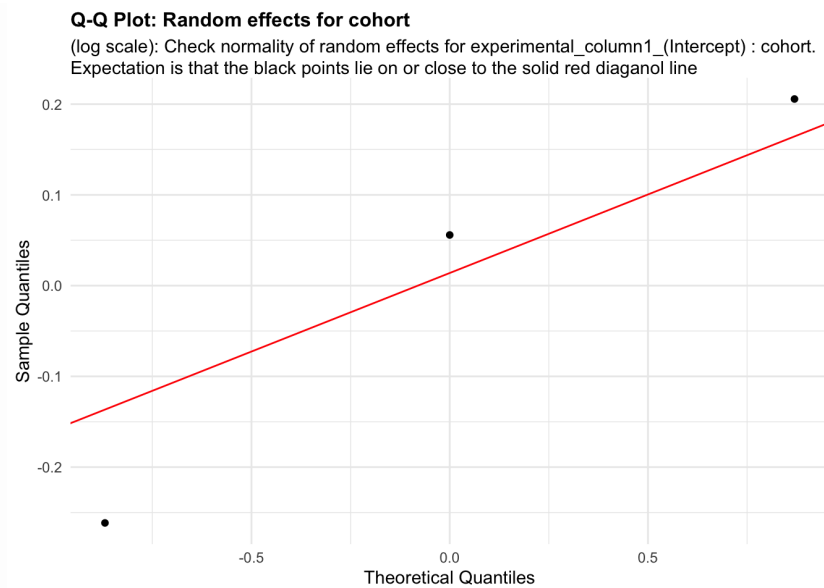


Figure 56: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (log scale): cohort. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

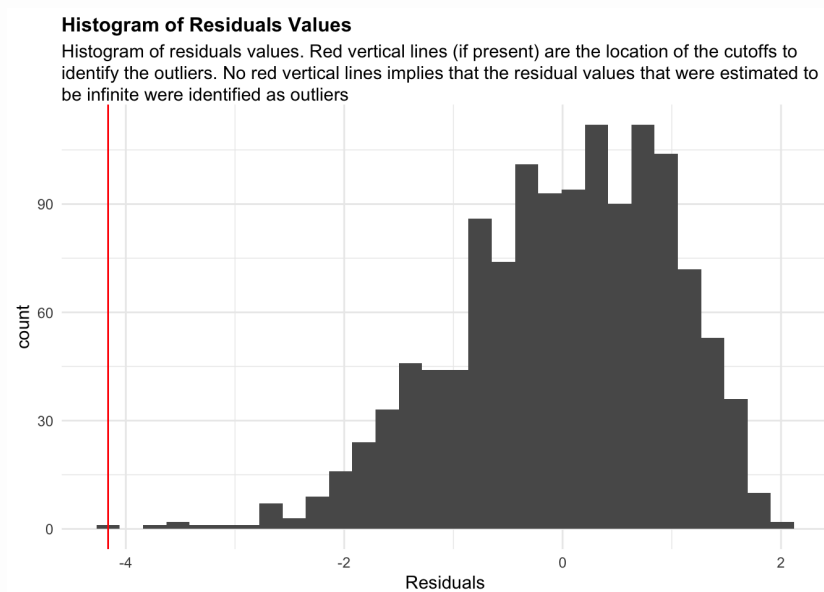


Figure 57: residuals_histogram. Histogram of residuals values. Red vertical lines (if present) are the location of the cutoffs to identify the outliers. No red vertical lines implies that the residual values that were estimated to be infinite were identified as outliers

```
cooks_plots <- diagnose_res$cooks_plots$log_scale
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

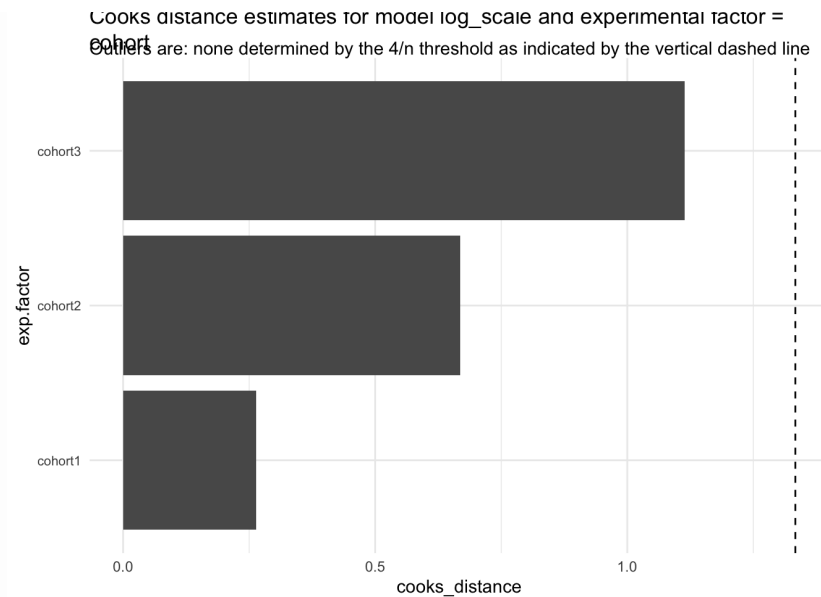


Figure 58:

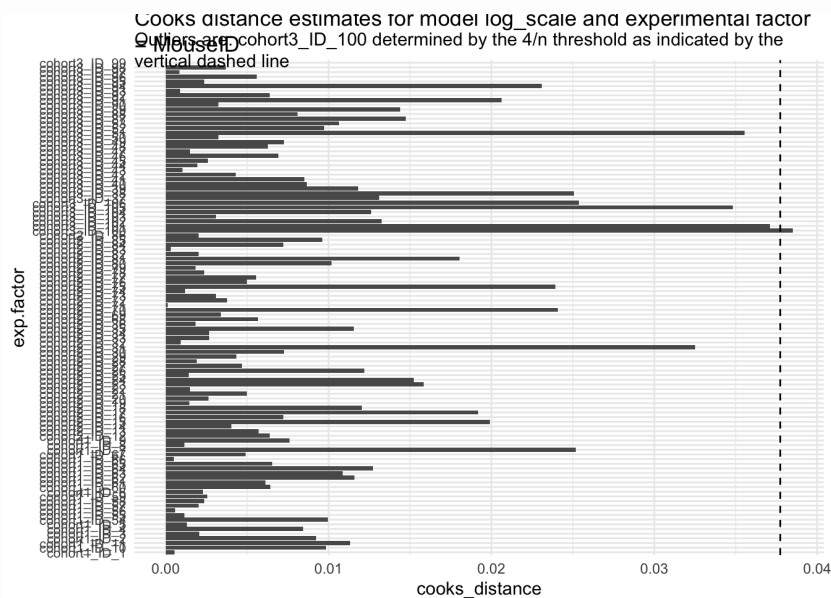


Figure 59:

```
print("Inferred outlier groups are")

[1] "Inferred outlier groups are"
```

```
print(diagnose_res$inferred_outlier_groups$natural_scale)
```

```
$cohort [1] "none"
```

\$MouseID [1] "cohort1_ID_7" "cohort2_ID_70" "cohort3_ID_105" "cohort3_ID_94" Now, let us look at the same set of QC plots for models on the log-transformed responses without the identified outliers in the log-transformed model

```
plots <- diagnose_res$diagnostic_plots$log_scale_wo_outliers$plots
captions <- diagnose_res$diagnostic_plots$log_scale_wo_outliers$captions

for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
  }
}
```

Q-Q Plot: Residuals(log scale wo outlier)

Check normality of residuals. Expectation is that the black points lie on or close to the solid red diagonal line

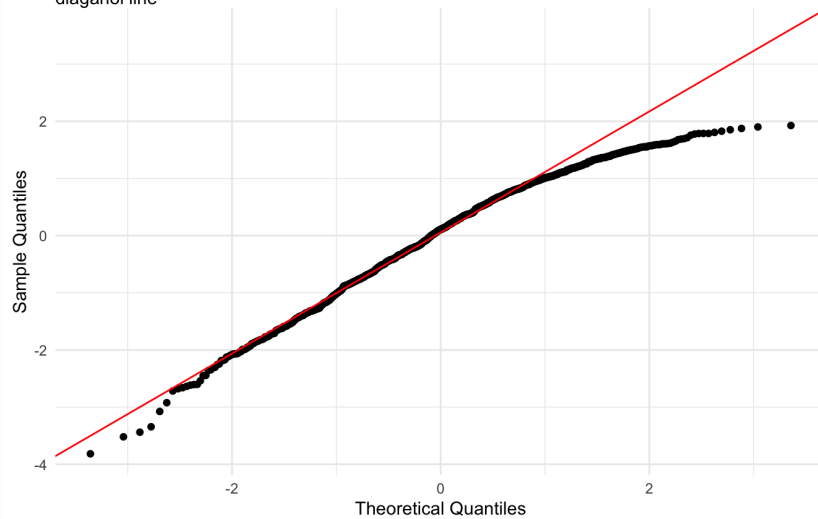


Figure 60: residuals_QQ. Check normality of residuals (log scale wo outlier). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Residuals vs Fitted Values (log scale wo outlier)

Check for linearity. Expectation is that the best fit solid red line is horizontal or close to being horizontal

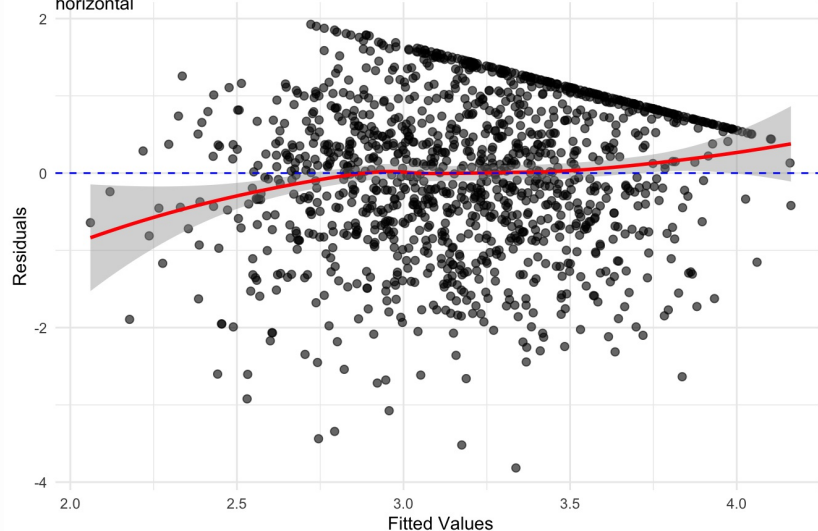


Figure 61: residuals_vs_fitted. Check for linearity (log scale wo outlier). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Scale-Location Plot (log scale wo outlier)

Check for homoscedasticity. Expectation is that the best fit solid red line is horizontal or close to being so

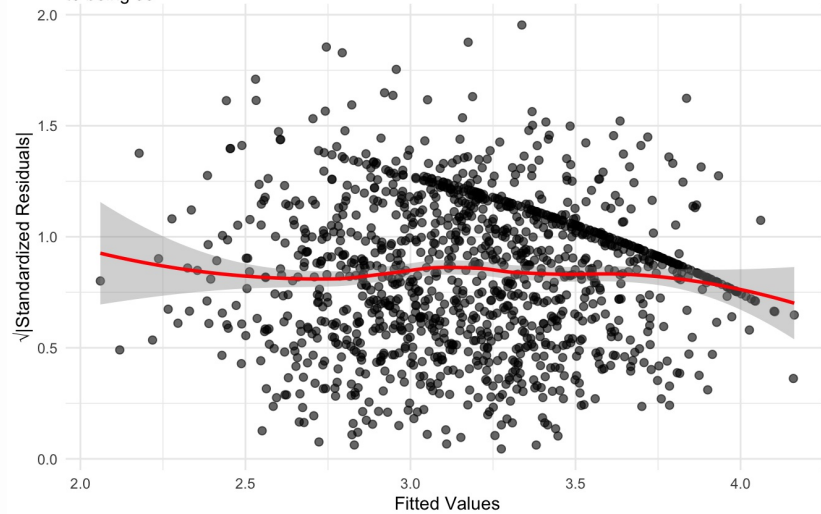


Figure 62: residuals_homoscedasticity. Check for homoscedasticity (log scale wo outlier). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Q-Q Plot: Random effects for MouseID

(log scale wo outlier): Check normality of random effects for experimental_column2_(Intercept) : MouseID. Expectation is that the black points lie on or close to the solid red diagonal line

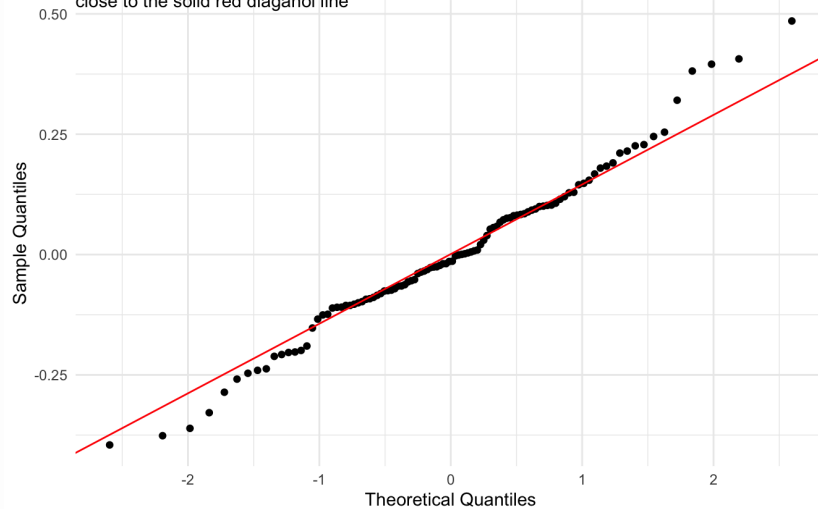


Figure 63: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (log scale wo outlier): MouseID. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

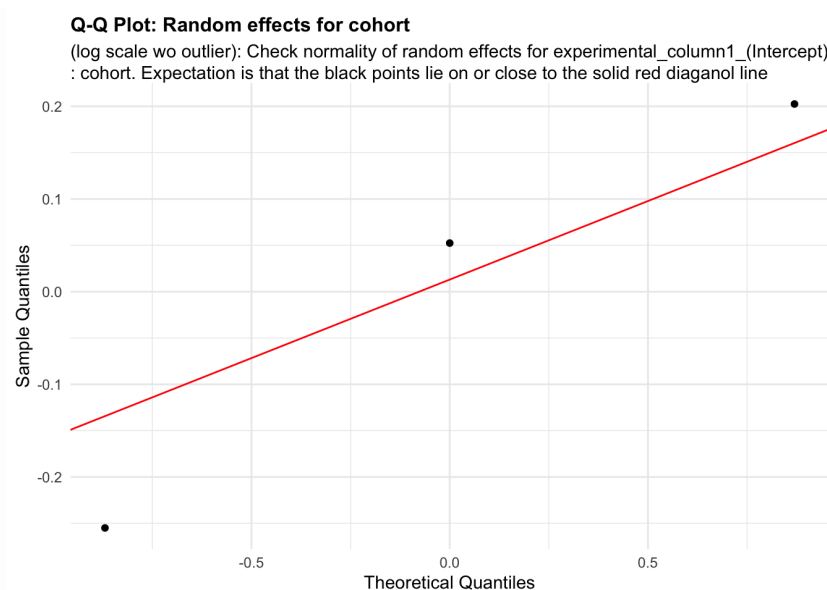


Figure 64: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (log scale wo outlier): cohort. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cooks_plots <- diagnose_res$cooks_plots$log_scale_wo_outliers
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

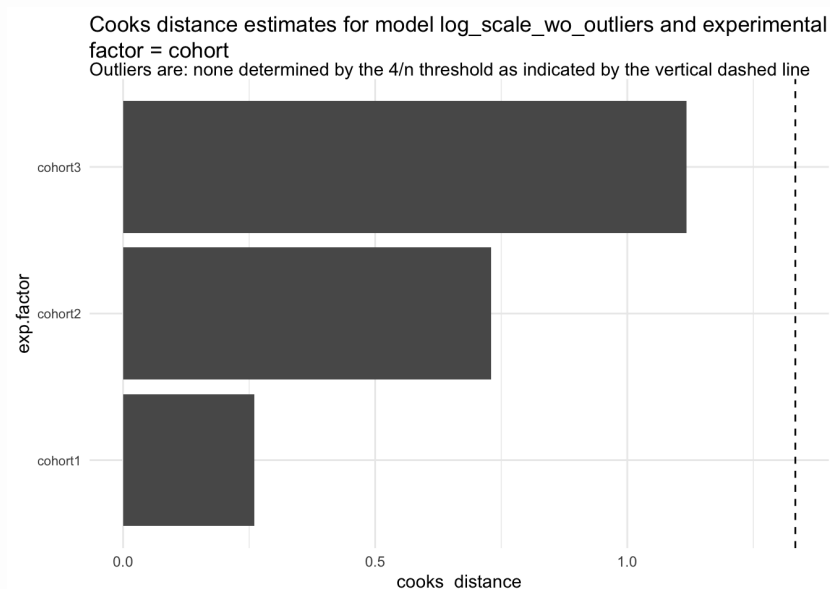


Figure 65:

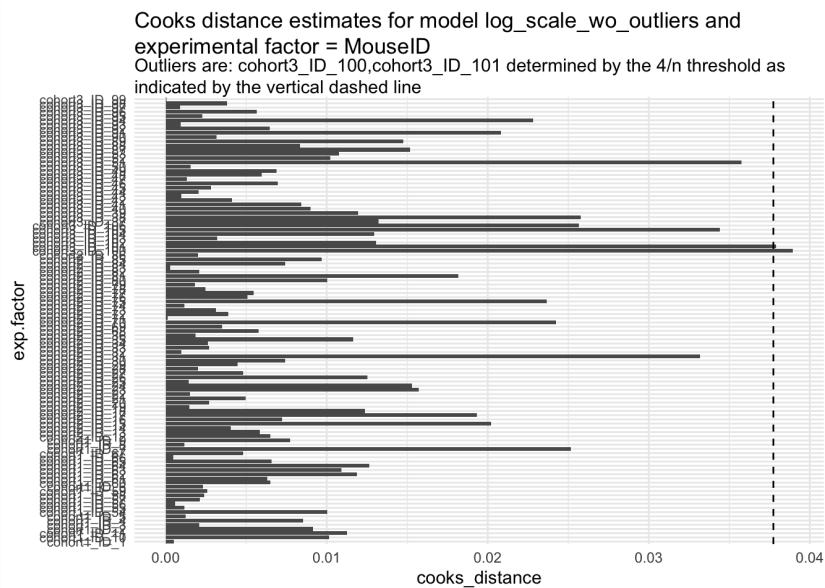


Figure 66:

```
print("Inferred outlier groups are")

[1] "Inferred outlier groups are"

print(diagnose_res$inferred_outlier_groups$natural_scale)

$cohort [1] "none"

$MouseID [1] "cohort1_ID_7" "cohort2_ID_70" "cohort3_ID_105" "cohort3_ID_94"
```

We see normality assumption is better met with the log-transformed model (Figure 6) compared to the model in the natural scale (Figure 1).

The code also outputs Cook's distance measures for each cohort and mouse that is intended to capture how influential each of these were in determining the final parameter estimates in the LMM model.

There aren't any obvious outliers in any of these models for cohort or mice.

Based on the above plots, it seems like the log transformed versions of the latency responses better fit the model assumptions. Therefore using these transformed responses we will estimate and visualize our parameter of interest.

```
data_update <- diagnose_res$Data_updated
design_update <- design
design_update@response_column %<-% paste0(., "_logTransformed_noOutlier")
estimate_res <- getEstimatesOfInterest(data_update, design_update, model)
print(estimate_res[[1]])
```

```
## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula:
## response_column ~ condition_column + covariate + (1 |
experimental_column1) +
## (1 | experimental_column2)
## Data: fixed_global_variable_data
##
## REML criterion at convergence: 3430.9
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -3.8168 -0.6592  0.1087  0.7697  1.9260
##
## Random effects:
## Groups              Name                Variance Std.Dev.
## experimental_column2 (Intercept)  0.06004   0.2450
## experimental_column1 (Intercept)  0.05800   0.2408
## Residual                    0.81359   0.9020
## Number of obs: 1271, groups:
## experimental_column2, 106; experimental_column1, 3
##
## Fixed effects:
##              Estimate Std. Error      df t value Pr(>|t|)
## (Intercept)    3.416e+00  1.554e-01  2.722e+00  21.983 0.000381
***
## condition_column1  3.716e-01  6.992e-02  1.022e+02   5.315 6.29e-07
***
## covariate        -5.878e-02  7.328e-03  1.164e+03  -8.022 2.52e-15
***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr) cndtn_1
## cndtn_clmn1 -0.230
## covariate   -0.307  0.000
```

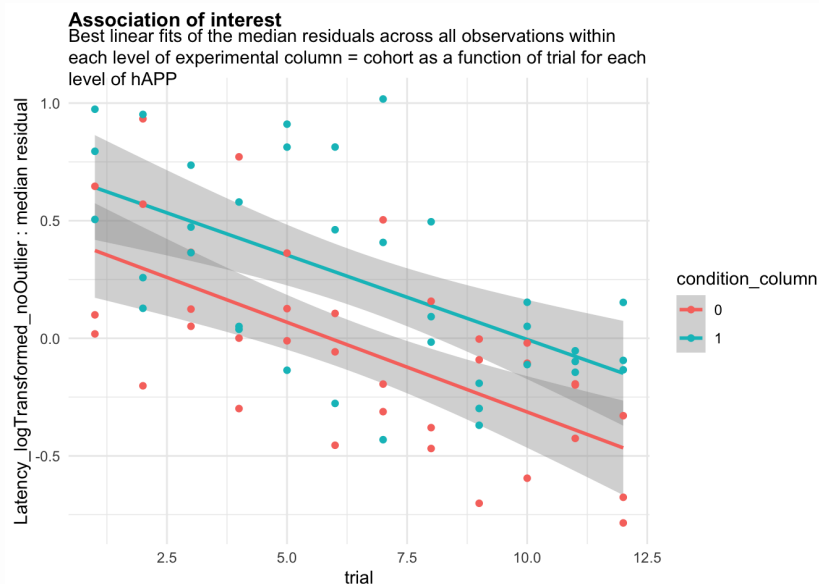


Figure 67: We will also perform sample-size calculations for the number of mice needed per cohort.

```
power_param@target_columns <- "MouseID"
power_res <- calculatePower(data_update, design_update, model, power_par
```

```
[[1]]
```

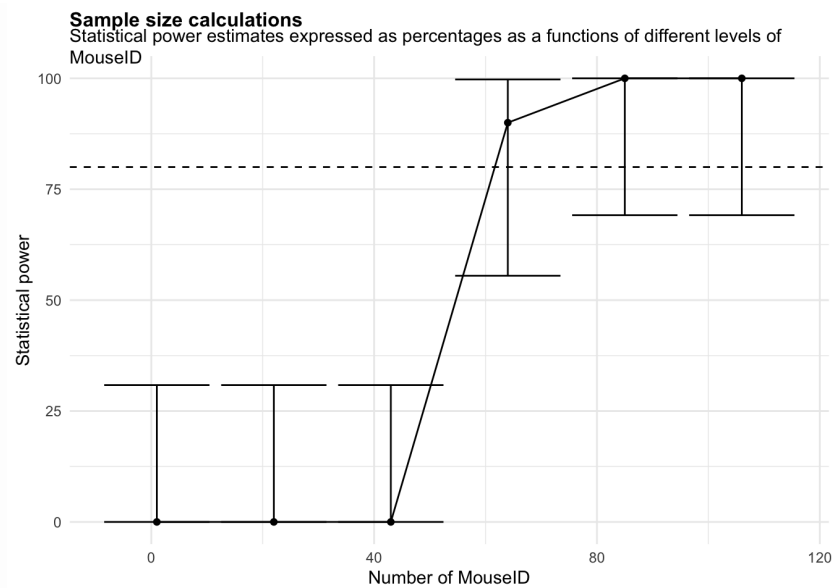


Figure 68:

2.4 Brain electrical signal assays

Patch clamp is a technique that can be used to measure membrane action potential in excitable cells like neurons. We will work with (simulated) data from two sets of mice - one representing a Alzheimer's Disease model (hAPP) and the other representing control or wild-type mice. In each of these mice, multiple brain tissue slices are isolated and the membrane action potential for at least one neuronal cell in each slice is recorded.

```
template_dir <- "~/Dropbox (Gladstone)/calcPower f1000_manuscript/Final_
data <- read.csv(paste0(template_dir, "patch_clamp_data.csv"), header =
head(data)
```

```
## negative_action_potential_mV Mice Genotype Sex slice_number
## 1 56.23547 Mouse_1 hAPP Male 1
## 2 47.89597 Mouse_3 hAPP Male 1
## 3 56.20910 Mouse_3 hAPP Male 2
## 4 53.14394 Mouse_9 hAPP Female 1
## 5 53.67793 Mouse_9 hAPP Female 1
## 6 61.21780 Mouse_9 hAPP Female 1
```

```
design <- readDesign(paste0(template_dir, "design_patch_clamp.json"))
print(design)
```

```

## An object of class "RMeDesign"
## Slot "response_column":
## [1] "negative_action_potential_mV"
##
## Slot "covariate":
## NULL
##
## Slot "condition_column":
## [1] "Genotype"
##
## Slot "condition_is_categorical":
## [1] TRUE
##
## Slot "experimental_columns":
## [1] "Mice"          "slice_number"
##
## Slot "crossed_columns":
## NULL
##
## Slot "total_column":
## NULL
##
## Slot "outlier_alpha":
## [1] 0.05
##
## Slot "na_action":
## [1] "complete"
##
## Slot "include_interaction":
## [1] NA
##
## Slot "random_slope_variable":
## NULL
##
## Slot "covariate_is_categorical":
## [1] NA

model <- readProbabilityModel(paste0(template_dir,"prob_model.json"))
print(model)

## An object of class "ProbabilityModel"
## Slot "error_is_non_normal":
## [1] FALSE
##
## Slot "family_p":
## NULL

power_param <- readPowerParams(paste0(template_dir,"power_param.json"))
print(power_param)

```

```
## An object of class "PowerParams"
## Slot "target_columns":
## [1] "Mice"
##
## Slot "power_curve":
## [1] 1
##
## Slot "nsimn":
## [1] 10
##
## Slot "levels":
## [1] 1
##
## Slot "max_size":
## [1] 1
##
## Slot "alpha":
## [1] 0.05
##
## Slot "breaks":
## NULL
##
## Slot "effect_size":
## NULL
##
## Slot "icc":
## NULL
```

We will now evaluate the model.

```
diagnose_res <-diagnoseDataModel(data, design, model)
```

```
## [1] "No outlier detected from the raw Data"
```

```
## [1] "No outlier detected from the raw Data"
```

To identify all the models fit to the data

```
print(diagnose_res$models)
```

```
## [1] "Natural scale"          "Natural scale wo outliers"
## [3] "Log scale"
```

We see that three models were fit to this data - one in the natural scale of negative_action_potential_mV, other in the natural scale without outliers and the last one in log scale.

Let us look the basic QC plots for the models fit in the natural scale of the responses.

```
plots <- diagnose_res$diagnostic_plots$natural_scale$plots
captions <- diagnose_res$diagnostic_plots$natural_scale$captions
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no,names(plots)[
    plot_no <- plot_no + 1
}
```

Q-Q Plot: Residuals(natural scale)

Check normality of residuals. Expectation is that the black points lie on or close to the solid red diagonal line

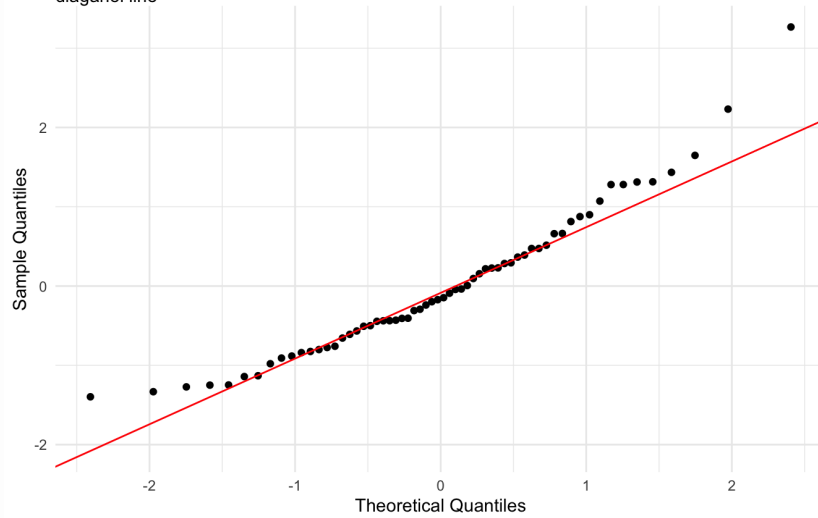


Figure 69: residuals_QQ. Check normality of residuals (natural scale). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Residuals vs Fitted Values (natural scale)

Check for linearity. Expectation is that the best fit solid red line is horizontal or close to being horizontal

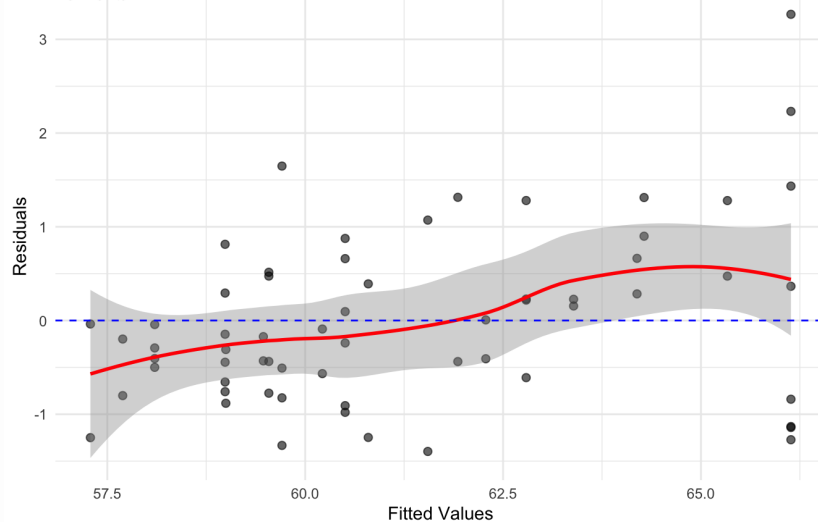


Figure 70: residuals_vs_fitted. Check for linearity (natural scale). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Scale-Location Plot (natural scale)

Check for homoscedasticity. Expectation is that the best fit solid red line is horizontal or close to being so

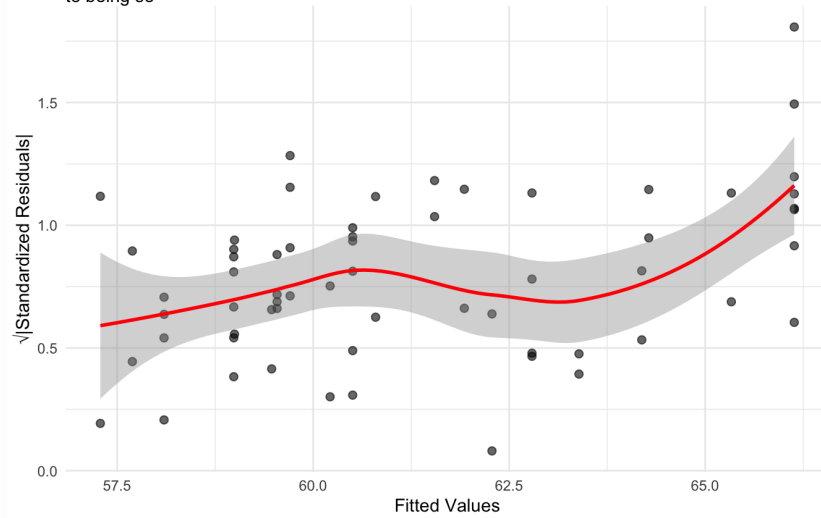


Figure 71: residuals_homoscedasticity. Check for homoscedasticity (natural scale). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Q-Q Plot: Random effects for slice_number

(natural scale): Check normality of random effects for experimental_column2_(Intercept) : slice_number. Expectation is that the black points lie on or close to the solid red diagonal line

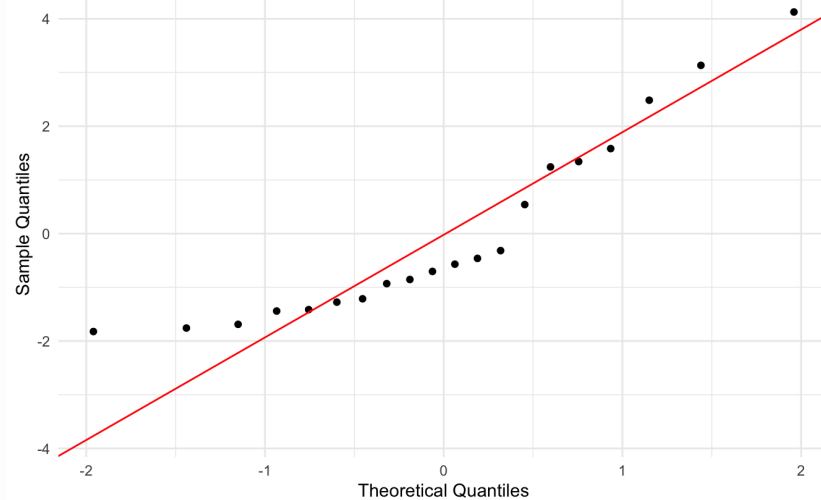


Figure 72: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (natural scale): slice_number. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

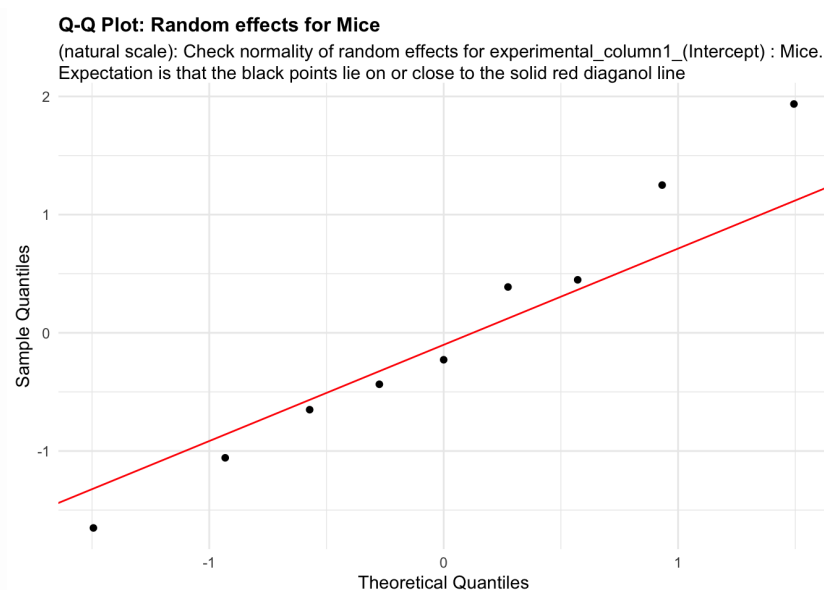


Figure 73: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (natural scale): Mice. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

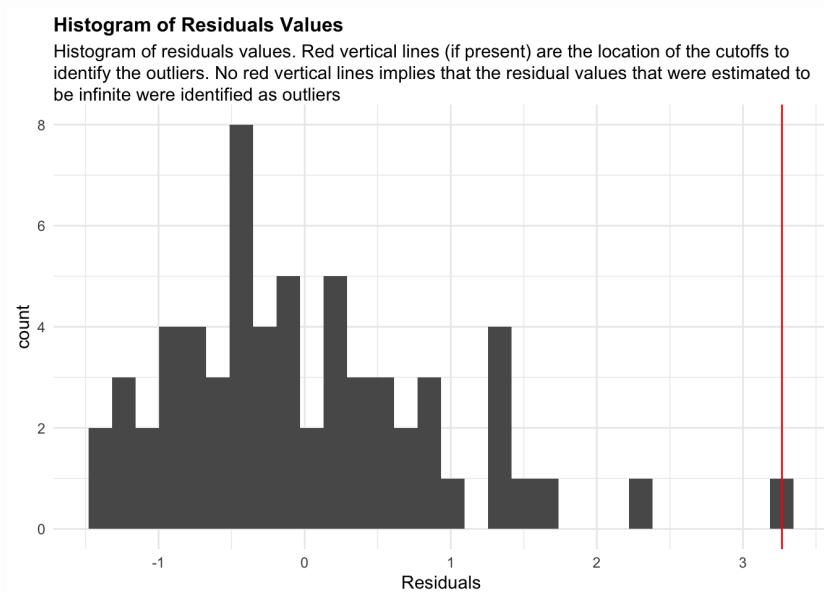


Figure 74: residuals_histogram. Histogram of residuals values. Red vertical lines (if present) are the location of the cutoffs to identify the outliers. No red vertical lines implies that the residual values that were estimated to be infinite were identified as outliers

```
cooks_plots <- diagnose_res$cooks_plots$natural_scale
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

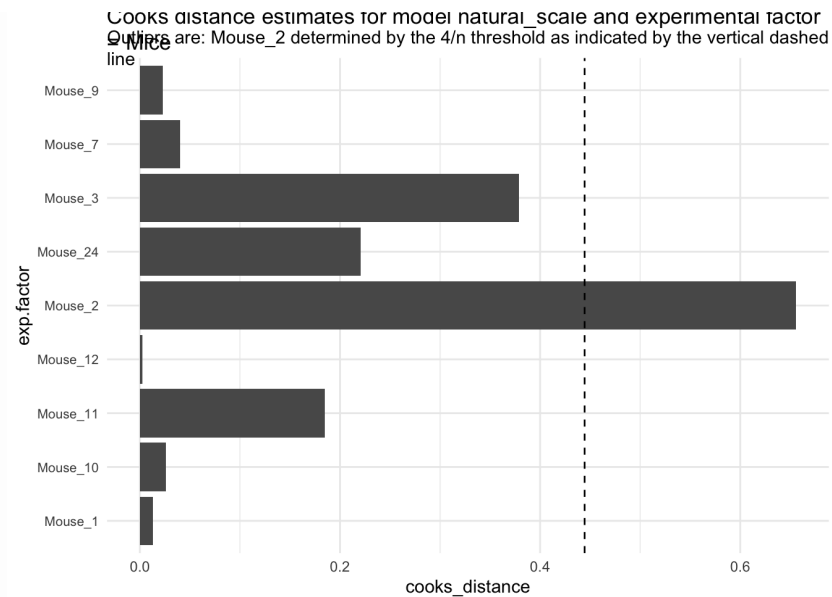


Figure 75:

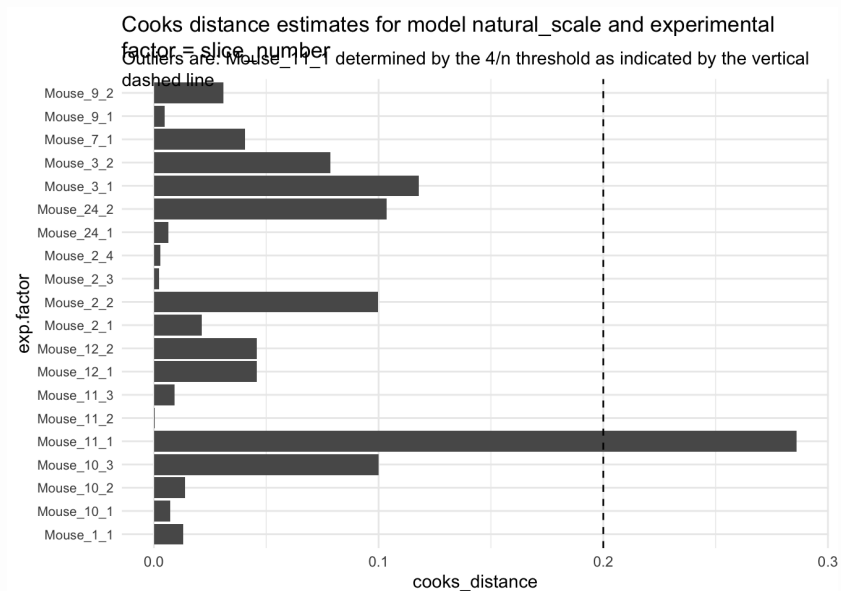


Figure 76:

```
print("Inferred outlier groups are")

[1] "Inferred outlier groups are"

print(diagnose_res$inferred_outlier_groups$natural_scale)

$Mice [1] "Mouse_2"

$slice_number [1] "Mouse_11_1"
```

Let us look the basic QC plots for the models fit in the natural scale of the responses without the outliers.

```
plots <- diagnose_res$diagnostic_plots$natural_scale_wo_outliers$plots
captions <- diagnose_res$diagnostic_plots$natural_scale_wo_outliers$capt
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
  }
}
```

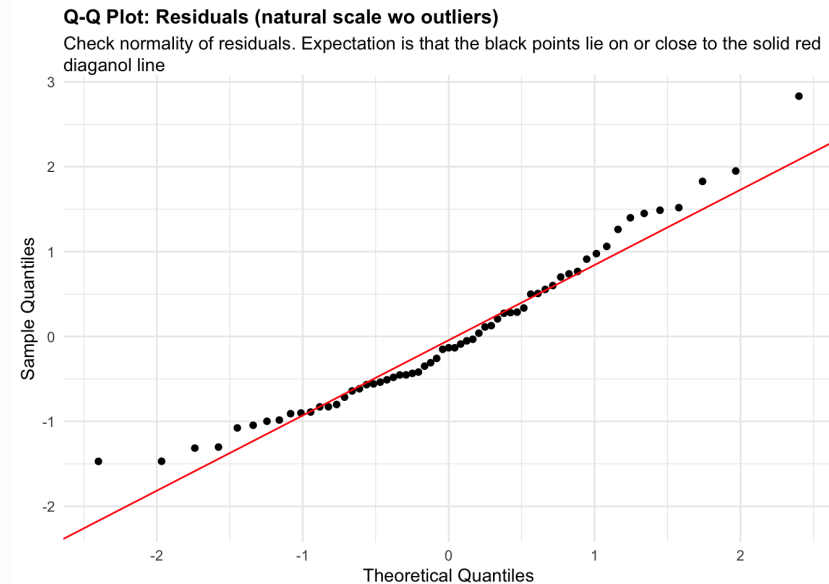


Figure 77: residuals_QQ. Check normality of residuals (natural scale wo outliers). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here:
<https://library.virginia.edu/data/articles/diagnostic-plots>

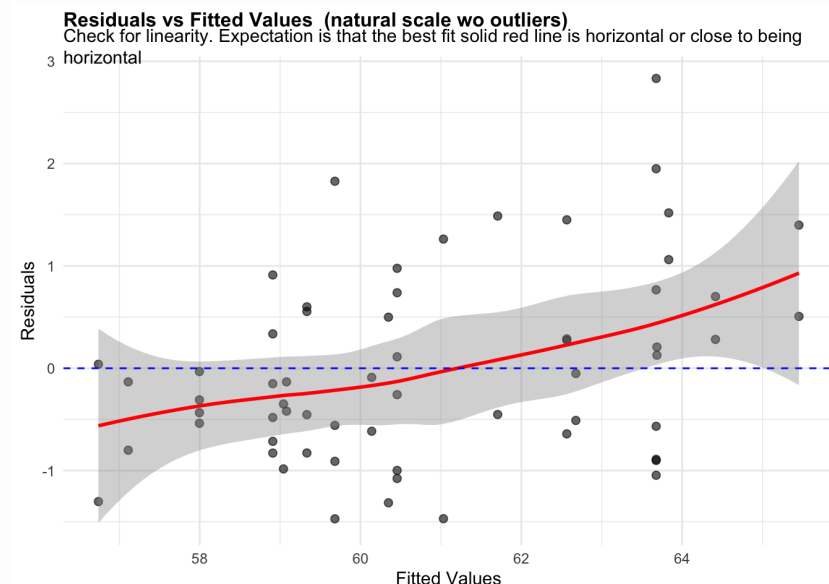


Figure 78: residuals_vs_fitted. Check for linearity (natural scale wo outliers). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here:
<https://library.virginia.edu/data/articles/diagnostic-plots>

Scale-Location Plot (natural scale wo outliers)

Check for homoscedasticity. Expectation is that the best fit solid red line is horizontal or close to being so

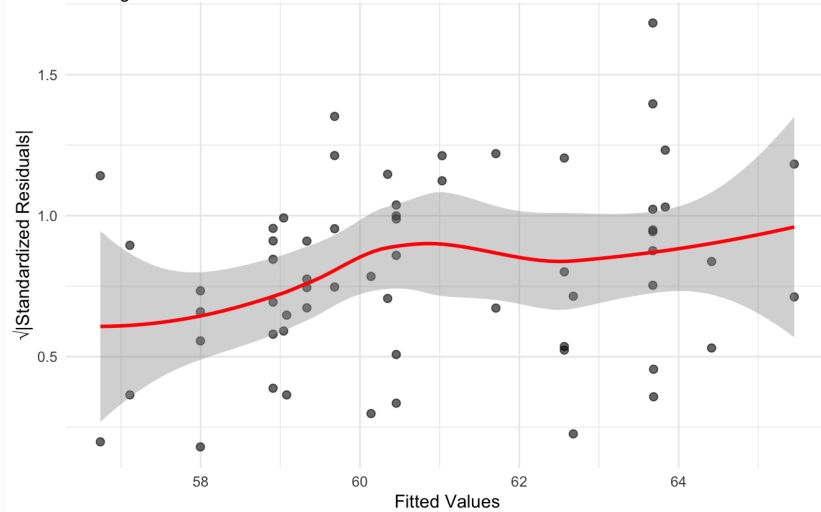


Figure 79: residuals_homoscedasticity. Check for homoscedasticity (natural scale wo outliers). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

Q-Q Plot: Random effects for slice_number

(natural scale wo outliers): Check normality of random effects for experimental_column2_(Intercept) : slice_number. Expectation is that the black points lie on or close to the solid red diagonal line

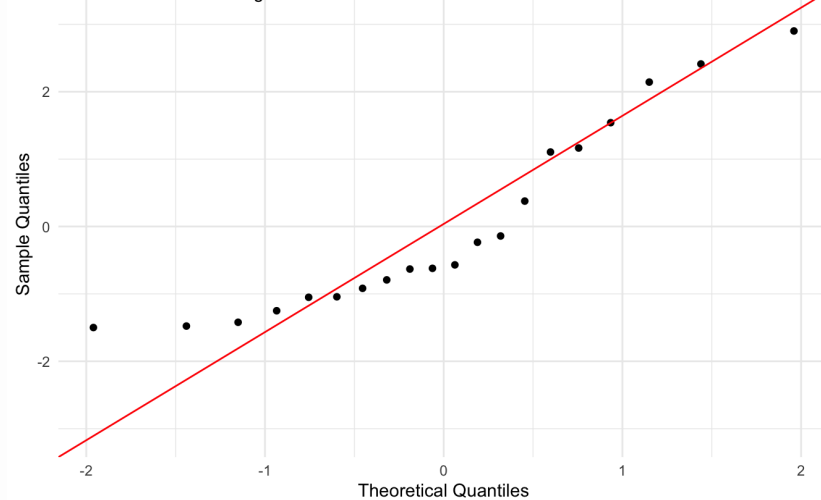


Figure 80: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (natural scale wo outliers): slice_number. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

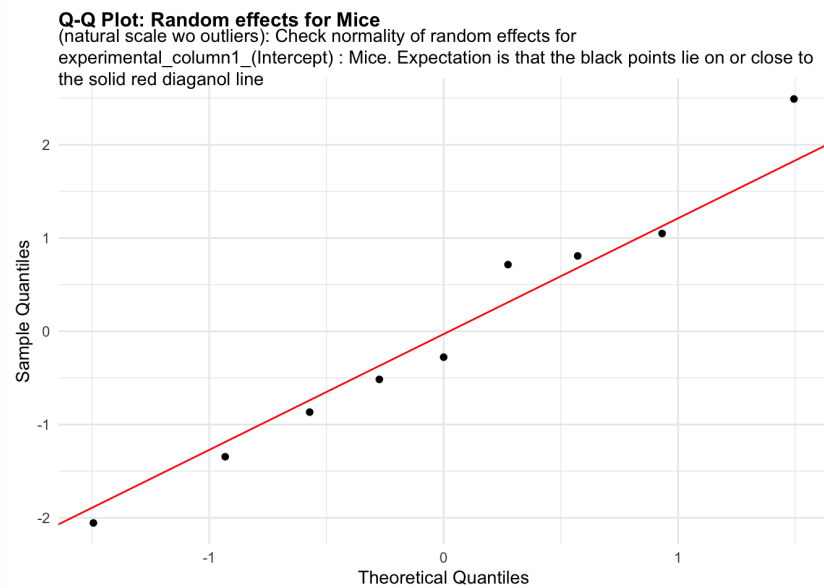


Figure 81: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (natural scale wo outliers): Mice. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cooks_plots <- diagnose_res$cooks_plots$natural_scale_wo_outliers
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

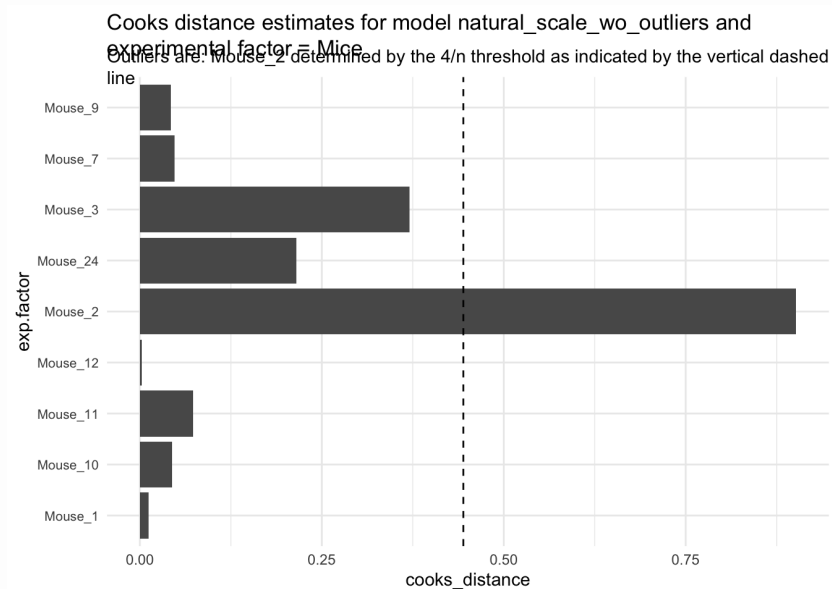


Figure 82:

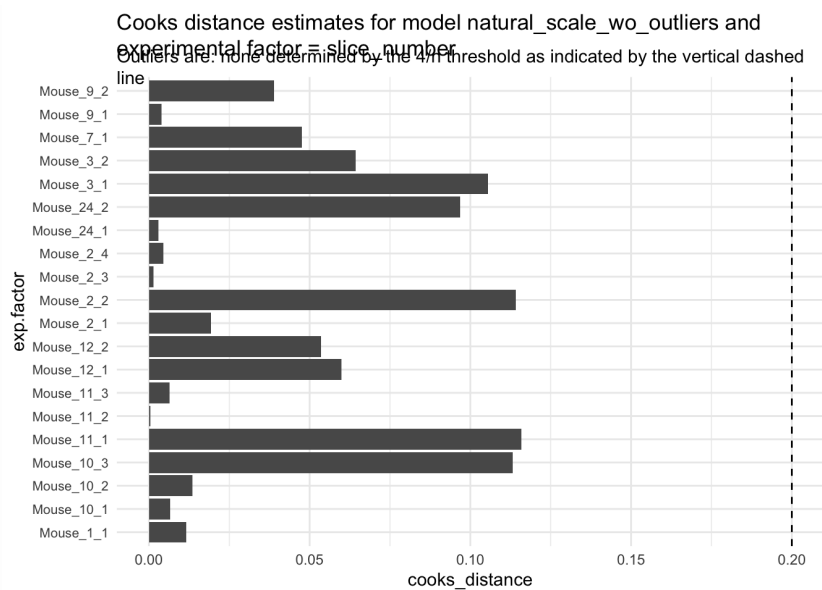


Figure 83:

```
print("Inferred outlier groups are")
```

```
[1] "Inferred outlier groups are"
```

```
print(diagnose_res$inferred_outlier_groups$natural_scale)
```

```
$Mice [1] "Mouse_2"
```

```
$slice_number [1] "Mouse_11_1"
```

Now, let us look at the same set of QC plots for models on the log-transformed responses.

```
plots <- diagnose_res$diagnostic_plots$log_scale$plots
captions <- diagnose_res$diagnostic_plots$log_scale$captions
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
}
```

Q-Q Plot: Residuals(log scale)

Check normality of residuals. Expectation is that the black points lie on or close to the solid red diagonal line

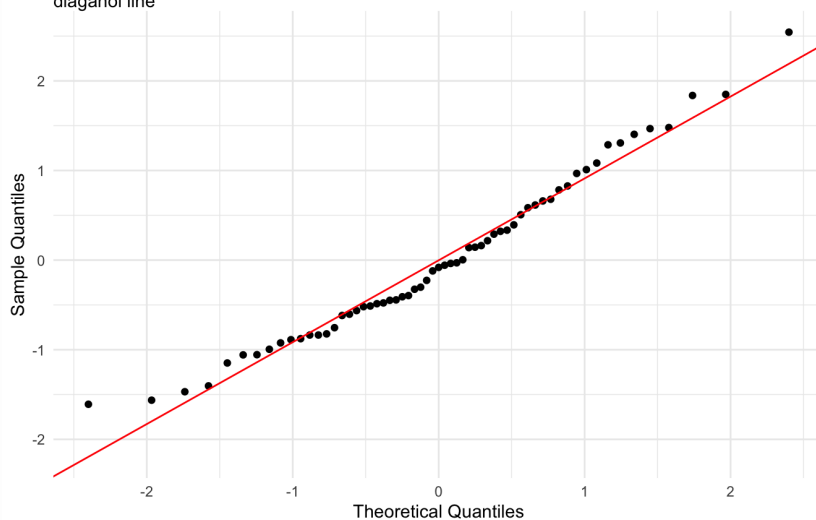


Figure 84: residuals_QQ. Check normality of residuals (log scale). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

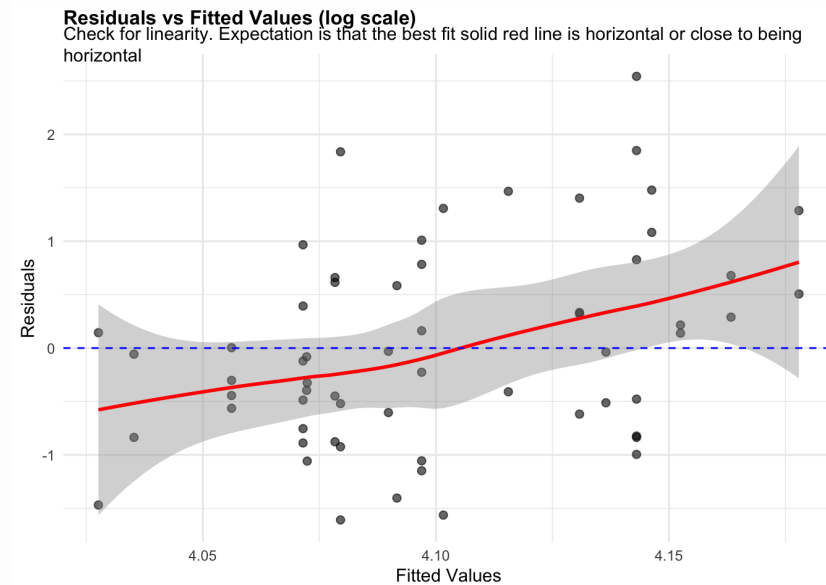


Figure 85: residuals_vs_fitted. Check for linearity (log scale). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

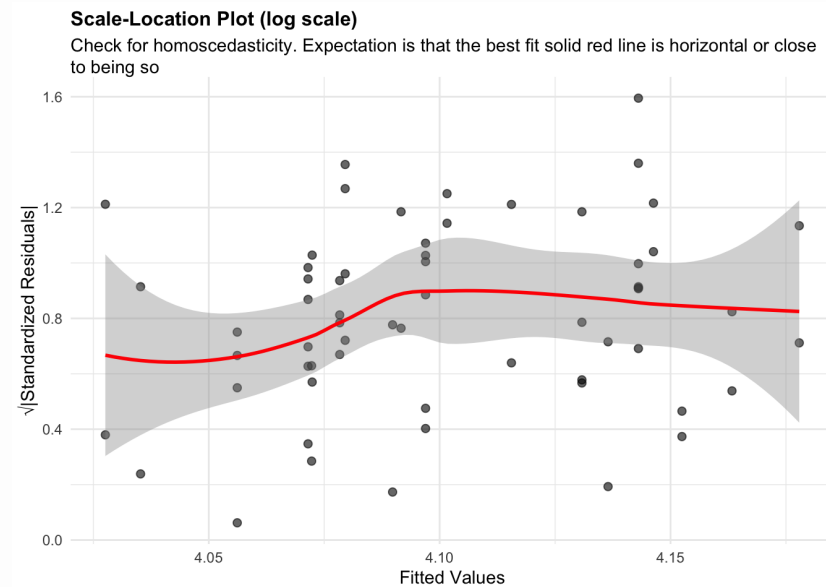


Figure 86: residuals_homoscedasticity. Check for homoscedasticity (log scale). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

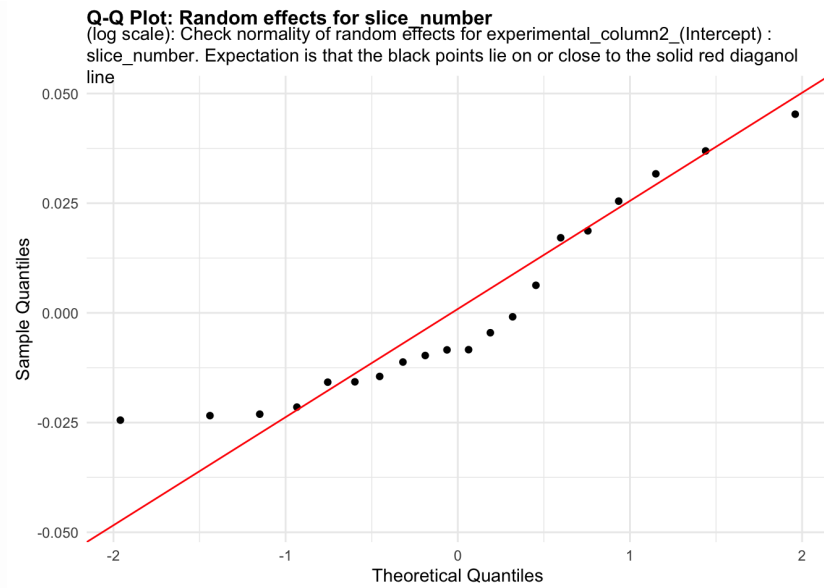


Figure 87: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (log scale): slice_number. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

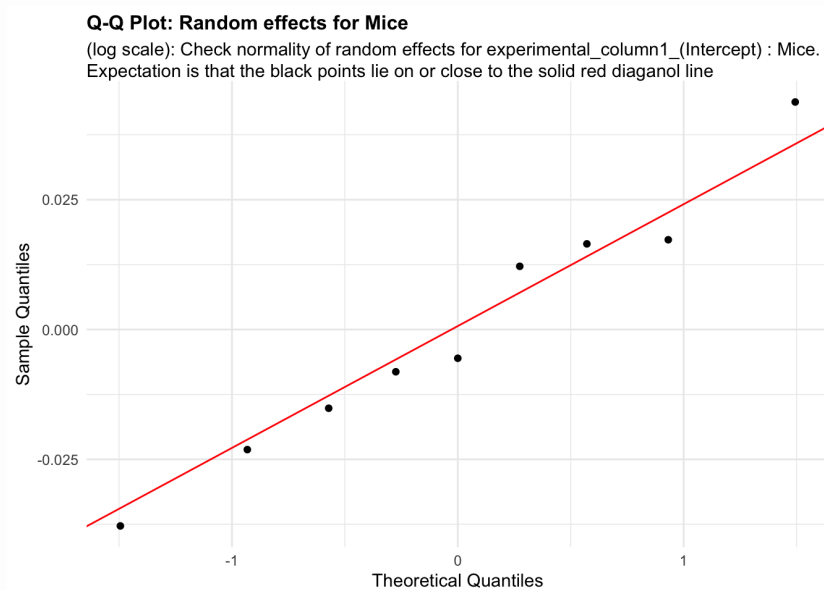


Figure 88: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (log scale): Mice. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cooks_plots <- diagnose_res$cooks_plots$log_scale
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

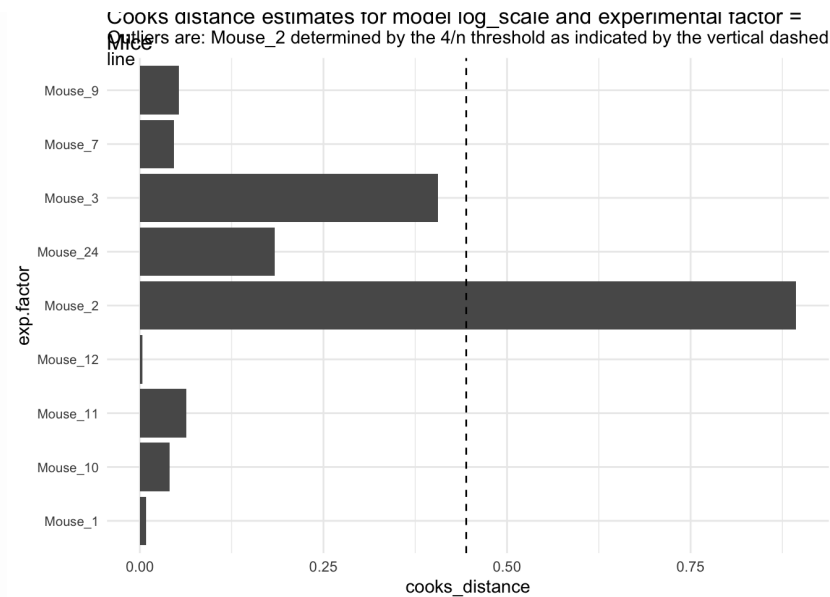


Figure 89:

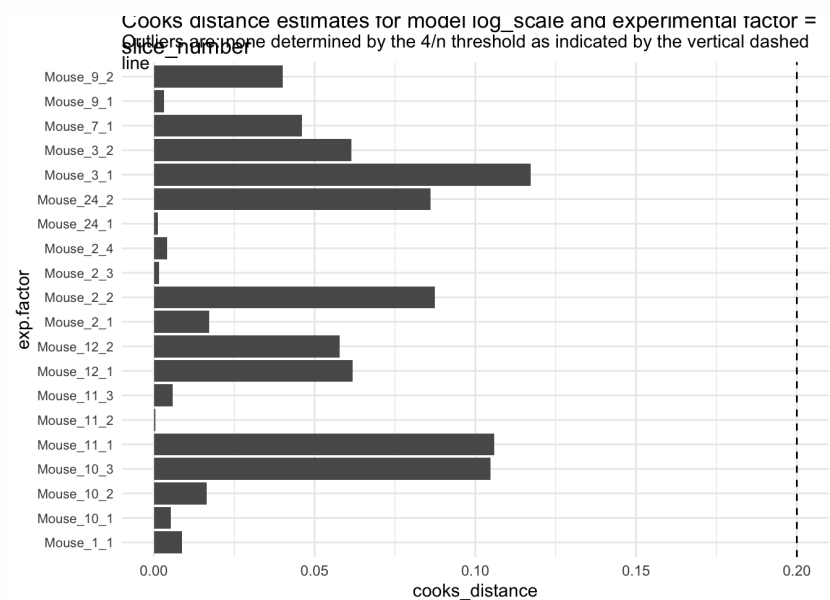


Figure 90:

```
print("Inferred outlier groups are")

[1] "Inferred outlier groups are"

print(diagnose_res$inferred_outlier_groups$natural_scale)

$Mice [1] "Mouse_2"

$slice_number [1] "Mouse_11_1"
```

We will work with the model of the electrical responses in the natural scale without outliers

The code also outputs Cook's distance measures for each cohort and mouse that is intended to capture how influential each of these were in determining the final parameter estimates in the LMM model.

Mouse_2 appears to be an outlier based on its cook's distance estimate (of 0.90) from the natural scale without outliers model and a $4/n=4/9=0.44$ threshold.

We will therefore drop all observations from Mouse_2.

```
data_update <- diagnose_res$Data_updated
data_update %<>% filter(Mice != "Mouse_2")
design_update <- design
design_update@response_column %<>% paste0(., "_noOutlier")
diagnose_res_update <- diagnoseDataModel(data_update, design_update, mod
```

```
## [1] "No outlier detected from the raw Data"
```

```
## [1] "No outlier detected from the raw Data"
```

To identify all the models fit to the data

```
print(diagnose_res_update$models)
```

```
## [1] "Natural scale" "Log scale"
```

We see that two models were fit to this data - one in the natural scale of negative_action_potential_mV, other in the log scale.

Let us look the basic QC plots for the models fit in the natural scale of the responses.

```
plots <- diagnose_res_update$diagnostic_plots$natural_scale$plots
captions <- diagnose_res_update$diagnostic_plots$natural_scale$captions
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
}
```

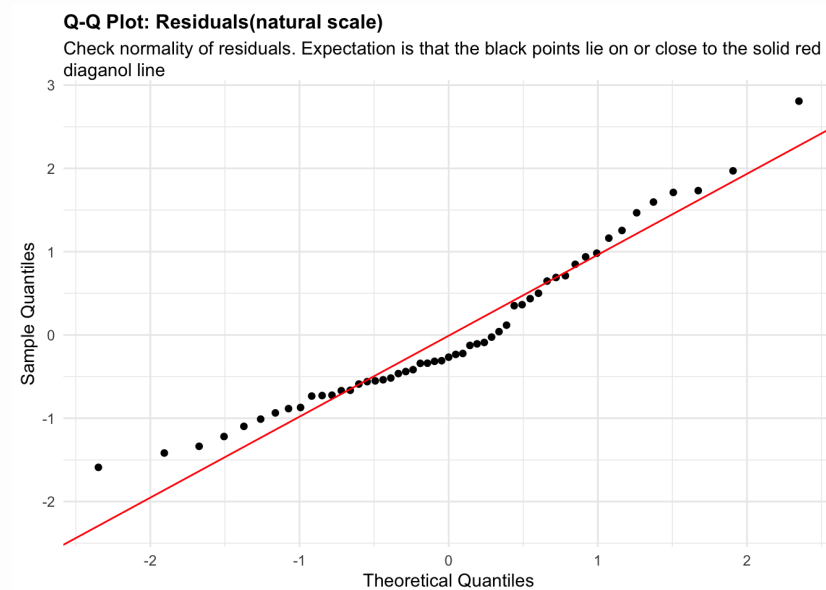


Figure 91: residuals_QQ. Check normality of residuals (natural scale). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

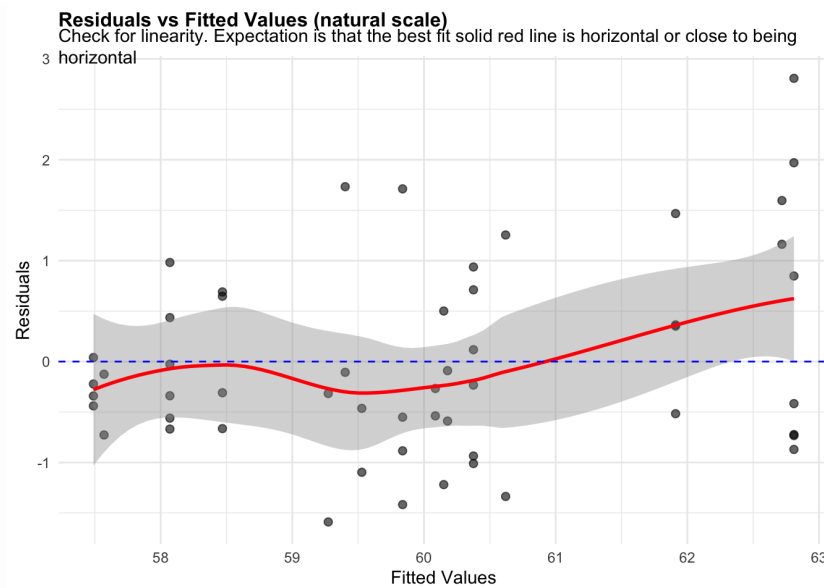


Figure 92: residuals_vs_fitted. Check for linearity (natural scale). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

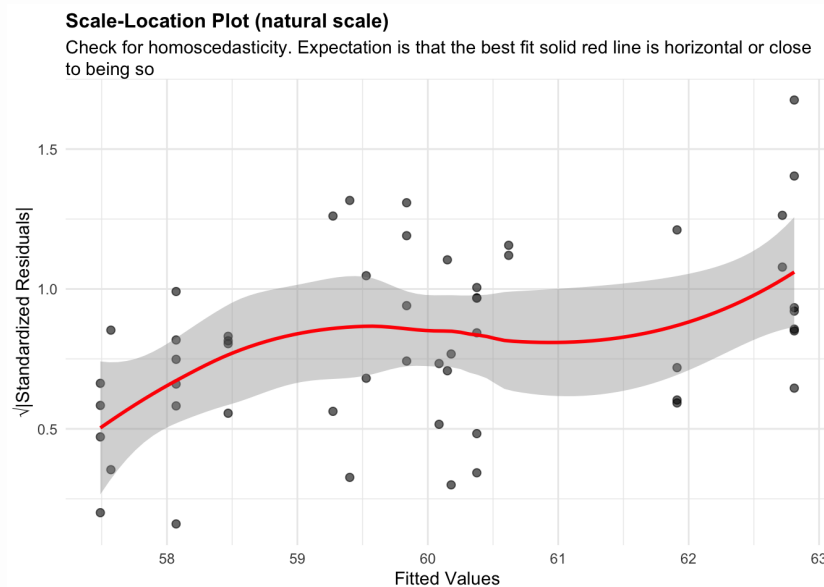


Figure 93: residuals_homoscedasticity. Check for homoscedasticity (natural scale). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

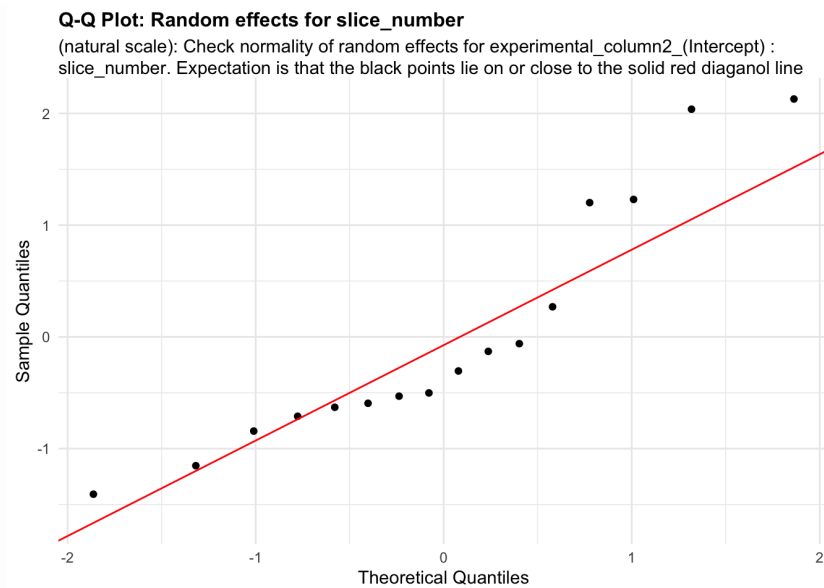


Figure 94: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (natural scale): slice_number. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

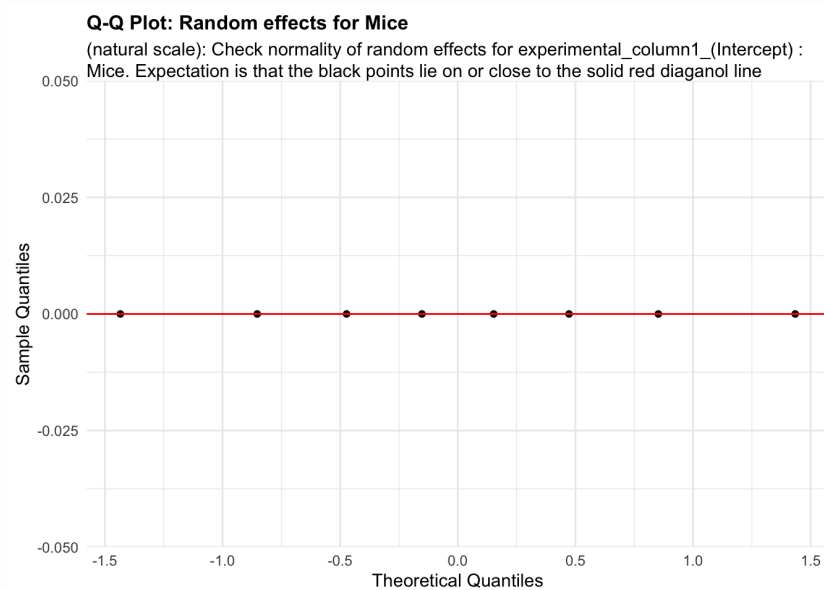


Figure 95: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (natural scale): Mice. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cooks_plots <- diagnose_res_update$cooks_plots$natural_scale
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

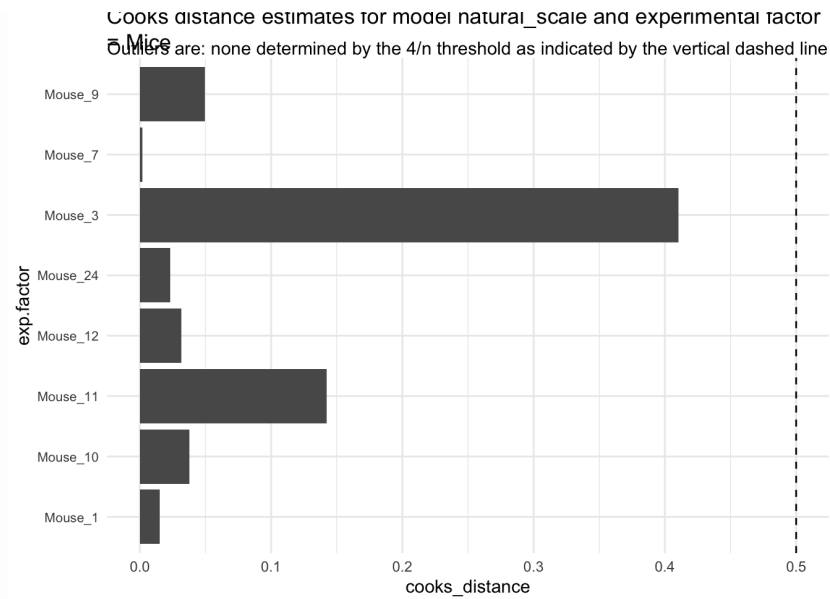


Figure 96:

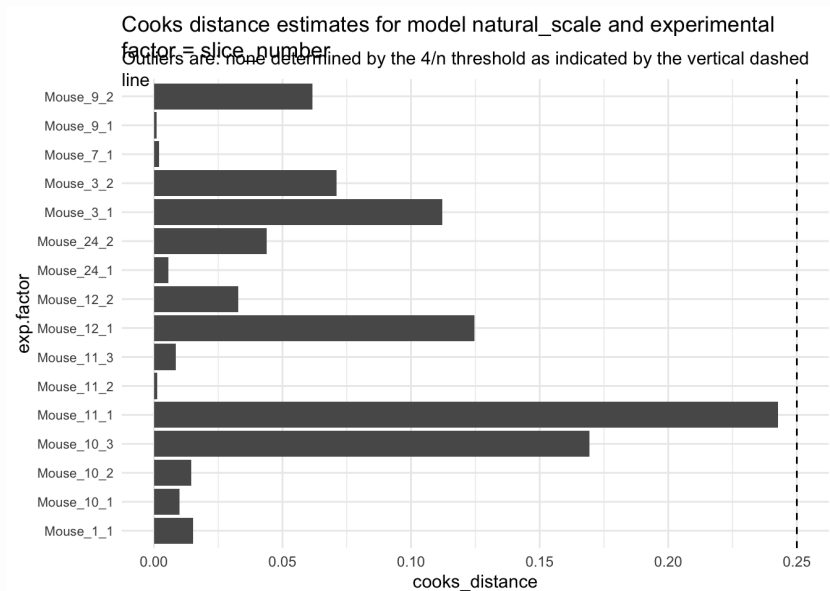


Figure 97:

```
print("Inferred outlier groups are")
[1] "Inferred outlier groups are"
print(diagnose_res$inferred_outlier_groups$natural_scale)
$Mice [1] "Mouse_2"
$slice_number [1] "Mouse_11_1"
```

Let us look the basic QC plots for the models fit in the log scale of the responses.

```

plots <- diagnose_res_update$diagnostic_plots$log_scale$plots
captions <- diagnose_res_update$diagnostic_plots$log_scale$captions
for (i in seq_along(plots)) {
  print(plots[[i]])
  cat(sprintf("\n\n**Figure %d:** %s. %s\n\n", plot_no, names(plots)[
    plot_no <- plot_no + 1
}

```

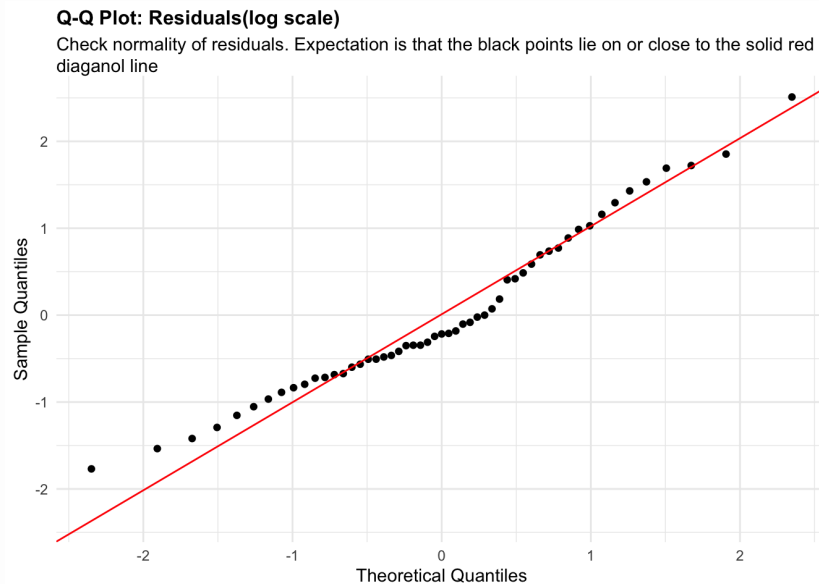


Figure 98: residuals_QQ. Check normality of residuals (log scale). Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

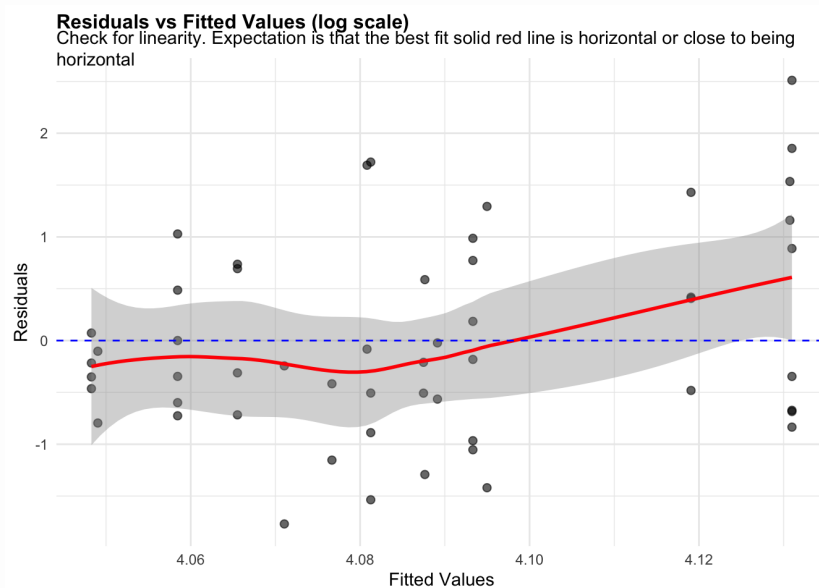


Figure 99: residuals_vs_fitted. Check for linearity (log scale). Expectation is that the best fit solid red line is horizontal or close to being horizontal. Check the Residuals vs Fitted plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

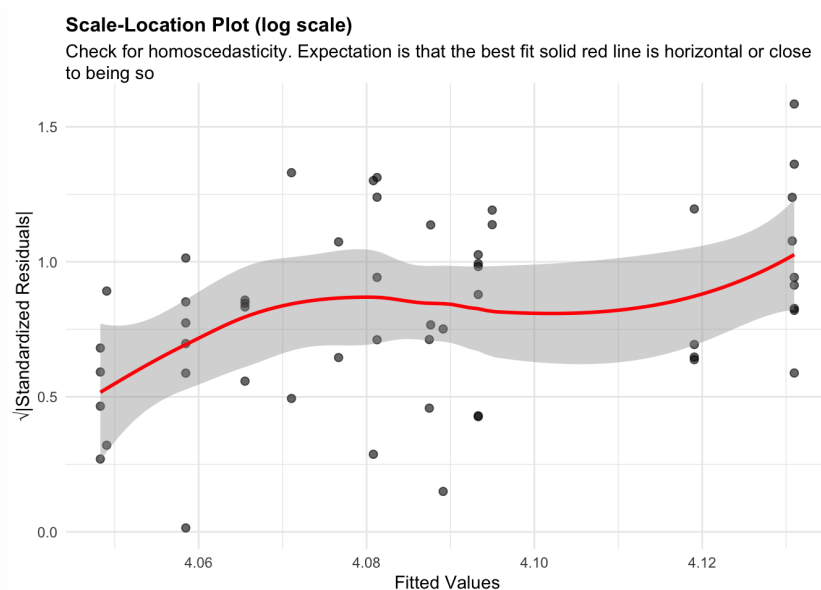


Figure 100: residuals_homoscedasticity. Check for homoscedasticity (log scale). Expectation is that the best fit solid red line is horizontal or close to being so. Check the Scale-Location plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

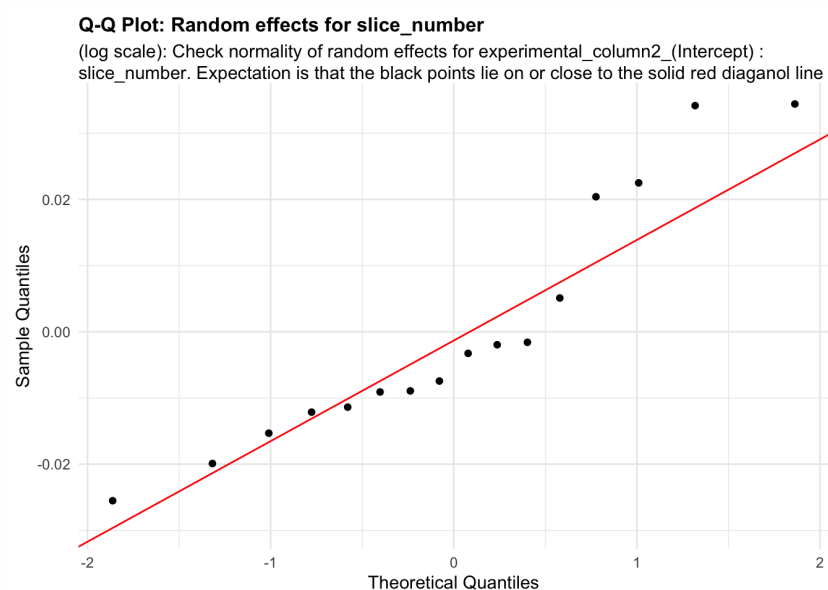


Figure 101: random_effects_QQ_1. Check normality of random effects for experimental_column2_(Intercept) (log scale): slice_number. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

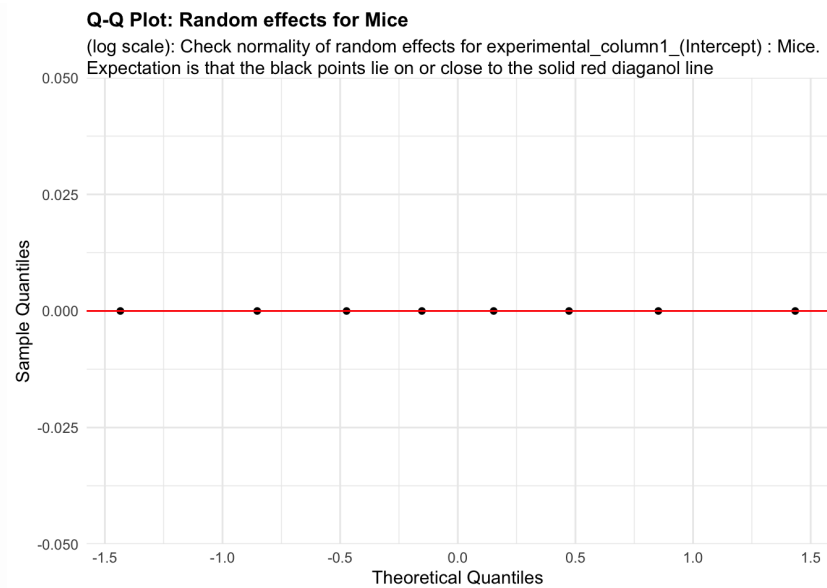


Figure 102: random_effects_QQ_2. Check normality of random effects for experimental_column1_(Intercept) (log scale): Mice. Expectation is that the black points lie on or close to the solid red diagonal line. Check the Normal Q-Q plots for good and bad examples here: <https://library.virginia.edu/data/articles/diagnostic-plots>

```
cooks_plots <- diagnose_res_update$cooks_plots$log_scale
cat("\n\n\n")

for(i in 1:length(cooks_plots)) {
  print(cooks_plots[[i]])
  cat(sprintf("\n\n\n**Figure %d:**\n\n", plot_no))
  plot_no <- plot_no + 1
}
```

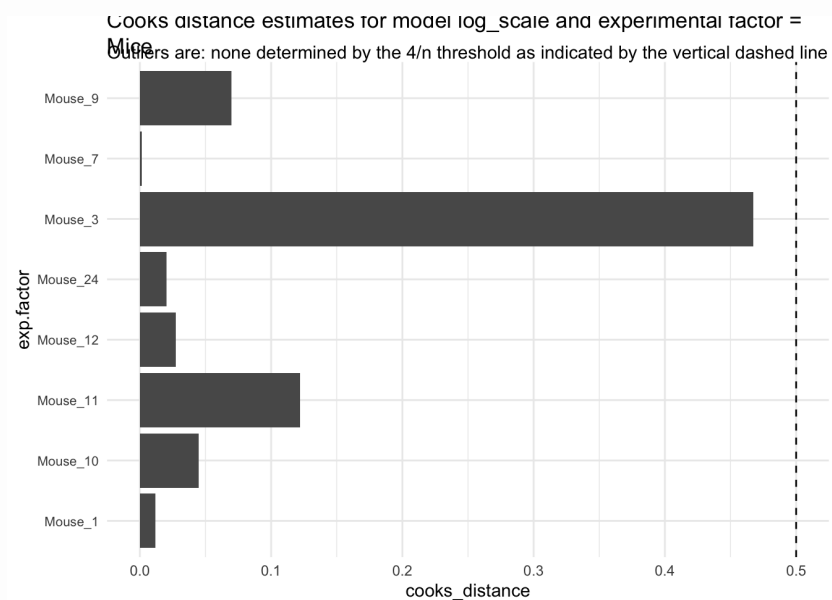


Figure 103:

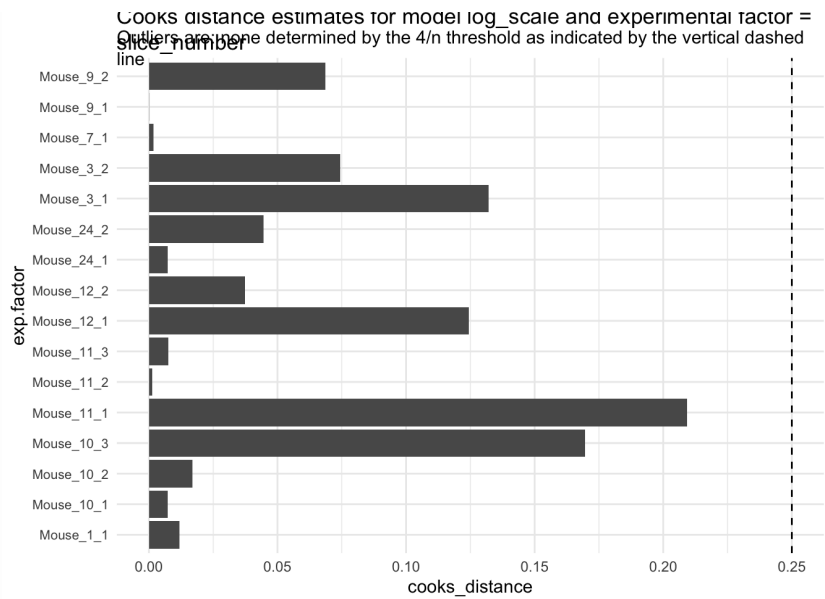


Figure 104:

```
print("Inferred outlier groups are")
```

```
[1] "Inferred outlier groups are"
```

```
print(diagnose_res$inferred_outlier_groups$natural_scale)
```

```
$Mice [1] "Mouse_2"
```

```
$slice_number [1] "Mouse_11_1"
```

It does not look like the log transformation resulted significantly changed how well the model assumptions were being met. We will estimate the association of genotype using the responses in their natural scale.

```
estimate_res <- getEstimatesOfInterest(data_update, design, model, print
print(estimate_res[[1]])
```

```
## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula: response_column ~ condition_column + (1 |
experimental_column1) +
## (1 | experimental_column2)
## Data: fixed_global_variable_data
##
## REML criterion at convergence: 355.8
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -1.5894 -0.6642 -0.2666  0.6472  2.8072
##
## Random effects:
## Groups              Name      Variance Std.Dev.
## experimental_column2 (Intercept)  5.288   2.300
## experimental_column1 (Intercept)  0.000   0.000
## Residual                    51.232   7.158
## Number of obs: 53, groups: experimental_column2, 16;
experimental_column1, 8
##
## Fixed effects:
##              Estimate Std. Error    df t value Pr(>|t|)
## (Intercept)    60.681     1.431 10.601  42.419 3.53e-13 ***
## condition_columnWT -2.481     2.467  9.736  -1.006   0.339
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr)
## cndtn_clmWT -0.580
## optimizer (nloptwrap) convergence code: 0 (OK)
## boundary (singular) fit: see help('isSingular')
```

Association of interest

Boxplot of the median residuals across all observations within each level of experimental column = Mice as a function of Genotype

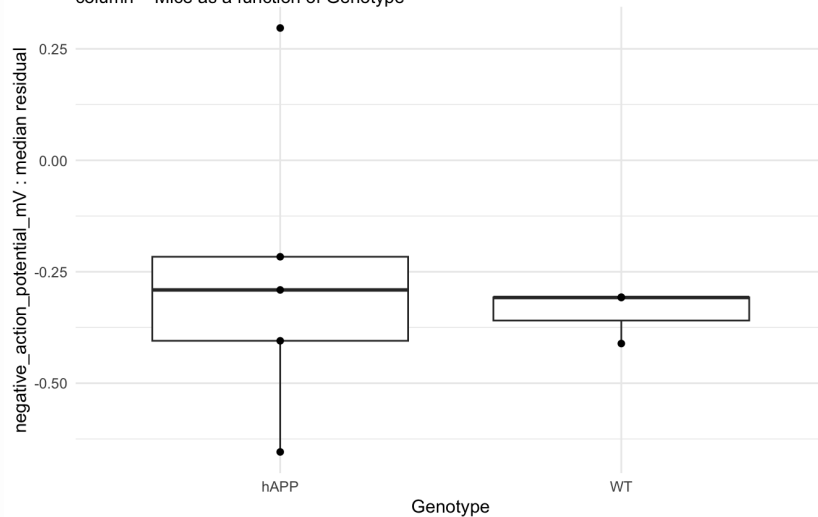


Figure 105:

This is not significant at all. How many mice do we need to have 80% power to estimate the observed difference?

```
power_param@target_columns <- "Mice"
power_param@effect_size <- 7
power_res <- calculatePower(data, design, model, power_param)
```

```
##
## [1] "_____Effect size of the
condition_column is now 7"
```

```
[[1]]
```

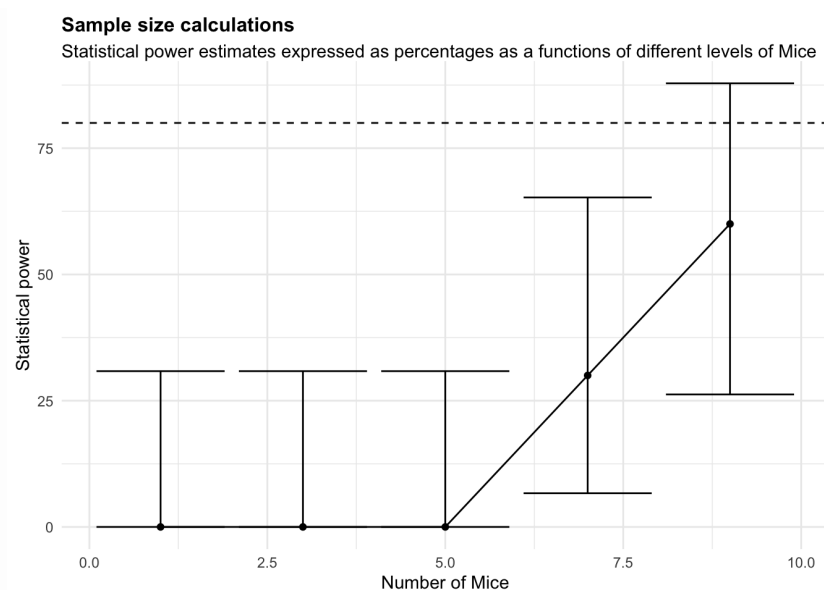


Figure 106:

```
power_param@target_columns <- "slice_number"
power_res_slice <- calculatePower(data, design, model, power_param)
```

```
##
## [1] "_____Effect size of the
condition_column is now 7"
```

```
[[1]]
```

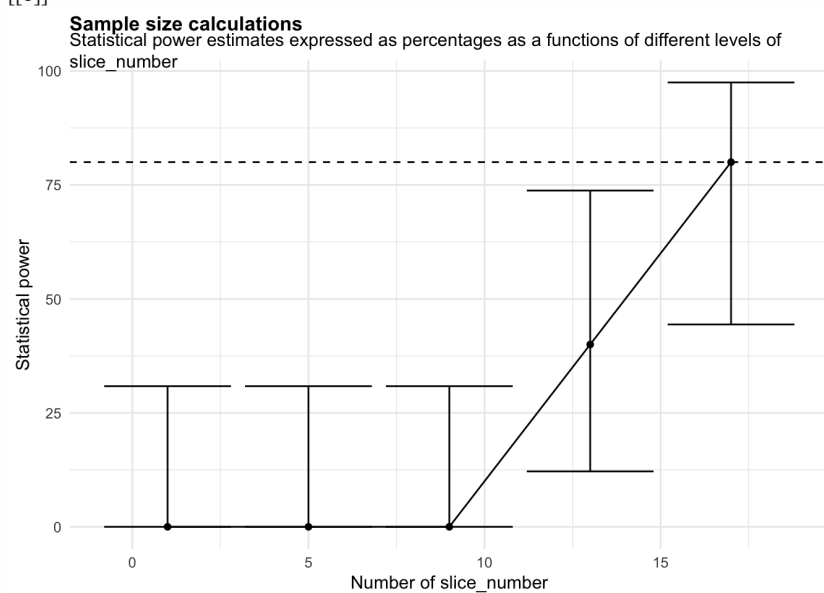



Figure 107:

3 Understanding simulations to estimate the power

RMedPower2 is designed to simulate the effect of variability of the responses which could come from differences in the processing batch, plates or cell lines on the responses of interest the cell assay data (described above for example). There are several ways to assess the impact

of different choices for the experimental variables in this package as outlined below.

First, a user can assess how increasing the number of independent experiments affects power. For example, if a user has a pilot dataset that consists of 3 experimental batches that each contain 2 plates, expanding this dataset two-fold would have the effect of simulating 6 experiments with a total of 12 plates (Figure @ref(fig:exp)).

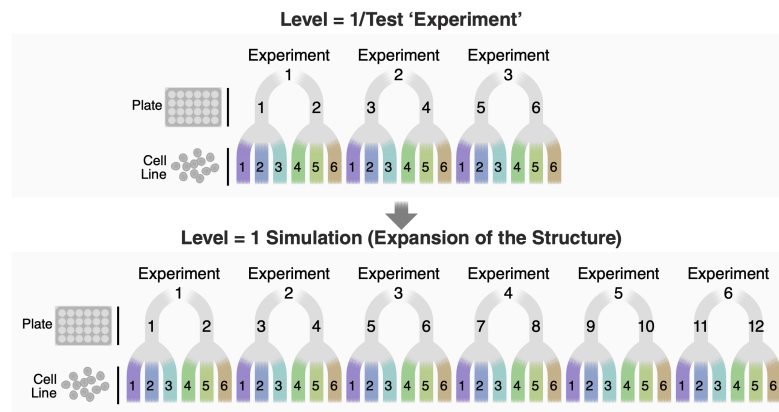

Example of RMeDPower’s simulation of experimental variability for ‘experiment’ for the power analysis. If level=1 is set, RMeDPower simulates the effect of adding in additional experiments by inheriting the experimental design structure from the existing data. This describes the situation where the pilot study involves data from 3 experiments, with 2 plates used per experiment, 3 cell lines within each plate and 12 cells per cell line are assayed.

In the code that tests power using the example data ‘RMeDPower_data1’, this scenario can be simulated by setting ‘target_columns’ to ‘line’ and ‘levels’ to 1 where ‘line’ corresponds to the cell line. The ‘condition_column’ of the data corresponds to ‘classification’ indicating the cell state, and there are two experimental variables: ‘experiment’ and ‘line’. Since the same cell line may appear in multiple experiments, “line” is treated as “crossed_column”. “cell_size2” is used as ‘response_column’ for the simulation (Figure @ref(fig:Sim1)).

```

template_dir=~/.Gladstone Dropbox/Reuben Thomas/calcPower f1000_manuscri

##load the design
design <- readDesign(paste0(template_dir,"design_cell_assay_sim1.json"))
##load the probability model
model <- readProbabilityModel(paste0(template_dir,"prob_model_sim1.json")
##load the relevant power parameters
power_param <- readPowerParams(paste0(template_dir,"power_param_sim1.jso

##filter out the top 5% of observations
RMeDPower_data1 %<>% filter(cell_size2 < quantile(cell_size2, 0.95))

print(design)

## An object of class "RMeDesign"
## Slot "response_column":
## [1] "cell_size2"
##
## Slot "covariate":
## NULL
##
## Slot "condition_column":
## [1] "classification"
##
## Slot "condition_is_categorical":
## [1] TRUE
##
## Slot "experimental_columns":
## [1] "experiment" "line"
##
## Slot "crossed_columns":
## [1] "line"
##
## Slot "total_column":
## NULL
##
## Slot "outlier_alpha":
## [1] 0.05
##
## Slot "na_action":
## [1] "complete"
##
## Slot "include_interaction":
## [1] NA
##
## Slot "random_slope_variable":
## NULL
##
## Slot "covariate_is_categorical":
## [1] NA

print(model)

## An object of class "ProbabilityModel"
## Slot "error_is_non_normal":
## [1] FALSE
##
## Slot "family_p":
## NULL

print(power_param)

```

```
## An object of class "PowerParams"
## Slot "target_columns":
## [1] "experiment"
##
## Slot "power_curve":
## [1] 1
##
## Slot "nsimn":
## [1] 10
##
## Slot "levels":
## [1] 1
##
## Slot "max_size":
## NULL
##
## Slot "alpha":
## [1] 0.05
##
## Slot "breaks":
## NULL
##
## Slot "effect_size":
## NULL
##
## Slot "icc":
## NULL
```

The first step involves running a diagnosis of the data and the model.

```
diagnose_res <- diagnoseDataModel(RMedPower_data1, design, model)
design_update <- design
data_update <- diagnose_res$Data_updated
print(colnames(data_update))

## [1] "cell_size2_logTransformed" "experiment"
## [3] "line" "classification"
## [5] "cell_size1" "cell_size2"
## [7] "cell_size3" "cell_size4"
## [9] "cell_size5" "cell_size6"

design_update@response_column <- "cell_size2_logTransformed"
```

We can now perform sample-size estimations for the effects of increasing the number of experimental batches.

```
##calculate power
power_res <- calculatePower(data_update, design_update, model, power_par
```

In a similar context, users can evaluate power for a given number of experiments. To do this, we assign a value corresponding to the number of experiments to 'max_size' and set 'power_curve' to 0. We can set the 'output' variable to specify the output file name.

```
template_dir "~/Gladstone Dropbox/Reuben Thomas/calcPower f1000_manuscri

##load the relevant power parameters
power_param <- readPowerParams(paste0(template_dir,"power_param_sim3.jso

print(power_param)
```

```

## An object of class "PowerParams"
## Slot "target_columns":
## [1] "experiment"
##
## Slot "power_curve":
## [1] 0
##
## Slot "nsimn":
## [1] 10
##
## Slot "levels":
## [1] 1
##
## Slot "max_size":
## [1] 15
##
## Slot "alpha":
## [1] 0.05
##
## Slot "breaks":
## NULL
##
## Slot "effect_size":
## NULL
##
## Slot "icc":
## NULL

##calculate power
power_res <- calculatePower(data_update, design_update, model, power_par

## Power for predictor 'condition_column', (95% confidence interval):
##      80.00% (44.39, 97.48)
##
## Test: Likelihood ratio
##
## Based on 10 simulations, (0 warnings, 0 errors)
## alpha = 0.05, nrow = 12290
##
## Time elapsed: 0 h 0 m 3 s
##
## nb: result might be an observed power calculation

```

Consider the situation where a user has a specific difference of mean perimeters in mind based on prior information from related previous experiments, but the pilot data itself does not reflect the a priori assumed difference. For example, previously an experimenter found a significant difference comparing a given response between control cell lines “A”, “B”, “C”, and cell lines from patients with a disease, “D”, “E” and “F”, and there was a sufficient sample size to estimate the effect size reliably. The experimenter then performs another set of experiments comparing the same disease lines (“D”, “E” and “F”) but this time uses different control cell lines (“G” and “H”), and the data did not have a sufficient sample size in terms of the number of experimental batches. It seems reasonable to expect that the magnitude of the associations of the response variable between the new control lines and the original disease lines would be similar to the first set of experiments. In this case, the user can then run power simulations using the known difference instead of estimating it from the pilot data. For our illustration, in the pilot data set the observed difference in mean log-transformed perimeter was 0.031 units. The power analysis shows that the power to detect this specific association between ALS status and the cell perimeter using 8 experimental batches is 72.1% with a 95% confidence interval (69.2, 74.9) at type I error rate of 0.05 reflecting what we observed in Figure 10 while if we expect the difference of means to be equal to 0.02 then the corresponding power estimate is 38.7% with a 95% confidence interval (35.7, 41.8).

```

set.seed(12345)
##observed differences of means = 0.03072
power_param$max_size <- 8
power_param$target_columns <- "experiment"
power_param$levels <- 1
power_param$power_curve <- 0
power_param$effect_size <- 0.03072
calculatePower(data_update, design_update, model, power_param)

```

```
##
## [1] "_____Effect size of the
condition_column is now 0.03072"
##
## Power for predictor 'condition_column', (95% confidence interval):
##      70.00% (34.75, 93.33)
##
## Test: Likelihood ratio
##
## Based on 10 simulations, (0 warnings, 0 errors)
## alpha = 0.05, nrow = 6428
##
## Time elapsed: 0 h 0 m 1 s
```

```
set.seed(12345)
##assumed difference of means = 0.02
power_param$max_size <- 8
power_param$target_columns <- "experiment"
power_param$levels <- 1
power_param$power_curve <- 0
power_param$effect_size <- 0.02
calculatePower(data_update, design_update, model, power_param)
```

```
##
## [1] "_____Effect size of the
condition_column is now 0.02"
##
## Power for predictor 'condition_column', (95% confidence interval):
##      50.00% (18.71, 81.29)
##
## Test: Likelihood ratio
##
## Based on 10 simulations, (0 warnings, 0 errors)
## alpha = 0.05, nrow = 6428
##
## Time elapsed: 0 h 0 m 2 s
```

We can also test the power of two experimental variables by assigning a vector of variable names to 'target_columns'.

```
template_dir "~/Gladstone Dropbox/Reuben Thomas/calcPower f1000_manuscri
power_param <- readPowerParams(paste0(template_dir,"power_param_sim5.js
print(power_param)
```

```
## An object of class "PowerParams"
## Slot "target_columns":
## [1] "experiment" "line"
##
## Slot "power_curve":
## [1] 1
##
## Slot "nsimn":
## [1] 10
##
## Slot "levels":
## [1] 1 0
##
## Slot "max_size":
## [1] 9 142
##
## Slot "alpha":
## [1] 0.05
##
## Slot "breaks":
## NULL
##
## Slot "effect_size":
## NULL
##
## Slot "icc":
## NULL
```

```
##calculate power
power_res <- calculatePower(data_update, design_update, model, power_par
```

Our power simulations depend on the variance components estimated from the input dataset. However, in some cases there may not be enough data to estimate the variance component. For example, the pilot data might have only a single category for 'experimental batch', 'plate' or 'line'. When this occurs, the user needs to provide ICC values. These values can be estimated from another dataset for which the variance components are assumed to be similar to those inherent for the new response being considered in the input dataset. ICC can be estimated by taking the ratio between the variance estimates using the following formula:

$$\sqrt{ICC_i = \frac{V_i}{\sum_{j \in S} V_i + e}}$$

where V_i represents the variance of the random effect linked to experimental variable (e.g., experimental batch, plate or cell-line) i , and e represents the variance of the residual error. S represents all the modeled sources of variability of the response under consideration. We will test this scenario using the example RMeDPower_data2 with only single experiment and cell line. To test power in scenarios with varying number of experiments, we set the 'icc' parameter to 0.8, 0.05, 0.05.

```
template_dir "~/Gladstone Dropbox/Reuben Thomas/calcPower f1000_manuscri
```


```
##load the design
design <- readDesign(paste0(template_dir,"design_cell_assay_sim6.json"))
##load the probability model
model <- readProbabilityModel(paste0(template_dir,"prob_model_sim6.json")
##load the relevant power parameters
power_param <- readPowerParams(paste0(template_dir,"power_param_sim6.jso

#print(design)
#print(model)
print(power_param)
```

```
## An object of class "PowerParams"
## Slot "target_columns":
## [1] "experiment"
##
## Slot "power_curve":
## [1] 1
##
## Slot "nsimn":
## [1] 10
##
## Slot "levels":
## [1] 1
##
## Slot "max_size":
## NULL
##
## Slot "alpha":
## [1] 0.05
##
## Slot "breaks":
## NULL
##
## Slot "effect_size":
## NULL
##
## Slot "icc":
## [1] 0.80 0.05 0.05

##calculate power
power_res <- calculatePower(RMeDPower_data2, design, model, power_param)
```


Alternatively, a user can assess how increasing the number of plates per experiment affects power. In the case where there are two experiments that each contain two plates, the user can double the number of plates used per experiment. In this way, the user can simulate how the statistical power changes as a result of increasing the number of plates used per experiment rather than increasing the number of experimental batches (Figure @ref(fig:plate)).

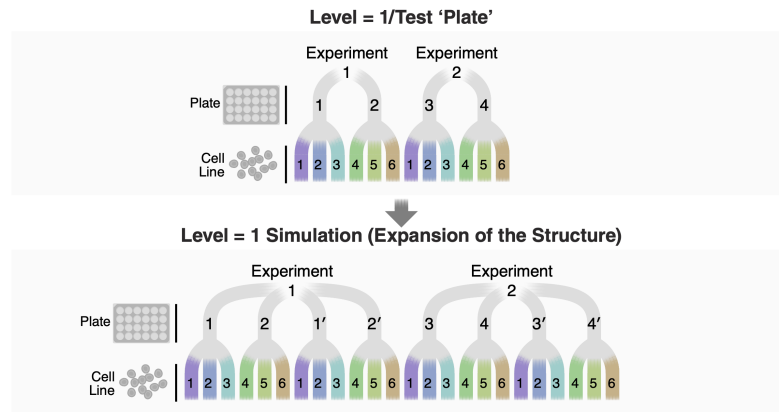

Example of RMeDPower's simulation of plate variability for 'plate' power analysis. If level=1 is set, RMeDPower simulates new plates by inheriting the experimental design structure from the existing data.


In a third example, a user can examine the effect of expanding the number of cell lines within each experiment affects power (Figure @ref(fig:line)). This would capture the effect of increasing the number of cells assayed as a consequence of having more cell lines.

Example of RMeDPower's simulation of cell line variability for 'cell line' power analysis. If level=1 is set, RMeDPower simulates new cell lines by inheriting the experimental design structure from the existing data.

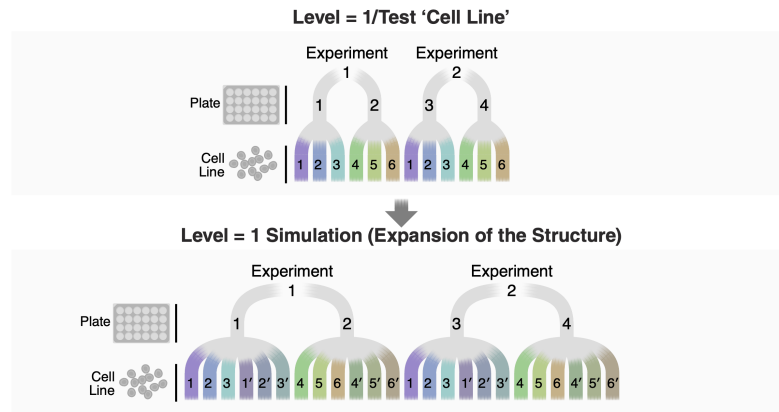

Alternatively, one might want to assess the effect of increasing the total number of cells by increasing the number of cells per cell line (Figure @ref(fig:lineCell)).


Example of RMeDPower's simulation of a sample size increase by increasing the number of cell line. If level=0 is set, RMeDPower multiplies the number of cells per cell line by M/N , where N is the maximum number of cells per cell line and M is a value assigned to the parameter 'max_size'.

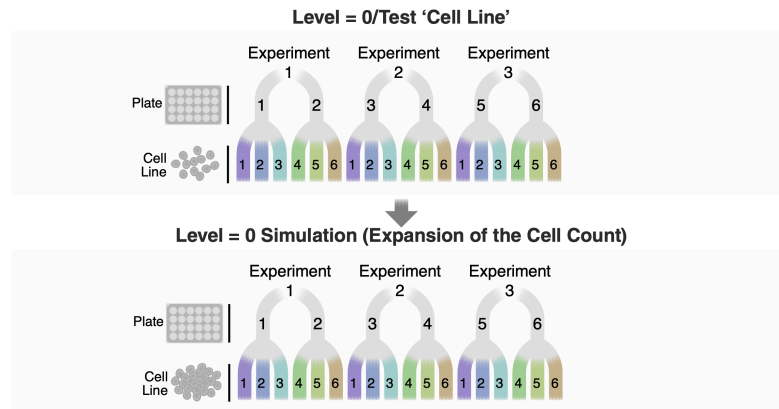


Tables 1-3, in addition to the figures, show the change in cell number after variable expansion in experiment, plate or cell line, especially when the cell distribution is asymmetric. A user may want to examine the power of increasing the total number of cells measured from each experimental variable per experiment. For example, if there are 12 cells per cell line on plate 1, doubling the number of cells from each plate will result in assessing the effect in twice the number of cells per cell line, even if the number of experiments and cell lines remain the same (Figure @ref(fig:plateCell)).

Example of RMeDPower's simulation of a sample size increase for 'plate' power analysis. If level=0 is set, RMeDPower multiplies the number of cells per plate by M/N , where N is the maximum number of cells per plate and M is a value assigned to the parameter 'max_size'.

Level = 0/Test 'Plate'



Level = 1 Simulation (Expansion of Cell Count)



Example of changes in cell counts in a simulation of experimental batch variability. (A) Original data structure and (B) changed data structure after simulation.

Simulation based on level=1 keeps the same structure and increases the number of experiments. This describes the situation where the pilot study involved 2 experiments, in the first experiment two cell lines are used with 3 and 6 cells assayed, respectively, and in the second experiment only 3 cells from the first experiment are assayed.

(A)	Cell line 1	Cell line 2
Exp 1	3	6
Exp 2	3	0
(B)	Cell line 1	Cell line 2
Exp 1	3	6
Exp 2	3	0
Exp 3	3	6
Exp 4	3	0

Example of changes in cell counts in a simulation of plate variability. (A) Original data structure and (B) changed data structure after simulation. Simulation based on level=1 keeps the same structure and increases the number of plates.

(A)	Cell line 1	Cell line 2
Plate 1	4	5
Plate 2	2	0
(B)	Cell line 1	Cell line 2
Plate 1	4	5
Plate 2	2	0
Plate 1'	4	5
Plate 2'	2	0

Example of changes in cell counts in a simulation of cell line variability. (A) Original data structure and (B) changed data structure after simulation. If level=1 is set, RMeDPower simulates new cell lines by inheriting the experimental design structure from the existing data. An example of a simulation in tabular format shows the change in the number of cell per cell line and experiment after simulation. Simulation based on level=1 keeps the same structure and increases the number of cell lines.

(A)	Cell line 1	Cell line 2				
Exp 1	3	6				
Exp 2	3	0				
(B)	Cell line 1a	Cell line 2a	Cell line 1b	Cell line 2b	Cell line 1c	Cell line 2c
Exp 1	3	6	3	6	3	6
Exp 2	3	0	3	0	3	0

Expansion results for plates and cell lines may differ if cells are asymmetrically distributed in different settings. Tables 4 and 5 show the different results users can get in an asymmetric

distributed cell scenario. This type of variable expansion can be accomplished by setting 'level=0' in the calculate_power function.

Example of plate-based cell count expansion simulation. (A) Original data structure and (B) changed data structure after simulation. The simulation is based on level=0 which results in increased number of cells per plate.

(A)	Cell line 1	Cell line2
Plate 1	3	6
Plate 2	3	0
(B)	Cell line 1	Cell line 2
Plate 1	6	12
Plate 2	6	0

Example of cell line-based cell count expansion simulation. (A) Original data structure and (B) changed data structure after simulation. An example of a simulation in tabular format shows the change in the number of cells per cell line and experiment after simulation. The simulation is based on level=0 which results in an increased number of cells per cell line.

(A)	Cell line 1	Cell line 2
Exp 1	3	6
Exp 2	3	0
(B)	Cell line 1	Cell line 2
Exp 1	9	18
Exp 2	9	0

The type of variable expansion shown in Table 3 and 5 can be accomplished by setting 'target_columns' to 'line' and 'levels' to 0. In the code example, we modified the maximum number of cell lines by setting 'max_size' to 700 (Figure @ref(fig:Sim2)).

References

4 Session info

```

## R version 4.5.1 (2025-06-13)
## Platform: aarch64-apple-darwin20
## Running under: macOS Sonoma 14.7.6
##
## Matrix products: default
## BLAS:   /Library/Frameworks/R.framework/Versions/4.5-
arm64/Resources/lib/libRblas.0.dylib
## LAPACK: /Library/Frameworks/R.framework/Versions/4.5-
arm64/Resources/lib/libRlapack.dylib; LAPACK version 3.12.1
##
## locale:
## [1] en_US.UTF-8/en_US.UTF-8/en_US.UTF-8/C/en_US.UTF-8/en_US.UTF-8
##
## time zone: America/Los_Angeles
## tzcode source: internal
##
## attached base packages:
## [1] stats      graphics  grDevices  utils      datasets  methods   base
##
## other attached packages:
## [1] RMedPower2_0.1.0 quantreg_6.1      SparseM_1.84-2  ggtext_0.1.2
## [5] ggplot2_4.0.0    magrittr_2.0.4  simr_1.0.8      dplyr_1.1.4
## [9] lme4_1.1-37      Matrix_1.7-3
##
## loaded via a namespace (and not attached):
## [1] influence.ME_0.9-9  gtable_0.3.6      xfun_0.53
## [4] bslib_0.9.0        lattice_0.22-7    numDeriv_2016.8-1.1
## [7] vctr_0.6.5         tools_4.5.1       Rdpack_2.6.4
## [10] generics_0.1.4     pbkrtest_0.5.5    parallel_4.5.1
## [13] tibble_3.3.0        pkgconfig_2.0.3   DHARMa_0.4.7
## [16] RColorBrewer_1.1-3 S7_0.2.0          lifecycle_1.0.4
## [19] binom_1.1-1.1      compiler_4.5.1    farver_2.1.2
## [22] stringr_1.5.2      MatrixModels_0.5-4 lmerTest_3.1-3
## [25] carData_3.0-5      litedown_0.7      htmltools_0.5.8.1
## [28] sass_0.4.10        yaml_2.3.10       Formula_1.2-5
## [31] pillar_1.11.1      car_3.1-3         nloptr_2.2.1
## [34] jquerylib_0.1.4    tidyr_1.3.1       MASS_7.3-65
## [37] cachem_1.1.0       reformulas_0.4.1  iterators_1.0.14
## [40] boot_1.3-31        abind_1.4-8       nlme_3.1-168
## [43] commonmark_2.0.0   tidyselect_1.2.1  digest_0.6.37
## [46] stringi_1.8.7      purrr_1.1.0       labeling_0.4.3
## [49] splines_4.5.1      fastmap_1.2.0     grid_4.5.1
## [52] RLRsim_3.1-8       cli_3.6.5         survival_3.8-3
## [55] broom_1.0.10       withr_3.0.2       scales_1.4.0
## [58] backports_1.5.0    plotrix_3.8-4     rmarkdown_2.29
## [61] png_0.1-8          evaluate_1.0.5     knitr_1.50
## [64] EnvStats_3.1.0     rbibutils_2.3      markdown_2.0
## [67] mgcv_1.9-3         rlang_1.1.6       gridtext_0.1.5
## [70] Rcpp_1.1.0         glue_1.8.0        xml2_1.4.0
## [73] rstudioapi_0.17.1 minqa_1.2.8       jsonlite_2.0.0
## [76] R6_2.6.1           plyr_1.8.9

```