
Design layer

the whole layer, as one document

Contents

1 Relay: typed MCP exchanges	4
1.1 Foundation	4
1.2 Pending updates	5
1.3 System at a glance	6
1.4 Domain model	6
1.5 Protocol and schema boundaries	9
1.6 Definitions and service catalog	10
1.7 Reducer and runtime ownership	12
1.8 HTTP endpoint and limits	14
1.9 Subscriptions and live registry changes	16
1.10 Stdio transport	17
1.11 Client calls and submission evidence	18
1.12 Bearer admission and tool policy	21
1.13 Composition ports and observations	22
1.14 Validation and extension ownership	23
1.15 Retained protocol strategies	24
1.16 End-to-end walkthrough	26
Glossary	26

Relay: typed MCP exchanges

1 Relay: typed MCP exchanges

1.1 Foundation

Relay carries MCP meaning and owns protocol execution lifetimes.

GOAL

Serve and call native application operations

Expose typed tools, resources, prompts, and completion through MCP server and client operations over stdio and Streamable HTTP. Reuse each tool's definition across declaration, binding, and typed calling.

GOAL

Retain the complete protocol capability scope

Support explicit revision strategies, both MCP authorization roles, and independently verifiable extension boundaries. The modern implementation and the retained compatibility obligations are distinguished in the pending ledger.

NO-GOAL

Own business execution or identity providers

Application effects, retry policy, durable runs, workflow settlement, web login, and general authorization-server operation belong to callers or independently useful libraries. Relay supplies protocol ports.

INVARIANT

Wire ids never own execution

Exchange and invocation identities select authoritative work and response destinations. Repeated JSON-RPC ids cannot merge concurrent work.

mechanism

INVARIANT

Admission precedes handler work

Protocol validation, endpoint bearer admission when configured, tool visibility and execution permission, and native argument decoding precede the handler's effect. A rejection produces no tool invocation.

mechanism

INVARIANT

Terminal exchanges suppress subsequent output

Completion and closure consume an exchange in one authoritative reducer history. A late completion or progress report cannot answer a replacement request.

mechanism

PRINCIPLE

Keep authority with the boundary that can prove it

Revision codecs own wire meaning; the runtime owns serialized effect interpretation; a token verifier owns token validity; the application owns business policy and effect outcome.

PRINCIPLE

Retain distinct absence and failure meanings

Omitted fields, explicit null, false hints, tool refusals, input requests, protocol failures, and uncertain delivery retain distinct representations. See [ADR-0002](#) and [ADR-0005](#).

1.2 Pending updates

ruling Bound admission without changing callback ownership —

Context construction and bearer verification execute synchronously before the HTTP invocation and response budgets start. Admission can retain a request slot outside those budgets. A whole-request deadline requires an explicit process-affinity, cancellation, cleanup, late-success, and capacity-release contract; no correction is approved here.

ADR-0008

ruling Bind paging and input state to the admitted view —

The implemented cursor authenticates family and offset with the server key; continuation state authenticates the operation family and a nonce, without binding arguments, principal or outstanding response keys. The retained design requires catalog revision, tenant and authorized visible-view binding. Cross-trust-domain grant reuse, anonymous access, and policy changes between rounds need explicit semantics before claiming these stronger guarantees.

ADR-0004

ruling Broaden dynamic schema interoperability deliberately —

MCP declarations may contain valid JSON Schema outside Blueprint's finite input-contract profile. UnsupportedSchema remains explicit; valid default-open schemas currently expose a Blueprint admission defect. Choosing a broader bounded contract port or an enlarged profile requires separate approval and external peer evidence.

ADR-0002

build Implement retained revision and OAuth strategies —

Legacy 2025-11-25 sessions and their transport strategy, older retained revisions, client OAuth discovery/registration/PKCE/refresh flows, and selected extensions remain designed scope. Modern readiness never invents a legacy handshake.

ADR-0001

build Complete protocol and public test support —

Resource-read continuation, an approved typed logging emitter, expanded paired/scripted/fake-clock transport and authorization-server helpers, and independently pinned client/auth/interoperability acceptance remain incomplete. Tasks, Apps, sender constraints, workload identity, target expansion, and release hardening require their scoped requirements and evidence.

ADR-0007

verify Verify resource claims at their actual boundaries —


Request slots are acquired after Mist reads the bounded body; mounted callers pre-read it themselves. These limits do not establish a bound on incomplete body readers or all network processes. Comprehensive owner-death/process-count evidence, SSE reconnection/resumption where supported, and continuous drift/soak/fuzz coverage remain separate obligations.

ADR-0003

1.3 System at a glance

One MCP context has separate wire, admission, execution, and application owners.

VIEWPOINT CONTEXT-OWNERSHIP · ALTITUDE L2 · CONTEXTS From native contracts to owned exchanges

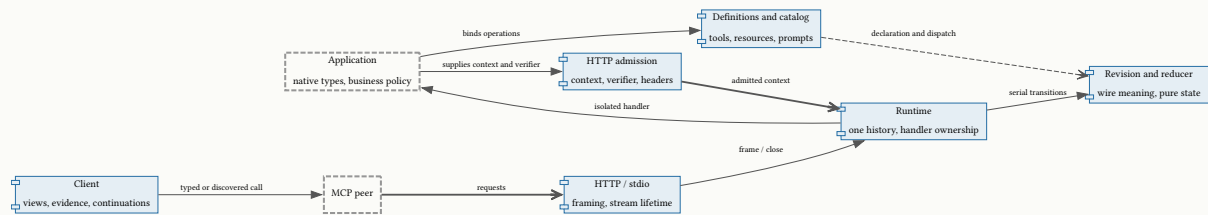

LEGEND

external system
trust boundary

component
owned runtime part

call
solid directed link

dependency
dashed directed link

dataflow
weighted directed link

Blueprint owns application codecs/contracts, HTTP Gun owns outbound HTTP, and Sinal owns observation delivery. Relay has no dependency on Fabric, Saga, or Warden.

- The **Server description** is immutable. An **Endpoint** or **Runtime** owns the live registry, while a copied description has no authority to mutate running work.
- Modern HTTP creates a runtime per request from the endpoint's current server snapshot. Studio and in-process clients retain one connection runtime. The **Reducer** consumes events in that owner's serialized history.
- Relay is one Erlang distribution with internal protocol, schema, transport, and foreign-boundary modules. A pure transition boundary is retained; JavaScript runtime support is not implemented. See [ADR-0001](#).

Decision	Authority	Outcome and boundary
Wire revision	Frozen MCP schema and requirements	Admission never infers compatibility from a malformed response.
Tool input/output	Definition codecs	Erasure retains closures; it does not expose Dynamic to ordinary callers.
Bearer validity	Configured verifier	Attestation asserted by trusted adapter; Relay checks resource/scopes.
Execution history	Runtime actor	One interpreter starts each admitted invocation; copied pure values do not prove exactly-once effects.
Business retry and durability	Application	Submission evidence and cancellation never establish rollback.

1.4 Domain model

Exchange ownership, handler execution, and connection lifetime are independent state axes.

- A **Definition** may create several **Bound tool** values. Each **Exchange** keeps a fresh response destination; each **Invocation** keeps its own handler identity even when a **Request id** repeats.

Definition value-object immutable MCP owned by tool admission

A tool's native contract reused on both sides of MCP.

ATTRIBUTES

authored **Contract** · name × Codec(input) × output mode
Structured output retains a codec and schema; content-only output retains no output codec.

derived **Declaration** · schemas, annotations, icons, metadata
Derived from admitted codecs and the caller's independent optional settings.

RELATIONSHIPS

1 : 0..n One definition may bind several handlers or serve typed calls without changing native type agreement.

Exchange phase

Vacant Active Stream Done

Exchange

entity stateful MCP owned by reducer history

An inbound frame's authoritative destination, independent of its wire id.


ATTRIBUTES

- derived Identity** · opaque ExchangeId
The transport allocates a fresh node-unique identity before parsing.
- derived Phase** · Exchange phase [exchange-phase](#) · [exchange-life](#)
Vacant means no retained record; Done is a retained terminal record.
- derived Routing** · RequestId × optional progress token × optional InvocationId
Active retains invocation and latest accepted progress; Stream retains a listen request.

RELATIONSHIPS

1 : 0..1 One exchange owns at most one handler invocation or one subscription stream.

STATE MACHINE One response destination

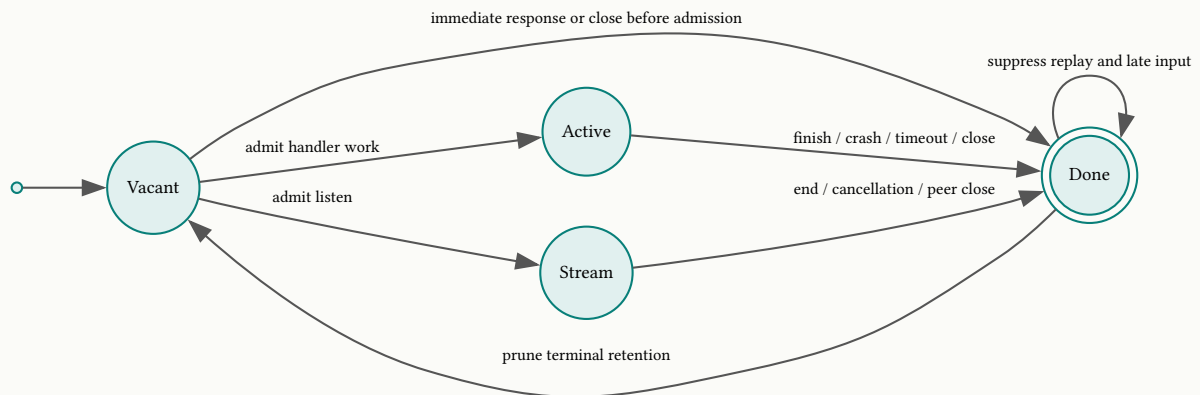

Fresh identity is mandatory even after retention is pruned. A pruned id is not reusable authority.

Worker phase

Pending Running Cancelling Exited

Invocation

entity stateful MCP owned by runtime

One admitted native handler work item and its owned worker.


ATTRIBUTES

- derived Identity and work** · InvocationId × exchange × selected work × context
Retains method, name, metadata, arguments, input responses, and correlation without reusing the client's id.
- derived Worker phase** · Worker phase [worker-phase](#) · [worker-life](#)
A terminal exchange may coexist with a Cancelling worker during its cleanup grace.

RELATIONSHIPS

n : 1 Every invocation returns to exactly one runtime history and one retained exchange.

STATE MACHINE Handler execution and cleanup

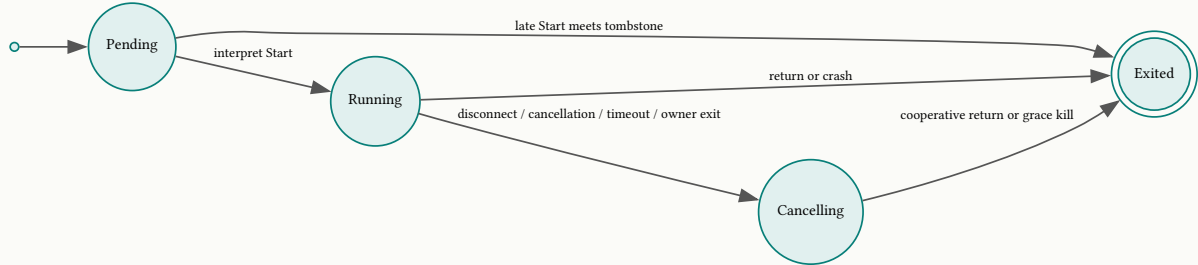

Cancellation stops publication immediately; cleanup completion is a separate observation.

Server catalog

aggregate stateful MCP owned by server description / live endpoint

The invariant owner of declaration and handler agreement.

ATTRIBUTES

authored **Services** · tools × resources × prompts × optional completion
Tools have unique names; listings retain registration order.

derived **Signing key and generation** · random key × monotonic registry generation
The immutable description retains the key across request runtimes; the endpoint owns generation changes.

RELATIONSHIPS

1 : 0..n Many request snapshots and streams refer to one current endpoint catalog.

Grant

value-object immutable MCP owned by resource admission

Accepted endpoint authority over one resource and native principal.

ATTRIBUTES

derived **Principal and authority** · principal × ProtectedResource × List(Scope)
Actual accepted claims, including scopes beyond endpoint requirements, survive admission.

RELATIONSHIPS

n : 1 An admitted HTTP request uses the endpoint's configured Protection; arbitrary grant reuse is not a public protected-registry mechanism.

Products, sums and refinements	Representations	Preserved meaning
Request id	StringId / IntegerId	String 1 and integer 1 remain distinct; ids may repeat.
Reply / ToolResult	complete / input round; Succeeded / ToolFailed / InputRequired	Application refusal completes an exchange but does not prove no effect.
Structured discovery	Option(Value)	None is absence; Some(Null) is present null.
Content	text / image / audio / link / embedded resource	Bytes remain native; base64 appears only in the codec.

Products, sums and refinements	Representations	Preserved meaning
Application annotations	Option(Bool) hints and optional generic annotations	Omission differs from False; hints are untrusted policy evidence.
Failures	Reason × Correlation; Kind; Evidence	Opaque context does not change detailed reason matches.
Validated values	name 1–128 permitted ASCII; resource absolute HTTP(S) without fragment; nonempty scope	Admission validates the boundary; it does not normalize resource aliases or scope case.

- There is no persistent storage aggregate in Relay. Tombstones are node-local suppression records; receipts, durable idempotency, and retained business outcomes belong to applications. Commands and effects are detailed below; observation events report completed protocol transitions.

1.5 Protocol and schema boundaries

Revision codecs validate envelopes independently of application schema admission.

Modern wire codec

responsibility

Parse and classify revision-specific messages and encode exact results and errors.

interface

Internal JSON-RPC and v2026_07_28 admission/encoding functions; public protocol data in content, declarations, and tool input methods.

interactions

Receives bounded bytes; supplies admitted request metadata and checked Blueprint values to reducer dispatch.

invariants

Unambiguous protocol members, trustworthy ids, required metadata, matching routing headers, and distinct envelope families.

failure

Parse, invalid request, invalid parameters, unknown method, unsupported version, and routing disagreement remain distinct; no handler starts on refusal.

Contract	2026-07-28	Retained 2025-11-25 strategy
Readiness	Self-contained request metadata; discover optional for caller	initialize → AwaitingInitialized → initialized → Ready
HTTP	One POST; no session GET/DELETE or Mcp-Session-Id	POST JSON/SSE, GET notifications, DELETE termination, session registry
Headers	MCP-Protocol-Version, Mcp-Method, tool Mcp-Name agree with body	Negotiated revision and session-aware header validation
Result	Complete includes resultType, including isError results	Legacy result codec omits resultType
Cancellation	HTTP close; stdio notifications/cancelled	Revision-scoped restrictions including initialize cancellation
Logging and ping	Per-request logLevel metadata; no legacy setLevel or ping route	Legacy methods only where its schema requires them

- Modern _meta carries protocol version and configured client capabilities. Unsupported versions return the pinned -32022 outcome with supported revisions. Omitted tool arguments become an empty object; supplied non-objects fail before domain decoding.
- A notification has no ordinary JSON-RPC response. Accepted HTTP notifications receive 202 with an empty body; valid unsupported notifications and inbound responses must not become invocations. Parse errors omit an untrustworthy wire id while retaining the exchange destination.
- Modern cache fields are private with zero TTL in the implemented families. This does not establish cache revision or conditional ownership semantics. Required fields are validated against the frozen fixture rather than inherited from older SDK shapes.

- The [Protocol schema](#) in test fixtures is authority for wire shapes. A tool inputSchema/outputSchema is an application JSON Schema document represented as an exact Blueprint Value. Loading an [Input contract](#) admits Blueprint's finite profile; provider schema lowering belongs to LLM Wire adapters, outside Relay.
- Local input admission accepts Blueprint ObjectSchema and UnionSchema; OtherSchema requires an explicit object declaration; AnySchema fails closed. Output admission requires a schema document whose JSON representation is an object, not an object-shaped application output. This permits string and other structured output codecs.
- Remote declarations preserve schema documents and metadata before optional input_contract loading. A valid MCP declaration need not have a locally admitted Blueprint contract; unsupported features remain an explicit error rather than silently closing or weakening the schema. See [ADR-0001](#), [ADR-0002](#), and [ADR-0007](#).

BEHAVIOR

Reject a mismatched modern request before dispatch

Given A POST claims a different version, method, or tool name in its routing headers and body.

When The server receives the MCP request.

Then The request receives the corresponding refusal without running its tool handler.

level: interface area: Wire admission

BEHAVIOR

Retain complete tool failures as protocol results

Given A handler returns a safe application ToolError.

When The modern call finishes.

Then The client receives ToolFailed from an isError result with resultType complete.

Then Submission evidence is Completed; the application's effect outcome remains its own contract.

level: interface area: Result semantics

1.6 Definitions and service catalog

One retained contract drives declaration and dispatch while caller records remain native.

Tool construction and binding

responsibility

Admit a name and codec-derived declarations; bind native handlers before erasure.

interface

define / try_define; define_content / try_define_content; handle, handle_with_error_renderer, handle_call; independent metadata setters.

interactions

Blueprint owns schema/codecs; bound tools enter server.new or live register_tool; client.call reuses a Definition.

invariants

Input schema object root; output schema availability for structured tools; duplicate names rejected; no private generic errors disclosed by ordinary handle.

failure

Source-definition mistakes panic with the offending name; runtime admission returns DefineError; ordinary handler errors become a generic safe ToolError.

- Name admission permits ASCII letters, digits, period, underscore, hyphen and slash with length 1–128. Static server.new rejects duplicate names; runtime register_tool returns DuplicateTool. Unregistering an absent name is a no-op.
- with_input_schema publishes an explicit JSON object document in place of the codec-derived input schema. It does not replace the retained native codec, which still decodes every call. A non-object schema document is a source-definition panic; truthful agreement between an override and actual accepted inputs belongs to its author.

- `handle` accepts the caller's arbitrary error type and hides its details. The explicit renderer chooses safe content; `handle_call` receives `Call(context)` and returns complete, explicit content, metadata, or input-required requests. Context, progress, cancellation, client info, correlation and ids remain per invocation.
- A structured success encodes the native output and generates a text mirror unless explicit content replaces it. `complete_with_meta` replaces metadata on generated content blocks. Invalid output encoding and crashes become sanitized protocol failures; they never manufacture successful data.
- Annotations retain independent optional fields, including absent versus false. `readOnlyHint` and `idempotentHint` describe remote claims; applications choose whether to trust them when deciding uncertain-effect handling.

Service	Interface and interaction	Failure and invariant
Resources	<code>static</code> / <code>template</code> / <code>try_template</code> / <code>template_with_matcher</code> ; <code>list/read</code> ; native text/blob contents	One simple variable per slash segment, including suffix/prefix; unsupported syntax requires explicit matcher; modern read failures return invalid params with the requested URI; private failure details remain hidden. See ADR-0009 .
Prompts	<code>prompt</code> / <code>prompt_call</code> with named string arguments; <code>list/get</code> ; role and content messages	Required arguments validated; private errors become invalid params; input rounds retain <code>Call</code> context.
Completion	<code>completion</code> receives <code>prompt/template</code> reference, argument name/value and other arguments	Private error becomes internal error; output limited to 100 values with <code>total</code> and <code>has_more</code> .
Content	<code>text/image/audio/resource link/embedded resource</code> ; annotations, icons, meta; <code>text_of</code>	Binary bytes preserved; <code>text_of</code> intentionally projects text only and joins text blocks.
Paging	Deterministic catalog order, signed family/offset cursor, client all-page traversal	Forged/cross-family cursors fail; <code>authorized-view/revision</code> binding remains a ruling.
Registry updates	server changes immutable description; <code>endpoint/runtime register_tool</code> changes live owner	Successful changes increment generation and notify active relevant streams; absent removals and failed additions do not invent changes.

BEHAVIOR

Modern resource failures retain the requested URI

Given A modern resource read names an unknown URI or its configured reader refuses the read.

When The server answers that read.

Then The caller receives invalid params with code `-32602`.

Then Error `data.uri` retains the requested URI.

Then Private reader failure details remain hidden.

level: interface area: Resource errors

BEHAVIOR

Re-evaluate visibility on named calls

Given A tool was listed for an earlier application context but is now hidden or not callable.

When The client names that tool in a new call.

Then The client receives the same inaccessible protocol outcome as an unknown name.

Then Neither argument decoding nor the handler runs.

level: interface area: Tool access

BEHAVIOR

Bind custom resource matching explicitly

Given A resource family uses syntax beyond one simple variable per segment.

When The application uses the built-in runtime template constructor.

Then It receives `UnsupportedTemplateSyntax`.

Then Using a caller matcher preserves the advertised template and the caller's URI-recognition policy.

level: interface area: Service extension

- Current interfaces and rationale are recorded in `ADR-0002`. Access policy is per request; its evaluation is not atomic with an application's later data changes or handler effects.

1.7 Reducer and runtime ownership

A pure state transition emits work; one actor decides when that work runs.

Reducer

responsibility

Maintain exchange, invocation, subscription, and catalog state for one authoritative history.

interface

init, step, perform; Received, Finished, Progressed, Crashed, TimedOut, ExchangeClosed, Notify, RegisterTool, UnregisterTool, EndStreams.

interactions

Produces Write, Start, Cancel, Close, and Admitted effects; perform runs outside step in the calling worker.

invariants

Every effect names an exchange or invocation; repeated admission and terminal input suppress output; progress requires the retained token and increasing nonnegative progress.

failure

Wire errors return immediate responses; unknown/late completions do nothing; copied state and invocations require an owner rather than granting exclusive execution.

Runtime actor

responsibility

Serialize reducer commands, account for live capacity, isolate handlers, and own cancellation cleanup.

interface

start / supervised, send_frame, exchange_closed, notify, register/unregister, close, stop; OutputWrite / OutputClose sink.

interactions

Unlinked monitored workers perform handlers; sink delivery is acknowledged; lifecycle telemetry reports transitions.

invariants

Duplicate exchange admission consumes no extra slot; bounded frames/depth/exchanges/tombstones; no late Start after cancellation tombstone; runtime remains alive until cancelled workers exit.

failure

FrameTooLarge, FrameTooDeep, TooManyLiveExchanges, RuntimeStopped are typed admission failures; worker crash/timeout is sanitized on its own exchange; sink error closes that exchange.

Runtime setting	Default	Boundary
Live exchanges	100	Admission refuses TooManyLiveExchanges before a new

Runtime setting	Default	Boundary
		worker. Duplicate admission consumes no slot.
Frame / depth	1 MiB / 64	FrameTooLarge / FrameTooDeep before reducer admission.
Invocation / cancellation	30 s / 5 s grace	Timeout closes publication; grace bounds the runtime-owned handler's cleanup interval.
Invocation tombstones	60 s / 10,000	Late starts are suppressed within retained identity history; fresh ids remain mandatory after pruning.

Effect timing	Owner action	Observable guarantee
Received → admitted	Reduce bounded validated bytes with explicit context	Admitted observation follows protocol acceptance; refusal starts no worker.
Start	Retain worker ownership and start handler once	Invocation.started identifies execution; no exactly-once business-effect promise.
Progressed	Validate active token, monotonic progress; wait for sink acknowledgement	Backpressure reaches the producer; late or invalid reports are dropped.
Finished / crash / timeout	Produce one terminal output and close exchange	Private crash details stay off wire; later completions cannot answer again.
Cancel	Signal handler selector; schedule grace kill	Wire output stops; handler may clean downstream work during grace.
Stop / owner exit	Cancel all active work and retain cleanup ownership	No unowned cancelled handler is declared cleaned before it exits or is killed.

- perform must run in the process addressed by signal_cancelled. Custom interpreters own scheduling, serialization, output acknowledgements, cancellation delivery and retention. A pure transition library cannot enforce these obligations for an arbitrary interpreter.
- Reducer closed exchange records are bounded at 10,000 and prune oldest records to three quarters when exceeded. Each runtime invocation `Tombstone` is retained for 60 seconds, at most 10,000 by default. Fresh node-unique identities prevent pruned records from aliasing new work.
- Every cancellation path signals first and preserves a default 5-second `Cancellation grace`, including timeout, close, stop, disconnect, stdio cancellation, and owner exit. The handler owns cancellation of effects it started elsewhere. Killing a worker is neither compensation nor proof a remote effect did not happen. See `ADR-0003`.

BEHAVIOR

A failed sink closes only its exchange

Given A runtime serves several exchanges and its output sink cannot write one exchange.

When That sink returns an error.

Then The affected exchange closes and its invocation receives cancellation.

Then Other exchanges retain their own destinations and lifetimes.

level: interface area: Runtime output

BEHAVIOR

A late completion cannot replace live work

Given An old exchange closed and a new exchange reused the same wire request id.

When The old invocation reports progress or completion.


Then No output is written for the old invocation and the new exchange remains unaffected.

level: interface area: Runtime races

1.8 HTTP endpoint and limits

Buffered mounting, streaming ownership, and admission budgets have different guarantees.

SEQUENCE Protected request timing

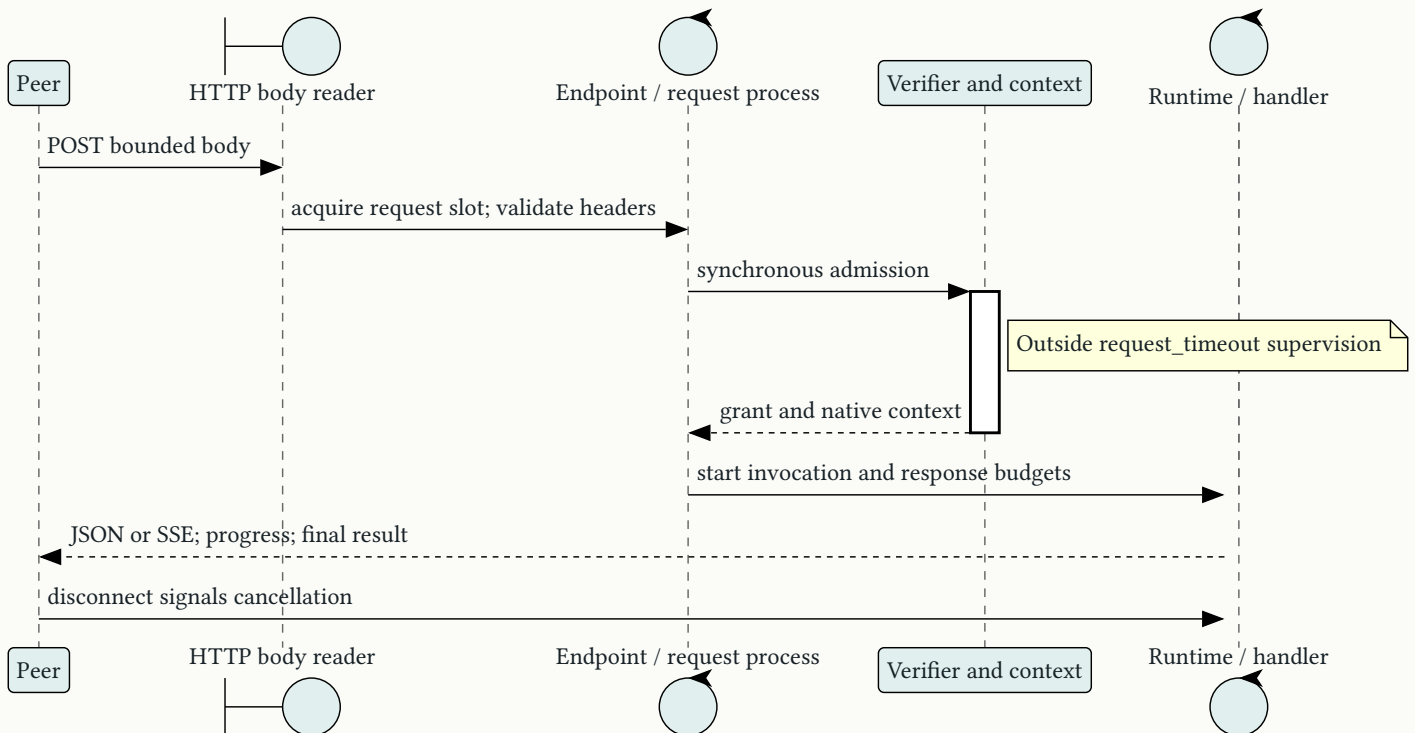

This is the implemented ordering. Whole-request deadline and callback process-affinity corrections remain unresolved in [ADR-0008](#).

Endpoint owner

responsibility

Own current registry, admission slots, streams, optional listener and shutdown ordering.

interface

new / new_with_context / new_protected, setters, handler, handle, mist_handler, start, supervised, stop; live registration and notify.

interactions

Mist owns socket reads/writes; the endpoint leases a server snapshot, builds context, then creates request runtime/broker; application router owns mounted endpoint lifetime.

invariants

Validate completed config before binding; loopback default; nonloopback unprotected bind requires explicit opt-in; header/media/Host/Origin validation and byte/depth limits precede protocol work.

failure

Typed startup settings/actor/listener failures; HTTP rejections with telemetry; capacity 503; body 413; buffered listen 406; response wait failure 504.

Endpoint phase Configured Running Stopping Stopped Failed

Endpoint lifetime aggregate stateful MCP owned by endpoint caller

The actor and optional linked listener that own admitted HTTP requests.


ATTRIBUTES

derived **Phase** · Endpoint phase endpoint-phase · endpoint-life
Running preserves unexpected listener failure propagation; intentional shutdown disconnects that link before termination.

RELATIONSHIPS

1 : 0..1 A mounted endpoint has no Relay listener; a started endpoint owns one listener.

STATE MACHINE Listener ownership

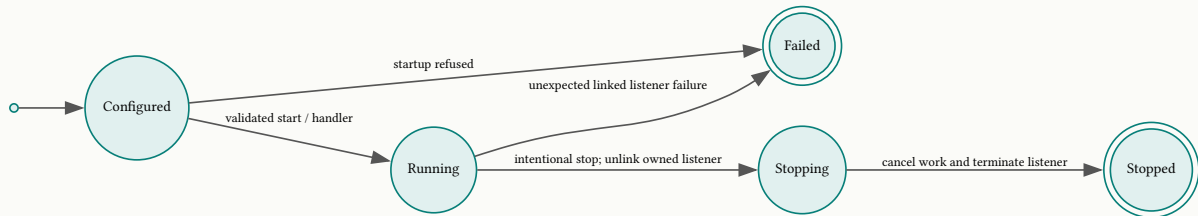

Unlinking a running listener or ignoring all linked exits would break ownership; [ADR-0006](#) records the intentional-shutdown correction.

Limit or policy	Default / refusal	Application point
Bind and protection	127.0.0.1, ephemeral; unprotected nonloopback start fails	Validated before listener startup; allow_unauthenticated is explicit caller policy.
Body and JSON depth	1 MiB → 413; depth 64 → 400	Mist bounded reader before slot; endpoint body check before context; depth before reducer parse. Mounted body allocation belongs to host.
Request slots and listen streams	1,024 and 64 → 503	Leased admitted requests/streams; does not count all incomplete network body readers.
Response budget	1 MiB response or cumulative stream event bytes	Broker enforces event output budget and acknowledged delivery; existing allocations are not erased by refusal.
Invocation / response wait	30 s	Begins after context and bearer callback; response collection and stream write waits have their own timing.
Cancellation and keepalive	5 s grace; 15 s SSE keepalive	Disconnect suppresses output and signals worker; keepalive is transport liveness.
Host and Origin	Loopback names / bind host and configured origins	Case-insensitive header names; rejection precedes callback; missing Origin is permitted by current policy.

- handle consumes Request(BitArray) and returns buffered Response(BytesTree). It drops progress, cannot observe peer disconnect, and rejects subscriptions/listen with 406. mist_handler, start, and supervised retain streaming, keepalive and disconnect cancellation.

- Context and verifier closures execute in the serving request process. A blocking callback occupies its admitted slot and can delay observing closure. Its own network/database timeout and owned cleanup remain the caller's responsibility under the current implementation; the false whole-request claim is a design gap, not a repaired runtime guarantee.
- Modern MCP accepts POST only; protected-resource metadata has a separate GET path. No modern GET notification endpoint, DELETE session termination, or protocol session is added by this metadata route.
- Optional FFI helpers inspect Mist's Connection record to set a send timeout and observe buffered connection closure. They fall back on unfamiliar shapes; Mist upgrades require the real disconnect tests and record-contract check. See [ADR-0003](#).

BEHAVIOR

Buffered mounting refuses listen streams

Given An application mounted the framework-neutral buffered handler.

When A client requests subscriptions/listen.

Then The response is 406; ordinary requests remain buffered and emit no progress.

level: interface area: HTTP mounting

BEHAVIOR

Protected context runs before invocation supervision

Given A configured verifier or context callback remains blocked beyond the request timeout.

When The callback later succeeds under the current implementation.

Then The invocation may still start and return success because its budget begins after the callback.

Then The request timeout setting has not bounded the callback's lifetime.

level: interface area: HTTP admission timing

1.9 Subscriptions and live registry changes

Acknowledgement follows successful owner registration, while churn history stays unretained.

- Each [Subscription](#) has an independent owner and cancellation destination. A listing [Cursor](#) selects a position, while endpoint generation orders live catalog reconciliation. Neither is business identity.

Endpoint stream registration

responsibility

Coordinate current catalog, subscription capability/filter and publication of the initial stream frames.

interface

subscriptions.listen through reducer, endpoint stream attach/reconcile, notify, register/unregister and end_streams.

interactions

The lease carries server snapshot and generation; the endpoint serializes activation and reconciles changed snapshots into request runtimes before acknowledgement release.

invariants

Same-name replacement updates handler and metadata; no lifetime change journal; no acknowledged ghost stream; unsupported notification kinds are omitted.

failure

Owner death, timeout, failed reconciliation or writer failure tears down runtime/broker/stream and queues unregister if admission may have happened.

Subscription phase

Pending Active Closed

Subscription

entity

stateful

MCP

owned by endpoint/runtime and client stream owner

An acknowledged notification filter tied to one listen exchange.

ATTRIBUTES

derived

Phase · Subscription phase `subscription-phase` · `subscription-life`
Pending bytes are held until owner registration succeeds.

authored


Filter · resource-updated URI / tools/resource/prompt list-change kinds
The acknowledgement retains only offered kinds, including tools-list change for an empty dynamic registry.

RELATIONSHIPS

n : 1

Many subscriptions share one stdio child or current HTTP endpoint catalog.

STATE MACHINE No acknowledgement before activation

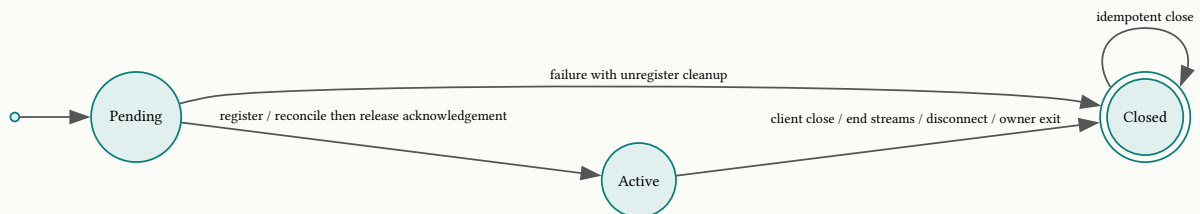

- Every accepted catalog mutation increments generation. A changed snapshot reconciles the complete current catalog and produces a tools-list-change notification before activation acknowledgement; reconciliation cost depends on snapshot/current size rather than prior churn.
- Stdio subscription ids correlate events within the child owner. FIFO queues preserve notifications for other subscriptions across a timed-out read; closing one subscription sends its cancellation, marks it closed and discards only its events. The shared child remains usable.
- Pending stdio frames and notifications have a 256-frame bound; overflow closes the owned child before evicting its handle. This is a retained-data count bound, alongside frame byte bounds, rather than a universal allocation or stream-delivery guarantee. See `ADR-0006`.

BEHAVIOR

Same-name replacement becomes current before acknowledgement

Given A pending stream's catalog snapshot contains a tool removed and re-registered under the same name.

When The server activates that stream.

Then The stream observes tools-list change and subsequent requests use replacement metadata and handler.

level: interface

area: Registry races

BEHAVIOR

Timeout preserves another stdio subscription's events

Given Events for subscription B arrive while a read waits on subscription A.

When A's read times out.

Then B's events remain available in arrival order and the child remains owned.

level: interface

area: Subscription reads

1.10 Stdio transport

A trusted parent owns the child boundary and one actor serializes pipe traffic.

Server stdio adapter

responsibility

Frame bounded newline JSON-RPC and serialize stdout without nonprotocol noise.

interface

serve blocks main; serve_with config sets chunk size and runtime limits.

interactions

Binary stdin reader, incremental framer, serialized writer and runtime; EOF and asynchronous writer error reach the serving owner.

invariants

4 KiB reads by default; LF or CRLF framing; UTF-8 may split between byte chunks; stdout exclusively protocol; oversized tail discarded until newline.

failure

Invalid settings, ReadFailed, StdoutBroken, StartupFailed and InvalidTrailingData are typed; broken stdout terminates even with idle stdin; shutdown retains cleanup ownership.

Client child owner

responsibility

Launch executable directly, own its port, and serialize requests and subscription reads.

interface

client.stdio config / connect; internal request, subscribe, next and cancellation protocol.

interactions

One actor retains child, framer, FIFO frames/notifications and closed subscription ids; outer client polls cancellation and budgets.

invariants

No shell fallback; command closure avoids accidental inspection; stderr isolated; reply ids correlated; unrelated responses fail; pending and buffered limits enforced.

failure

Child exit, malformed frame, timeout, cancellation, client close, oversize and overload become typed client reasons/evidence; terminal errors close port before clearing state.

- Stdio provides no bearer authorization. Its trust boundary is the parent process and launched executable; metadata or a caller-supplied principal does not supply transport authentication.
- Cancelling one active stdio call sends notifications/cancelled. Closing the client closes its owned child and in-flight waits; repeated or concurrent close observes the owner via a monitor rather than treating dead-owner acknowledgement as success work.
- EOF in the middle of a nonterminated frame returns trailing-data failure. Idle broken output and child/owner death require asynchronous lifecycle tests; line parsing alone cannot prove cleanup.
- Legacy retained stdio shutdown and reconnect behaviors require their own strategy and tests. Existing bounded frames and child ownership do not establish legacy session conformance. See [ADR-0003](#) and [ADR-0007](#).

BEHAVIOR

Stdio overflow closes its child before eviction

Given A child sends more retained frames than the client permits.

When The owner detects overflow.

Then The child is closed and subsequent calls fail as a terminal connection.

level: interface area: Child lifetime

1.11 Client calls and submission evidence

Client views share a connection while deadlines, correlation and cancellation remain explicit.

Client configuration and connection

responsibility

Validate target/settings, own resources it creates, and keep caller-owned HTTP resources distinct.

interface

http(url), stdio(executable,args), in_process; pure setters; connect; close; with_http_client injection.

interactions

HTTP Gun provides transport, TLS, pool and cancellation; stdio owns child; in-process owns runtime; immutable views share the peer.

invariants

Validation precedes connection; plaintext headers off loopback require explicit opt-in; absolute HTTP(S) URL excludes userinfo/query/fragment and invalid escapes; no automatic retry.

failure

InvalidConfig, ConnectFailed and Refused occur before request delivery; setup errors have a fresh correlation no server saw.

Calls, lists and continuations

responsibility

Encode arguments, correlate responses, preserve typed protocol outcomes, bound traversal and retain originating continuation.

interface

call, call_discovered, discover, list services, read_resource, get_prompt, complete, listen/next/close_subscription, resume; list_raw / call_raw; per-client deadline/cancellation/correlation/key views.

interactions

Definition output codec decodes native values; discovered calls preserve optional exact structured Value and media; request metadata advertises only configured input methods.

invariants

One response id must match request; response/version/size validation; each continuation retains original client/name/arguments/state; supplied responses cover every request key once with object values.

failure

Opaque Error retains Reason and Correlation; stable Kind/Evidence classify without diagnostic parsing; malformed or oversized response does not establish application outcome.

Client setting	Default	Boundary
Connect / request timeout	10 s / 30 s	Connection startup and individual request; absolute deadline may shorten request budget.
Response bytes	1 MiB	ResponseTooLarge retains delivery evidence rather than manufacturing a tool outcome.
All-page listings	256 pages / 10,000 items	ListingLimitExceeded; a repeated cursor is MalformedResponse.
Stdio pending calls	64	TooManyPendingCalls before enqueueing additional work.
Advertised input methods	None	Explicit configuration opts into Elicitation, Sampling or Roots.
Control / result	Contract	Decision left to caller
Timeout and deadline	30 s per request; absolute deadline view shares a total budget and may shorten it	Multi-page traversal otherwise resets request timeout per page; choose total budget explicitly.
Cancellation	HTTP closes that request connection; stdio sends notification; in-process signals handler	Handler cleanup and external effect reconciliation remain separate.

Control / result	Contract	Decision left to caller
Client close	Owned peer cancels in-flight calls; injected HTTP Gun remains running and calls may finish	Use per-call cancellation to stop work on the shared HTTP client.
ToolResult	Succeeded(output,content), ToolFailed(content,structured), InputRequired(requests,state,continuation)	Continue interaction or choose lossy output projection.
NotSent	Configuration, pre-send refusal, invalid input, overload; no request sent	Retry only within caller policy and remaining budget.
MaybeSent	Lost/oversized/malformed response or in-flight timeout/cancellation	Mutating work may have happened; use principal+key receipts or reconciliation.
Completed	HTTP status / RPC answer / tool result / input request observed	Completion is exchange evidence; tool failure can follow effects.
Output projection	require retains transport error and classifies refusal/needs-input; require_discovered uses actual presence	InputRequired projection discards the continuation deliberately; text projection discards nontext media.

Detailed Reason	Kind	Evidence / retained payload
InvalidConfig	Configuration	NotSent; invalid ConfigField.
ConnectFailed / Refused	Unreachable	NotSent; failed establishment / HTTP destination policy.
TimedOut / Cancelled / ConnectionClosed	Timeout / Cancellation / Unreachable	Explicit Evidence argument records whether submission may have occurred.
TooManyPendingCalls	Overloaded	NotSent; configured pending-call limit.
ResponseTooLarge	TooLarge	MaybeSent; response byte limit.
HttpStatus	Rejected	Completed; status and optional WWW-Authenticate challenge.
RpcError	Protocol	Completed; code, message and optional exact data.
MalformedResponse	Protocol	MaybeSent; diagnostic detail for logs.
UnsupportedVersion / UnsupportedInputRequest	Protocol	Completed; supported revisions / unsupported requested method.
InvalidArguments / InvalidInputResponses	InvalidInput	NotSent; arguments diagnostic / exact one-object-per-request-key failure.
ListingLimitExceeded	TooLarge	Completed; page or item limit encountered after a listing response.

- `list_raw` preserves exact item values while retaining the same page/item bounds and repeated-cursor protection. `call_raw` returns the exact result value through the same request validation, evidence and controls; `tools/call`, `prompts/get` and `resources/read` require a routing name, while other methods reject one. Raw access does not bypass revision or transport admission.
- Error Kind remains closed: Configuration, Unreachable, Timeout, Cancellation, Overloaded, Rejected, Protocol, InvalidInput, TooLarge. Detailed Reason includes status and WWW-Authenticate, RPC code/message/data, version, input and limit detail, and delivery evidence. Log describe_error with error_correlation; never branch on prose.
- `is_retryable` is an advisory classification, not a retry loop or effect proof. NotSent unreachable/timeout and overload can be retried; MaybeSent unreachable/timeout requires application-approved idempotence; 429/503 retain explicit HTTP status. Read-only hints from untrusted peers do not supply that approval.
- Input methods Elicitation, Sampling and Roots are configured explicitly; no responders are advertised by default. Handler requests are filtered to client capability; unsupported incoming methods fail instead of automatically executing local capabilities. A [Continuation](#) retains its origin rather than retargeting subsequent answers.
- Connection copies share lifetime. Views attach an absolute deadline, cancellation token, correlation or idempotency key without creating resources. Borrowed HTTP Gun correlation can supply the base view; invalid wire correlation stays local.

- Absent discovered structuredContent is None, including continuation rounds; explicit null is Some(Null). output.require_discovered projects text only on actual absence and does not inspect outputSchema to invent presence. See [ADR-0005](#).

BEHAVIOR

Invalid idempotency key fails before sending

Given A client view has an empty, oversized or non-visible-ASCII idempotency key.

When It attempts a request.

Then The result is InvalidArguments with NotSent evidence and the call's correlation.

level: interface area: Client controls

BEHAVIOR

Preserve present structured null

Given A discovered call completes with structuredContent explicitly null and nonempty text.

When The caller requires the discovered output.

Then The answer remains Null rather than the content's text.

level: interface area: Discovered output

1.12 Bearer admission and tool policy

A trusted verifier supplies claims; Relay admits resource authority and applies current request policy.

- The configured verifier's [Attestation](#) is admitted against [Protection](#) to produce a [Grant](#). The caller translates that grant into [Application context](#) it does not replace endpoint admission with a web-login identity.

Resource-server authorization

responsibility

Parse bearer headers, admit exact resource/scopes, render challenges and metadata.

interface

BearerToken/ProtectedResource/Scope constructors; verifier(name, fn(token,correlation)); attestation; admit; Grant readers; Protection; challenge and resource_metadata.

interactions

new_protected calls the selected verifier and builds native context from Grant; Warden may supply an independently configured verifier recipe but Relay does not import it.

invariants

Singleton exact resource audience; all endpoint scopes present; retain actual scopes; correlation never affects admission; token not retained as Grant field.

failure

MissingToken, VerificationFailed, ResourceNotGranted and MissingEndpointScope produce distinct internal decisions; public HTTP status/challenge is sanitized.

Refusal	Response	Caller action
Missing token	401 Bearer with resource_metadata; no error code	Discover protected-resource metadata or supply credentials.
Rejected/unmapped/wrong-resource token	401 invalid_token	Refresh or reauthorize under resource/issuer policy; no infinite 401 loop.
Missing required scope	403 insufficient_scope and required scopes	Explicit step-up policy.
Verifier unavailable	503 without authentication challenge	Verifier availability is not invalid identity.

Refusal	Response	Caller action
Hidden/denied/unknown tool	One inaccessible protocol outcome	No tool-existence disclosure; handler and decoder untouched.

- The verifier owns signature, issuer, expiry, status, algorithm, key rotation, introspection and sender-constraint checks. Its Attestation constructor can assert arbitrary claims; the application selects and trusts that implementation. Empty audience/scope strings are filtered before exact admission; duplicate/additional audiences still fail the singleton profile.
- Protection stores an absolute HTTP(S) resource URI without fragment, nonempty exact scopes and declared authorization servers. URI and scope equality are exact configured strings; no path, case, alias or audience-set normalization grants authority.
- BearerToken captures raw value inside a closure to reduce accidental inspect disclosure; token_value intentionally reveals it to the verifier. A caller-owned principal can still retain secrets, so token redaction remains an adapter and observation obligation.
- new_protected runs admission on each HTTP request before building context. The historical protected-registry wrapper is superseded; grants are translated into native context and server.with_tool_access filters listings and rechecks visible+callable before argument decode. Per-input permissions remain in typed handlers.
- The metadata GET at /.well-known/oauth-protected-resource plus resource path reports resource, authorization servers, scopes and header bearer method. Challenge header escaping and status behavior belong to Relay; token validity remains outside it.
- A Warden web identity cannot substitute for a Relay grant. Relating a login identity to bearer principal, tenant and business access is explicit application policy. Multiple trust domains sharing resource and principal type need explicit verifier-origin reuse rules. See [ADR-0004](#).

BEHAVIOR

Additional audience prevents admission

Given A trusted verifier returns a valid token attestation with the configured audience and one additional audience.

When Relay admits it under the singleton resource profile.

Then It returns ResourceNotGranted and no Grant or tool work is admitted.

level: interface

area: Resource grants

BEHAVIOR

Unavailable verification is not invalid authentication

Given The configured verifier cannot obtain enough evidence to decide token validity.

When It returns VerifierUnavailable.

Then The protected server answers 503 without WWW-Authenticate and emits the unavailable decision.

level: interface

area: Authorization failure

1.13 Composition ports and observations

Applications translate protocol evidence and native execution outcomes at small explicit boundaries.

- The application maps [Submission evidence](#) into its effect model. [Correlation](#) joins observations, while [Idempotency key](#) acquires business meaning only under authenticated principal and application policy.

Typed tool output port

contract

Expose answer, failure classification, evidence and reply metadata without importing an agent runtime.

responsibility

Return native output or structured projection failures.

interface

relay/client/output require, require_discovered, error_kind, evidence, describe_error, meta; tool.complete_with_meta; content.text_of.

interactions

An application translates its durable-run or agent vocabulary; full ToolResult remains available for media and interaction.

invariants

CallFailed retains original Error; ToolFailed and InputRequired retain Completed evidence; metadata lookup imposes no Fabric key.

failure

Projection loss is explicit; uncertain transport does not become application refusal.

- Fabric invoke owns principal+key run identity, matching-input reopen, wait, cancellation and durable outcome. A Relay recipe copies request correlation/key, builds invoke request from native principal/input, sets its wait shorter than Relay's invocation budget, and returns native result plus application run metadata.
- For an unkeyed request the recipe forwards tool.cancelled to the owned invoke wait; keyed work may retain its durable run under application policy. Relay's JSON-RPC id and InvocationId never identify that durable run.
- Discovery has separate listing and schema/name admission boundaries. The application decides peer trust before treating readOnlyHint as evidence that MaybeSent work is safe to repeat. tool_hub trusts the inventory endpoint it owns; this is not a general trust policy for arbitrary remote peers.
- Secure MCP uses a Warden resource-verifier recipe and native principal context. Warden validates token cryptography/introspection with its own limits; Relay maps resource/scope admission and challenges. Independent Warden bounds do not repair Relay's callback budget gap.

Correlation and telemetry

responsibility

Carry request observation identity and emit typed protocol facts after transitions.

interface

client.with_correlation, http.with_correlation, tool.correlation, telemetry event descriptors; Sinal observers.

interactions

HTTP x-correlation-id and _meta io.github.gleam-dream/correlation join client, endpoint, verifier, handler and downstream events.

invariants

Every request gets a Correlation; precedence is transport override, valid carried value, then fresh; accepted wire value is 1–128 visible ASCII; correlation never authorizes.

failure

Invalid carried correlation is ignored rather than refusing the call; before-call errors carry a fresh local-only correlation; rejected frame has no admitted request correlation.

Event	Transition observed
frame.rejected / http.rejected	Boundary refusal before admitted work
request.admitted	Accepted protocol request
invocation.started / completed / cancelled / crashed	Worker execution, result, cancellation intent or crash/timeout; duration on completion
exchange.closed	Terminal destination with its request correlation
authorization.decided	Configured verifier/resource admission decision
client.call	Call outcome and elapsed duration with outgoing correlation

- Observation callbacks do not choose protocol results. Request ids, correlation and idempotency keys are untrusted independent values; the authenticated principal controls business authority. The optional idempotency metadata key is io.github.gleam-dream/idempotency-key, accepted only for 1–128 visible ASCII. See [ADR-0005](#).

1.14 Validation and extension ownership

Structural validity, runtime fidelity and complete conformance require different evidence.

Public testing and evidence tools

responsibility

Provide deterministic local serving/calling and validate compiler, schema, runtime and external contracts independently.

interface

testing.connect/error/request/body_text/verifier/unavailable_verifier; test suites and peer fixtures; schema/negative/checksum scripts; pinned conformance runner.

interactions

In-process uses the same wire and runtime; fixture peers exercise hostile declarations/continuations/subscriptions; conformance launches a local endpoint; external recipes compile in Fabric consumers and application checkouts.

invariants

Schema checksum and sibling revisions recorded; tests use actual encoder bytes; unsupported features and suite omissions remain explicit; no selected scenario or expected-failure file claims full conformance.

failure

Wrong native handler codec fails compilation; schema mutations fail validation; runtime races need process/socket assertions; client and auth suites require independent invocation.

Evidence layer	What it proves	What it cannot prove
Compiler / negative fixture	Native codec/handler agreement and public construction boundaries	Runtime lifecycle or token authenticity
Frozen JSON schema corpus	Actual wire output shape and required-field mutations	Behavior, framing or complete protocol conformance
Pure/property/race histories	One authoritative transition history, ids, terminal suppression	Exclusive interpreter ownership or stopped external effects
Runtime / real HTTP / child tests	Measured process cleanup, acknowledged backpressure, disconnect and FIFO behavior	All OS/library versions or untested admission/allocation bounds
Pinned server conformance	Emitted assertions for frozen 2026-07-28 server scenarios	Client/auth/legacy support or zero-check scenario coverage
External consumers	Common and advanced public usage with caller-native types and failure handling	General third-party schema/peer trust or production provider acceptance

- test/fixtures/mcp_2026 retains upstream raw bytes, checksum, commit and MIT license. scripts/conformance retains package and lockfile; acceptance uses the pinned 0.2.0-alpha.10 requirement anchor. See [ADR-0007](#).
- The pinned server gate requires assertions for every selected scenario and rejects missing results, skips, failures and warnings. The unpublished fixture validates its requested elicitation response, mutates the live tool catalog and publishes prompt notifications through the endpoint owner. See [ADR-0009](#).
- Keep split UTF-8/large frames, broken stdout with idle stdin, owner/child death, equal wire ids, duplicate admission, cancellation races, tombstones, held-writer mailbox bounds, burst disconnect, registry-generation barriers, FIFO subscription timeout and overflow fixtures. Source assertion names supply reproduction points, not a test-run diary.
- Revision codecs, custom template matcher, generic verifier and reducer interpreter are extension contracts with different ownership. A new transport must prove framing, limits, disconnect/cancellation and cleanup from an external consumer; a buffering interface cannot fabricate socket ownership.
- A new protocol revision carries its schema, requirements, supported-method set and independent lifecycle strategy. Supported-version removal requires a major version; deprecation lasts at least a minor release. Older than 2025-03-26 is excluded.
- Release verification retains Erlang/OTP target matrices, pinned TypeScript/Python peers in both directions, Inspector smoke, fuzz/soak/cancellation storms, bounded process/mailbox evidence and continuous latest-harness/schema drift. No completed hardening run is inferred from the standing design.

1.15 Retained protocol strategies

Full scope includes separately modeled compatibility and authorization flows.

Legacy compatibility strategy

responsibility

Admit a session through initialize, negotiate revision/capabilities and gate requests on initialized readiness.

interface

Intended revision-bound client/server codecs and session owner; no legacy public runtime is implemented.

interactions

Share native definitions, results and application ports; keep session registry, idle/max-session limits, transport resumption and revision notifications separate from modern POST-only execution.

invariants

Reject repeated initialize, stale/unknown session, early normal calls and post-initialization version disagreement; resultType remains absent.

failure

Revision-specific protocol failures, cleanup, unsupported capability and session termination outcomes; initialize cancellation rules must match the frozen revision.

Legacy session phase

AwaitingInitialize AwaitingInitialized Ready Closed

Legacy session

aggregate stateful MCP owned by legacy session runtime

Retained design for negotiated 2025-11-25 lifecycle, absent from modern state.

ATTRIBUTES

derived


Phase · Legacy session phase legacy-phase · legacy-life
Only valid initialize establishes negotiated version, capabilities and session identity.

RELATIONSHIPS

1 : 0..n

One ready legacy session may own requests and its notification/resumption stream.

STATE MACHINE Retained legacy handshake

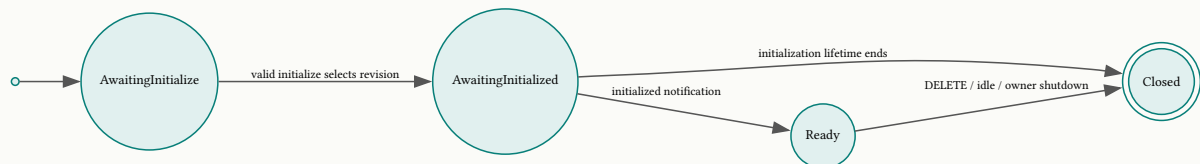

No transition from modern discovery creates this session. Early or repeated handshake messages reject without changing the phase.

MCP client authorization strategy

responsibility

Own MCP-specific resource discovery, issuer-bound credentials, scope step-up and bounded reauthorization.

interface

Intended static bearer, authorization-code PKCE, client credentials and private-key-JWT modes; preregistration, permitted dynamic registration and client metadata documents; pluggable memory/file token custody.

interactions

Challenge → RFC 9728 resource metadata → RFC 8414 or permitted OIDC metadata → registration → authorization/token exchange; application callback handles user interaction.

invariants

Bind state, PKCE verifier, selected issuer, callback issuer, resource, redirect and scopes; reject replay/forged state; persist rotation before using refresh credentials; coalesce concurrent 401 flows.

failure

Discovery/issuer/registration/token/PKCE/callback/step-up failures remain explicit; repeated 401 retry is bounded; malicious discovery cannot relax credential or network policy.

- Legacy 2025-03-26 and 2025-06-18 remain deferred supported-target ambitions. Deprecated dual-endpoint HTTP+SSE is optional compatibility; GET notification streams, Last-Event-ID, reconnect hints, ordered event replay and duplicate suppression require separate revision evidence. Parser carry-over alone does not prove exactly-once delivery.
- Logging retains an approved typed request-scoped emitter and legacy set-level behavior where defined. Arbitrary handler JSON logging was rejected in prior automatic review and remains absent; no indirect sender may be treated as approved.
- Retained resource-read continuation, rich client interactions, form/URL elicitation outcomes, roots, sampling and extension methods are capability checked and revision scoped. Deprecated server-initiated behavior is not transplanted into modern wire methods.
- Tasks, Apps, DPoP, mTLS sender constraints, replay checks and workload identity require explicit pinned models and consumers. Public helpers retain paired transports, fake clock, scripted peers and configurable authorization metadata/JWKS server as unbuilt support.
- The retained eight-distribution and dual-target ambitions change no capability responsibility: one package remains the implemented distribution; independent package/target splits require consumer and dependency evidence. See [ADR-0001](#) and [ADR-0007](#).

1.16 End-to-end walkthrough

A protected typed operation keeps protocol evidence separate from the business effect.

- An application owns Item and LookupError records and their input/output codecs. It defines lookup once, binds a handler with an explicit safe error renderer, creates server.new, and supplies its own principal/context policy.
- The protected HTTP endpoint validates its configuration before acquiring a listener. Its configured verifier checks the presented token and returns principal, audience and scopes; Relay admits exactly its resource and required scopes, then constructs native context in the serving request process.
- A client connects to the endpoint using one configuration and a view with a 10-second absolute deadline, cancellation token, correlation and optional order key. The request carries modern metadata and agreeing routing headers; schema and tool access refusal occur before the handler.
- The endpoint allocates an exchange, the runtime admits one invocation and the handler receives Call with native context, correlation and cancellation. It performs lookup or explicitly maps a durable invoke port, whose wait must fit inside the transport budget.
- A successful structured answer has native output plus content mirror; a safe application failure becomes ToolFailed; a required input round returns an originating continuation. On lost delivery the client receives MaybeSent and must consult business identity/reconciliation before retrying a mutation.
- A streaming peer disconnect closes publication and signals cancellation; the worker gets grace to stop work it owns elsewhere. Client close releases Relay-owned resources; endpoint stop disconnects its listener failure link before intentional termination. Shared HTTP Gun and business receipts retain their own application owners.
- The boundary gap is visible even in this path: verifier/context time is outside Relay's current invocation budget. A caller needing an end-to-end bound must bound those callbacks independently until the admission model is decided. No evidence above proves that an external business effect was undone.

Glossary

Every term the layer declares, with the context that owns it.

Application context

[owned by root](#)

The caller-owned native value supplied to listing policy and handler invocation for one request.

Attestation

[owned by root](#)

A configured verifier's assertion about a token's principal, audiences, and scopes. Construction is not proof of cryptographic verification.

Bound tool

owned by root

A definition joined to an application handler before heterogeneous registration erases the handler's native types.

Cancellation grace

owned by root

The interval after a handler receives cancellation and before Relay kills a handler that has not returned.

Continuation

owned by root

The originating client, operation, arguments, signed request state, and required responses retained for a subsequent tool input round.

Correlation

owned by root

A Sinal value joining observations across a request and its downstream work. A carried value is untrusted telemetry rather than identity.

Cursor

owned by root

An opaque server-authenticated reference to a position in one listing family. Catalog and authorization-view binding remain required refinements.

Definition

owned by root

A reusable tool contract containing a validated name, an input codec, and either an output codec or content-only output.

Endpoint

owned by root

The HTTP owner of the current server description, admitted request slots, active streams, and an optional listener.

Exchange

owned by root

One inbound frame's response destination and the lifecycle of output to that destination.

Grant

owned by root

An admitted principal, exact protected resource, and actual attested scopes accepted by Relay's resource-server policy.

Idempotency key

owned by root

An optional client assertion that repeated requests refer to one logical operation. The application determines identity using the authenticated principal and key.

Input contract

owned by root

A Blueprint contract loaded from a tool's application input schema for local argument validation. Admission to Blueprint's finite profile is separate from MCP protocol validity.

Invocation

owned by root

One admitted unit of application handler work, identified independently of its client's wire request id.

Protection

owned by root

The configured resource and endpoint scopes against which an attestation is admitted, together with authorization-server metadata.

Protocol schema

owned by root

The frozen revision's authority for JSON-RPC envelopes, method parameters, declarations, and result fields.

Reducer

owned by root

A pure transition over one connection's protocol state that returns effects for an authoritative interpreter.

Request id

owned by root

The client-selected string or integer echoed inside a JSON-RPC response. It is neither execution identity nor authenticated authority.

Runtime

owned by root

The actor owning one reducer history and supervising the invocation processes that interpret its effects.

Server description

owned by root

An immutable catalog of bound tools, resources, prompts, completion, identity, and tool access policy.

Submission evidence

owned by root

The client's knowledge that a request was NotSent, MaybeSent, or completed its protocol exchange. It does not establish the application's effect outcome.

Subscription

owned by root

One owned listen request with an acknowledged notification filter and a cancellable stream lifetime.

Tombstone

owned by root

A retained terminal identity suppressing late or repeated work during a bounded retention interval.