
Design layer

the whole layer, as one document

Contents

1 Warden	4
1.1 Foundation	4
1.2 Pending updates	5
1.3 System at a glance	7
1.3.1 Whole-model relationships	8
1.4 Role and provider authority	8
1.4.1 Trust and configuration refinements	9
1.4.2 Metadata compatibility and signing keys	9
1.5 Login and identity	11
1.5.1 Transaction model and lifecycle	12
1.5.2 Verification and identity projections	13
1.6 Custody and refresh	13
1.6.1 Sealed records and the storage contract	14
1.6.2 Session lifetime and installation	14
1.6.3 Refresh generation state and authority	15
1.6.4 Access operation and competing requests	17
1.7 Resource validation and provider operations	17
1.7.1 Local access-token validation	17
1.7.2 Userinfo and service token grants	18
1.7.3 Introspection and logout	19
1.8 Transport and observations	19
1.8.1 Typed observations and correlation	20
1.9 Lifecycle and limits	20
1.9.1 Startup and cache replacement	21
1.9.2 Fetch ownership and cancellation	21
1.9.3 Bounds and cleanup guarantees	21
1.10 Failures and caller decisions	22
1.11 Testing and retained capability scope	23
1.11.1 Test and extension ports	23
1.11.2 Evidence and release conditions	24
1.11.3 Threat and authority coverage	25
1.11.4 Full capability disposition	25
1.12 End-to-end walkthrough	25
Glossary	26

ROOT DESIGN

Warden

1 Warden

1.1 Foundation

Warden verifies OIDC and OAuth evidence and owns user-token custody.

GOAL

Authenticate browser users with confirmed custody

A relying party completes authorization-code login over verified transport and receives checked identity only after confirmed session installation.

GOAL

Serve service and resource roles independently

A confidential service obtains its own access tokens without inventing a login redirect. A resource server validates access tokens without inventing client credentials.

GOAL

Retain the full protocol capability scope

Supported operations and deliberately unbuilt protocol families have explicit contracts and dispositions. External evidence constrains any growth or backend replacement.

NO-GOAL

Supply application permissions or browser sessions

Applications own business authorization, their authenticated session cookie, admission limits and protected resource requests.

NO-GOAL

Implement an authorization server or cryptography

The package targets Erlang. Authorization-server behavior, implicit, hybrid and password grants and JavaScript runtime support are excluded; cryptographic primitives belong to gose, kryptos and OTP.

INVARIANT

Only confirmed consumption authorizes code exchange

A rejected binding, rejected expiry admission, losing compare-and-set or unknown store outcome never authorizes exchange. A consumed authorization code is never resent.

mechanism

INVARIANT

Only fresh reservation authorizes refresh dispatch

Possible transmission quarantines the predecessor generation. Publication recovery never repeats provider refresh.

mechanism

INVARIANT

Checked identity and permissions have separate owners

Only Warden issues opaque identity, session and access-claim values. These values carry no application permission authority.

mechanism

INVARIANT

Provider observations cannot replace configured trust

Exact issuer, authentication method, algorithm policy and destination policy govern every provider operation. A token header or discovered endpoint cannot enlarge that authority.

mechanism

INVARIANT

Replacement caches cannot restore obsolete keys

Every cache incarnation discovers independently. Results from another incarnation cannot change its snapshot.

mechanism

INVARIANT

Ordinary diagnostics exclude credential material

Errors and typed observations omit codes, state, nonce, verifiers, credentials, tokens, raw claims and arbitrary foreign terms. VM inspection remains outside that guarantee.

mechanism

PRINCIPLE

Ask callers for decisions and retain owned facts

Configuration stays pure until validation. Protocol state and concurrency remain behind the public client, session, validator and store boundaries.

PRINCIPLE

Preserve uncertainty until authority resolves it

Refusal, proven non-action, possible effect and confirmed publication remain different outcomes. A convenient retry classification cannot erase them.

PRINCIPLE

Compose through caller-owned projections

Claim decoders preserve application types. Relay admission and Fabric approver policy compose through compiled consumer recipes without runtime dependencies.

1.2 Pending updates

build Adopt later protocol families through explicit contracts

PAR, JAR, DPoP, JWT-bearer grant and dynamic registration remain retained intent. Each requires its own configuration, typed failures, public consumer and external suite before support is claimed.

ADR-0009

ruling Choose optional security profiles and flow extensions

JARM and FAPI 2.0 security/message signing remain optional scope. Device grant, token exchange and back/front-channel logout remain explicit unsupported gaps. Social-provider quirks and broader refresh-scope profiles need a concrete growth decision.

ADR-0009

ruling Define quarantine reconciliation authority

No public operator clears quarantine or turns uncertain reservation into dispatch. Define provider/generation reconciliation authority; the current caller action is reauthentication.

ADR-0005

ruling Decide consumption commit-time expiry authority

Intended consumption must atomically reject expiry with the clock sampled after lock acquisition: the transaction must be unexpired at consumption. Current Warden checks wall-clock expiry before CAS; the Store port guarantees version atomicity but cannot require that clock sample. Decide how to establish the required atomic expiry boundary, then verify a blocked-CAS expiry schedule.

ADR-0004

ruling Decide the required shutdown completion boundary

stop observes supervisor exit for at most five seconds and returns Nil even on expiry. Whether a consumer needs confirmed fetch and admitted-store-call completion before releasing captured resources is unresolved.

ADR-0011

verify Verify deadline return latency during cleanup

complete_login propagates one admission deadline. A timed-out store worker is killed and its monitor may be awaited for up to one additional second before reply draining; synchronous telemetry also runs in the emitting process. Verify whether the promised whole-operation bound requires stronger completion semantics.

ADR-0011

verify Verify third-party initiation and certification limits

Independent coverage must establish third-party initiation, RP logout's browser/session effects and unsigned-token refusal under the selected profiles. Certification requires the exact release's selected-suite acceptance and independent security review. Recorded regression receipts cannot confer certification.

ADR-0008

ruling Choose kid-less rotation availability policy

A kid-less wrong-key signature can report bad signature without a key refresh. Refreshing on that failure needs an explicit bounded policy and attacker-load evidence.

ADR-0008

build Adopt typed email claims in the public test issuer

2026-10-09


Per-subject optional email and verification assertions, runtime updates and native public-consumer checks are accepted. Production protocol and constructor authority remain unchanged; implementation acceptance is separate from release certification.

ADR-0012


1.3 System at a glance

One Warden context owns protocol and custody; its neighbors retain distinct authorities.

VIEWPOINT CONTEXT-OWNERSHIP · ALTITUDE L1 · BOUNDARY Authentication and authorization owners

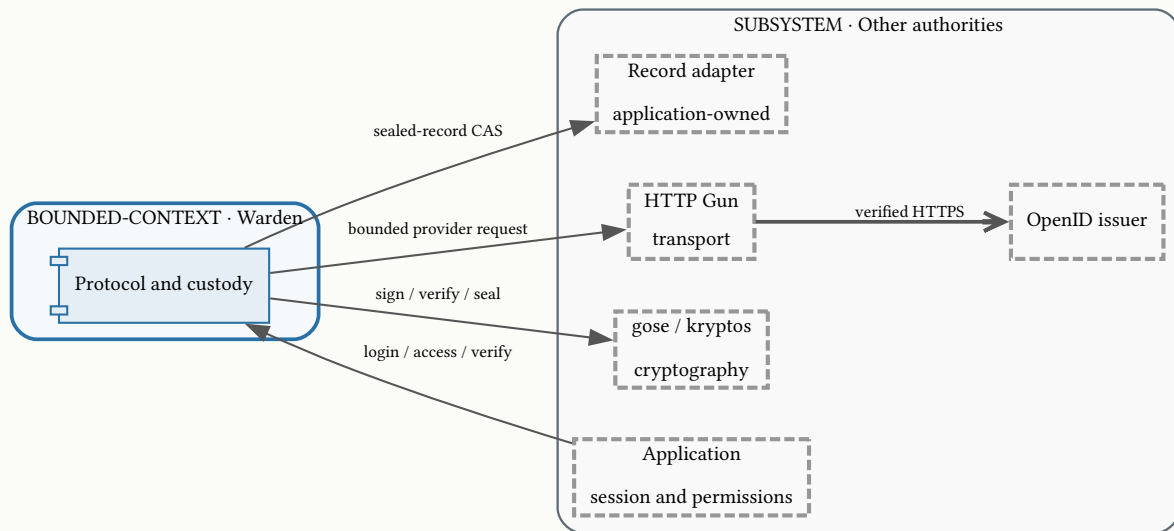

LEGEND

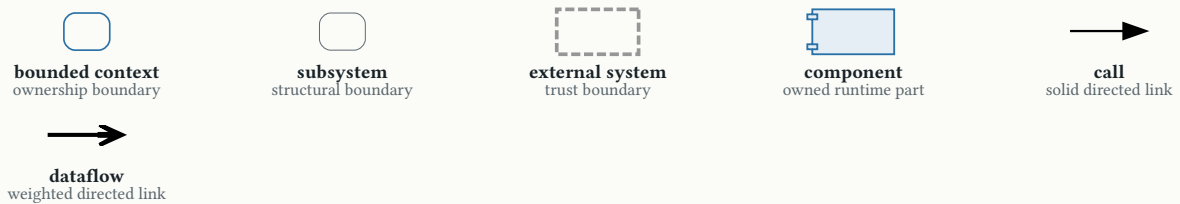


The Warden boundary owns checked evidence and token state. The application owns adapter correctness, connection lifetime and business decisions.

- A browser starts a **Login transaction**. Warden binds the callback and installs **Custody**. A later request restores that custody and obtains a usable token.
- A service client performs client credentials or introspection without login. A resource validator uses the same issuer cache without user custody.
- Each **Client** owns its **Provider** cache, HTTP pool, sweeper and optional in-memory stores. A durable Store captures application-owned resources.

1.3.1 Whole-model relationships

VIEWPOINT DOMAIN-MODEL · ALTITUDE L2 · CONTEXTS Authorities and checked projections

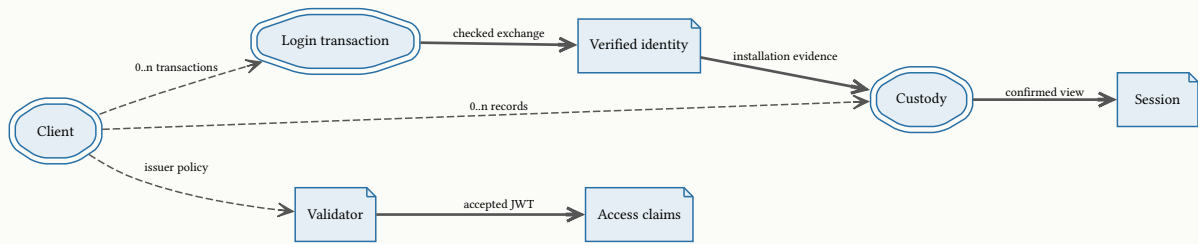

LEGEND



Identity is immutable authentication evidence; custody is mutable token authority. Access claims are an independent resource projection.

Model	Identity and authority	Canonical unit
Client, provider snapshot	Client names; snapshot accepted by one cache incarnation	Role and provider authority
Login transaction	state digest, version, expiry; one confirmed consumption	Login and identity
Custody record, refresh dispatch	reference digest, store version, token revision, dispatch and command ids	Custody and refresh
Session, recovery, access token	opaque owner-bound projections or retained commands	Custody and refresh
Validator, access claims	configured resource policy; checked token facts	Resource validation
Telemetry events	observed outcomes and correlation; no decision authority	Transport and observations

- The model has three mutable invariant owners: client/cache lifecycle, login transaction and custody record. Identity, session, token, validator and recovery values are immutable views or commands.
- Telemetry events are observed facts; they are neither durable custody events nor authorization commands. Correlation is observational and never changes admission.

1.4 Role and provider authority

Configuration admits a role before processes or provider effects exist.

Configuration admission

responsibility

Bind issuer, role, authentication, policy, limits and stores.

interface

config.new, service_client or resource_server; pure setters and validate; warden.new returns Client or StartError.

interactions

Validation derives internal settings, transport policy, sealing ring and stable names.

invariants

No connection or process starts during configuration. Invalid settings produce all detected ConfigErrors.

failure

Malformed issuer, redirect, scopes, trust, credentials or limits fail before startup.

Role	Required configuration	Admitted operations
Relying party	issuer, client id, redirect, authentication	login, custody, service grants, introspection and local validation
Service client	issuer, client id, confidential authentication	client credentials, introspection and validation; no login
Resource server	issuer; no client identity	local access-token validation; no grants or introspection

1.4.1 Trust and configuration refinements

- Issuer is an absolute HTTPS URI with no userinfo, query or fragment. Discovered issuer must equal it exactly. Redirects are absolute, fragment-free HTTPS except explicit loopback policy.
- A per-login redirect is chosen by exact string equality from the default and immutable allowlist. Near matches by port, case, slash or encoding fail before storage. Each address must be registered with the provider.
- Client authentication is PublicClient, secret basic, secret post, secret JWT or private-key JWT. The selected method never falls back silently; service clients require credentials.
- SigningAlgorithm admits RS256, PS256, ES256 or EdDSA, excluding none and HMAC. Keys must fit their algorithm, intended signing use and strength; RSA requires at least 2048 bits and unsupported curves are excluded.
- Secrets and signing/sealing keys are opaque redacted values. Durable stores require an admitted 32-byte sealing key; previous keys only open old records.
- Scope strings follow RFC 6749 bytes and preserve case. OIDC login adds openid; authorization options bound each value to 2 KiB and cannot override reserved parameters.
- Configuration includes response mode, issuer-parameter policy, prompt, max age, login hint, ACR, UI locales, destinations, trust, scopes, durations and store selection. Caller-owned option records extend default_login or default_logout by record update.

Duration or capacity	Admitted range	Default
provider request	1 ms–5 min	10 s
startup	1 ms–10 min	15 s
store and complete login	1 ms–10 min each	5 s / 30 s
pending lifetime / capacity	1 s–1 day / 1–10M records	10 min / 100K
session lifetime	positive idle $\leq$ absolute $\leq$ 1 year	1 h idle / 12 h absolute
clock tolerance	0–300 s	5 s
refresh margin / wait	0–1 h / 0–1 min	30 s / 5 s
provider body	1 KiB–64 MiB	1 MiB

1.4.2 Metadata compatibility and signing keys

Provider cache

responsibility

Authenticate discovery, admit compatible metadata and maintain signing keys.

interface

Cached metadata/keys, bounded first-attempt outcome and unknown-key refresh.

interactions

Native provider parsing uses HTTP Gun; native JOSE selects compatible keys after checking algorithm policy.

invariants

At most one active fetch per incarnation. Failed reload keeps its last accepted snapshot. Replacement starts empty.

failure

Unavailable cache is ProviderNotReady; incompatible metadata is typed refusal; malformed keys or metadata never become success.

- The discovery URI appends /.well-known/openid-configuration to the configured issuer. Discovery and initial JWKS share the startup deadline; background rediscovery permits two provider request timeouts.
- Cache-Control lifetime is clamped to 60 s–24 h, default 1 h. Failed discovery retries with backoff 1–60 s. Failed reload retains the live snapshot.

- An unknown kid can request keys once; a new kid refreshes immediately, repeated identifiers are throttled to once a second, and at most 64 identifiers are remembered. Multiple callers share active work.
- Unusable JWKs are skipped. X.509 members x5c, x5t, x5t#S256 and x5u are stripped before going parsing; key material is verified without certificate-chain trust. TLS trust anchors authenticate transport, not token-key pinning.
- Login requires provider code-flow, authentication, signing and response-mode compatibility. Requiring PAR or signed requests is unsupported. Default PKCE policy requires advertised S256.
- AssumeS256WhenUnadvertised accepts only omission, only for confidential clients. An explicit list without S256 still fails. The same verifier/challenge and nonce remain mandatory; the provider's enforcement cannot be inferred. ADR-0003

BEHAVIOR

Unavailable fresh discovery grants no token authority

Given A replacement cache has no accepted provider snapshot.

When The caller requests validation or login.

Then The operation reports provider unavailability until compatible fresh discovery succeeds.


Then No earlier startup snapshot becomes authoritative.

level: boundary area: Provider readiness

1.5 Login and identity

A bound callback consumes one transaction before any code exchange.

SEQUENCE Code login and confirmed custody

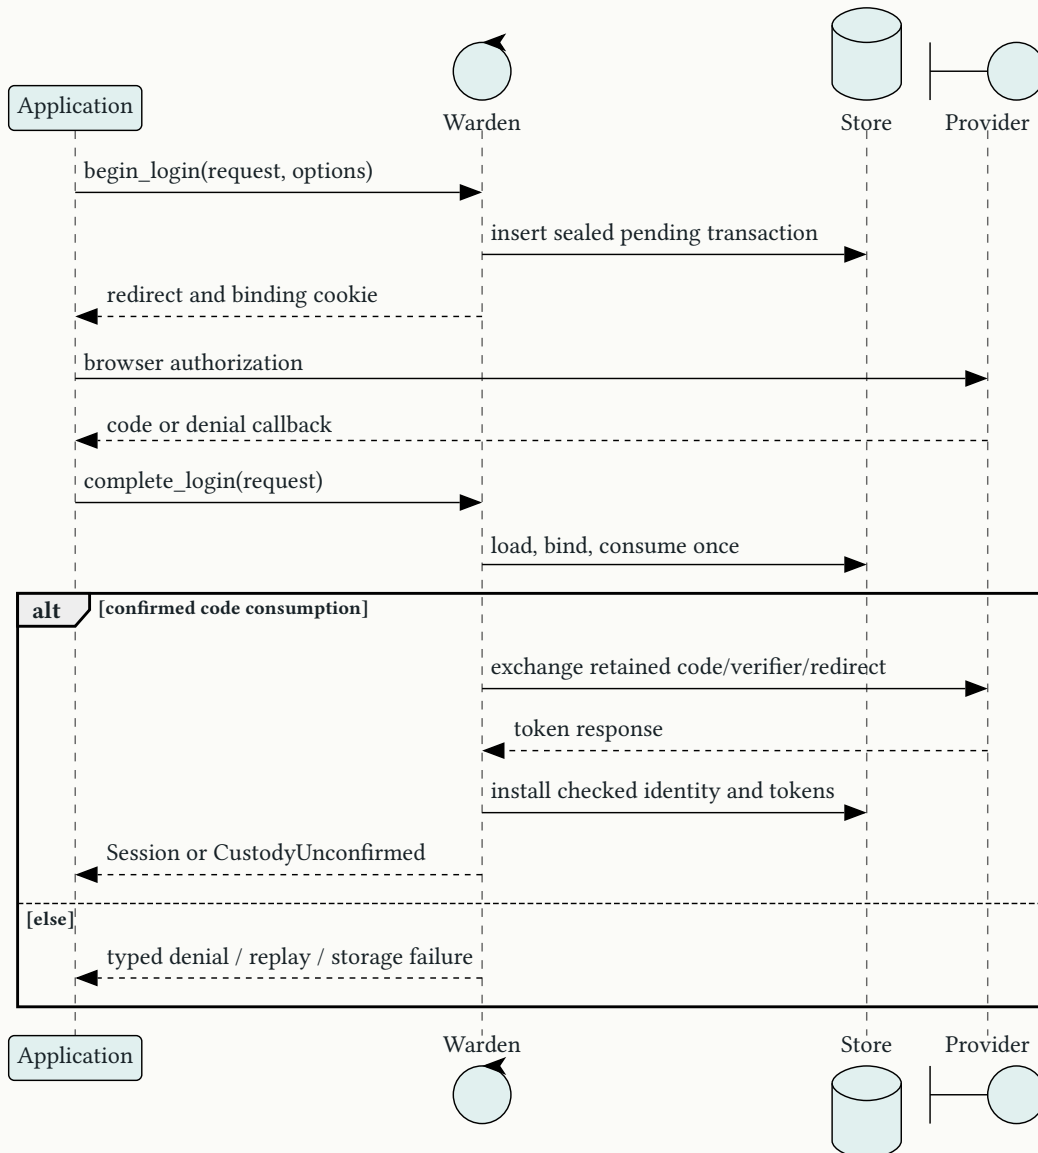

Only confirmed consumption authorizes exchange. Installation recovery reuses its command and cannot re-enter the provider step.

Login boundary

responsibility

Generate independent login material, bind callbacks, consume once and issue checked identity/session.

interface

`begin_login`; `login_response`; `complete_login`; `recover_custody`; identity accessors and `decode_claims`.

interactions

Callback parser, transaction CAS port, native token client, JOSE verifier and custody installation.

invariants

Binding failure never consumes a legitimate login. Exchange never precedes confirmed consumption. Session construction requires custody confirmation.

failure

Malformed callback, binding refusal, expiry, replay, changed record, store failure, denial, exchange uncertainty, rejected identity and uncertain installation stay typed.

1.5.1 Transaction model and lifecycle

Login status vacant pending consumed expired

Login transaction aggregate stateful OIDC login owned by Warden

One pending authorization-code exchange and its bounded terminal evidence.


ATTRIBUTES

- derived** **Status** · Login status [login-status](#) · [login-lifecycle](#)
Derived from sealed record, store version and expiry at decision time.
- derived** **Binding material** · state, nonce, verifier, redirect, browser digest
Fresh cryptographic material and exact selected redirect retained at creation.
- derived** **Lifetime and version** · wall-clock seconds and store version
Creation/expiry and CAS concurrency evidence. The record remains until expiry plus one login lifetime.

RELATIONSHIPS

- n : 1** Belongs to one configured client and issuer.
- 1 : 0..1** A confirmed code exchange may produce one checked identity installation.

STATE MACHINE Single-use transaction

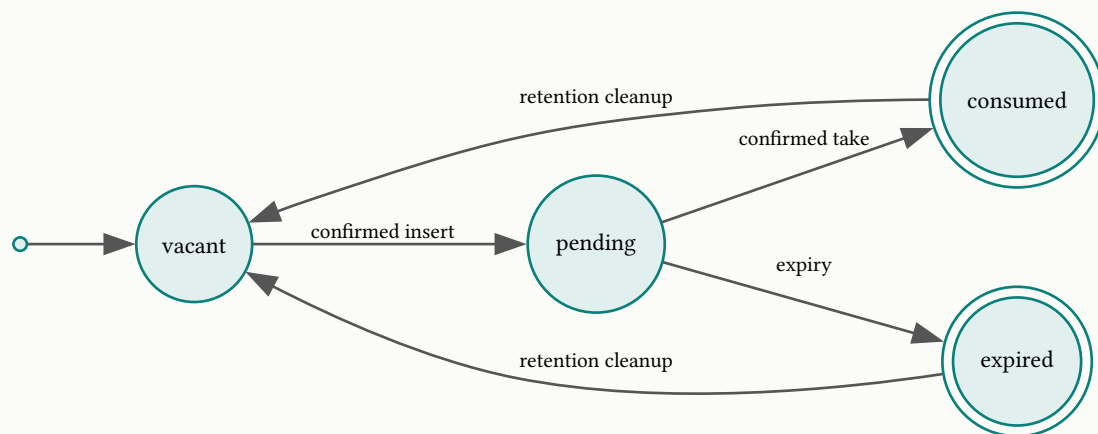

Consumption withdraws exchange permission permanently. A terminal record is retained to distinguish replay from missing state.

- State, nonce and verifier each use 32 independent CSPRNG bytes. Their base64url representation has 43 characters; S256 derives the challenge from the same verifier.
- `begin_login` reads a shaped existing binding cookie or creates one. Tabs reuse that browser binding but receive independent state/nonce/verifier material. Transactions retain the binding digest, never the cookie value.
- `login_response` produces 303, Location and no-store and sets `__Host-warden_binding` with Secure, HttpOnly, Path=/, no Domain, and SameSite Lax for query or None for form post. Cookie lifetime exceeds login lifetime by five minutes.
- Callbacks require GET query or form POST of application/x-www-form-urlencoded according to configured mode. Parsing rejects duplicate/ambiguous parameters, malformed encoding, missing state/code, empty code and oversized input: 16 KiB total, 4 KiB per value.
- State and browser binding compare in constant time. A present iss equals the configured issuer; absence follows the explicit issuer-parameter policy and advertised requirement. Invalid binding performs no consumption or exchange.

- Consumption writes a sealed spent tombstone by CAS at the version read. Losing callbacks reload terminal disposition. The clock is sampled again before attempting the write; unknown writes send nothing. An adapter guarantees atomic version comparison, not a clock sample inside a database lock. [ADR-0004](#)

BEHAVIOR

A bound denial consumes without exchange

Given A pending transaction belongs to the callback's browser and issuer.

When The caller completes a provider denial.

Then The transaction becomes consumed if its consumption is confirmed.

Then The caller receives the normalized denial and no code exchange occurs.

level: boundary area: Login consumption

BEHAVIOR

A losing callback cannot repeat exchange

Given One callback already consumed a transaction.

When Another callback completes the same transaction.

Then It reports replay and issues no identity or provider exchange.

level: boundary area: Login consumption

1.5.2 Verification and identity projections

- The code request retains configured client authentication, exact redirect, verifier and nonce. A consumed code is not restored after rejection, timeout, rejected identity or possible send. Proven no-send also requires a new login.
- Verification first rejects unsupported compact/JWE shape, none or non-allowlisted algorithm. It selects algorithm-compatible keys and delegates signature verification to gose; Warden performs its stricter claim profile.
- ID token is mandatory for login. Issuer is exact; audience is exactly the client; a present azp matches it; sub, iat and exp are required. Expiry is strict; iat, nbf and max-age authentication checks admit configured tolerance.
- Nonce is mandatory and equals the transaction. A present at_hash is checked against access material. Mistyped azp/at_hash are rejected; max_age requires a nonfuture sufficiently recent auth_time.
- VerifiedIdentity stores authenticated issuer/subject and checked claims. Email is optional and is never a stable identity key. Standard profile fields, email_verified, auth_time, ACR, AMR and caller-decoded claims retain absent values honestly.
- decode_claims accepts the caller's ordinary JSON Decoder and returns caller-owned values or DecodeErrors. Decoding a permission claim does not itself authorize a business action.
- One monotonic login deadline is passed through stores, exchange, key refresh and installation. Before exchange expiry is LoginTimedOut; uncertain installation is CustodyUnconfirmed. Cleanup and synchronous observation limits are stated in Lifecycle and limits.

BEHAVIOR

Uncertain installation recovers without exchange

Given Identity was checked and installation acknowledgement is uncertain.

When The caller submits the retained custody recovery to its client.

Then Custody repeats the same installation command and returns its existing confirmed session when known.

Then No authorization code is exchanged again.

level: boundary area: Login installation

1.6 Custody and refresh

Sealed CAS records retain token-generation authority across processes and nodes.

Custody

responsibility

Own verified session material, expiry, token revision, refresh state and bounded command receipts.

interface

restore_session, access_token, refresh, recover_refresh, logout; Store is an extension port.

interactions

Record sealing, CAS transitions, wall clock and native provider calls admitted by dispatch.

invariants

One fresh refresh dispatch per generation. Publication replaces access and refresh material together. Tombstones prevent late installation resurrection.

failure

Missing, lost, unreadable and unavailable custody differ; uncertainty is never permission to resend.

1.6.1 Sealed records and the storage contract

Sealed-record compare-and-set port

contract

Let applications persist records without owning OAuth transitions.

responsibility

Store key, version, expires_at and opaque sealed bytes; Warden owns interpretation.

interface

get(key); put(record, expected); delete_expired(now).

interactions

Captured adapter closures may use a caller-owned database pool. The same port can hold prefixed login and session rows.

invariants

None inserts only absent key; Some(version) replaces only equal version. False means no write. Delete includes equality at expiry.

failure

StoreUnavailable proves non-action, StoreFull proves refusal, StoreOutcomeUnknown preserves a possibly completed write.

- Keys are login: or session: plus SHA-256 digest of state/reference. Plain bearer references, verifiers and tokens never reach the adapter. Store version changes on every accepted record mutation; token revision changes only on publication.
- AES-256-GCM uses a fresh 96-bit nonce; format is version byte, eight-byte key digest id, twelve-byte nonce, sixteen-byte tag and ciphertext. Additional data binds record kind, key and version.
- Current key seals; current and previous keys open. An unreadable or tampered record fails closed. GCM nonce/call budget requires rotation well before about 2^{32} seals per key.
- AEAD prevents forgery or moving bytes to another key/version. It does not prevent restoration of a whole older row under its original key/version; applications protect writers, backups and rollback authority.
- In-memory stores use an ephemeral key and epoch-bearing reference. Restart can yield SessionLost; a missing durable reference yields SessionNotFound. A durable store's lifecycle and capacity remain application-owned.
- Every port call executes in an isolated monitored worker and catches adapter exceptions. Timeout/crash maps reads to unavailable and writes to unknown; termination drains the late private reply. Killing that worker cannot revoke a database effect already accepted.
- check_store verifies insert-if-absent, stale/absent CAS refusal, byte-exact payload, expiry equality and concurrent single-winner inserts/replaces. Passing those tests does not prove deployment durability or historical rollback prevention. [ADR-0004](#)

1.6.2 Session lifetime and installation

Session custody status

vacant live ended expired

Custody record

aggregate

stateful

Token custody

owned by Warden

The mutable authority behind a session reference.

ATTRIBUTES

derived

Status · Session custody status `session-status` · `session-lifecycle`
Derived at read from the live/tombstone record and lifetime policy.

derived

Reference and installation · digest key and command identifier
Random 256-bit reference and exact owner-bound installation command.

observed

Identity and authentication evidence · issuer/subject, claims, nonce, auth_time
Verified original provider evidence; refresh cannot create a new authentication event.

observed

Tokens and token revision · access/refresh/logout hint, expiry, scopes, revision
Accepted provider material; missing expiry remains absent. Publication advances revision.

derived

Lifetime and receipts · created_at, last_used_at, bounded command history
Wall-clock absolute/idle expiry and at most eight recent publication receipts.

RELATIONSHIPS


n : 1

Each record belongs to one configured provider/custody owner.

1 : 0..1

At most one outstanding refresh dispatch owns its current generation.

STATE MACHINE Session admission and termination

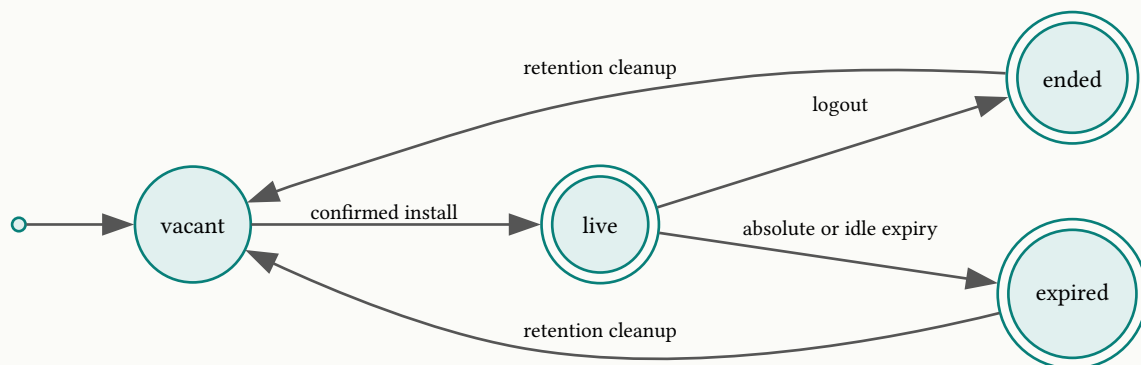

An ended retained installation cannot return to live through recovery. Expired records are denied before sweeper cleanup.

- Session is an immutable checked view holding client binding, reference, identity and token revision. Custody remains authoritative when a copied view is old.
- Installation inserts once and retains its command identifier. Recovery uses the same opaque command/reference/material; an earlier accepted command returns its current revision. A conflicting ended installation cannot be reinstalled.
- Install commands older than the login-lifetime recovery horizon fail `RecoveryExpired`. Logout tombstones preserve provider and install evidence for that horizon; late matching recovery reports `RecoveryEnded`.
- Session expires at either absolute or idle deadline, with equality invalid. Restore, access, refresh and userinfo count as use. Idle touches are coalesced at min(60 s, idle/10); a failed touch does not turn a valid read into a write-confirmed result.
- Record physical retention is at least installation horizon even if live session lifetime is shorter. Sweeper removes records at `expires_at` every 60 s; expiry denies use without waiting for the sweep.
- Session count per identity is unbounded. Applications choose admission/rate/capacity policy; library defaults do not evict an older session to admit a new one. [ADR-0004](#)

1.6.3 Refresh generation state and authority

Refresh generation status

idle

outstanding

orphaned

quarantined

revoked

Refresh generation

entity

stateful

Token custody

owned by Warden custody

The dispatch permission and settlement evidence for one custody token revision.

ATTRIBUTES

derived

Status · Refresh generation status [refresh-status](#) · [refresh-lifecycle](#)
Confirmed reservation, settlement or publication determines the current permission.

derived

Dispatch binding · reference, provider, revision, command, dispatch id
A newly confirmed reservation is the only authority for provider invocation.

derived


Lease · wall-clock expiry
Request timeout plus two store timeouts plus one second, rounded to seconds.

RELATIONSHIPS

n : 1

A generation belongs to one custody record.

STATE MACHINE Refresh permission and settlement

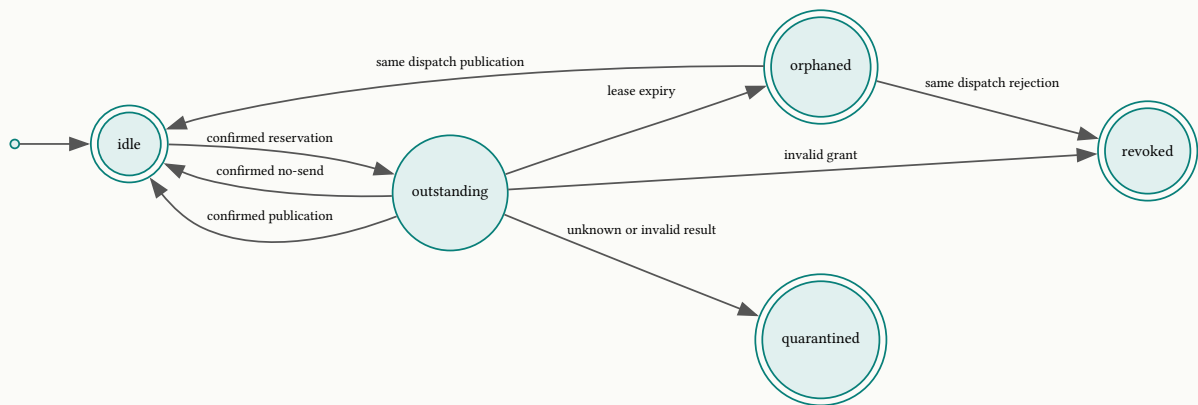

Lease expiry never releases the predecessor for resend. Its own delayed publication can still install valid new material.

- reserve binds provider, reference, expected token revision and fresh command. A stale revision returns the current snapshot; busy, quarantined, revoked, missing and unknown reservations never dispatch. CAS conflicts retry at most eight times per transition.
- A confirmed NotSent settlement releases an outstanding generation. A known OAuth refusal such as `invalid_request` may permit later retry; `invalid_grant` revokes. Unknown status, possible send or invalid success quarantines.
- An outstanding lease found expired becomes Orphaned. Late no-send cannot release it; only its own valid publication or definite rejection may settle it. No process-local monitor substitutes for this multi-node lease.
- The refresh response may omit ID token and retains original identity. Present ID token must retain issuer, subject, audience, authorized party, original nonce when present and original `auth_time` when present.
- Omitted refresh token or ID-token hint retains prior material; explicit replacement supersedes it. Returned scopes must match the established case-sensitive set; broader scope transitions require a separate profile decision.
- Publication binds dispatch and command, replaces access and refresh material atomically and increments token revision. At most eight recent command/revision pairs permit duplicate publication receipts; old command eviction never authorizes another provider call.
- RefreshUnconfirmed retains exact publication material. `recover_refresh` repeats publication only, and rejects a foreign client. CustodyUnconfirmed and RefreshUnconfirmed have distinct opaque recovery types. [ADR-0005](#)

BEHAVIOR

Possible send withdraws refresh retry permission

- Given** A fresh dispatch authorized one refresh request.
- When** Its provider outcome becomes unknown.
- Then** The generation is quarantined and the predecessor is not sent again.
- Then** The caller action is reauthentication, rather than an ordinary retry.

level: boundary area: Refresh settlement

BEHAVIOR

Publication recovery cannot refresh again

- Given** New token material exists but publication was not confirmed.
- When** The caller submits the retained refresh recovery.
- Then** Custody attempts the same publication and reports its confirmed current session when recorded.
- Then** No provider refresh is dispatched.

level: boundary area: Refresh publication

1.6.4 Access operation and competing requests

- `access_token` restores the current custody snapshot and returns `Access(session, token, expires_at, scopes)`. It refreshes within the default 30-second margin. Missing provider expiry is not fabricated.
- A competing request polls custody with backoff from 20 ms to 250 ms for at most `refresh_wait`, default five seconds. Waiting never creates a second dispatch; another attempt is admitted only after confirmed no-send settlement.
- An old Session uses current custody revision. Forced refresh returns the newer already-published token instead of repeating refresh.
- A margin-triggered refresh with `RetryLater` may return the still-unexpired current token. Revoked or quarantined outcomes never fall back. Forced refresh never uses that fallback.
- `authorize` sets Bearer on a caller-owned `gleam_http` request; resource network I/O and resource-request retry remain application-owned. A resource 401 may motivate one forced refresh under application policy.

1.7 Resource validation and provider operations

Checked access claims, service grants and introspection are independent of browser identity.

1.7.1 Local access-token validation

Resource validator

responsibility

Verify one JWT against configured issuer, audience, algorithm, token-type, time and required-scope policy.

interface

`resource.new`; pure policy setters; `verify` returns `AccessClaims` or `TokenError`; `verifier` projects to caller token/result/error types.

interactions

Uses Client's key cache and JOSE verifier; unknown signing keys can trigger bounded refetch.

invariants

No per-token provider request on cached keys. Audience mismatch is exposed only after other token validation.

failure

Rejected, WrongAudience, Forbidden and Unavailable preserve distinct caller response meaning.

Check	Default contract	Explicit variation
size and shape	nonempty ≤8 KiB compact signed JWS; JWE refused	none

Check	Default contract	Explicit variation
algorithm and key	configured asymmetric allowlist before key lookup	with_algorithms
type	at+jwt or application/at+jwt	allow_any_token_type
issuer and time	exact issuer; required strict exp; iat required; nbf/iat tolerance	client clock tolerance
subject and client	sub required; client_id optional with azp fallback; jti optional	caller claims decoder
audience	exact singleton configured audience	AudienceIncluded membership
scopes	all configured required scopes present; scope string/list or scp list	with_required_scopes

- WrongAudience means an otherwise checked token names another resource; forged, expired or malformed tokens never gain that description. Required scopes are checked after token audience validation.
- AccessClaims exposes issuer, subject, optional client id/JWT id, audiences, scopes and Timestamp expiry/issue time. decode_claims preserves the caller's types. It grants no business permission.
- Local JWT validation cannot see immediate token revocation. Short token lifetimes bound that lag; introspection is the explicit availability/network alternative when immediate provider state is needed.
- Relay owns endpoint scope admission and bearer challenges. Its recipe leaves required scopes unset in Warden, projects a Principal/Attestation and exhaustively maps ErrorKind through on_error. Warden has no Relay dependency. ADR-0006

BEHAVIOR

Unavailable keys do not reject or admit a token

Given The validator cannot obtain authoritative issuer keys.

When The caller verifies a bearer token.

Then The result is Unavailable and no access claims are issued.

level: boundary area: Resource validation

1.7.2 Userinfo and service token grants

- userinfo obtains the token access_token would use and checks response subject against established session identity. JSON and signed JWT responses are supported; signed userinfo need not have exp, but its signature and relevant issuer/audience rules remain checked.
- UserInfo is a separate opaque subject-bound claim view and decode_userinfo returns caller-owned data. It cannot be substituted for VerifiedIdentity.
- client_credentials validates requested scopes locally, uses exactly configured confidential authentication and returns ClientToken with opaque AccessToken, optional Timestamp expiry and granted scopes. One call performs one grant; no caching or user session is implied.
- The application decides service-token reuse and cache identity. Missing expiry, concurrency, scope/resource policy and request retries remain explicit service decisions. ADR-0006

Provider operation boundaries

responsibility

Encode grants and userinfo requests and interpret provider results without choosing application resource retries.

interface

userinfo, client_credentials and each operation's typed error/describe function.

interactions

Provider metadata, selected authentication, transport and JOSE validation.

invariants

Userinfo subject continuity and configured grant authentication are retained.

failure

Unsupported endpoint/role, invalid scope, provider refusal, malformed response and session error remain distinguishable.

1.7.3 Introspection and logout

- introspect accepts a raw token, refuses >8 KiB locally and treats empty as inactive without a request. It requires configured credentials and an introspection endpoint.
- Introspection returns `ActiveToken(TokenInfo)` or `InactiveToken`; provider/network failure stays `Error`. `exp` is strict when present and `nbf` admits configured tolerance; invalid timing is inactive.
- `TokenInfo` carries optional subject/client id/time/expiry/type, scopes, audiences and opaque raw claim decoding. Introspection has no resource audience argument: the serving application or Relay must compare audience and permission.
- logout removes custody by reference before provider effects, irrespective of a stale Session revision. It retains a tombstone; missing custody may be treated as already signed out.
- Default logout revokes refresh token, or access token if no refresh token, through RFC 7009 and configured authentication. `SkipRevocation` is explicit. Failed or unsupported revocation never restores local custody.
- `ProviderLogout` separately reports redirect, no end-session endpoint or refused endpoint. `LogoutRedirect` keeps the ID-token hint secret under ordinary inspection; `logout_response` emits 303 and no-store. Post-logout redirect policy is validated.
- Third-party initiation belongs to the public reference RP route: issuer/client selection and target-link handling must be validated by the application. Back/front-channel logout is not provided by that route.

BEHAVIOR

Provider logout failure cannot restore custody

Given Local custody termination was confirmed.

When Provider revocation fails.

Then The returned outcome reports revocation failure and the session remains locally ended.

level: boundary area: Session termination

1.8 Transport and observations

Provider traffic and diagnostics preserve trust, limits and send evidence.

Warden to HTTP Gun

contract

Carry provider operations over bounded verified HTTPS.

responsibility

Warden applies OIDC URL/header/body policy; HTTP Gun owns DNS, destination checks, connection and framing.

interface

Supervised shared HTTP Gun client and per-request deadline/response limits.

interactions

One pool per Warden client; configured trust anchors, hosts, destination policy and Sinal correlation.

invariants

No redirects, automatic grant retries or decompression. Requests use selected provider endpoints only.

failure

`NotSubmitted` becomes `NotSent`; possible submission becomes `MaybeSent`. Typed transport failures omit provider body.

- HTTP Gun resolves once per connection, checks every destination address before connection, connects to checked addresses and verifies TLS against the original hostname or IP SAN. Production defaults allow public addresses and system trust; loopback/internal providers need explicit policy.
- Host allowlists constrain hostnames, not ports. Certificate revocation checks are not claimed; deployment egress policy remains a separate owner.
- Warden rejects insecure schemes, userinfo/control characters, unsafe headers and requests above 64 KiB. It refuses oversized declared length early and rejects content encoding; provider response default is 1 MiB with 16 KiB head and 100 headers.
- Transport limits bound collected input, not total VM/kernel/TLS heap. Decoded key sets and forwarding add allocations beyond JSON byte size. Concurrent active clients multiply those costs.
- Four malformed responses can map to `ReceiveFailed` with possible-send evidence rather than finer parse classes. Bare LF in discarded status reason text may be accepted on a close-delimited connection. These existing limitations are retained by `ADR-0002`.

- Unknown foreign shapes and exceptions become sanitized typed failures. Warden implements no cryptographic primitive and contains supported foreign boundary failures; no arbitrary formatter turns raw provider terms into diagnostics.

1.8.1 Typed observations and correlation

Telemetry

responsibility

Report completed provider/login/refresh/logout outcomes using closed redacted values.

interface

warden/telemetry descriptors and pure with_correlation client view.

interactions

Sinal emits over native telemetry; correlation is also passed to HTTP Gun.

invariants

No token, code, state, nonce, verifier, identity, query, body or header enters Warden events.

failure

Observer failure does not authorize a state change; callbacks run synchronously and can add latency.


Descriptor	Emission point	Permitted data
http_request	provider request returns or fails	duration, method, host, path, status or evidence/reason, correlation
login	complete_login or recover_custody returns	duration, closed outcome, correlation
refresh	refresh completes, joins or fails	duration, closed outcome, correlation
logout	custody has ended	duration, closed revocation outcome, correlation

- with_correlation returns a value view and shares all client processes. Caller-supplied correlation is not authentication, a session key or idempotency authority.
- Opaque redaction prevents ordinary inspect output; it does not erase BEAM memory or defend against sys:get_state, tracing, crash dumps, malicious trusted callbacks or host administrators. Applications protect these operational surfaces.

1.9 Lifecycle and limits

Stable handles survive process replacement; admitted effects retain their own cleanup boundary.

VIEWPOINT RUNTIME · ALTITUDE L3 · COMPONENTS Per-client process ownership

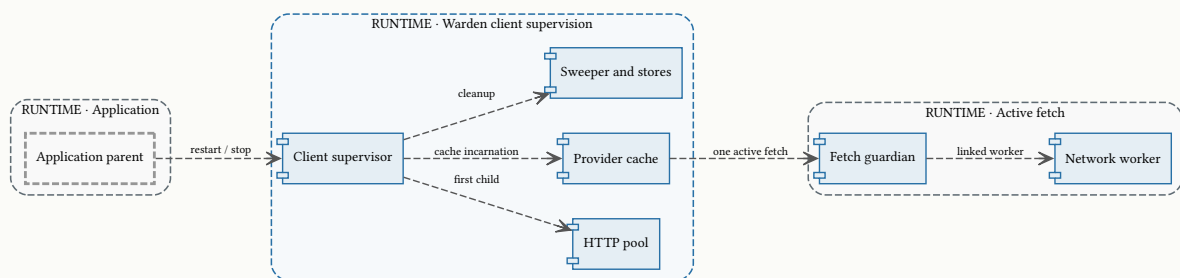

LEGEND

runtime
execution boundary

external system
trust boundary

component
owned runtime part

dependency
dashed directed link

The guardian monitors the actual cache and worker. Durable stores are outside this tree and are never joined by startup.

Client lifecycle

responsibility

Create and replace only the client's own processes without stale key or name authority.

interface

new, start, supervised and stop.

interactions

Application parent, pool, provider cache, sweeper and default stores.

invariants

Names are allocated once at trusted setup; request strings never become atoms. Live supervisor means AlreadyStarted.

failure

Startup joins held old children under one deadline; expiry returns StartupTimedOut without takeover. stop is a bounded request, not a completion receipt.

1.9.1 Startup and cache replacement

- Manual start builds the tree and awaits the cache's first compatible discovery plus keys. First-attempt outcome remains metadata or failure, never a historical key set, so a background recovery cannot hide that initial failure.
- Supervised starts discover in the background. Until ready every relevant operation fails closed. Restart-stable client names do not imply ready metadata or persistent default sessions.
- Whole-tree replacement monitors the actual old pool, cache, sweeper and optional in-memory stores before using their names. Startup cleanup and manual discovery share one monotonic deadline. At most five temporary monitors are removed on exit or expiry.
- A held old child can delay its parent's synchronous startup management up to `startup_timeout`. Existing unrelated client request processes remain independent; no global coordinator serializes them.
- Failed manual start requests shutdown only of the supervisor it created and waits using the remaining budget. Timeout can return while that tree drains, so immediate retry may report AlreadyStarted. [ADR-0007](#)

1.9.2 Fetch ownership and cancellation

- Each active fetch has one guardian beside its network worker. The guardian monitors the actual cache and worker and links the worker; cache monitors guardian. There is no idle guardian.
- Completion goes to the cache process subject with guardian identity. Obsolete completion/exit notifications cannot settle newer work or reach a replacement's registered name.
- Cache death terminates the worker even when HTTP or an application telemetry handler blocks. Worker loss releases active state and waiting callers, preserves last accepted snapshot and follows existing retry/reload cadence.
- One active fetch adds one process, three monitors, one link and one forwarding hop. The decoded metadata/key result is copied once more; cost depends on key-set size and is not bounded by JSON bytes alone.
- Cancellation is process-ownership loss and deadlines rather than a public cancellation-token API. Termination cannot undo a provider request already received. [ADR-0007](#)

BEHAVIOR

Old fetch completion cannot alter a replacement

Given A fetch's cache incarnation has ended.

When That fetch completes.

Then Its result cannot become the replacement cache's provider snapshot.

level: boundary area: Cache lifetime

1.9.3 Bounds and cleanup guarantees

Boundary	Bound	Expiry or cleanup meaning
provider request	10 s default; HTTP Gun connect/checkout 5 s, idle read 30 s, idle connection 60 s	typed failure retains send evidence; inner bounds can expire earlier
provider-cache call	request timeout + 1 s	typed not-ready/failure; no fabricated key rejection

Boundary	Bound	Expiry or cleanup meaning
complete login	30 s admission deadline default	remaining time passed to each effect; cleanup/telemetry caveat below
store call	5 s worker deadline default	kill worker, wait DOWN up to 1 s, drain late reply; accepted external effect can remain unknown
refresh wait	5 s default	RefreshWaitTimedOut; no dispatch permission
refresh lease	request +2×store timeout +1 s	Orphaned quarantine; not resend permission
stop	5 s supervisor observation	Nil on exit or expiry; worker notification can follow supervisor exit
storage sweeping	60 s cadence	logical expiry already denies use

- The complete-login deadline bounds effect admission and propagated time budgets. A timed-out store's monitor drain can add up to one second, and synchronous telemetry observer work has no Warden timeout; the pending verification records this precise return-latency tension.
- stop neither confirms shutdown on wait expiry nor synchronously joins fetch workers or external adapters. Stop a supervised client through its owning parent or it may restart. Applications retain captured resources until their required completion boundary is known. [ADR-0011](#)
- Built-in pending-login capacity counts pending and retained terminal records. FIFO/capacity bookkeeping avoids unnecessary scans while there is room; a full login store returns TooManyPendingLogins. Sessions deliberately have no identity-count cap.

1.10 Failures and caller decisions

Typed failures preserve phase, authority and effect evidence.

Family	Distinct evidence	Caller handling
StartError / ConfigError	invalid config, discovery failure, incompatibility, startup timeout, process failure, already started	describe safely; fix configuration or apply deployment startup policy
LoginError	malformed/refused callback, expired/replayed/changed transaction, store failure, denial, exchange no-send/unknown, rejected identity, unconfirmed installation	login_error_action
SessionError	missing/lost/foreign/unreadable/unavailable; absent access/refresh; revoked/refused/no-send/quarantined; wait timeout; unconfirmed publication	session_error_action
TokenError	shape/type/algorithm/signature/keys/issuer/time/claims/audience/scopes	resource.error_kind and caller projection
ProviderFailure	not ready; TransportFailure(evidence, reason); status and closed OAuth code; malformed response; issuer mismatch; unmapped failure	preserve operation-specific effect meaning
StoreError	unavailable versus outcome unknown versus full	adapter must report knowledge honestly
Userinfo / client credentials / introspection / logout	role/endpoint/option/session/provider failures	operation-specific typed result and describe function

Closed Action	Meaning
Reauthenticate	Start a new login; never replay a possibly sent code or quarantined refresh token.
RetryLater	No final decision; repeat only the operation whose contract permits it.
Recover	Submit carried custody or refresh publication recovery; never call provider again.

Closed Action	Meaning
FixConfiguration	Operator/configuration issue such as foreign owner or unsupported authentication.
RejectRequest	Incoming request is invalid and should not be retried.

- Error unions and protocol registries may gain variants; Action is the stable closed handling boundary. Use describe functions rather than inspecting raw error material.
- A provider status is not universally definite non-action. Refresh maps only recognized safe refusal evidence to release; possible processing and invalid success quarantine.
- Claims or endpoint error descriptions are never embedded in ordinary errors. Known claim names and missing required scope names are safe typed diagnostics, not raw provider payloads.

1.11 Testing and retained capability scope

Executable consumers and independent oracles establish specific contracts with explicit evidence limits.

1.11.1 Test and extension ports

Public testing support

responsibility

Provide explicit local issuer behavior and store-conformance checks to consumers.

interface

warden/testing scripted provider, PKI, authorize, token issuance/mutation, request counts and `check_store`.

interactions

Linked HTTPS listener/state actor using OTP `ssl/public_key` and `gose`; application routes need no production test hook.

invariants

Only explicit testing.config/trusting grants loopback and test-root trust. Production defaults never weaken.

failure

Typed startup/test failures; caller/link lifetime cleans provider processes; fixtures still do not certify security.

- Typed EmailClaims pairs independently optional email and verification assertions. `with_email_claims` configures one subject; `set_email_claims` changes that subject's future ID tokens and userinfo evidence. None omits the field, while `Some(False)` preserves explicit false. These assertions do not validate email or confer application permission.
- A subject without an override retains subject-derived email and verified true in ID tokens; userinfo retains subject-derived email without a verification field. Reserved protocol claims, production trust and opaque identity construction remain unchanged. Previously signed tokens and immutable verified identities do not change when fixture settings change. [ADR-0012](#)

BEHAVIOR

Scripted email assertions retain absence and subject scope

Given The local test issuer has explicit email assertions for one subject.

When It issues identity or userinfo evidence for that subject.

Then Each assertion is present or absent exactly as configured, including explicit false.

Then Subjects without overrides retain the issuer's existing default assertions.

level: boundary area: Public testing support

BEHAVIOR

Changing fixture assertions preserves prior identity evidence

Given A client already holds checked identity from the local test issuer.

When The fixture changes that subject's email assertions.

Then Later evidence reflects the new assertions.

Then The identity held earlier and its issuer/subject key remain unchanged.

level: boundary area: Public testing support

- The provider supplies discovery/JWKS, S256 code login, rotating refresh, service grants, userinfo, introspection, revocation and end-session. It scripts sign-in/refusal, clock skew, audience/key changes and forged tokens.
- Scripted scopes are per subject: configured list replaces requested scopes exactly, including empty or unrequested scopes; no entry preserves requested scopes. One grant feeds token response, JWT and introspection.
- Testing trust exposes PEM for Warden and DER for HTTP Gun. Test listener/state are linked to their caller; tests stop supervised fixtures through their parents.
- Compiled consumer exercises common login/access/logout, advanced authentication/transport policy, custom CAS storage and caller-owned claims/errors. Relay consumer verifies recipe equality and admission/challenge behavior.
- Negative compiler fixtures reject forged opaque authority and interchange of identity, userinfo, introspection, session, access token and recovery phases. Runtime tests establish race, uncertainty, redaction, bounds and process ownership beyond those type checks.

1.11.2 Evidence and release conditions

Evidence family	Source and operation	Acceptance limit
Supply chain	major-bounded runtime ranges and exact lock; pinned oidcc 3.9.0/jose dev oracles; license records	review changed resolved versions and advisories; runtime pins do not inherit certification
Owned facade	URI/callback/scope tables, RFC7636 vector, races, CAS, unreadable records, secret sentinels	type opacity alone proves neither secrecy nor store atomicity
JOSE / differential	gose/kryptos, independent panva/jose tokens, RFC7515/7517/7520 and Wycheproof vectors, raw oidcc corpus; RFC9449 vectors when DPoP is built	record strict audience/required-ID-token/refresh differences; wrapper tests do not revalidate all cryptography
Provider interoperability	Keycloak, node-oidc-provider, Dex, Hydra; recorded receipts	local fixtures do not establish arbitrary-provider compatibility
OIDF RP plans	Basic, Config, Form Post, refresh, RP logout and third-party initiation harness	skipped/review/interrupted cases are not passes or certification
Operational	restart, fetch owner loss, barriers, bounds, lease loss, mailbox/atom/memory tests	local benchmark samples are not deployment capacity
Replacement	same contracts, corpus, differential, selected conformance profiles	never shadow single-use code or rotating-refresh effects

- Release acceptance requires no vulnerable/unreviewed dependency, no owned-facade failure, no unexplained differential, no selected conformance regression, no failing attack requirement and no supported-provider interoperability failure. Independent review and release SBOM remain obligations.
- Raw license notices, vendor record declarations, lockfiles, provider image/schema fixtures, receipt JSON/logs and executable probes remain intact. ADRs carry provenance and interpretation rather than rerun diaries. [ADR-0008](#)
- The native layer owns standing design and vocabulary. Coverage names each repository part's owner; operational guides preserve executable usage and consumer decisions. [ADR-0010](#)

1.11.3 Threat and authority coverage

Threat	Invariant owner	Required evidence
login CSRF / fixation	transaction state and binding; app session/origin protection	binding mismatch leaves pending, protected-route tests
code replay / injection / downgrade	CAS consumption, S256, nonce, selected auth	concurrent single-winner and PKCE/nonce attack cases
issuer mix-up / token substitution	exact issuer, audience, azp and nonce	wrong issuer/audience/party and duplicate callback cases
signature / algorithm confusion	allowlist before keys; gose and key policy	none/HMAC, bad signature, wrong/weak keys, rotation and JWE rejection
malicious discovery / SSRF / TLS	configured destination policy and HTTP Gun	private/mixed/rebinding, redirect, wrong host/expired CA tests
rotation replay / uncertain effects	custody dispatch, quarantine and publication	lost provider response, invalid continuity, orphan lease, recovery without resend
storage forgery / rollback	AEAD and CAS; app write/backup protection	swap/tamper/key rotation; explicit whole-row rollback limit
secret/atom/resource exhaustion	redacted boundaries, stable names, limits; app admission	secret sentinels, hostile callbacks, bounds and process cleanup

1.11.4 Full capability disposition

Capability	Disposition	Growth or evidence contract
discovery/JWKS; code/S256/state/nonce; five authentication forms	supported	provider/cache, login and verification units
identity/claims; sealed custody; refresh/recovery; service grants	supported	typed authority, CAS and uncertainty units
JSON/JWT userinfo; introspection; revocation/RP logout; local JWT resource role	supported	operation-specific checks and caller authorization
query/form callback; third-party initiation reference path	supported path with third-party suite gap	own HTTP browser/session obligations and external verification
PAR, JAR, DPoP, JWT-bearer grant, dynamic registration	retained later intent	separate typed protocols, authority and external suites
JARM; FAPI2 security and message signing	optional later intent	profile-specific owner decision and conformance
device grant, token exchange, back/front-channel logout	explicit unsupported gaps	growth decision and protocol evidence
social-provider quirks; broader refresh scope/resource profiles	optional / unresolved	concrete provider/consumer need; no implicit generic extension
replaceable protocol backend and application mocks	retained architectural replaceability; no public backend selector	protocol operation contracts plus same independent corpus
stateless cookie-only take-once; signing-key trust anchor	unsupported	AEAD lacks replay authority; no offline-key requirement
authorization server; implicit/hybrid/password; JS runtime	excluded	no inference from oracle capability

- Backend replaceability is an architecture obligation, not an exposed alternate selector. Sole runtime backend is native Gleam over gose/kryptos; oidcc is test-only. Any replacement preserves opaque constructor ownership and operation-specific contracts. A default replacement after published use retains the predecessor for at least one release; shadow comparison is limited to side-effect-free verification/parsing. [ADR-0001](#)
- The retained scope is not narrowed to today's signatures. Unbuilt families remain in Pending updates; runtime/example changes require separate evidence and authorization. [ADR-0009](#)

1.12 End-to-end walkthrough

A relying party signs Ada in, keeps a session reference, and handles one resource request.

- The application creates a relying-party Config for <https://login.example.com> and a registered callback, then calls new and supervised. Provider unavailability produces typed not-ready responses until compatible discovery succeeds.
- Ada follows the application's login route. `begin_login` inserts fresh transaction material; `login_response` sets Warden's binding cookie and sends the authorization redirect.
- The provider returns a bound code to the callback. `complete_login` parses, compares state/browser/issuer, consumes by CAS, exchanges once, checks the required ID token and installs sealed custody. The application retains the reference in its protected session.
- A later request restores the reference and calls `access_token`. Near expiry one request reserves refresh; competitors wait. If provider outcome is unknown they reauthenticate; if publication acknowledgement is uncertain they submit its exact recovery without another refresh.
- The application authorizes its own API request using the returned AccessToken and decides resource retry after a resource response. Checked identity and scopes are projected into application permission rules.
- Logout first ends custody and retains its tombstone, then reports provider revocation and RP redirect separately. Application removes its own session and stops its owning client supervisor according to its resource lifetime policy.

Glossary

Every term the layer declares, with the context that owns it.

Access claims

owned by root

An opaque checked JWT access-token view for one validator's issuer and resource policy. Application authorization remains a separate decision.

Action

owned by root

The closed caller response classification Reauthenticate, RetryLater, Recover, FixConfiguration or RejectRequest. It classifies recovery meaning rather than generic retryability.

Browser binding

owned by root

The random cookie value tying pending login transactions to one browser. It is distinct from the application's authenticated session.

Cache incarnation

owned by root

One live provider-cache process with its own accepted snapshot and fetch ownership. A replacement process has a different incarnation even when its registered name is unchanged.

Client

owned by root

An immutable handle binding one validated role configuration to restart-stable process names. A correlated client view shares those processes.

Custody

owned by root

Warden's authority over session identity, authentication evidence and token generations in sealed records. It owns installation, refresh transitions and termination.

Custody recovery

owned by root

An owner-bound opaque installation command retained after uncertain custody acknowledgement. It can repeat installation of the same evidence without repeating code exchange.

Login transaction

owned by root

A single-use pending authorization-code login bound to one client, exact redirect, state, nonce, PKCE verifier, browser binding and expiry.

Provider

owned by root

The configured OpenID issuer and the endpoints and signing keys authenticated through its discovery and transport policy.

Provider snapshot

owned by root

The metadata and signing-key set accepted by one cache incarnation. It is observed provider evidence, not a substitute for configured policy.

Quarantine

owned by root

Custody's refusal to dispatch a token generation whose provider outcome or accepted response is unsafe to reuse. It retains uncertainty rather than proving revocation.

Refresh dispatch

owned by root

The fresh custody reservation authorizing one provider refresh call for one token revision. Possession of an old session or a waiting result does not create it.

Refresh lease

owned by root

The wall-clock interval during which an outstanding refresh reservation may settle normally. Expiry withdraws permission to resend the predecessor.

Refresh recovery

owned by root

An owner-bound opaque publication command holding already received refreshed material. It cannot authorize another provider request.

Sealing key ring

owned by root

One current AES-256-GCM key and retired keys permitted for opening older records. Its lifecycle is controlled by the application for durable stores.

Send evidence

owned by root

The distinction between proven no transmission and possible provider receipt. A timeout or connection failure after submission cannot prove no send.

Session

owned by root

An opaque view of confirmed custody containing verified identity, reference and revision. It is neither a token bag nor a business permission grant.

Session reference

owned by root

A random bearer value naming custody. A reference proves neither that custody still exists nor that the caller may perform a business operation.

Store version

owned by root

The compare-and-set concurrency value of a stored row. It is distinct from the token revision and advances on record writes such as refresh reservation or idle touch.

Token revision

owned by root

The generation number of the material exposed by a session. It advances when refreshed material is published.

Tombstone

owned by root

A bounded terminal record preserving consumption or termination evidence after secret material is removed. It prevents replay and late installation recovery within its retention horizon.

Verified identity

owned by root

The checked identity evidence obtained from an ID token for a consumed login transaction. Its stable key is the pair of issuer and subject.