

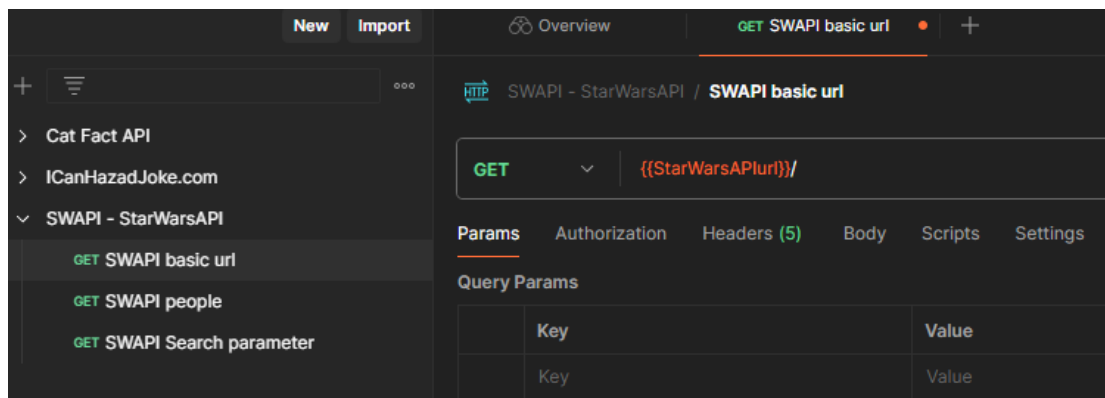
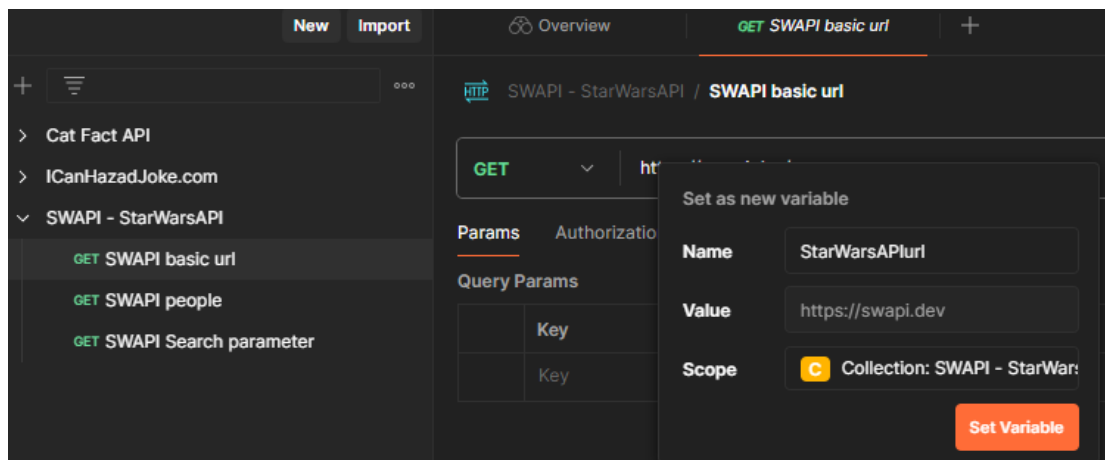



Setting a variable for common use

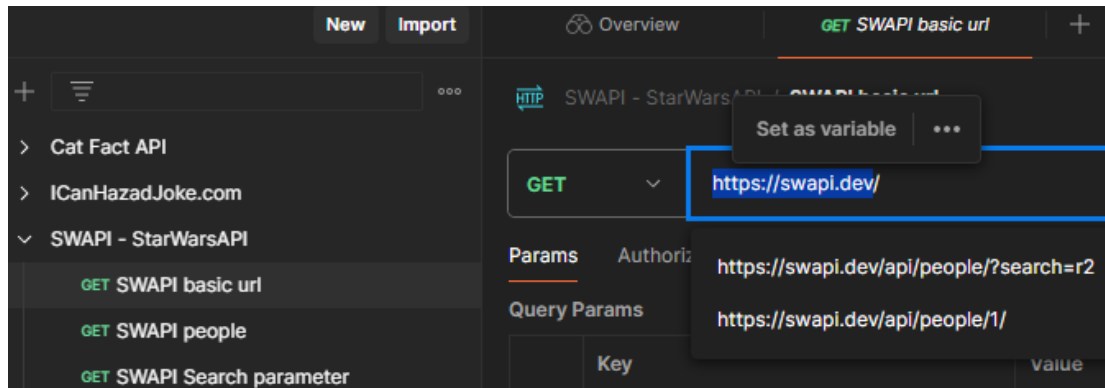

Replace the url with the variable in other files

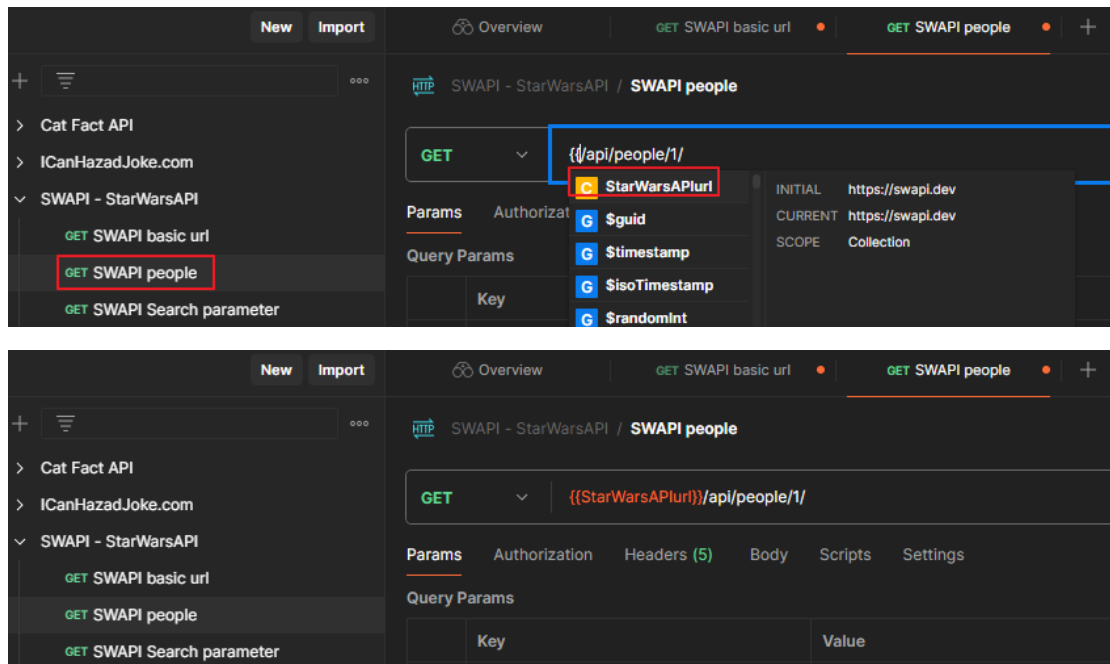

GET request

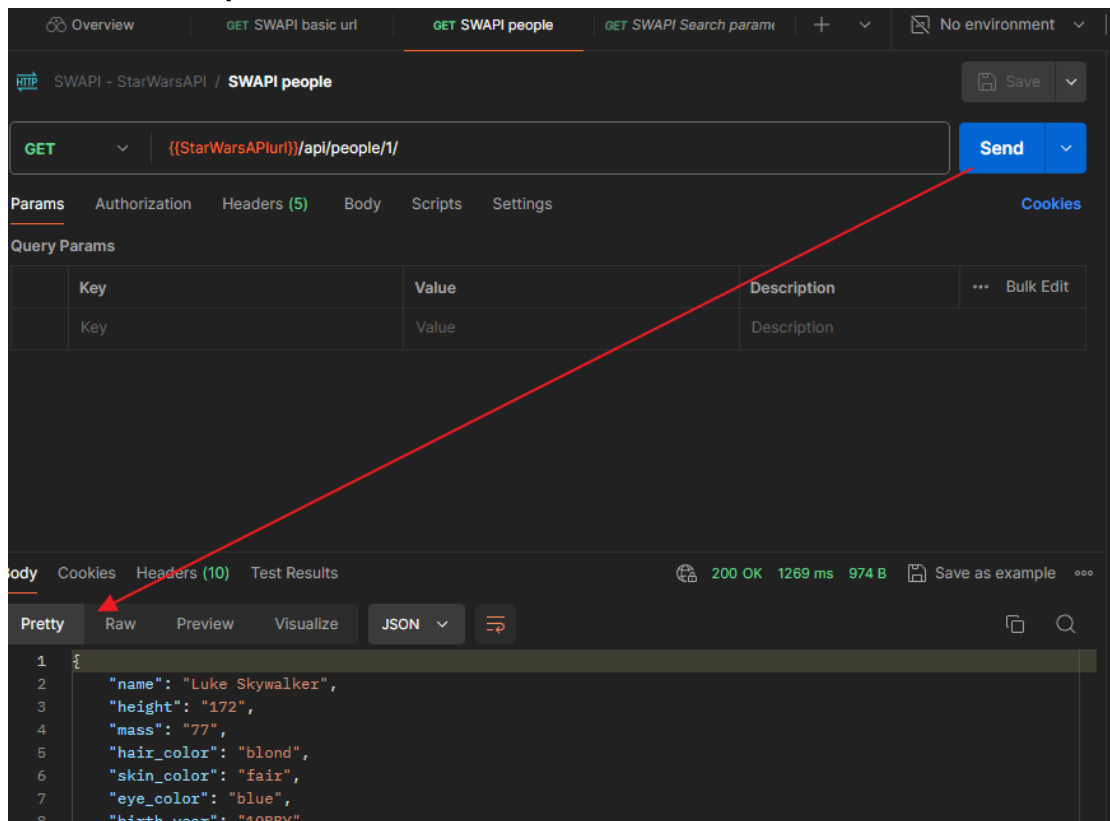

Using parameters

The screenshot shows the Postman interface for an API request. The left sidebar lists the API collection, with 'GET SWAPI Search parameter' selected. The main panel shows the request details for 'SWAPI Search parameter'.

Request Details:

- Method: GET
- URL: `{{StarWarsAPIurl}}/api/people/?search=r2`
- Params: search (Key), r2 (Value)

Response Details:

- Status: 200 OK
- Time: 457 ms
- Size: 971 B
- Format: JSON

Response Body (JSON):

```
{
  "count": 1,
  "next": null,
  "previous": null,
  "results": [
    {
      "name": "R2-D2",

```