

Claude Code Analytics Report

60-day period

5,000

Sessions

\$6,001

Total Cost

6.4B


Tokens Processed

100


Active Engineers

Cost & Token Patterns

Avg Tokens per User by Practice (n=5)

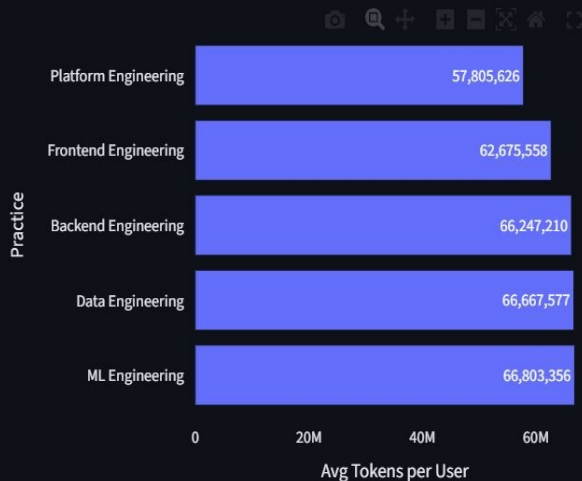

Avg Tokens per User by Seniority Level (n=10)

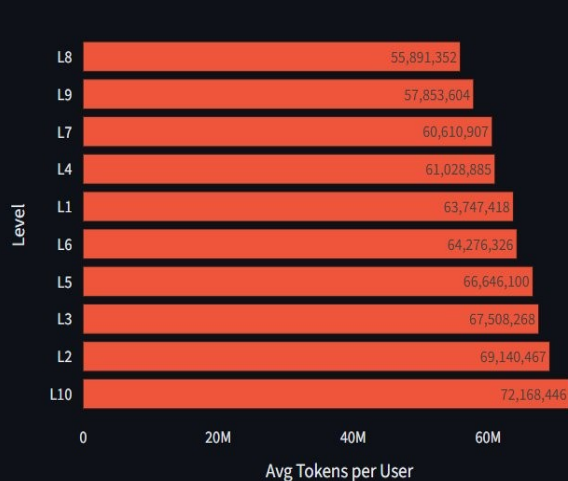

Practices nearly equal

Avg token/user varies only 14% across all practices (57M–66M). No single team dominates — usage is well distributed.



Seniority drives usage

L10 engineers use 30% more tokens than L8. Senior engineers leverage Claude Code for more complex, longer-context tasks.



Key finding: Token consumption is driven more by seniority level than by engineering practice — L10 engineers write more complex prompts.




\$60/user average

At \$6,001 across 100 engineers, average cost per developer per 60 days is \$60 — a modest spend for AI-assisted development.

When Do Engineers Use Claude Code?

Peak Usage Heatmap — Hour × Day of Week (n=118,014 requests)

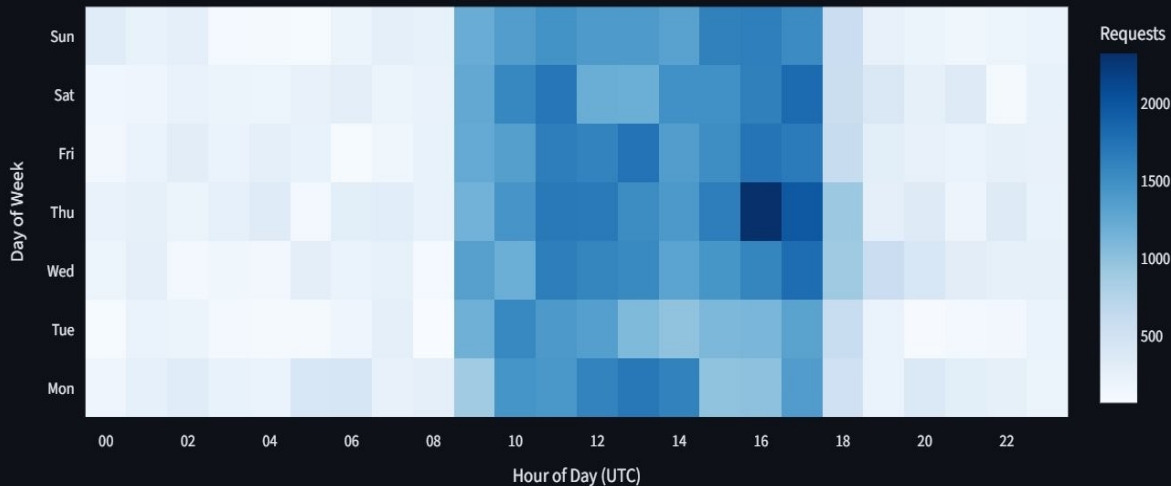

Thu
16:00
Peak hour

10-18
UTC
Core window


~70%
Weekday share

↓ 60%
Weekend drop

💡 Key finding: Usage is heavily concentrated in business hours (10-18 UTC), Mon-Thu. Thursday afternoon is the absolute peak — suggesting end-of-sprint activity.

Outliers & Risk Signals

Cost vs Token Consumption (n=100 users)

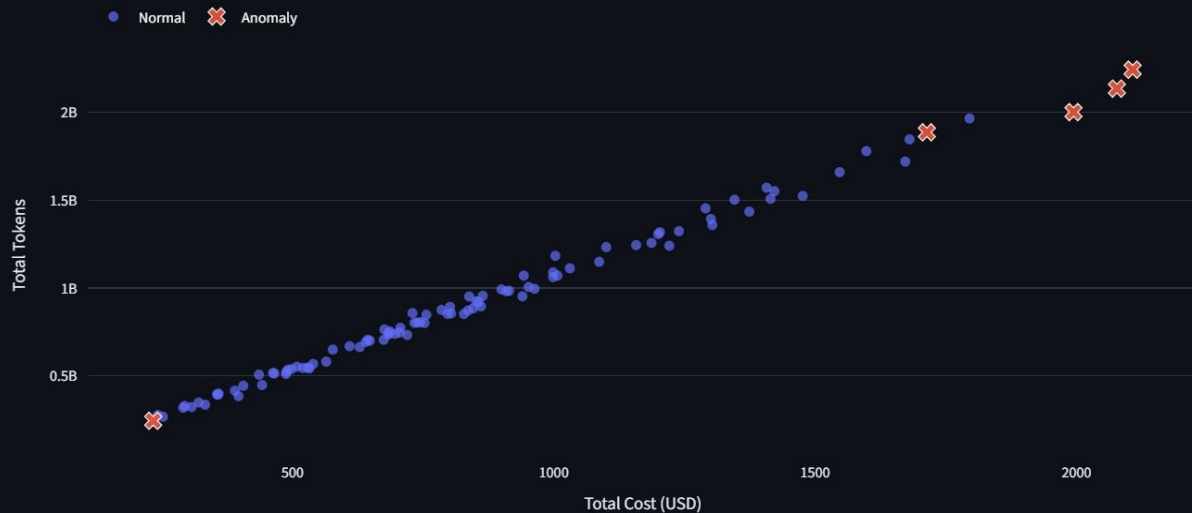

⚠️ 5 anomalous users

Isolation Forest flagged 5 engineers (5%) with unusual cost-to-token ratios — spending 2-3× more than peers at similar token volumes.

🔴 Bash tool: 6.7% fail rate

Bash has the highest failure rate of all tools. Likely cause: long-running or environment-sensitive commands without error handling.

🚫 Rate limits: 45% of errors

HTTP 429 errors account for nearly half of all API errors. Engineers are hitting account rate limits — a sign of intensive usage bursts.



Key finding: The 5 flagged users warrant a closer look — their token efficiency is significantly below average, suggesting suboptimal prompting patterns.