A Tutorial for

L_SU,
a graphical user interface
for Seismic Unix (CSM),
under Linux

Louisiana State University
Dept. Geology and Geophysics
Baton Rouge
Juan M. Lorenzo

Version: 0.4.0.1 (March, 2020)

1 General Information

1.1 Acknowledgements

This project is possible only because of the selfless work of others. I have shamelessly copied and modified notes extensively from the Colorado School of Mines website (Stockwell) for S*nix. Over the years, many students have also contributed to these notes: Class of 2008: Erin Walden, Kody Kramer, Erin Elliott, Andrew Harrison, Andrew Sampson, Ana Felix, JohnD'Aquin, Russell Crouch, Michael Massengale, and David Smolkin; Chang Liu (2013), Nevra Bulut (2019).

I will greatly appreciate any and all questions you have regarding installation and running of any of the programs to help us continue developing L_SU. Please send your questions to ***gllore@lsu.edu***. Please indicate what your operating system is and whether you have administrative priviliges (preferred).

Thanks,

Juan Lorenzo, BatonRouge, Dec. 5, 2019

1.2 What is L_SU?

L_SU, a graphical user interface (GUI), serves to select and build sequences of Perl modules and their parameters. L_SU generates two versions of these instructions in text files. These text files contain a shell and a Perl script version that can be modified and also executed independently of this GUI and from the command line.

Seismic Unix (Stockwell, 1999) is a widely distributed free software package for processing seismic reflection and signal processing. In Seismic Unix, a sequence of independent programs receive modify and generate data files of streams of data that are displayed on the screen. The data file is read in and the generated output data are handled internally by stdin, stdout functions in C while the data exchanges between programs and the linux operating system are managed from the command line via pipes "|" and redirections "> or <" respectively. Traditionally, the instructions on the command line can be assembled and saved as re-usable bash scripts. L_SU assembles these same scripts for the operating system to run with the help of modules written in Perl. L_SU generates these scripts within the directory of the user and thes scripts can be run independently of L_SU running.

L_SU is written using Perl/Tk which is mature, well-documented Perl module that allows its users to construct graphical user interfaces.

In a classroom environment, shell scripting of SU modules engages students and helps focus on the theoretical limitations and strengths of signal processing. However, complex interactive processing stages, e.g., selection of optimal stacking velocities, killing bad data traces, or spectral analysis requires advanced flows beyond the scope of introductory classes. In a research setting, special functionality from other free seismic processing software such as SioSeis (UCSD-NSF) can be incorporated readily via an object-oriented style to programming.

An object-oriented approach is a first step toward efficient extensible programming of multi-step processes, and a simple GUI simplifies parameter selection and decision making. Currently, in L_SU, Perl 5 packages wrap 65 of the most common SU modules that are used in teaching undergraduate and first-year graduate student classes (e.g., filtering, display, velocity analysis and stacking). Perl packages (classes) can advantageously add new functionality around each module and clarify parameter names for easier usage. For example, through the use of methods, packages can isolate the user from repetitive control structures, as well as replace the names of abbreviated parameters with self-describing names. Moose, an extension of the Perl 5 object system, greatly facilitates an object-oriented style. Perl wrappers are self-documenting via Perl programming document markup language.

An automatic directory structure is created for the user in which data and programs are distributed according to a pre-defined hierarchy. All the directories and minimal files needed by L_SU are created whenever a new 'Project' is created within the 'Project Selector' tool. The user can also create new projects within main GUI of L_SU as well as selecting different projects. At all times the user can use linux commands to navigate freely through the directories. Sometimes the user may find it convenient to create new subdirectories within the existing file structure. L_SU will not be able to detect these folders and their contents.

1.3 GUI Sections

1.3.1 Overview

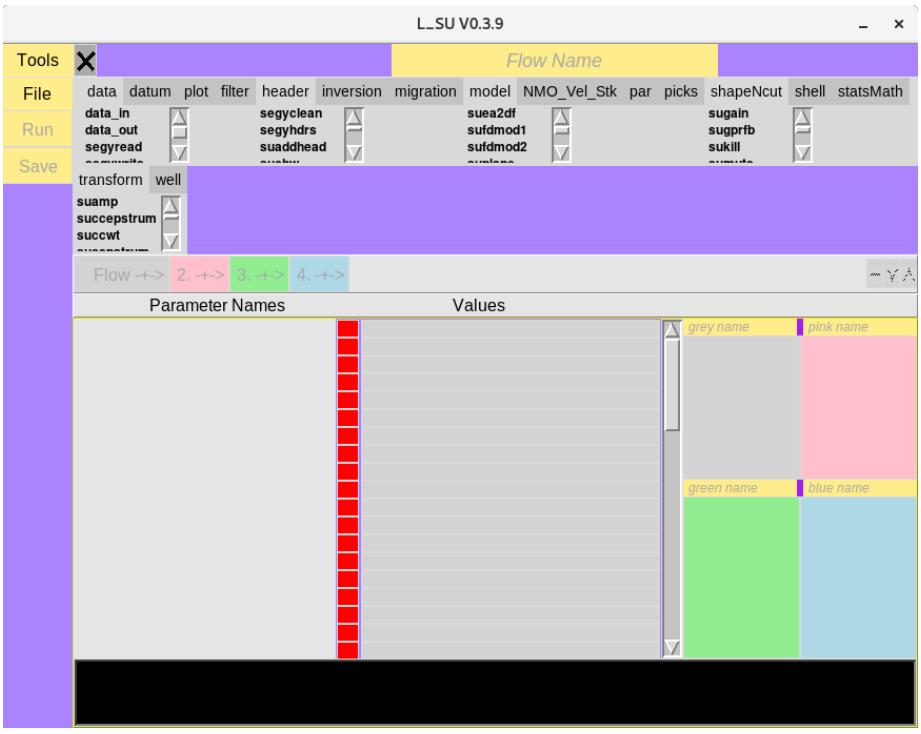

The main GUI is divided into 4 areas: Top Menu, Left Side Menu, Parameter Names and their Values, Four flow boxes, and a Message area. The large cross (**X**) in the top-left corner is used to kill many unwanted graphical process running in the background.

1.3.2 Top Menu

There are more than 400 independent programs are available from Seismic Unix. Currently L_SU implements over 65 of these.

1.3.3 Side Menu

1.3.3.1 Tools

Project: Defines the directory structure for data sets and programs in many languages, e.g. matlab, R, Perl etc.

Sseg2su: Converts SEG-2 formatted data into the su format which is a simplified SEG-Y format.

```
% Sseg2su
```

Sucat: Concatenates multiple files of any format into a single file. These files can have names related by a continuous sequence of integers, e.g., Seismic Unix data files: 1000.su, 1001.su, 1002.su. If not, a list of names can be specified. Output files from interactive muting or velocity analysis and that have specific “par” formats can be handled.

```
% Sucat
```

1.4 What is an example directory structure for a Project?

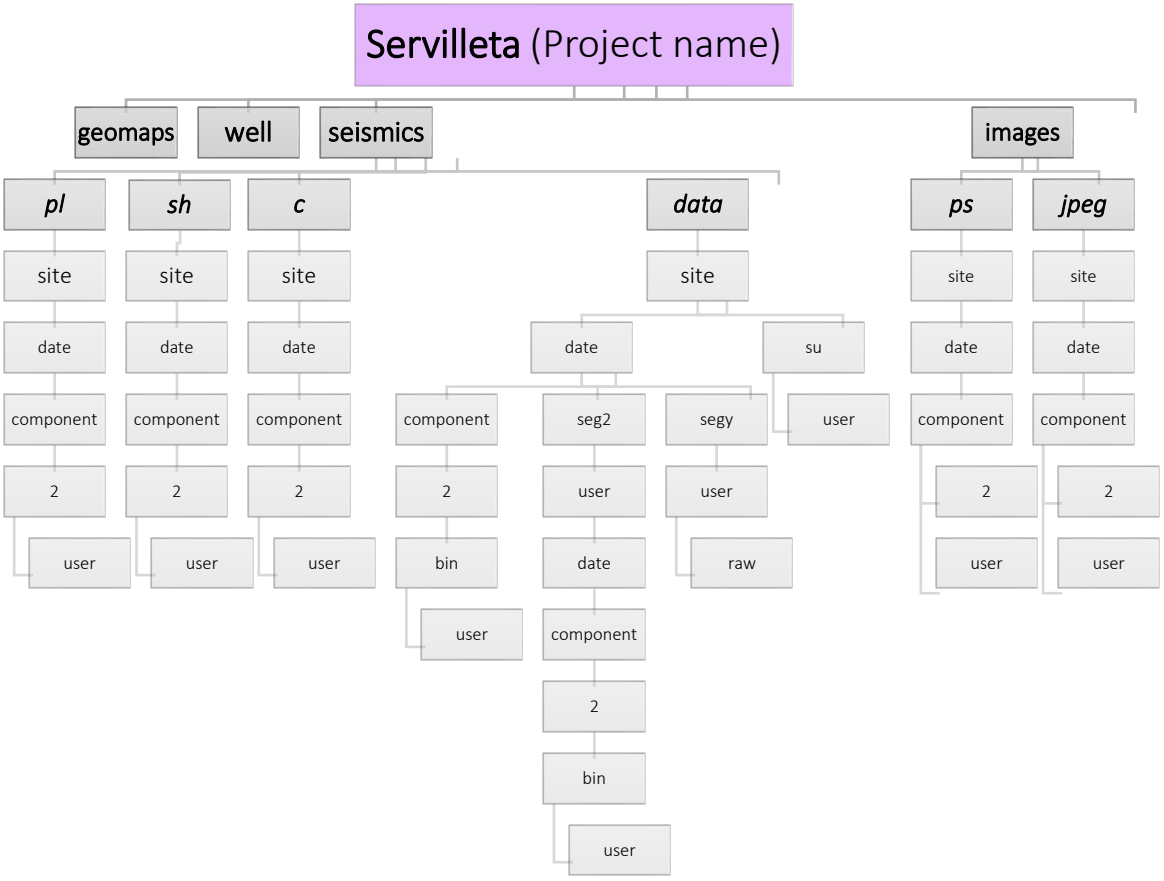

1.4.1 Copying data into the project directory structure from elsewhere in the system

If you want to copy seismic data already in su (seismic unix) format copy it with the following instruction, but first move yourself into the directory that receives the data.

Example 1:

```
% cd  PROJECT_HOME/seismics/data/site/component/line/username
```

Example 2:

```
% cd  /home/gllore/seismics/data/Servilleta/H/1/gllore
```

Example 2:

```
% cp data /home/refseis18/Aug27_lab1/*.su   .
```

1.4.2 Where are my flows kept?

```
% cd  PROJECT_HOME/seismics/pl/site/component/line/username
```

1.5 Text conventions in this tutorial and their meaning

Left Mouse click is abbreviated to <MB1> Instruction

Right Mouse click is abbreviated to <MB3> Instruction

Variable names are shown in a large bold-style font.

% Command-line instructions are shown with pink background

1.6 Glossary

Term	Explanation and Example	Brief
HOME	Full linux directory path to the user's home directory, e.g. /home/xavier45	home directory path
PROJECT_HOME	Located inside **HOME** directory -- can be a soft link	project directory path
Projectname	e.g., Servilleta -- a National Wildlife Refuge in New Mexico, U.S.A.	name of the project
spare_dir	can be left empty	a bonus directory
date	053018	Of field work
component	Z stands for vertical and and H can be horizontal but any name is possible	Geophone particle displacement component
line	1	used to identify a profile
user	e.g., xavier45	login name

subUser	must be set to the user's login name, e.g.,also xavier45	Allows groups to share Project space
flow	Data_in, sugain, suximage	Sequence of programs to execute
geomaps	Directories will be created when working with-maps	Directories for third-party software (if installed and accessible)
sqlite	Databases	Directories for third-party software (if installed and accessible)
gmt	GMT	Directories for third-party software (if installed and accessible)
grass	GRASS GIS	Directories for third-party software (if installed and accessible)

Table 1: Definitions of terms used when creating working projects

2 Demonstration Projects

When either creating a new project or accessing a pre-existing project instances, always start by running the following instruction:
% L_SU

2.1 A Quick start to preparing a demonstrations

2.1.1 Where are my data sets stored?

Before starting a new project you should understand the file structure in which programs and data sets are stored. The main directories are shown above for the example of Servilleta_demos in Section 1.4.

2.1.2 Install example flows and data sets

Several example projects that contain data and examples flows can help you become acquainted with the Seismic Unix Tools. For example:

- ***Servilleta_demos contains files from the 2018 IRIS internship orientation program***
- ***LSBB contains files from Pau University in France, courtesy of Dominique Dominique Rousset and Guy Sénéchal, both extensive contributors to the improvement of Seismic Unix.***
- ***Demos contains general demonstrations of tools not included in the previous tutorials***

The following is explained the L_SU Installation manual (Section 1.3.6) but is repeated here for convenience of the user. Once you completely instal L_SU on your system, you can move or copy any of the accompanying demonstration folders to the home directory of the user, where /home/user is the complete path to the location of the user (=”gllore”).

```
% cp -R $installation_directory_for_L_SU/L_SU/demo_projects/Servilleta_demos
        /home/gllore/

% cp -R $installation_directory_for_L_SU/L_SU/ demo_projects/LSBB       /home/gllore/

% cp -R $installation_directory_for_L_SU/L_SU/ demo_projects/demos     /home/gllore/
```

2.1.3 Create a new project, e.g., Servilleta_demos (IRIS demonstration data set)

The following instruction starts the program:

% L_SU

If you do not have any projects created previously, then:

<MB1> Create New

Otherwise, go to next section 2.1.5: Open a pre-exisitng project

After clicking on Create New, a default set of parameter names (e.g., **HOME**) and their values (e.g. **/home/gllore**) appears:

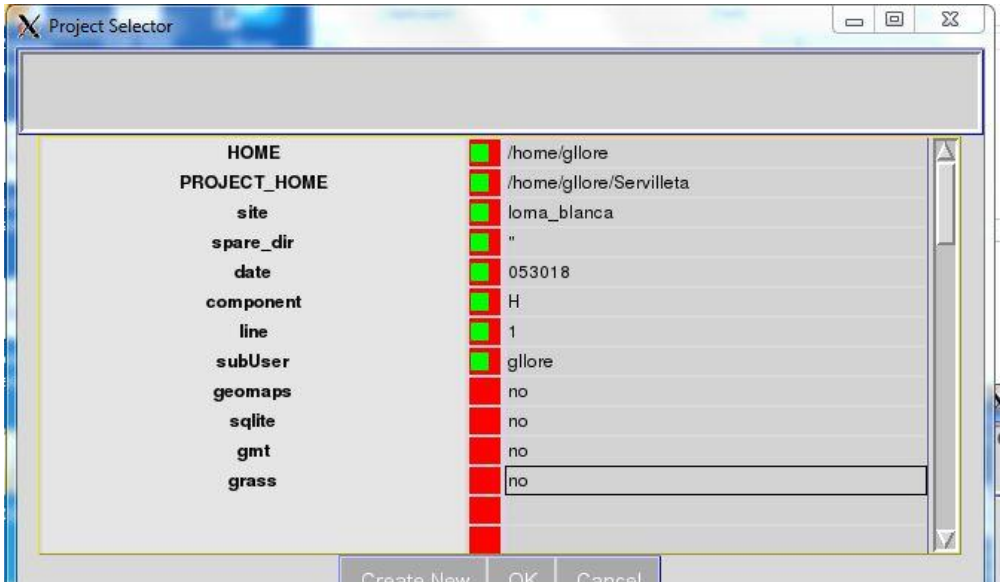

Figure 1: Screen capture of Project Selector Pane with parameters and their values

The Project Selector pane displays several default options that work with the test data set that is included for this tutorial. The old variables are defaulted from prior projects and serve as an example to guide your input. The home directory of the user is required to follow the standard linux file structure naming system.

These options should be updated with an actual user name, for example:

Parameter name	Default values	User's new values
HOME	/home/**gllore**	home/user

PROJECT_HOME	/home/gllore/Servilleta_demos	/home/**user**/Servilleta_demos
Site	Servilleta	loma-blanca
spare_dir	“”	
date	053018	053018
component	Z	H
line	2	1
subUser	**gllore**	user
geomaps	no	no
sqlite*	no	no
gmt*	no	no
grass*	no	no

Table 1: Suggested changes to parameter vlaues

*** if set to ‘yes’ only the directories will come to be created although the accompanying programs are not yet available in this version (Nov. 2019)**

Finally, select: <MB1> OK

2.1.4 For the IRIS Data set, confirm you are working Project called “Servilleta_demos”

In the top left menu, select <MB1> Tools->Project

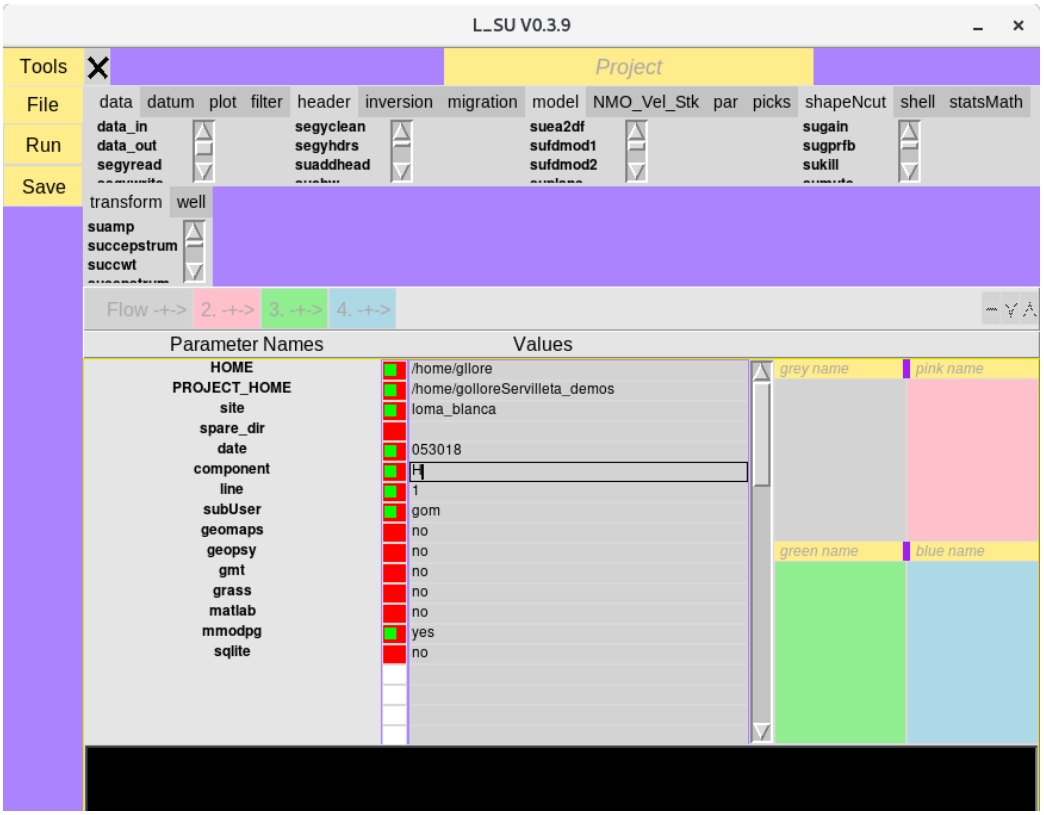

In the main window of the L_SU GUI you should see the previous changes you made to the same parameter values. It they are incorrect (the figure above show an inconsistent use of the user name) you can modify them again and, whothout exiting this window you can then select:

In the top left menu: <MB1> Save->Run

2.1.5 For the GPR data sets (from LSBB), confirm you are working Project called "LSBB"

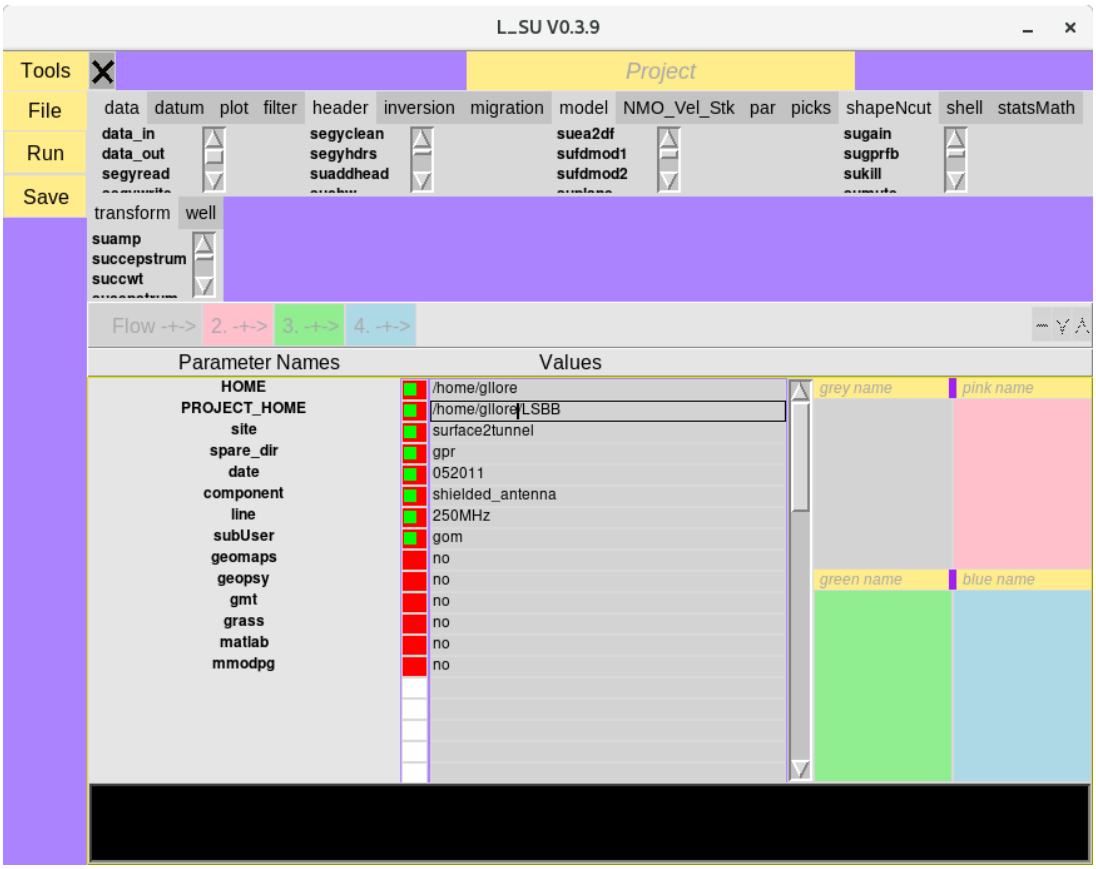

2.1.6 For the remaining Demo Project confirm you are working Project called "demos"

2.2 Open a pre-existing project

2.2.1 The following instruction starts the program, and open the pane of the Project Selector window:

% L_SU

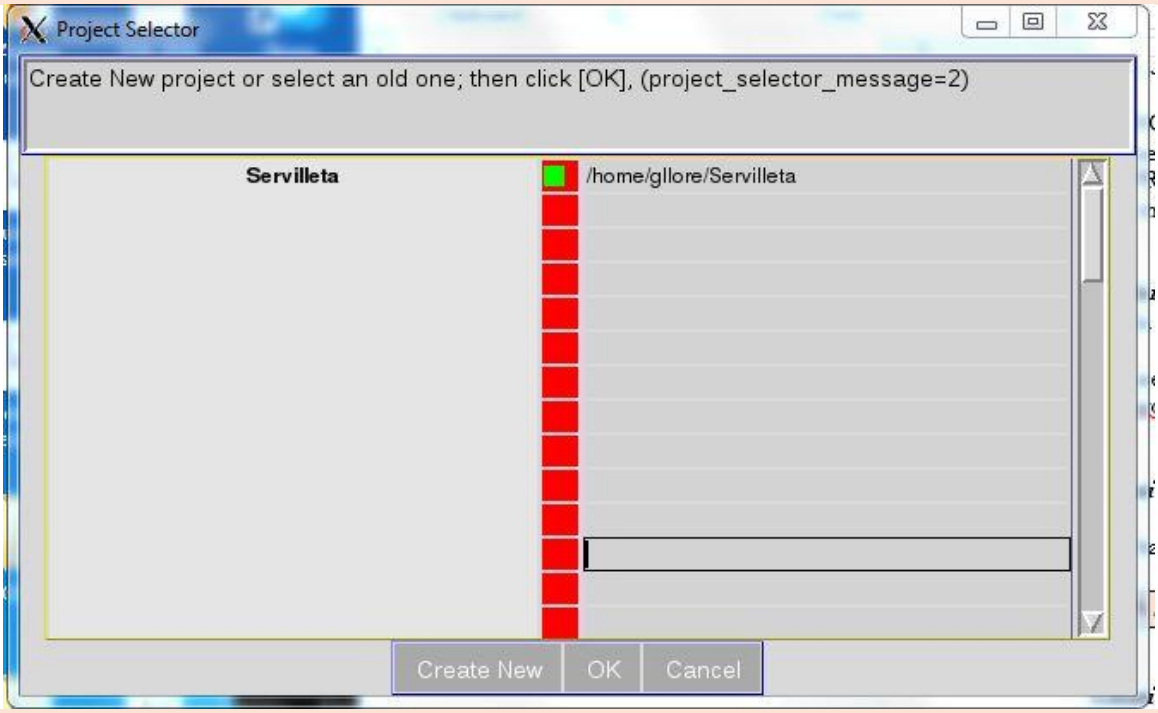

If the project of interest (in this case Servilleta) is selected (button is green) :

Select: <MB1> on OK

2.3 Running your first flows

Assemble a sequence of modules to carry out a processing procedure. Choose one of four differently colored flow windows (grey, pink, green and blue) in which to place your sequence. The colored window appear on the right-hand side of the main window.

A module, with a specific functionality, is selected by clicking on its name from within the list on the left-hand side of the main window.

The module name must be transferred to the list on the right by clicking one of the four different colored flow arrows, just to the right of the word “Flow”.

A final assembled flow must first be saved to a file before it is executed (**File->SaveAs**). Thereafter all executions require that the flow be first saved before running.

In a simple sequence of modules, data are usually read in first, the data is modified and the result is placed into another file or displayed using an imaging module (e.g., suximage, suxwigb)

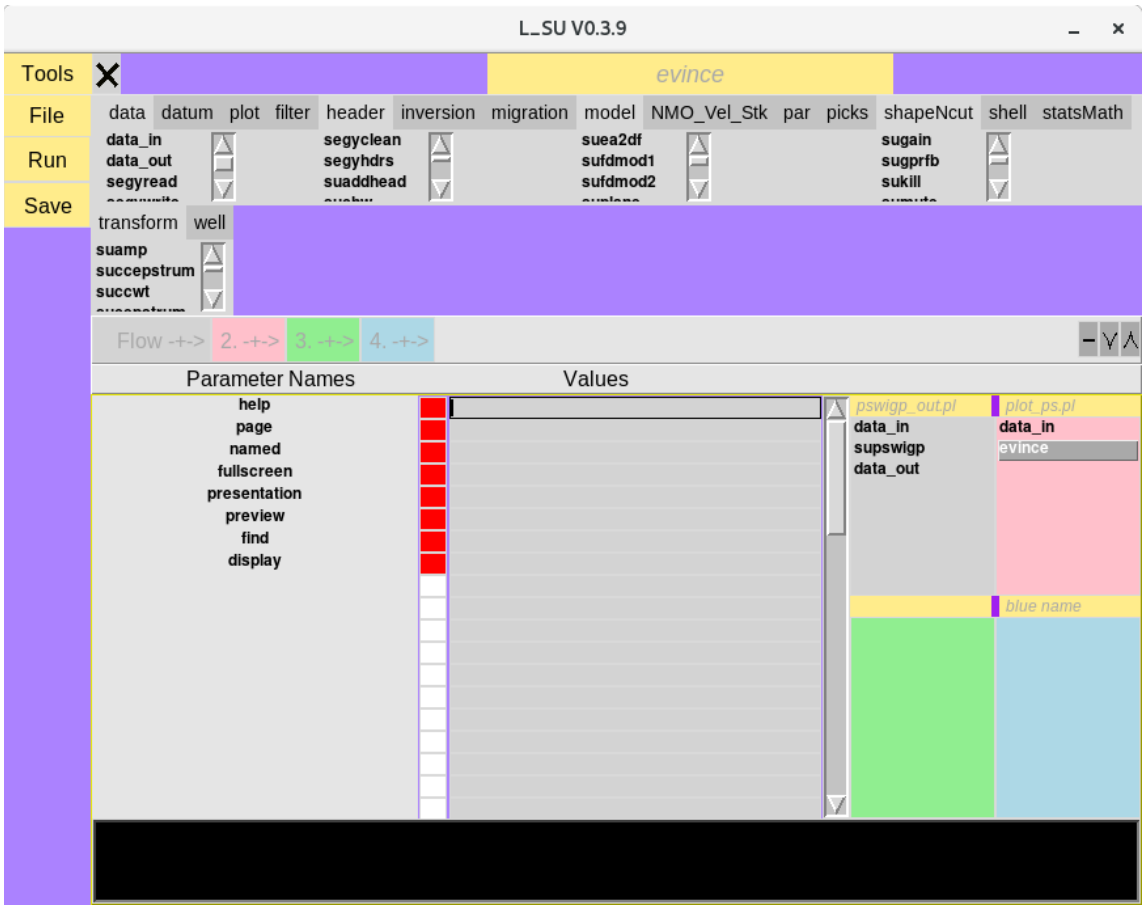

1. Select the following named modules: ***data_in, supswig, and data_out***. Click on each names inside list on the left side of the window. When you do that, the words in the row immediately above will become activated. You will then be able to click on the words inside the grey box:

Flow-+->

You should be able to see the name of the program that you just selected move over to a colored box on the right-hand side of the window.

Select each of the three program names: ***data_in, supswigp,*** and ***data_out***

2. You are required to select a **Value** for **base_file_name** (= “file name”).

To do so, move your cursor into the corresponding row to the right of **base_file_name**.

A click of the right-mouse-button will automatically open a second window from which you can select a file, e.g. **"103.su"**.

Before you can run the program you have built, it must be saved:

For L_SU GUI

<MB 1> File/SaveAs

Save the resultant perl script file as, e.g.,

"pswigp_out.pl"

Then, click on

Tool: <MB 1> Run

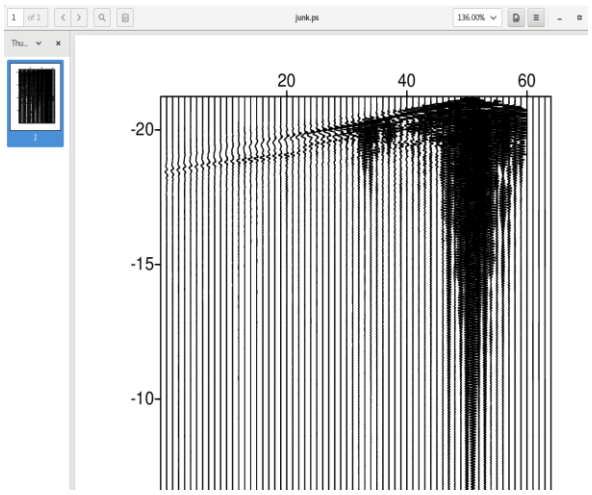

Postscript plot viewed using the GUI

Tool: <MB1> Run

2.3.1 Perl and Shell script flows generated by L_SU

GUI-generated perl script: plot_ps.pl

To run from the command line in the directory where the perl flows are kept (see 1.4.3):

```
% perl plot_ps.pl
```

To run the bash script from the command line that is generated by plot_ps.pl:

```
% evince /home/gllore/Servilleta_demos/seismics/im-
ages/ps/loma_blanca//053018/H/1/gllore/junk.ps &
```

(Note that pswigp_out.pl is run first and and plot_ps.pl second.

2.3.2 Access to Documentation

Select **<MB3>** over the name of the program:

Conventional Seismic Unix documentation for the modul: suwind

3 Simple Processing Flow: IRIS Data Set, Socorro New Mexico

Each year Incorporated Research Institutions for Seismology (IRIS) hold an orientation week for undergraduate research interns in the town of Socorro, New Mexico. As part of a week of training, the on May 30 of 2018, the students collected an active-source seismic data set, which we process using Seismic Unix.

3.1 Processing steps

The following outline is taken from a called notes.pl. This files exists in the perl flow directory (1.4.3) of the Servilelta_demos project. To get there change to the following directory:

```
% cd  /home/user/seismics/pl/site/component/line/user
```

To see the marked-up contenst of the perl file:

```
%perldoc notes.pl
```

LOMA BLANCA

IRIS 2018 survey May 30 2018
on S bank of Rio Salado
along same line as pseudo-walkaway taken on 032618
shoot-through

Acquisition paramters

Date	**053018**
SI	**1000 S/s**
delrt	**-11 ms**
rec. length	**2 s**
num tracr	**64**
Live channels	**1-64**
Channel 1	**closest to recorder-- toward SE**
Channel 64	**farthest from recorder-- toward NW**
geophones: Geospace	**28 Hz L-4 3 component**
geophone spacing:	**1 m**
line orientation:	**NW-SE later shots more toward NW**
Number of Geophones	**60**
Shotpoint Spacing	**1 m**
GPS is available (etrex garmin 10 m)	

	(sx-m)	NOMINAL offset-m	ACTUAL (m)
Raw SP 1	**0**	**1-60**	**0.5 - 59.5**
Raw SP 2	**1**	**0-59**	**-0.5 - 58.5**
Raw SP 3	**2**	**-1-58**	**-1.5 - 57.5**
Raw SP 4	**3**	**-2-57**	**-2.5 - 56.5**
Raw SP 60	**59**	**-58-1**	**-58.5 - 0.5**
Striker plate	**I-beam**		
Hammer	**10 lb sledge**		
No. blows	**3 per side**		

Noise sources: **5 - 10 mph from SE**
I-25 **to E**

Acquisition parameters taken from the file notes.pl

3.2 STEP 1. File format conversion

Tool: Seg2su (from GUI)

Purpose: Convert Seg2 to Seismic Unix format
Input: 1 to 120.dat
Output: 1 to 120.su

3.3 STEP 2. Concatenate files

Tool: **Sucat** (from GUI)
Purpose: cat all files
Input: 1.su to 120.su
Output: 1_120.su
Uses: /home/gllore/Servilleta_demos/seismics/pl/loma_blanca/053018/**Sucat.config**

L_SU Gui:

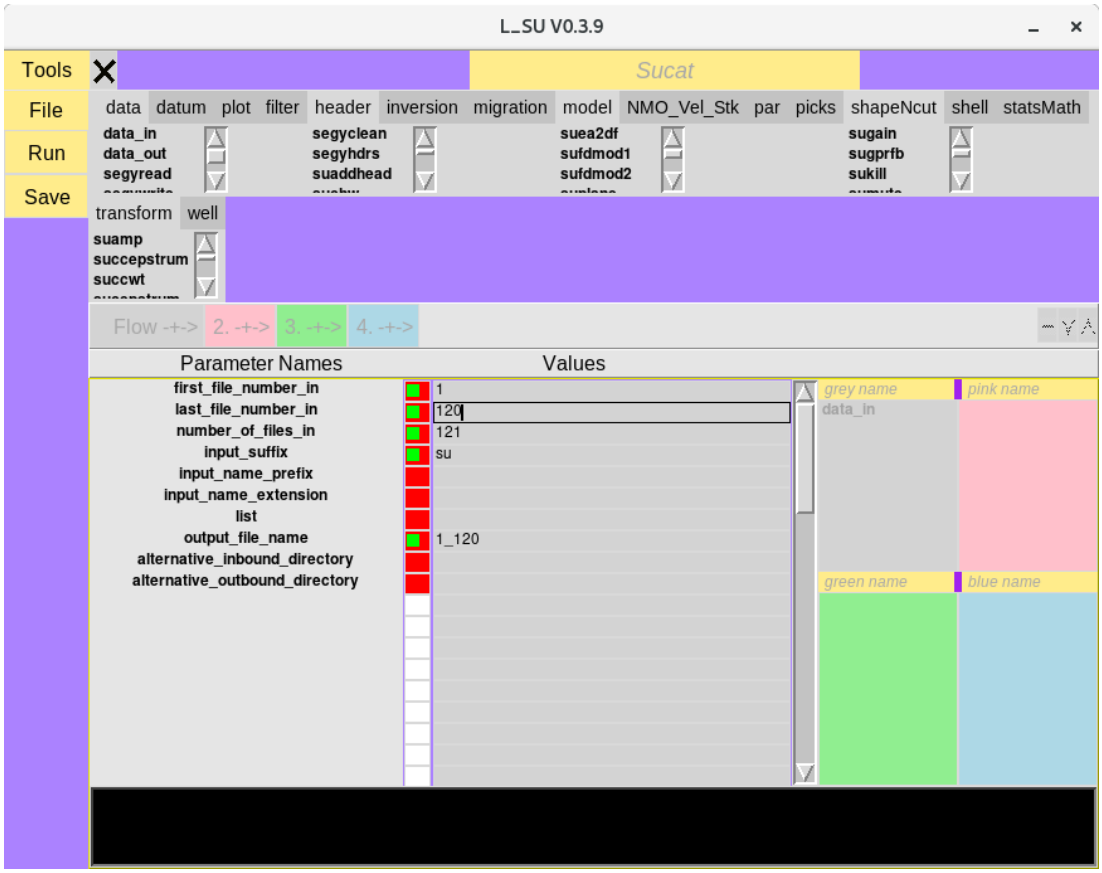

3.4 STEP 3. Clean headers

Flow name: **Suclean_geom.pl** (from GUI)

Purpose: Modify the geometry headers for shoot-through survey

by wiping certain headers and populating new ones

Input: 1_120.su
Output: 1_120_clean.su

3.5 STEP 4. Window the shotpoint gathers

Flow name: **Suwind.pl** (from GUI)

Purpose: Only allow
traces 1-60 (exclude last 4 in each gather)

Input: 1_120_clean.su
Output: All.su

To view the data as an image: **view_All.pl** (from GUI)

3.6 STEP 5. Negative stack

Flow name: **suop2.pl**
Input: L28HzHit_fromNE.su and L28HzHit_fromSW.su
Output: L28Hz_Ibeam.su

Subtract 'from-NE_shotgathers' from 'from-SW-gathers'

To view the data: **view_L28Hz_Ibeam.pl** (from GUI)

3.7 STEP 6. Modify header files--gx,ep,sx

SuGeom2.pl (from GUI)
Purpose: populate headers with meaningful values;
header names are: gx, ep and sx

Input: L28Hz_Ibeam
Output: L28Hz_Ibeam_geom2

To verify new header parameters: **SuPlotHeader.pl** (from GUI)

To view new header parameter numerical values: **suxedit**
If you want to directly view the data change to the current data directory (2.4.1):

% cd /home/gllore/Servilleta_demos/seimics/data/loma_blanca//053018/H/1/su/**user**

And then when you are in the correct data directory:

% **suxedit** L28Hz_Ibeam_geom2

3.8 STEP 7. Modify Header files--offsets

SuGeom3.pl (from GUI)

Purpose: Add offsets to headers

Input: L28Hz_Ibeam_geom2
Output: L28Hz_Ibeam_geom3

Graphically verify new header parameters using **view_traclVsoffset.pl**

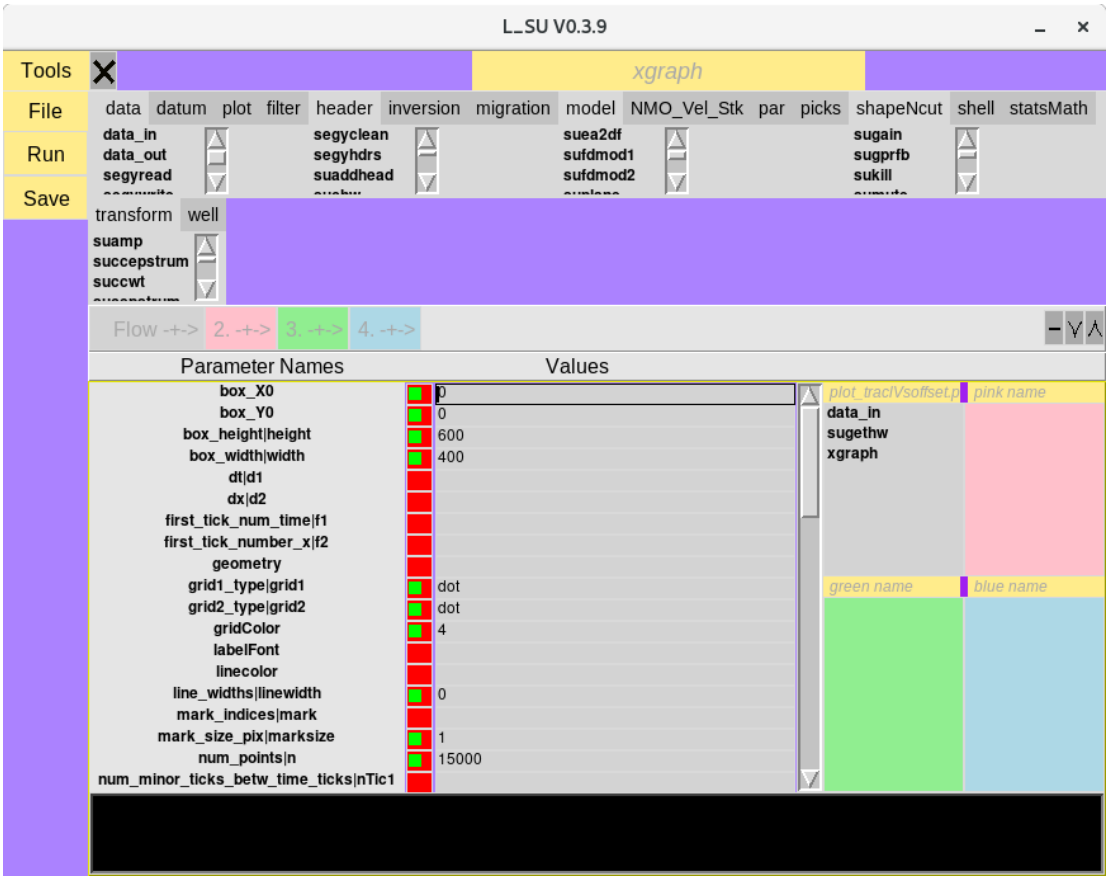

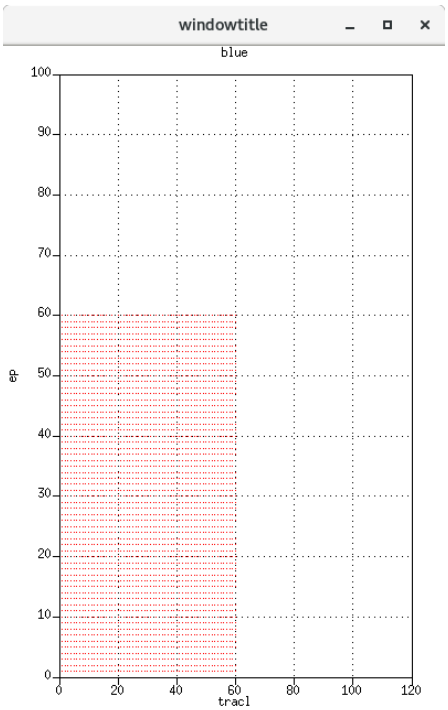

Plotted header values of tracl versus offset display a regular geometric pattern that reflects the regular acquisition geometry of soruces and ssoureces used in the experiment.

Numerically verify new header parameters using **suxedit**

Convention: Positive offets are when geophones lie N of shot. Negative offsets are when shot lies N geophone

% cd /home/gllore/Servilleta_demos/seimics/data/loma_blanca//053018/H/1/su/**user**

And then when you are in the correct data directory:

% **suxedit** L28Hz_Ibeam_geom3

3.9 STEP 8. Modify Header files--Make CMP's

make_cmp.pl (from GUI)

Purpose: Put cdp values in the ”cdp” headers

Input: L28Hz_Ibeam_geom3
Output: All_cmp(.su)

3.10 STEP 9. Dip filter

Tool: **ifk** (interactive velocity filtering)

Purpose: Useful for separation of reflections from surface waves
Uses: /home/gllore/Servilleta_demos/seismics/**pl**/loma_blanca/053018/Sucat.config

L_SU Gui

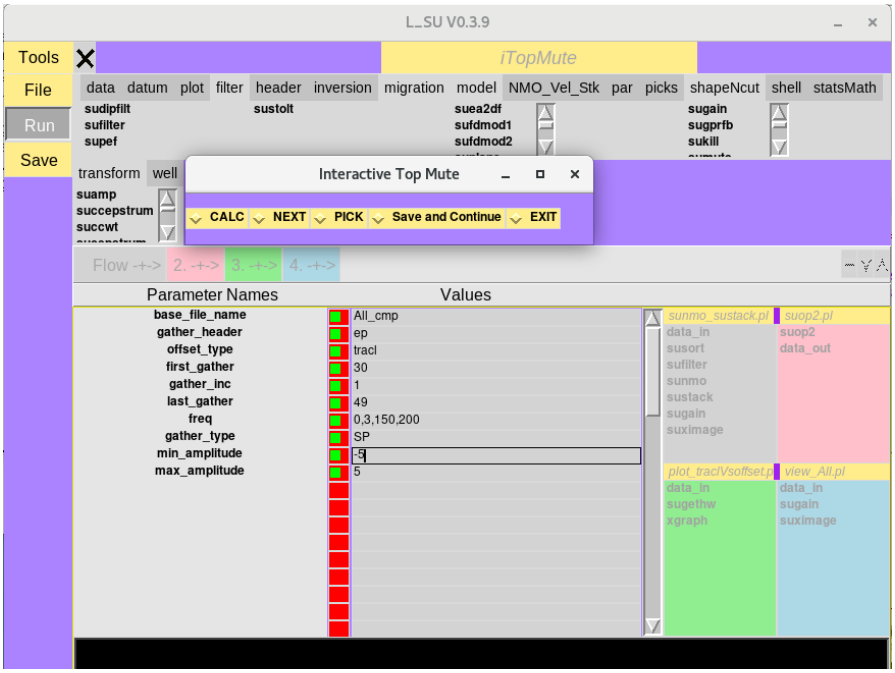

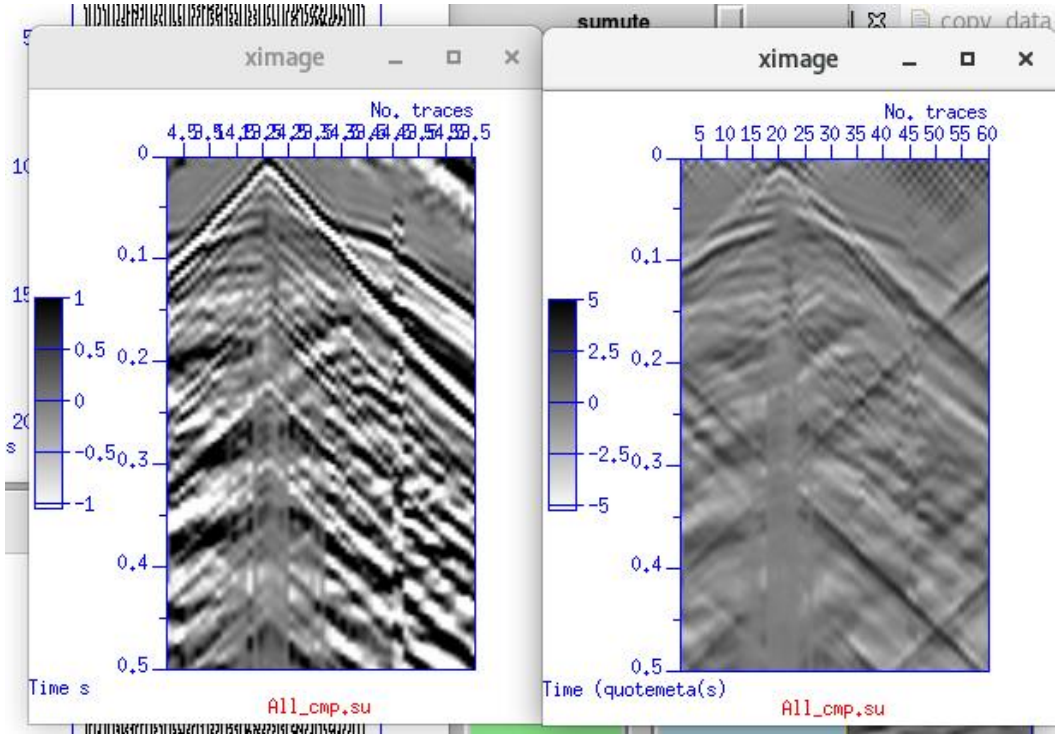

Before (left) and after (right) f-k filtering

3.11 STEP 10. Test Muting of surface waves and refracted waves

Tool: **iBottomMute** Interactive Top Bottom Mute,SP 1

Testing- not used in this flow
Input:
Output:
Uses: Uses: /home/gllore/Servilleta_demos/seismics/pl/loma_blanca/053018/Sucat.config

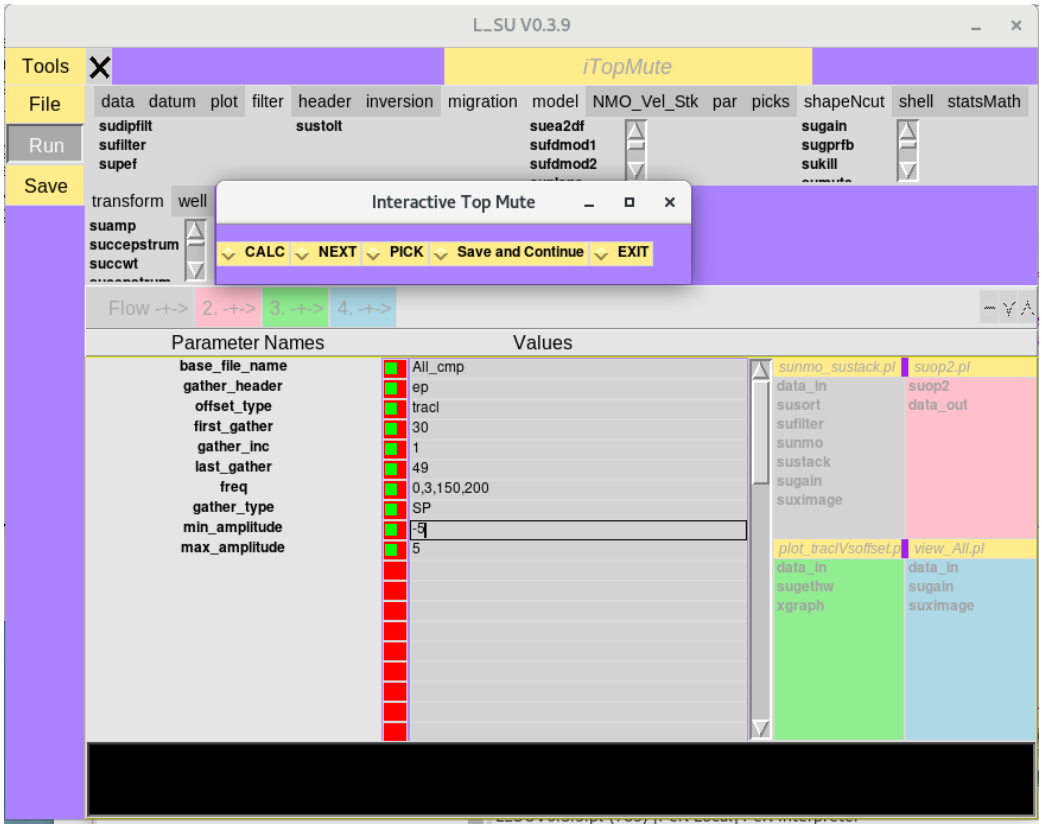

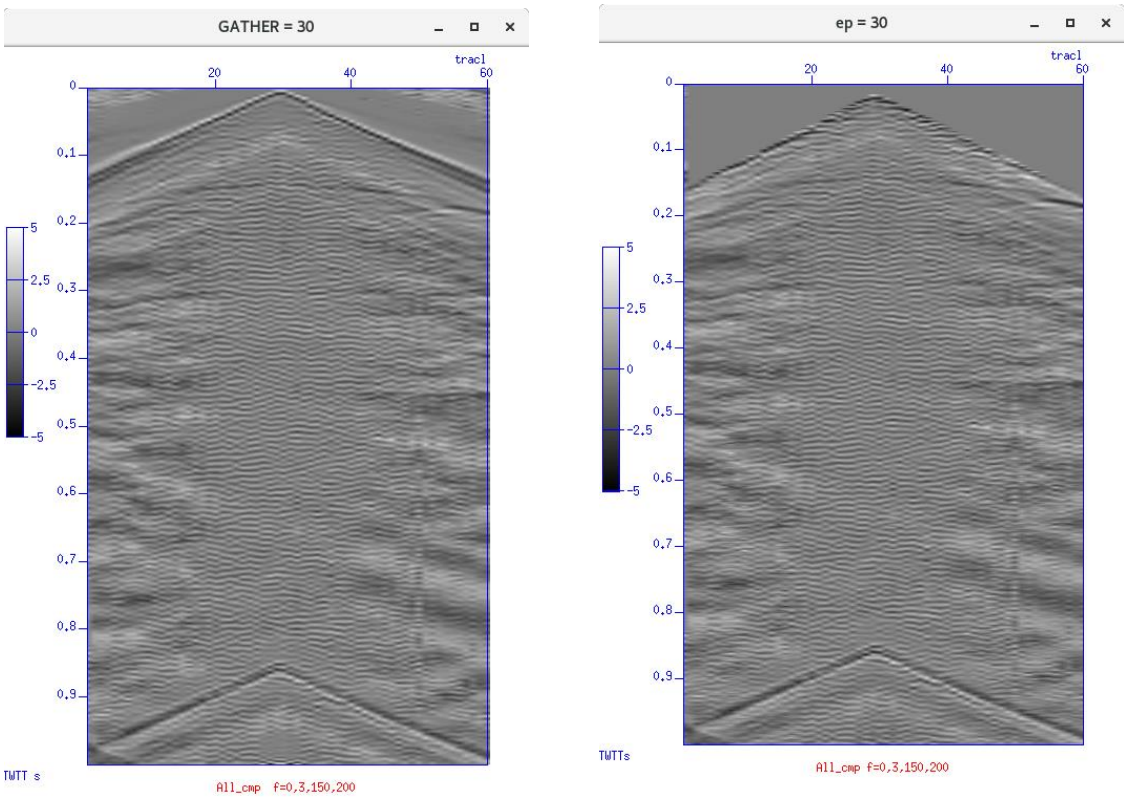

(Left) Before and after (Right) images of cdp=30 gather generated during application of interactive top-muting Tool.

3.12 STEP 11. Test Semblance Analysis

Tool **iVA:** Interactive velocity analysis
Uses: Uses: /home/gllore/Servilleta_demos/seismics/pl/loma_blanca/053018/Sucat.config

L_SU Gui

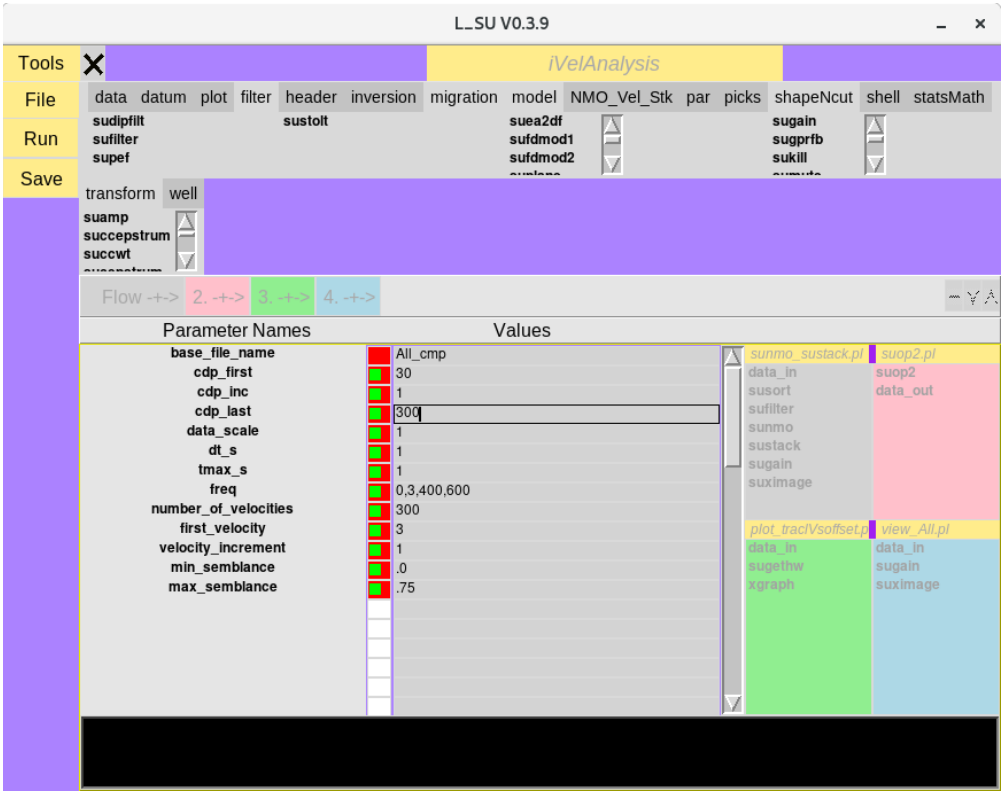

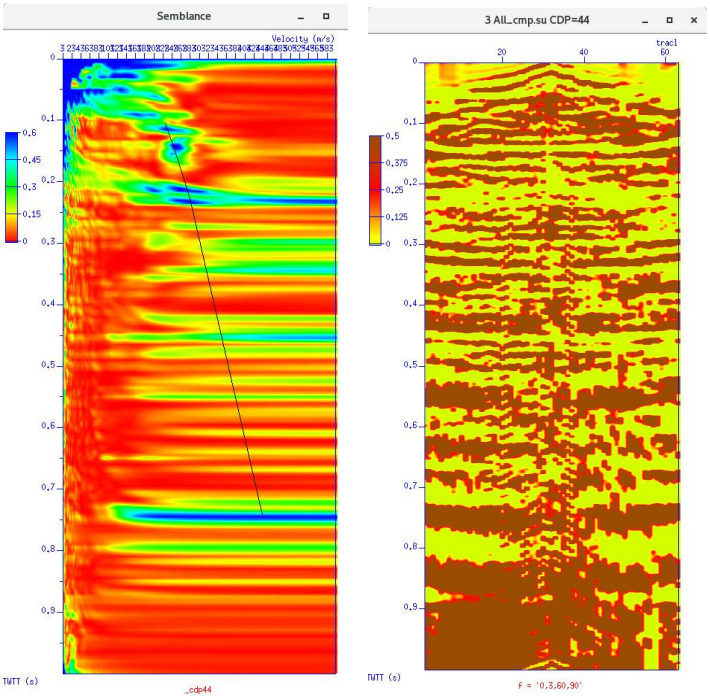

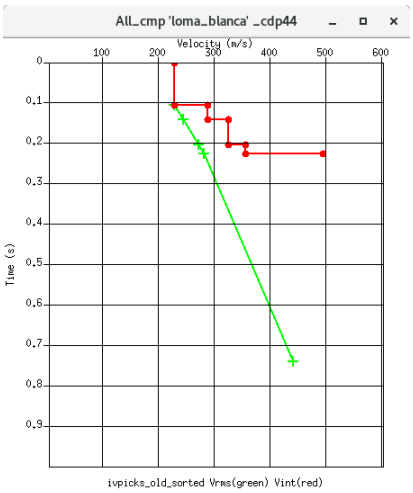

Velocity-time picks interpreted from the semblance plot (far left)

(Left) Velocity verusus time and semblance image (left) and two selected points connected by a line. (Right) CDP/CMP gather analyzed in the adjoining semblance image. Data are NMO-corrected with the two velocity-time values selected in the semblance image.

3.13 STEP 12. Normal Moveout and Stacking and Migration

Uses two velocity-time pairs from the iVA above.

STEP 12: L_SU Gui:

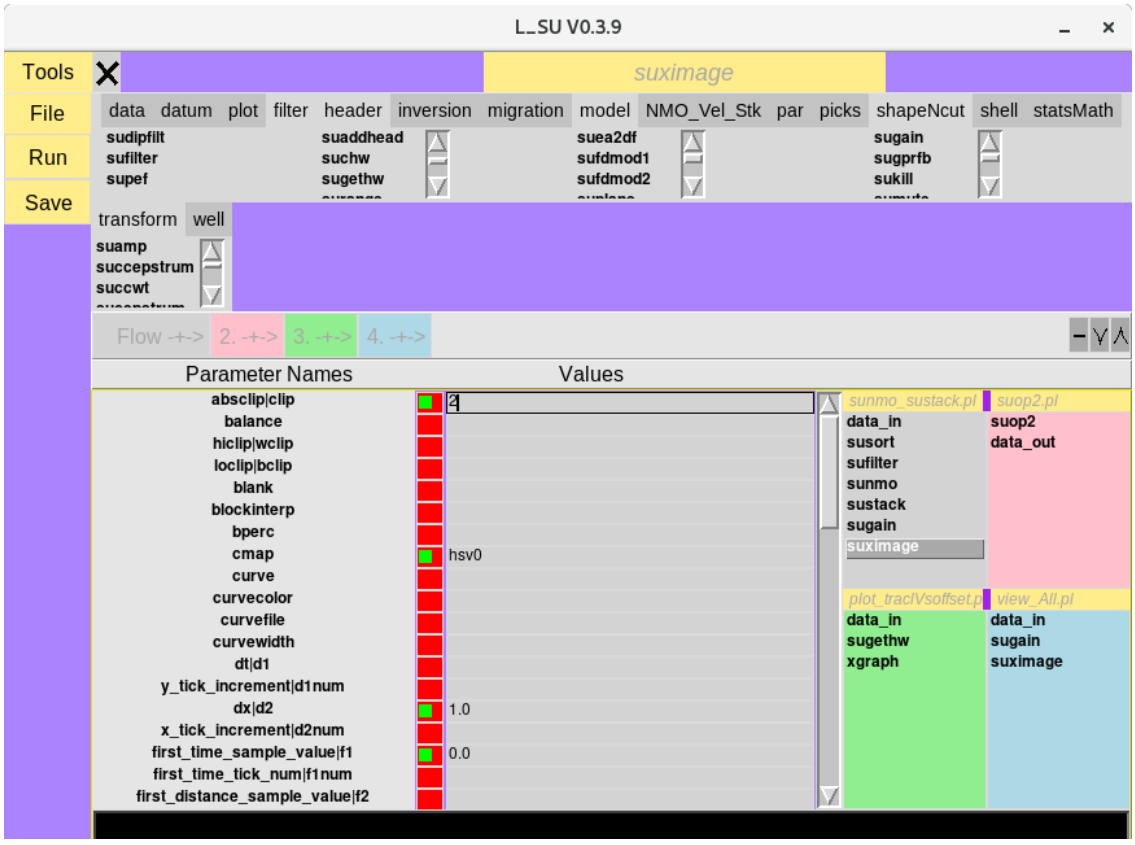

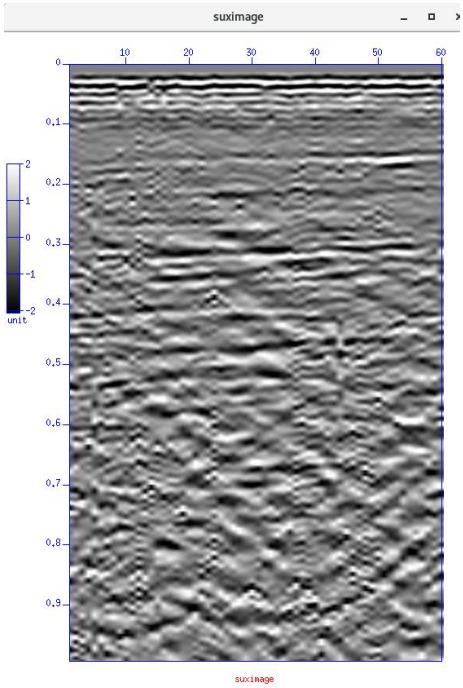

STEP 12: Output image of field data

4 Simple Processing Flow for GPR data

L_SU GUI:

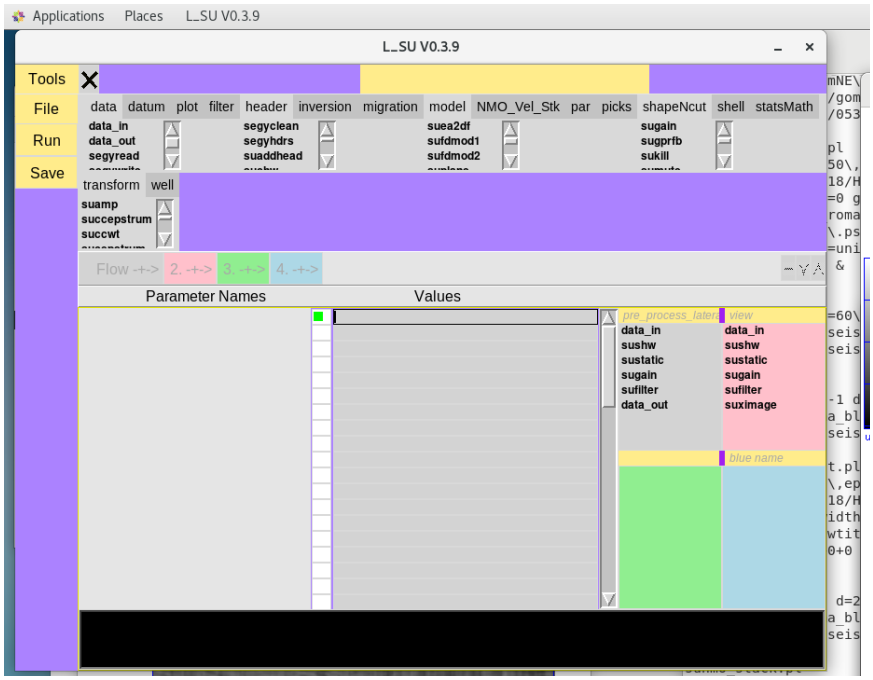

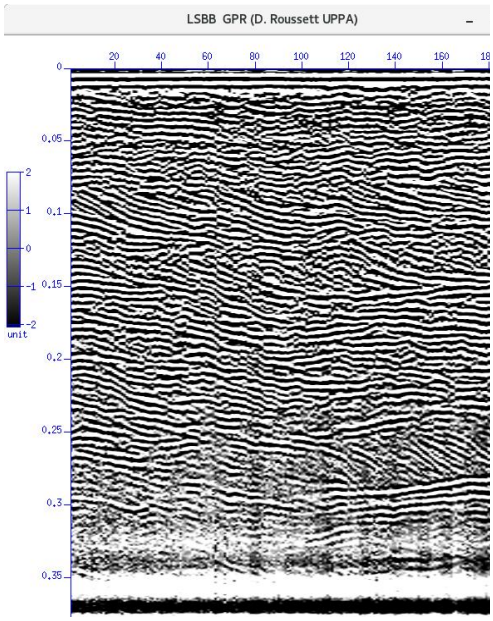

Output image of GPR data

5 Perl and Shell script flows generated by L_SU

5.1 IRIS Data Set, Socorro, New Mexico

Project Name: Servilleta_demos

STEP 2: GUI Tool Name: Sucat

Uses: /home/gllore/Servilleta_demos/seismics/pl/loma_blanca/053018/Sucat.config

To run from the command line in the directory where the perl flows are kept (see 1.4.3)

```
% Sucat
```

STEP 5: GUI-generated perl script: suop2.pl

To run from the command line in the directory where the perl flows are kept (see 1.4.3):

```
% perl suop2.pl
```

To run the bash script from the command line that is generated by suop2.pl:

```
% suop2 \/home\/gllore\/Servilleta_demos\/seis-
mics\/data\/loma_blanca\/\/053018\/H\/1\/su\/gllore\/L28HzHit_fromNE\.su
```

```
\/home\/gllore\/Servilleta_demos\/seis-
mics\/data\/loma_blanca\/\/053018\/H\/1\/su\/gllore\/L28HzHit_fromSW\.su op=diff >
/home/gllore/Servilleta_demos/seis-
mics/data/loma_blanca//053018/H/1/su/gllore/L28Hz_Ibeam.su &
```

STEP 5: GUI-generated perl script: view_L28Hz_Ibeam.pl

To run from the command line in the directory where the perl flows are kept (see 1.4.3):

```
% perl view_L28Hz_Ibeam.pl
```

To run the bash script from the command line that is generated by view_L28Hz_Ibeam.pl:

```
% sufilter f=3\,6\,50\,80 verbose=0 < /home/gllore/Servilleta_demos/seis-
mics/data/loma_blanca//053018/H/1/su/gllore/L28Hz_Ibeam.su | sugain agc=1 wagc=0\.1 |
suximage clip=1 cmap=hsv0 d2=1 f1=0 gridcolor=blue labelcolor=blue labelfont=Erg14 legend=1
legendfont=times_roman10 lwidth=16 lx=3 mpicks=\/dev\/tty n1tic=1 n2tic=1 perc=100 plot-
file=plotfile\.ps style=seismic title=suximage titlecolor=red titlefont=Rom22 tmpdir=\.\/
units=unit verbose=1 windowtitle=suximage wperc=100 xbox=500 ybox=500 wbox=550
hbox=550 &
```

STEP6: GUI-generated perl script: SuGeom2.pl

To run from the command line in the directory where the perl flows are kept (see 1.4.3):

```
% perl SuGeom2.pl
```

To run the bash script from the command line that is generated by SuGeom2.pl:

```
% sushw a=0\,1\,1 j=60\,60\,60 key=sx\,gx\,ep b=0\,1\,0 c=1\,0\,1 < /home/gllore/Servi-
lleta_demos/seismics/data/loma_blanca//053018/H/1/su/gllore/L28Hz_Ibeam.su >
/home/gllore/Servilleta_demos/seis-
mics/data/loma_blanca//053018/H/1/su/gllore/L28Hz_Ibeam_geom2.su &
```

STEP 7: GUI-generated perl script: SuGeom3.pl

To run from the command line in the directory where the perl flows are kept (see 1.4.3):

```
% perl SuGeom3.pl
```

To run the bash script from the command line that is generated by SuGeom3.pl:

```
% suchw a=0 b=1 c=\-1 d=1 e=1 f=1 key1=offset key2=gx key3=sx < /home/gllore/Servilleta_demos/seismics/data/loma_blanca//053018/H/1/su/gllore/L28Hz_Ibeam_geom2.su > /home/gllore/Servilleta_demos/seismics/data/loma_blanca//053018/H/1/su/gllore/L28Hz_Ibeam_geom3.su &
```

STEP 7: GUI-generated perl script: plot_traclVsoffset.pl

To run from the command line in the directory where the perl flows are kept (see 1.4.3):

```
% perl plot_traclVsoffset.pl
```

To run the bash script from the command line that is generated by plot_traclVsoffset.pl:

```
% sugethw key=tracl\,ep output=binary < /home/gllore/Servilleta_demos/seismics/data/loma_blanca//053018/H/1/su/gllore/L28Hz_Ibeam_geom3.su | xgraph grid1=dot grid2=dot gridColor=4 linewidth=0 marksize=1 n=15000 reverse=0 style=normal title=blue windowtitle=windowtitle x1beg=0 x1end=120 x2beg=0 x2end=100 label2=ep label1=tracl -geometry 400x600+0+0 &
```

STEP 8: GUI-generated perl script: make_cmp.pl

To run from the command line in the directory where the perl flows are kept (see 1.4.3):

```
% perl make_cmp.pl
```

To run the bash script from the command line that is generated by plot_traclVsoffset.pl:

```
suchw a=0 b=1 c=1 d=2 e=1 f=1 key1=cdp key2=gx key3=sx < /home/gllore/Servilleta_demos/seismics/data/loma_blanca//053018/H/1/su/gllore/L28Hz_Ibeam_geom3.su > /home/gllore/Servilleta_demos/seismics/data/loma_blanca//053018/H/1/su/gllore/All_cmp.su &
```

STEP 12: GUI-generated perl script: sunmo_stack.pl

To run from the command line in the directory where the perl flows are kept (see 1.4.3):

```
% perl sunmo_stack.pl
```

To run the bash script from the command line that is generated by sunmo_stack.pl:

```
% cdp offset < /home/gllore/Servilleta_demos/seismics/data/loma_blanca//053018/H/1/su/gllore/All_cmp.su | sufilter f=10\,20\,70\,80 verbose=0 | sunmo invert=0 lmute=25 smute=1\.5 sscale=1 tnmo=0\,1 upward=0 vnmo=100\,600 | sustack key=cdp normpow=0 nrepeat=1 repeat=0 verbose=0 | sugain agc=1 wagc=0\.2 tmpdir=\/tmp | suximage clip=2 cmap=hsv0 d2=1 f1=0 gridcolor=blue labelcolor=blue labelfont=Erg14 legend=1 legendfont=times_roman10 lwidth=16 lx=3 mpicks=\/dev\/tty n1tic=1 n2tic=1 perc=100 plotfile=plotfile\.ps style=seismic title=suximage titlecolor=red titlefont=Rom22 tmpdir=\.\/ units=unit verbose=1 windowtitle=suximage wperc=100 xbox=500 ybox=500 wbox=550 hbox=550 &
```

5.2 GPR data

Collected in Low-Noise Underground Gallery (LSBB) in southern France forming by Dominique Rousset of the Université de Pau et des Pays de l'Adour (UPPA) Institut Pluridisciplianire de Recherche Appliqué

Project Name: LSBB

To run the bash script from the command line that is generated by view_LSBB-1.pl:

To run from the command line in the directory where the perl flows are kept (see 1.4.3):

```
% perl view_LSBB-1.pl
```

In the case immediately above, the location of the perl flow is in the following directory: /home/gllore/LSBB/seismics/data/surface2tunnel/gpr/052011/shielded_antenna/250MHz/su/gllore/. In this example “gllore” is the name of the user and should be changed in your particular case.

To run the bash script from the command line that is generated by .pl:

```
% sushw a=9\,1 key=tstat\,cdp b=0\,1 < /home/gllore/LSBB/seismics/data/surface2tunnel/gpr/052011/shielded_antenna/250MHz/su/gllore/LSBB1\-1.su | sustatic hdrs=1 | sugain mbal=1 tmpdir=\/tmp | sufilter f=0\,30\,400\,500 verbose=0 | suximage clip=2 cmap=hsv0 d2=1 f1=0 gridcolor=blue labelcolor=blue labelfont=Erg14 legend=1 legendfont=times_roman10 lwidth=16 lx=3 mpicks=\/dev\/tty n1tic=1 n2tic=1 perc=100 plotfile=plotfile\.ps style=seismic title=suximage titlecolor=red titlefont=Rom22 tmpdir=\.\/ units=unit verbose=1 windowtitle=LSBB\ \ GPR\ \(D\.\ Roussett\ UPPA\) wperc=100 xbox=500 ybox=500 wbox=550 hbox=550 &
```

5.3 General tools

5.3.1 How to mute a data set consisting of a range of multiple gathers

Data set: