
Arexdata – Salesforce Reports Documentation

1. File Events

The File Events screen under the Salesforce section of Reports in the Arexdata platform provides users with an overview of the activity performed on records and files across their Salesforce organisation connected to the platform. Users can view who performed an action, when it occurred, what operation was executed, and which record or object was affected.

This section helps users monitor and audit user behaviour across Salesforce, detecting unauthorised changes or suspicious access patterns on organisational data.

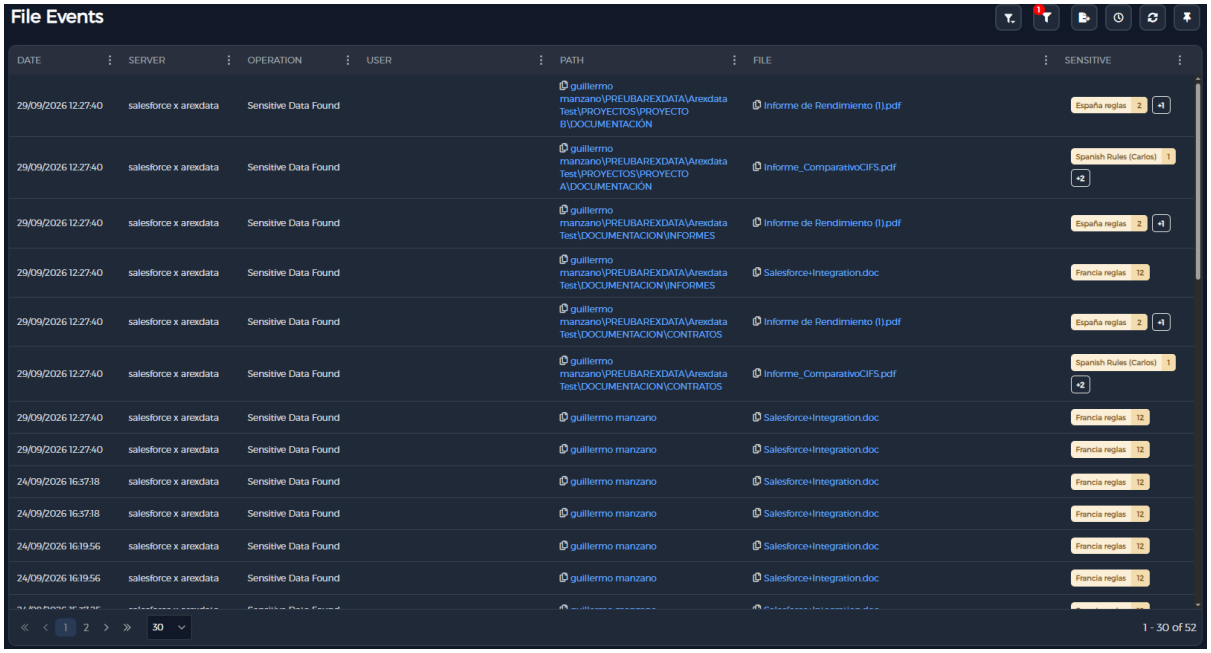

<u>Column Headers</u>

Date: Timestamp of when the operation was executed, based on the Salesforce server clock.

Server: Name of the Salesforce integration as defined in Administration → Integrations → Salesforce.

Operation: Action performed on the record: read, created, modified, deleted, permission change, ownership change, or renamed.

User: The user who performed the action. Clicking the username displays a detailed activity report for that user.

Path / Object: The Salesforce object or record path on which the operation was performed. Clicking it displays a detailed activity report for that path.

File / Record: The specific record or file affected. Clicking it displays detailed event information.

Filters

The following filters are available to narrow down the records displayed:

Date / Time: Filter by a specific date range or relative period (e.g. last 7 days). Time filters support Include and Exclude ranges.

Server: Filter events by a specific Salesforce integration.

Operation: Filter by operation type: Created, Modified, Deleted, Read, Permissions Changed, Ownership Changed, Renamed, and others.

User: Search by username using conditional operators: Contains, Not Contains, Equals, Not Equals, Starts With, Not Starts With.

Path / Object: Filter by object or record path using the same conditional operators.

File / Record: Search for a specific record name using conditional operators.

Additional Tools

Export: Export report data to PDF, CSV, Excel, PowerPoint, RTF, or Word.

Scheduled Report: Schedule automatic report delivery to specified email addresses. Visible to Administrators only.


Refresh Data: Reload the current data displayed on screen.

Init Page: Set this screen as the default landing page upon login.

2. Open Links

The Open Links screen under the Salesforce section in the Arexdata platform provides users with an overview of publicly or externally accessible links associated with Salesforce records. Users can identify which records or files are exposed through shared links and what level of access those links grant.

This section helps users detect and review potentially over-exposed records, reducing the risk of unauthorised external access to organisational data.

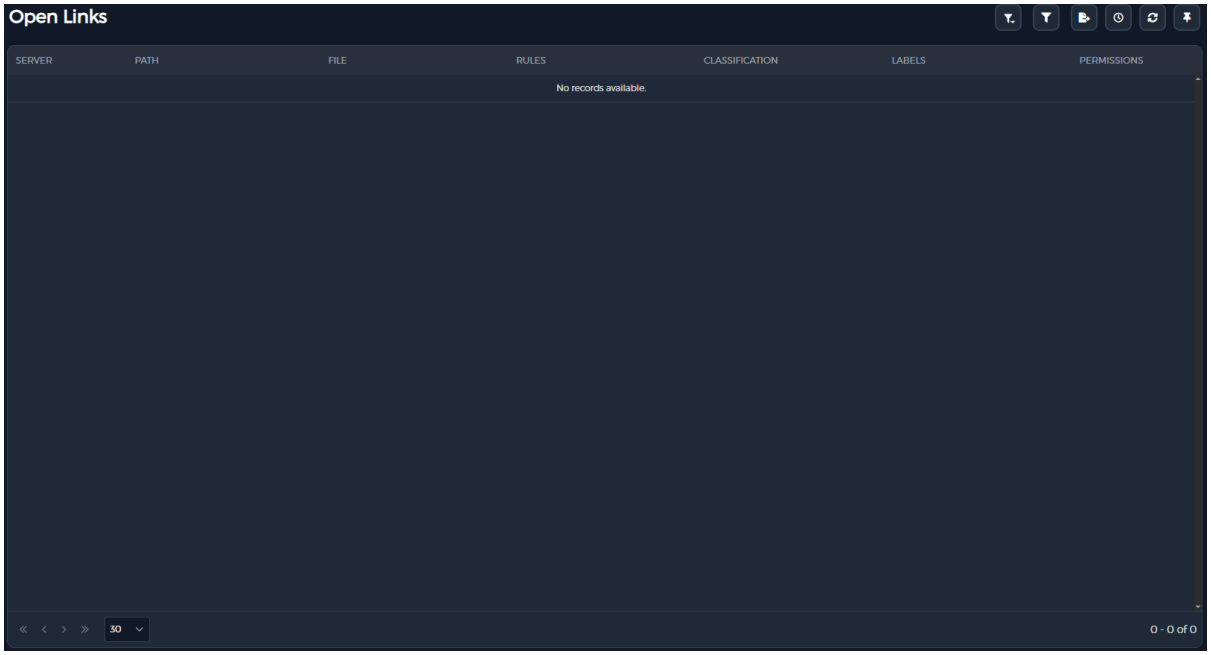

Column Headers

Server: Name of the Salesforce integration as defined in Administration → Integrations → Salesforce.

Path / Object: The path to the Salesforce record accessible through the open link.

File / Record: The name of the record or file accessible through the link.

Permissions: The access level granted by the link. Click Details to view the full permission breakdown.

Filters

Server: Filter by a specific Salesforce integration.

Path / Object: Filter by object path using conditional operators: Contains, Not Contains, Equals, Not Equals, Starts With, Not Starts With.

File / Record: Search for a specific record name using the same conditional operators.

Additional Tools

Export: Export report data to PDF, CSV, Excel, PowerPoint, RTF, or Word.

Scheduled Report: Schedule automatic report delivery to specified email addresses. Visible to Administrators only.


Refresh Data: Reload the current data displayed on screen.

Init Page: Set this screen as the default landing page upon login.

3. Permissions

The Permissions screen under the Salesforce section in the Arexdata platform provides users with an overview of the access rights granted to different users and groups across their Salesforce objects and records. Users can view folder-level and record-level permissions, identify owners, and review CRUD rights per user or group.

This section helps administrators identify excessive or incorrect permissions and ensure the principle of least privilege is applied across the organisation.

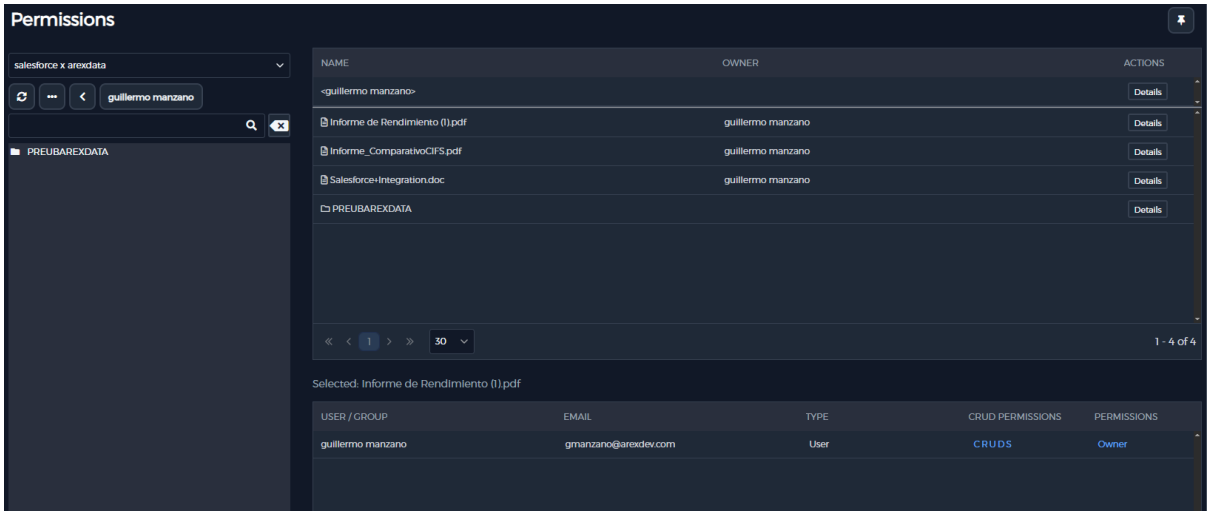

Navigation

Select a Salesforce integration from the dropdown at the top of the screen. The left panel will list all available objects. Select an object to view the permissions assigned across its records and sub-objects.

Column Headers – Main Panel

Name: Name of the sub-object or record within the selected object.

Owner: The Salesforce user who owns the record or object.

Actions: Click Details to expand the permission breakdown for that record.

Column Headers – Permission Detail Panel

User/Group: Name of the user or group with access to the record.

Email: Email address of the user or group.

Link: Direct link associated with the permission entry.


CRUD Permissions: Create, Read, Update, Delete rights granted. Click CRUD to see the full breakdown.

Permissions: Named permission set or role applied. Click Permissions to see details.

4. Search Permissions

The Search Permissions screen under the Salesforce section in the Arexdata platform allows users to search and query the permissions granted to users and groups across all Salesforce objects and records connected to the platform. Unlike the Permissions screen, this view enables a targeted search without navigating the object tree.

This section helps administrators quickly locate and audit access rights for any specific user, group, path, or record, making it easier to identify and remediate excessive permissions.

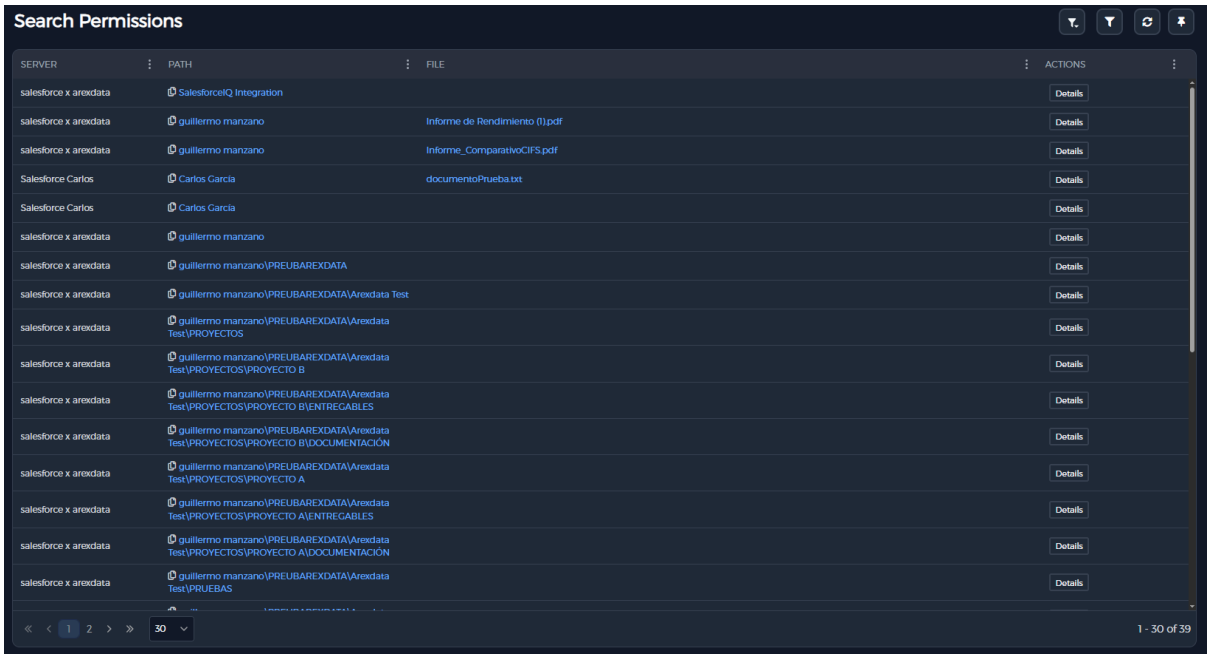

Column Headers

Server: Name of the Salesforce integration.

Path / Object: Path to the record or object.

File / Record: Name of the specific record.

Actions: Click Details to view the full permission breakdown for the selected record.

Filters

Server: Filter by a specific Salesforce integration.

Path / Object: Filter by object path using conditional operators: Contains, Not Contains, Equals, Not Equals, Starts With, Not Starts With.

File / Record: Search for a record by name using the same conditional operators.

User/Group: Search by user or group name using conditional operators.

CRUD Permissions: Filter by permission type: Create, Read, Update, Delete, Special.

Permissions: Filter by named permission level: Owner, Organizer, Writer, Reader, Commenter, File Organizer.

Additional Tools


Refresh Data: Reload the current data displayed on screen.

Init Page: Set this screen as the default landing page upon login.

5. Sensitive Files

The Sensitive Files screen under the Salesforce section of Reports in the Arexdata platform provides users with information about records and files containing sensitive data detected within their Salesforce organisation. Users can view the detection date, the last modification date, the location of the sensitive file, the rules that triggered the classification, and the operations performed on it.

This section helps users identify where sensitive information is stored within Salesforce, monitor who is accessing it, and take remediation action when necessary.

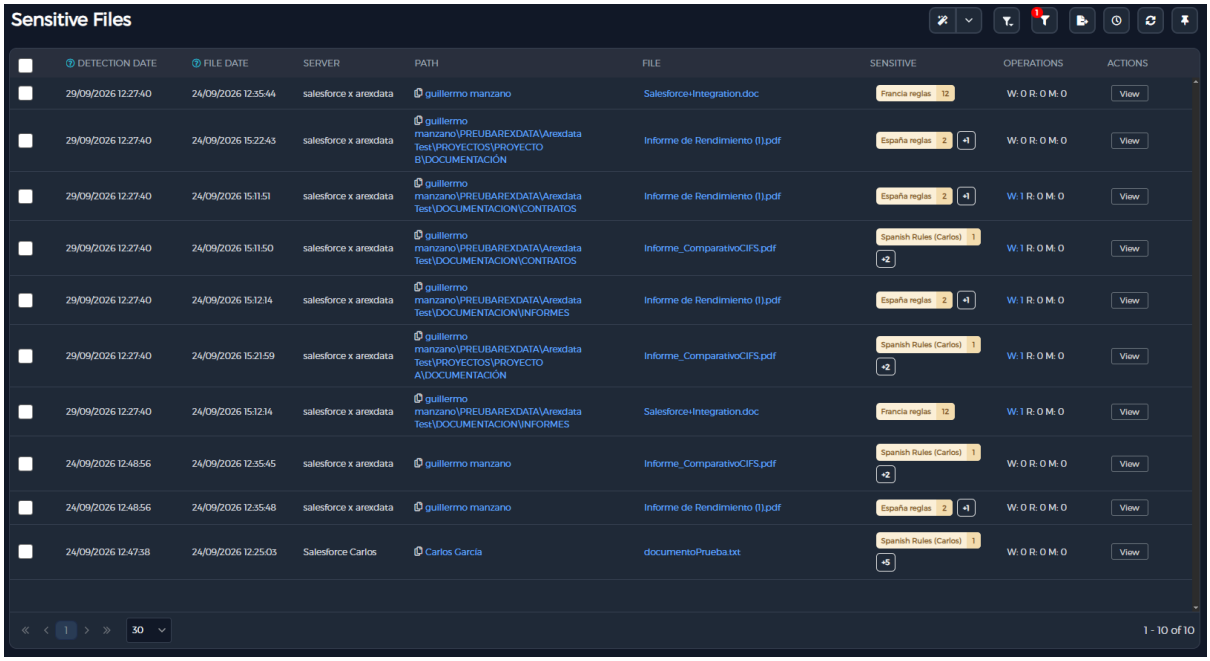

Column Headers

Detection Date: The last date on which sensitive data was detected in the record or file.

File Date: The last date on which the file or record containing sensitive data was modified.

Server: Name of the Salesforce integration as defined in Administration → Integrations → Salesforce.

Path / Object: Location of the sensitive file within Salesforce. Clicking displays a detailed activity report.

File / Record: The specific record identified as containing sensitive data. Clicking displays detailed file event information.

Rules: The detection rules that triggered the sensitive data classification.

Label: The sensitivity label applied to the file or record.

Actions: Click Details to review the permissions applied to the sensitive file.

Operations: A summary count of operations performed on the sensitive file (reads, modifications, etc.).

Filters

Detection Date / Time: Filter by detection date range (Between or Relative) and time window (Include or Exclude).

File Date: Filter by the last modification date of the sensitive file.

Server: Filter by a specific Salesforce integration.

Path / Object: Filter by object path using conditional operators.

File / Record: Search for a specific record name using conditional operators.

Rule: Filter by the detection rule name using conditional operators.

Risk: Filter by risk level: All, Low, Medium, High.

Label: Filter by the sensitivity label using conditional operators.

Find Data / Entity Names (NER): Search for specific data patterns or named entities detected within the files.

Additional Tools

Remediation: Identify threats and execute the steps required to resolve them.

Export: Export report data to PDF, CSV, Excel, PowerPoint, RTF, or Word.

Scheduled Report: Schedule automatic report delivery to specified email addresses. Visible to Administrators only.

Refresh Data: Reload the current data displayed on screen.

Init Page: Set this screen as the default landing page upon login.

6. Sensitive Folders

The Sensitive Folders screen under the Salesforce section of Reports in the Arexdata platform provides users with information about the objects and folders within Salesforce that contain sensitive files detected by the platform. Users can view the path, the number of sensitive files found, and any rules or labels associated with each folder.

This section gives administrators a high-level view of where sensitive data is concentrated within Salesforce, enabling prioritised review and remediation.



Column Headers

Server: Name of the Salesforce integration as defined in Administration → Integrations → Salesforce.

Path / Object: The path to the folder or object containing sensitive files. Clicking displays a detailed activity report.

Sensitive Files: The count of sensitive files detected within the folder. Clicking the count displays the full list and their associated events.

Rules: The detection rules associated with the sensitive content found in the folder.

Label: The sensitivity label applied to the folder.

Filters

Server: Filter by a specific Salesforce integration.

Path / Object: Filter by folder path using conditional operators: Contains, Not Contains, Equals, Not Equals, Starts With, Not Starts With.

Rules: Filter by the detection rule associated with the sensitive folder.

Label: Filter by sensitivity label using conditional operators.

Sensitive Files: Filter by the number of sensitive files using numeric operators: =, <, >, ≤, ≥.

Additional Tools

Export: Export report data to PDF, CSV, Excel, PowerPoint, RTF, or Word.

Scheduled Report: Schedule automatic report delivery to specified email addresses. Visible to Administrators only.

Refresh Data: Reload the current data displayed on screen.

Init Page: Set this screen as the default landing page upon login.