


Food processing structure across CLIP vision layers (mean patch token, binary processed/prepared RDM)

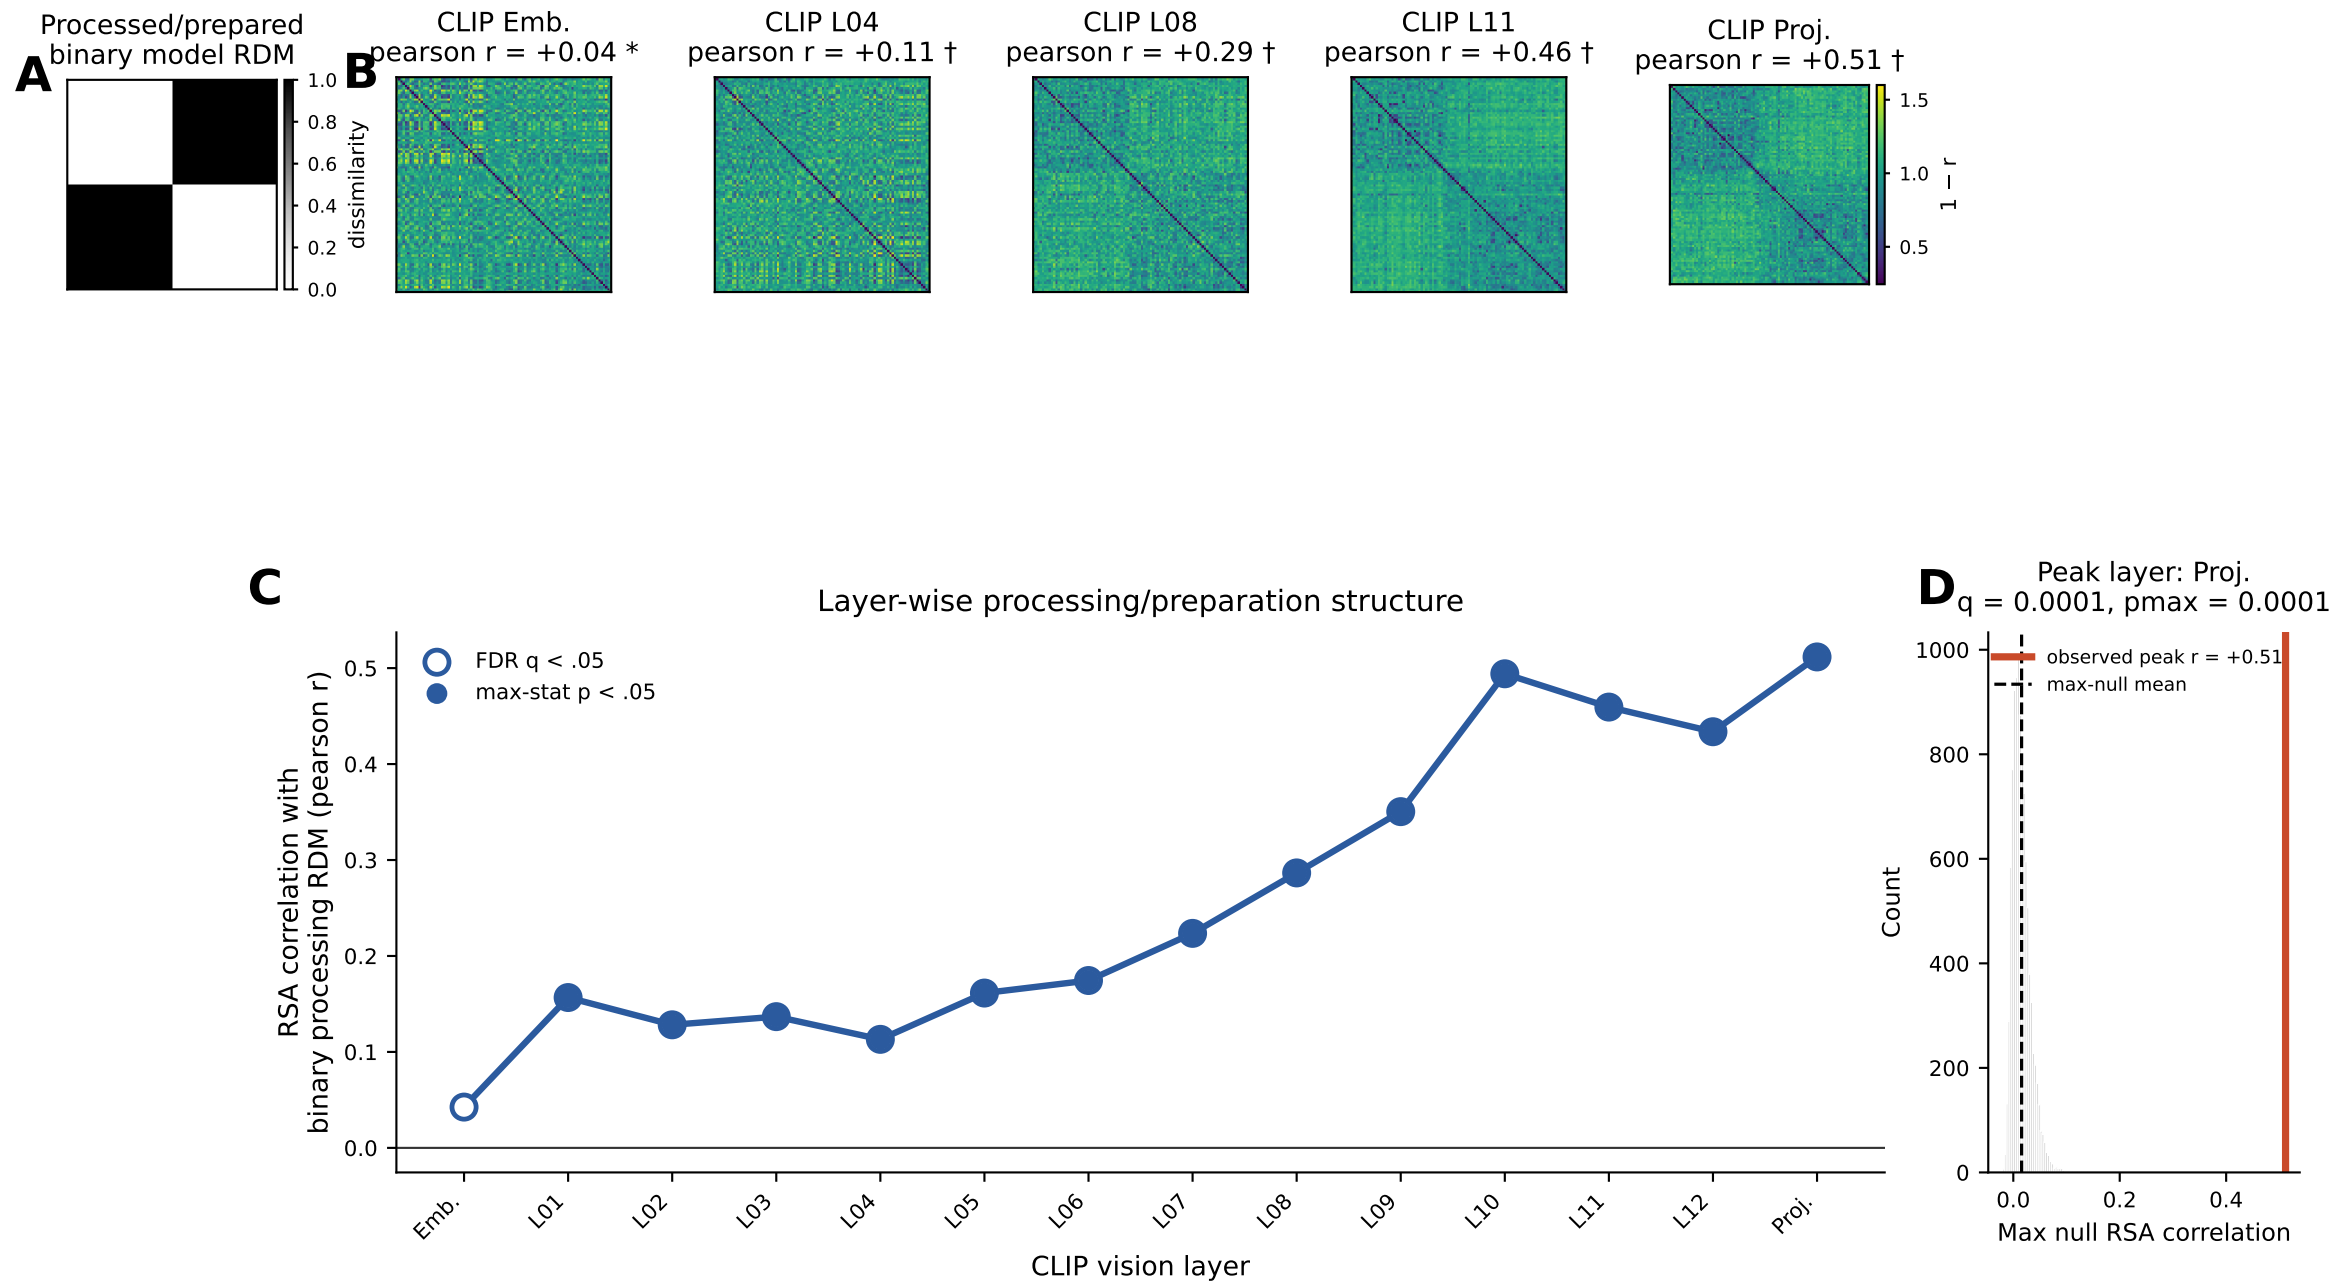

RDMs sorted by processing/preparation level. CLIP RDMs use correlation distance. RSA method: pearson. * = FDR $q < .05$; † = max-stat familywise $p < .05$. For CLS-token analyses, the image-independent embedding-stage CLS token is omitted.