

Figure S1. Report states for rendering failure, incomplete annotation and the legacy placeholder image.

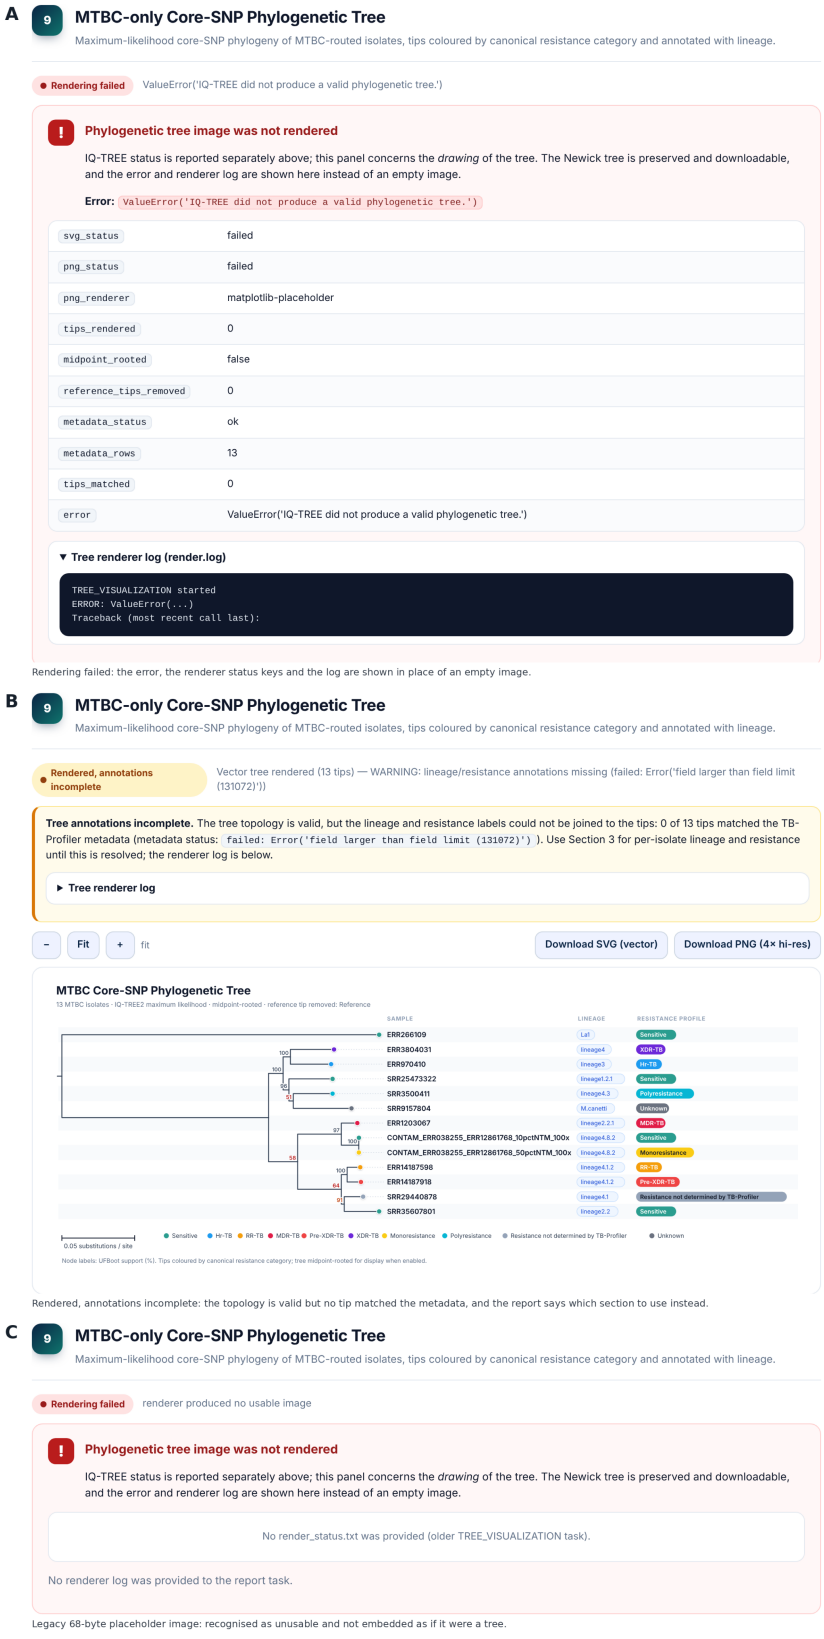

Each panel is the phylogeny section of an integrated report built from synthetic inputs by the repository's test-suite, which asserts the state shown. (A) The tree renderer failed: the report gives the error, the renderer status keys and the renderer log in place of an empty image, and states separately that IQ-TREE itself succeeded, so a drawing failure is not read as an analysis failure. (B) The tree rendered but no tip matched the TB-Profiler metadata; the topology is shown, the annotation failure is named with its underlying error, and the reader is directed to the per-isolate section for lineage and resistance. (C) A 68-byte single-pixel placeholder image, produced by an earlier version of the renderer, is recognised as unusable and is not embedded as though it were a tree. Produced by benchmark/scripts/gen_states.py, which calls the same fixtures and report builder as tests/test_merge_report.py and re-checks each test's assertions.

Figure S2. Pairwise core-SNP distance heatmap for Panel 2.

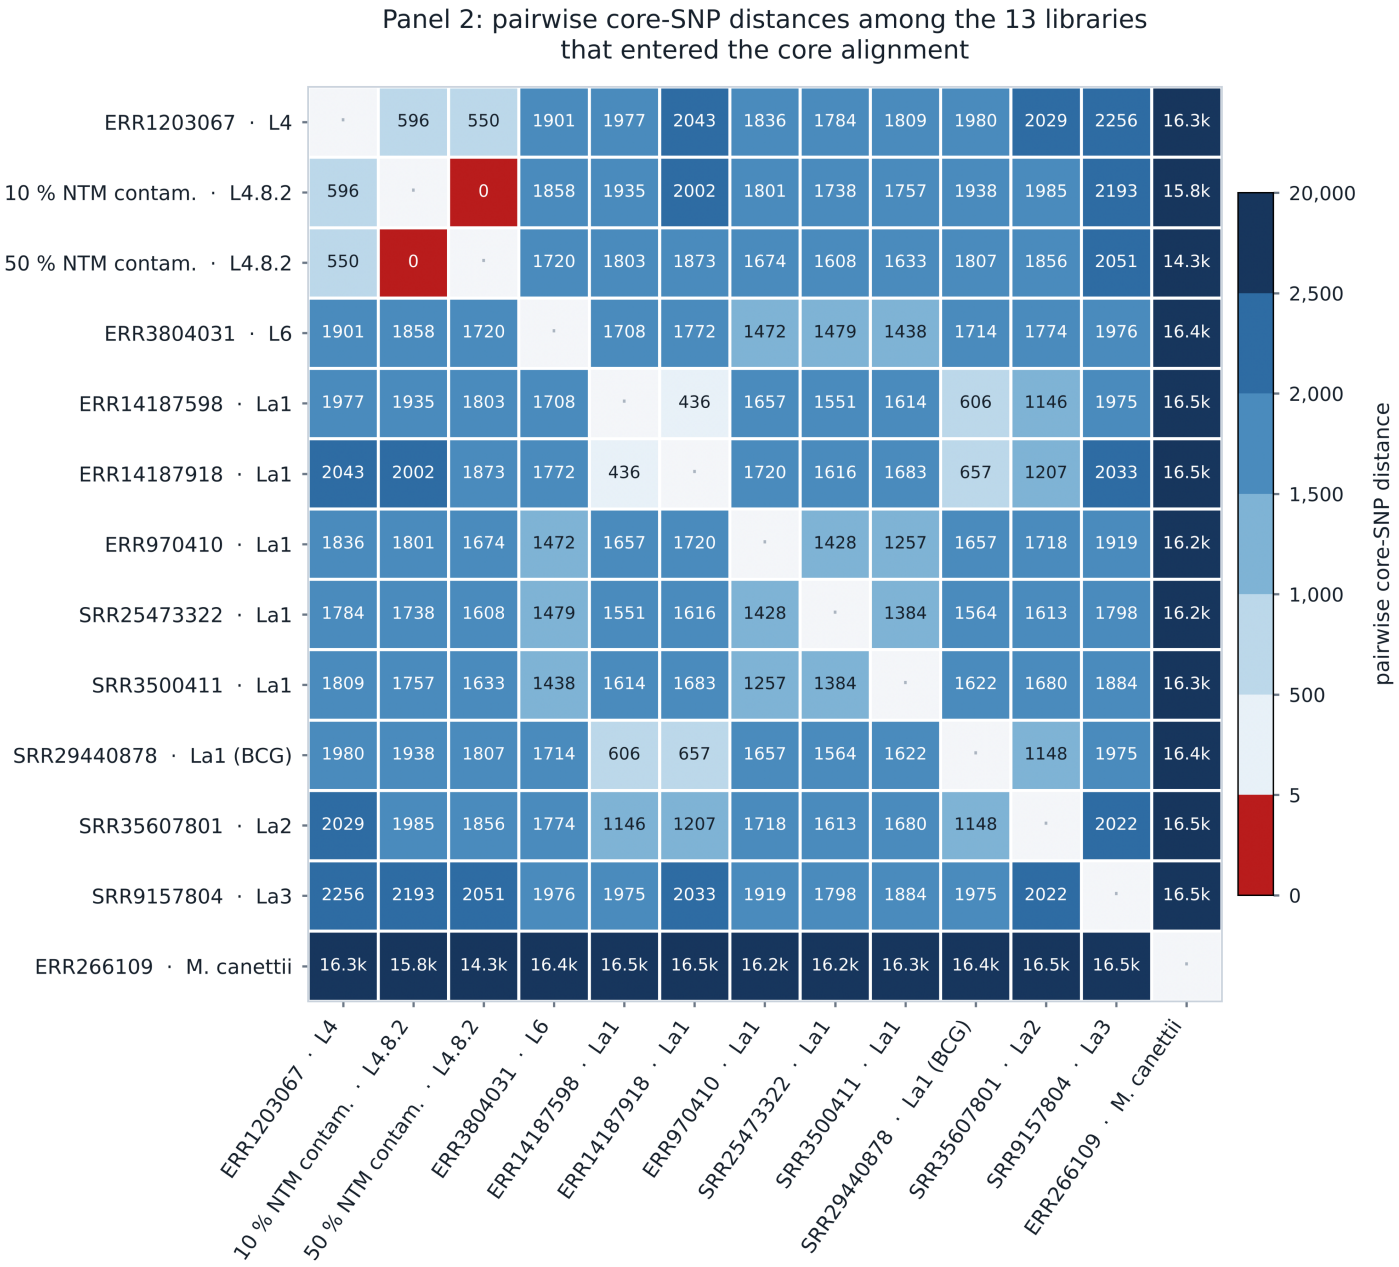

All 78 pairwise distances among the 13 libraries that entered the core alignment, from the workflow's own pairwise distance table. Labels give the accession and the lineage call. Colour is binned rather than continuous, because a continuous scale is dominated by the M. canettii outgroup at roughly 16,000 SNPs and hides the structure within the complex. Red marks the only pair at or below the 5-SNP transmission threshold: the two contamination mixtures built from the same host library, 0 SNPs apart. SRR1239339 was removed by the post-mapping coverage gate before alignment and so does not appear. Comparable sites ranged from 3,703,794 to 3,962,824 across the pairs.