

GMC and Kony

An Overview

Version 9.4

An Overview

Product version 9.4

Document version 9.4.0.1

Release date: October 2014

GMC Software AG

www.gmc.net



See also all [GMC documentation online](#)

Should you have any queries, suggestions or comments concerning these materials, please do not hesitate to contact us at documentation@gmc.net.

This document contains information classified as **Public**.

The GMC Software Group of companies are ISO 9001:2008 certified.

Copyright

Information contained within this document may contain technical inaccuracies or typographical errors. Changes will be added periodically and modifications will be made thereto without prior notification. GMC Software AG does not enter into any obligations or responsibilities regarding the content of this document and does not assume any legal liability – neither expressed or implied – for its accuracy, completeness and/or usefulness.

Copying of the software or manual on to any data storage medium or in any other way, except for explicit company internal use, is strictly forbidden without the prior written authorization of GMC Software AG. Failure to comply with these restrictions is liable to prosecution.

Trademarks



GMC Software Technology and its logo are trademarks and service marks of GMC Software AG registered in Switzerland, the US and numerous other countries.

Adobe and Adobe ® PDF Library™ are trademarks or registered trademarks of Adobe Systems Inc. in the US and other countries. The names of other companies, products and services are the property of their respective owners.

Table of Contents

1	Introduction	4
1.1	Readers of this Document	5
2	Showcase Application GUI	7
2.1	Proof Sample	8
2.2	Multipage Proof Sample	11
2.3	List Sample	12
2.4	Signing Sample	14
3	Architecture	16
3.1	Default Demo Installations in GMC Cloud	17
3.2	Your Own Kony Cloud	18
3.3	Your Own Environment	19
4	Setting Up	20
4.1	Default Demo Installations in GMC Cloud	20
4.2	Your Own Kony Cloud	23
4.3	Your Own Environment	27
5	GMC Mobile API	30
5.1	Document Formatting	31
5.1.1	Calling the Service Definition	31
5.1.2	Service Definition in Kony	31
5.1.3	Calling the Inspire Connect .NET Method	33
5.2	Repository Handling	34
5.2.1	Calling the Service Definition	34
5.2.2	Service Definition in Kony	34
5.2.3	Calling the Inspire Connect .NET Method	35
5.3	Document Signing	36
5.3.1	Calling the Service Definition	36
5.3.2	Service Definition in Kony	37
5.3.3	Calling the Inspire Connect .NET Method	39
A	GMC Inspire Applications	40
A.1	Inspire Designer	40
A.2	Inspire Connect .NET	41

1 Introduction

The GMC Showcase application is a mobile application developed in Kony Studio. It is a working, sample application that demonstrates the functionality of the GMC Mobile API used on the Kony platform.


The application supports:

- Integration of variable data into documents.
- Creation of output documents in various formats.
- Displaying the output documents on mobile devices.
- Creation of output documents divided into several pages.
- Listing properties of files contained in a directory.
- Integration with e-signature provider.

The application is designed for mobile devices, with the graphics optimized for smart phones. However, the functionality is usable on both smart phones and tablets.

Supported platforms are:

- Android – for smart phone and tablet
- iOS – for iPhone and iPad

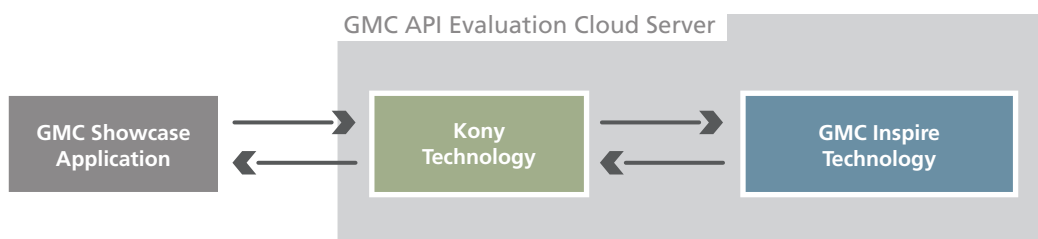

GMC Showcase application Ready-made mobile application installed on a mobile device.

GMC API Evaluation Cloud Server GMC Cloud server with demo installations of necessary components.

The source code of the GMC Showcase application serves programmers as a base material for developing their own mobile applications, designed to their specific needs. The goal is for programmers to use their own environment supporting their own functionalities and document design.

1.1 Readers of this Document

This document is intended for [business people](#) and [programmers](#).

Business People

Business people can download the ready-made GMC Showcase application to a mobile device and test it.

The application can be downloaded for free from Inspire Store: <http://inspirestore.gmc.net> [↗](#). To obtain the login credentials, contact the GMC Product Management group.

The application only needs to be downloaded (i.e. installed on a mobile device), no additional settings are needed.

INSPIRE STORE



Product Info



GMC SHOWCASE APPLICATION

The GMC Showcase application is a mobile application developed in Kony Studio. It is a working sample application that demonstrates the functionality of the GMC Mobile API used on the Kony platform.

Download

System	Supported devices	Version	Description	Download
iOS	iPhone	9.4.1		Install
iOS	iPad	9.4.1		Install
Android	Mobile	9.4.1		Download
Android	Tablet	9.4.1		Download

© GMC Software Technology 2014 | www.gmc.net

Sections (within this document) providing information for business people are:

- [Showcase Application GUI](#)
- [Architecture](#)

Programmers

Besides testing the ready-made GMC Showcase application, programmers can download the whole project of the application, open the project in Kony Studio, examine and customize it and compile their own application.

The project can be downloaded from GitHub: <https://github.com/gmcinspire/Kony-APIShowCaseApp>.

The project should be set up and customized in three stages described in this document.

GitHub This repository Search Explore Features Enterprise Blog Sign up Sign in

gmcinspire / Kony-APIShowCaseApp ★ Star 0 🍴 Fork 0

2 commits 1 branch 0 releases 1 contributor

branch: master **Kony-APIShowCaseApp** / +

Initial commit		
DaliborFlorian authored an hour ago	latest commit 3f4d50bcb1	
📁 GmcApiShowcase	Initial commit	an hour ago
📁 SolutionData	Initial commit	an hour ago
📄 LICENSE	Initial commit	an hour ago
📄 README.md	Initial commit	an hour ago

Code

Issues 0

Pull Requests 0

Pulse

Graphs

HTTPS clone URL

<https://github.com/gmcinspire/Kony-APIShowCaseApp>

Sections (within this document) providing information exclusively for programmers are:

- [Setting Up](#)
- [GMC Mobile API](#)

Tip You can learn more about Kony Studio on www.kony.com.


To examine the GMC Showcase application project in Kony Studio, it is sufficient to have a trial version. Here you can register for a free 90 day trial: <http://www.kony.com/products/development/trial>.

2 Showcase Application GUI



Launch the application by touching its icon on the mobile device.



The initial page displays.

On the initial page (or after touching the **List**  icon), you get the application's menu with the following sections:

- [Proof Sample](#)
- [Multipage Proof Sample](#)
- [List Sample](#)
- [Signing Sample](#)

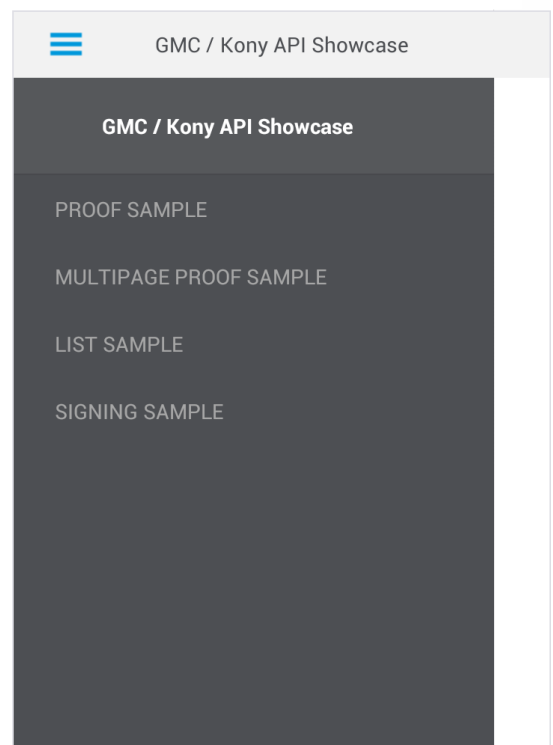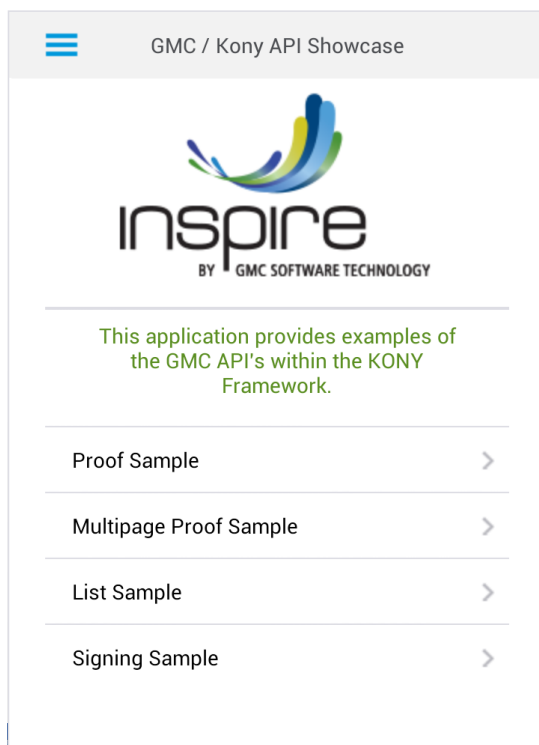

2.1 Proof Sample

If you go to Proof Sample, you get the following screen.

You can edit the **Name** and **Surname** text fields. Provided values will be included in the output document.


Proof HTML

After touching the **Proof HTML** button, you get the output document in the HTML format.

Values provided in the **Name** and **Surname** text fields are included.

Proof PDF

After touching the **Proof PDF** button, the output document in the PDF format is downloaded to your mobile device.

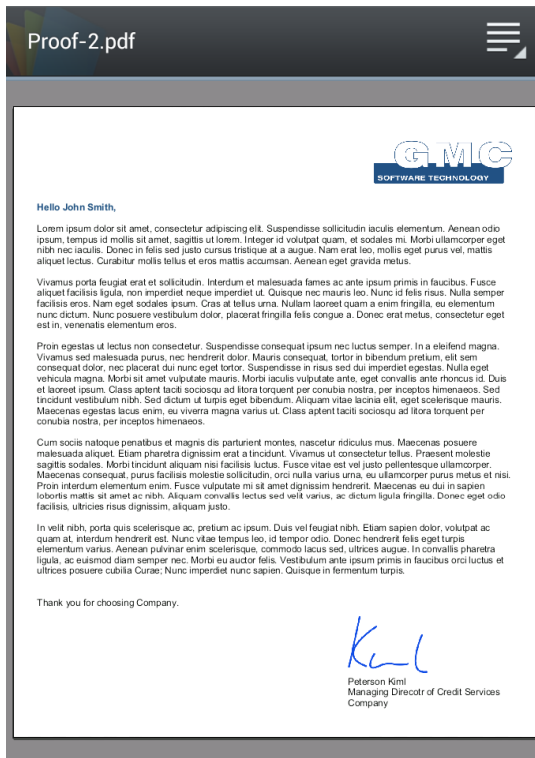

Values provided in the **Name** and **Surname** text fields are included.

Proof Dynamic Document

After touching the **Proof Dynamic Document** button, you get the dynamic document output.

Welcome John Smith

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Phasellus faucibus molestie nisl. Pellentesque arcu. Itaque earum rerum hic tenetur a sapiente delectus, ut aut reiciendis voluptatibus maiores alias consequatur aut perferendis doloribus asperiores repellat.



Lorem ipsum dolor sit amet, consectetur adipiscing elit. Phasellus faucibus molestie nisl. Pellentesque arcu.



Lorem ipsum dolor sit amet, consectetur adipiscing elit.

Values provided in the **Name** and **Surname** text fields are included.

Proof Image

After touching the **Proof Image** button, you get the output document in the Image format.

Hello John Smith,

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Vivamus porta feugiat erat et sollicitudin. Aliquet facilisis ligula, non imperdiet facilisis eros. Nam eget sodales ipsum nunc dictum. Nunc posuere vestibulum est in, venenatis elementum eros.

Proin egestas ut lectus non consectetur. Vivamus sed malesuada purus, nec consequat dolor, nec placerat dui nunc vehicula magna. Morbi sit amet vulputate et laoreet ipsum. Class aptent tacit sociosqu ad litora tincidunt vestibulum nibh. Sed dictum Maecenas egestas lacus enim, eu conubia nostra, per inceptos himen

Values provided in the **Name** and **Surname** text fields are included.

Proof Raster

After touching the **Proof Raster** button, you get the output document in the Raster Image format.

Hello John Smith,

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.


Vivamus porta feugiat erat et sollicitudin. Aliquet facilisis ligula, non imperdiet facilisis eros. Nam eget sodales ipsum nunc dictum. Nunc posuere vestibulum est in, venenatis elementum eros.

Proin egestas ut lectus non consectetur. Vivamus sed malesuada purus, nec consequat dolor, nec placerat dui nunc vehicula magna. Morbi sit amet vulputate et laoreet ipsum. Class aptent tacit sociosqu ad litora tincidunt vestibulum nibh. Sed dictum Maecenas egestas lacus enim, eu conubia nostra, per inceptos himen

Values provided in the **Name** and **Surname** text fields are included.

2.2 Multipage Proof Sample



If you go to Multipage Proof Sample, you get the following screen.

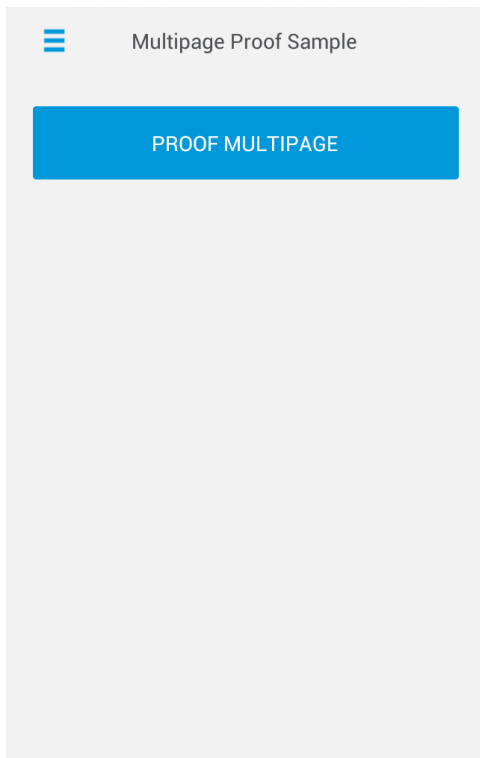

No text fields for variable data are currently available.


Proof Multipage

After touching the **Proof Multipage** button, you get the output document in the Image format. The document is divided into multiple pages.

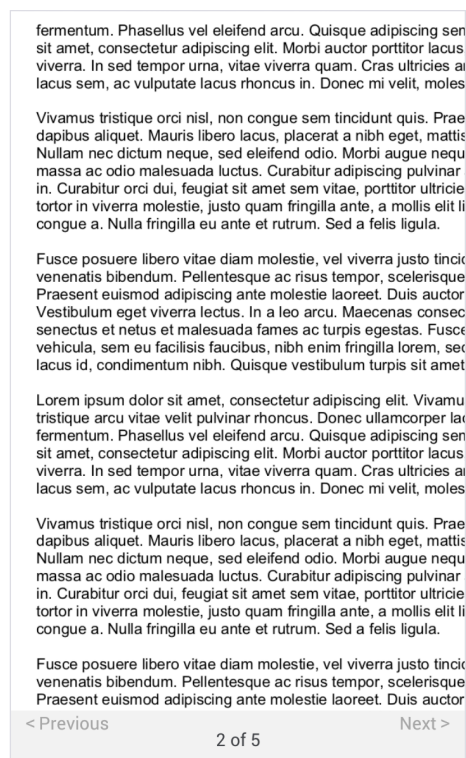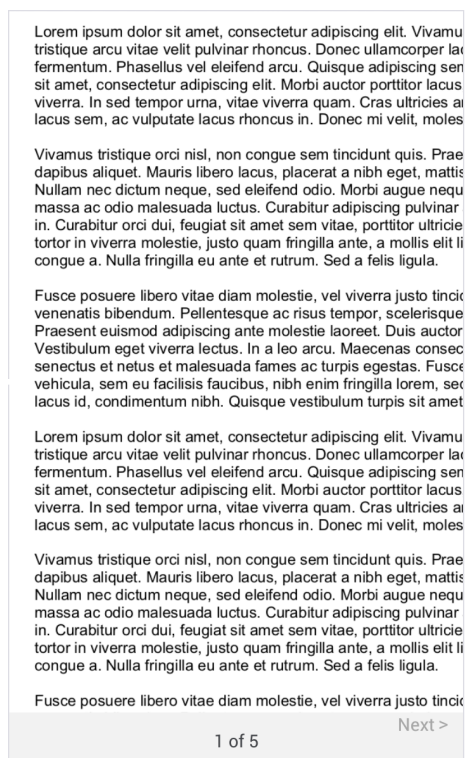

2.3 List Sample

If you go to List Sample, you get the following screen.

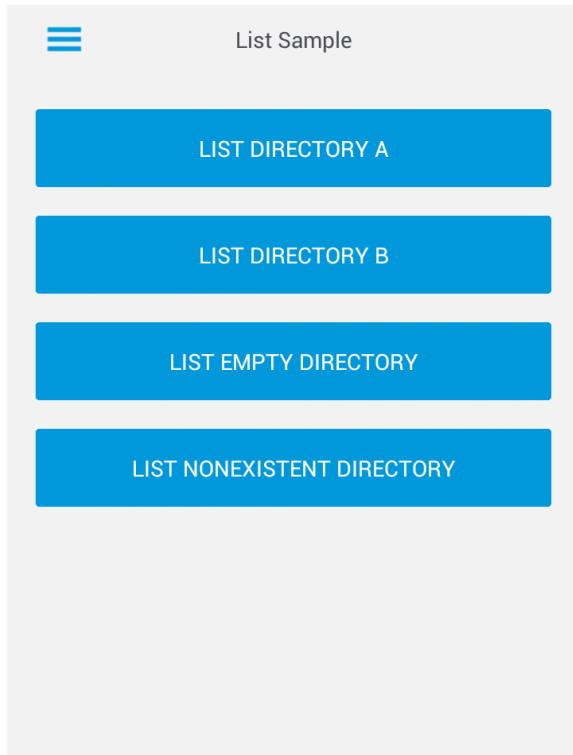


List Directory A

After touching the **List Directory A** button, you get properties (metadata) of all files contained in directory A (in the GMC repository).

Apply for Savings Account Vital.html 37*****7841 Please find details of your statement and pay a minimum amount of 25\$ this month.
Credit card.html 37*****7841 You have a positive balance of 1500\$ on your current account.
insurance.html Your car insurance has been approved.
vitalInsurance-WelcomeKit.html We would like you to rate our serices.

List Directory B


After touching the **List Directory B** button, you get properties (metadata) of the files contained in directory B (in the GMC repository).

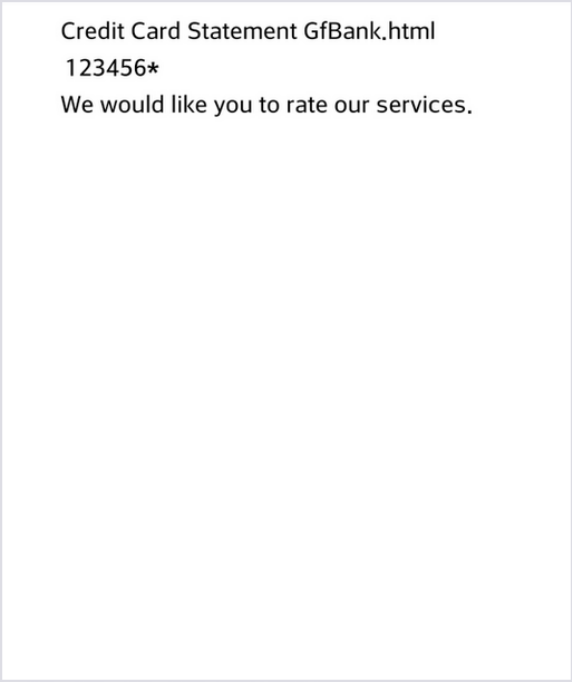

Credit Card Statement GfBank.html
123456*
We would like you to rate our services.


List Empty Directory / List Nonexistent Directory

After touching the **List Empty Directory** or **List Nonexistent Directory** button, you get the following message on the screen.

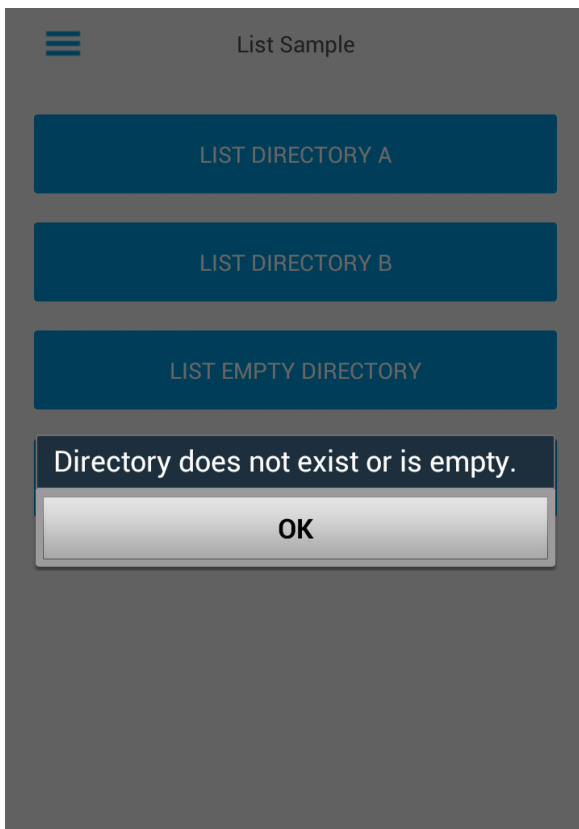

2.4 Signing Sample

If you go to Signing Sample, you get the following screen.

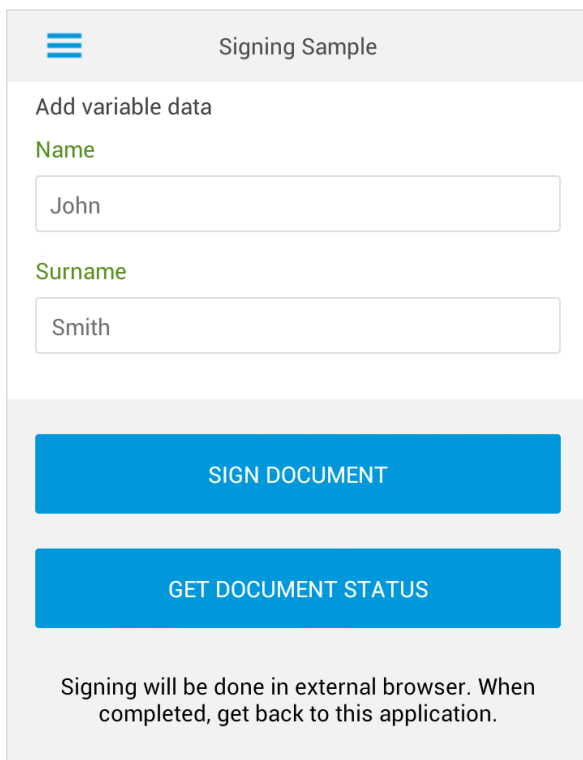

The screen is titled "Signing Sample" and features a hamburger menu icon in the top left. Below the title, there is a section "Add variable data" with two text input fields: "Name" (containing "John") and "Surname" (containing "Smith"). Below these fields are two large blue buttons: "SIGN DOCUMENT" and "GET DOCUMENT STATUS". At the bottom, a message states: "Signing will be done in external browser. When completed, get back to this application."

You can edit the **Name** and **Surname** text fields. Provided values will be included in the output document.

Sign Document

After touching the **Sign Document** button, you get the output document ready to be electronically signed.




The image shows a mobile browser interface displaying a document from "USA BANK". The document header includes the bank's logo, address (100 Forest Ave, Seattle, WA 4002), phone number (18-473734-339), website (www.usabank.com), and email (info@usabank.com). The document is addressed to John Smith at 2218 Baker Street, London, NW1 6XE, United Kingdom. The main body of the document is titled "Credit Card" and lists terms and conditions, including a \$20000 total annual income, 1-3 ATM usage, cash advance taking 2 times per 6 months, and express delivery. It also mentions a \$100 bonus for purchases in the first 3 months and a 6% intro APR for 15 months. The document is signed by Nick Lee, Representative, and includes a "Click to Sign" button.

The document is displayed in an external browser.


Get Document Status

After touching the **Get Document Status** button, you are informed whether the document has already been signed.

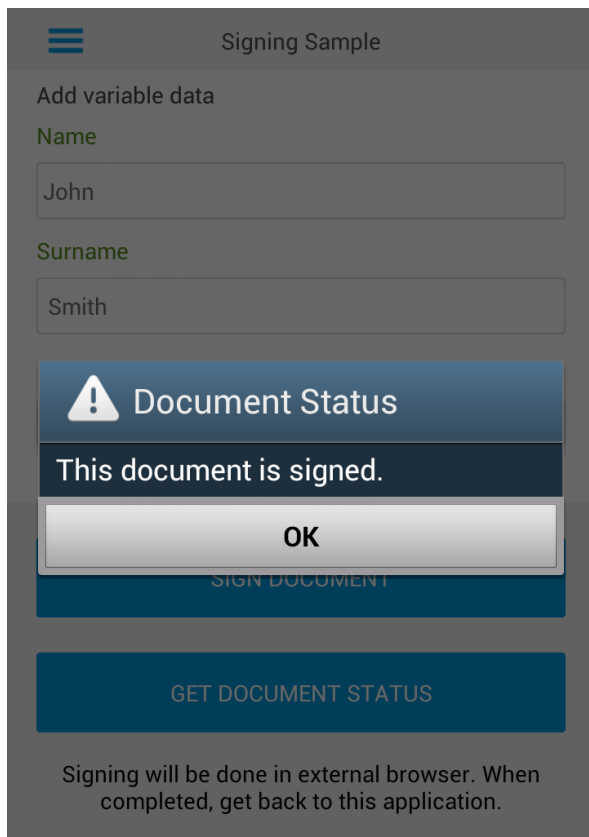

The screenshot displays a mobile application interface titled "Signing Sample". At the top left is a hamburger menu icon. Below the title, there is a section "Add variable data" with two input fields: "Name" containing "John" and "Surname" containing "Smith". A modal dialog box is centered on the screen with a blue header containing a white warning triangle icon and the text "Document Status". The dialog body has a dark blue background with the text "This document is signed." and a light gray button labeled "OK". Behind the dialog, a blue button labeled "SIGN DOCUMENT" is partially visible. Below the dialog is a large blue button labeled "GET DOCUMENT STATUS". At the bottom of the screen, a text message states: "Signing will be done in external browser. When completed, get back to this application."

3 Architecture

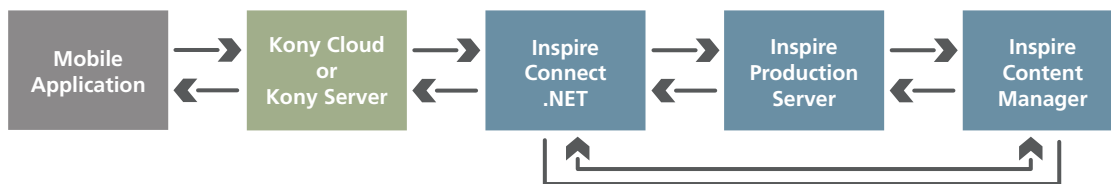

These components are integrated:

- Mobile Application – Mobile application developed in Kony Studio and installed on a mobile device.
- Kony Cloud / Kony Server – Kony Cloud or a Kony Server installation.
- Inspire Connect .NET – Web application that integrates with Inspire Production Server and Inspire Content Manager services. You can learn more about it in the appendix: [Inspire Connect .NET](#).
- Inspire Production Server – Production console of Inspire Designer, responsible for the document composition. You can learn more about it in the appendix: [Inspire Production Server](#).
- Inspire Content Manager – GMC storage containing WFD files and sample directories. You can learn more about it in the appendix: [Inspire Content Manager](#).

Communication is based on requests and responses:

1. A request is initiated from the mobile application where you can enter input data, e.g. client information.
2. The request is sent to Kony Server (or Kony Cloud) and further passed to Inspire Connect .NET and Inspire Production Server.
3. Design of the output documents is predefined by a WFD file saved in Inspire Content Manager.
4. Output document in the required format (PDF, HTML, image, etc.) is generated and its URL is passed back in a response (from Inspire Production Server via Inspire Connect .NET and Kony Server/Cloud) to the GMC Showcase application where the document is displayed (on the same mobile device).

These sections describe the stages of the setup that programmers should follow:


1. [Default Demo Installations in GMC Cloud](#)
2. [Your Own Kony Cloud](#)
3. [Your Own Environment](#)

3.1 Default Demo Installations in GMC Cloud

At this stage, programmers:

- Use demo installations of Kony Server and of the GMC applications (provided on a GMC Cloud server).
- Verify communication between the GMC Showcase application and Kony Server.

Step-by-step instructions for setting up this stage are in the [Default Demo Installations in GMC Cloud](#) section.

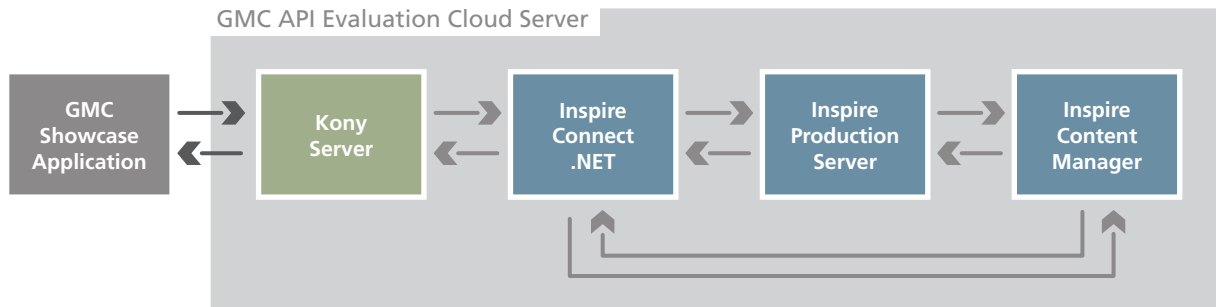

This architecture is ready to be used after you download the GMC Showcase application project from [GitHub](#).

Programmers need to have Kony Studio (for the purpose of examining the project, a trial version is sufficient).

The GMC API Evaluation Cloud Server runs on the following address: <http://api.gmc.net/mobileapi> and contains demo installations and configurations of all necessary components.

- Kony Server uses services (defined in the project imported to Kony Studio) to call Inspire Connect .NET.
- Inspire Connect .NET uses its methods to call Inspire Production Server.
- Inspire Production Server uses demo WFD files that are stored in Inspire Content Manager. The files define the design of the output documents.


No customization is allowed at this stage.

3.2 Your Own Kony Cloud

At this stage, programmers:

- Use their own Kony Cloud and demo installations of the GMC applications (provided on a GMC Cloud server).
- Verify communication between Kony Cloud and the GMC Inspire Connect .NET.

Step-by-step instructions for setting up this stage are in the [Your Own Kony Cloud](#) section.

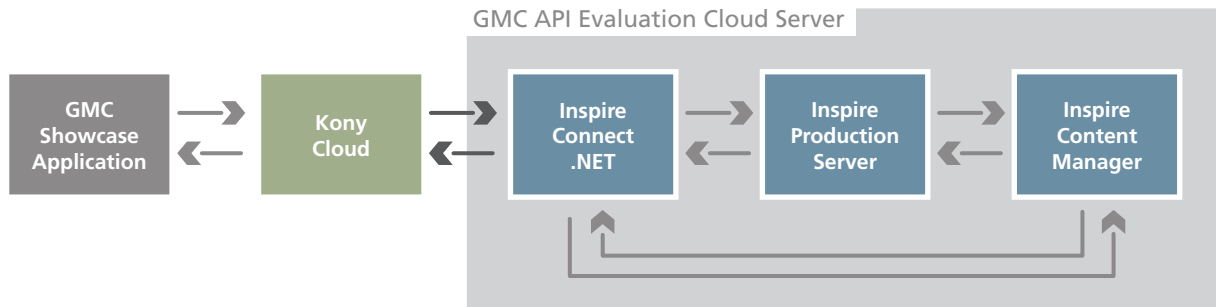

Programmers need to have Kony Studio and an account on Kony Cloud (for the testing purposes, a trial version of both is sufficient).

Note Depending on your specific needs, you can also use an internal Kony Server (installed on your own server) instead of Kony Cloud, e.g. if your mobile application is intended only for internal users within an intranet or if you need to use web services specific for internal Kony servers.


At this stage, you can customize parameters of the services offered by the GMC mobile API. For example, you can change the output format to Docx or use a different output module than the one defined by default.

3.3 Your Own Environment

At this stage, programmers:

- Use their own Kony Cloud (or Kony Server), as well as your own installations of the GMC applications. As all components are in your environment, you can modify them according to your needs.
- Verify communication among all customized components.

Step by step instructions for setting up this stage are in the [Your Own Environment](#) section.

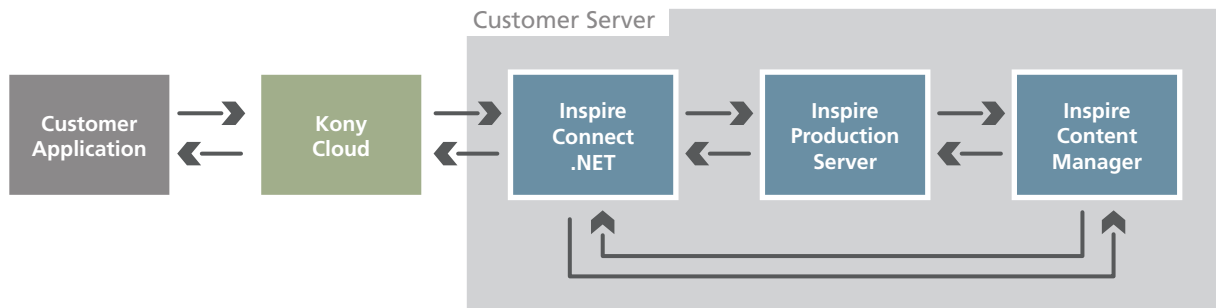

Programmers need to have Kony Studio and an account on Kony Cloud (for the testing purposes, a trial version of both is sufficient) and their own installations of the GMC Inspire applications (for the testing purposes, demo versions are sufficient).

Note Like in the previous stage, you can use an internal Kony Server (installed on your own server) instead of Kony Cloud.

At this stage, you can create your own design of documents or implement your own processing logic. You need to refer to documentation of the GMC Inspire applications.

4 Setting Up

4.1 Default Demo Installations in GMC Cloud


These are instructions for setting up the stage described in the [Default Demo Installations in GMC Cloud](#) section.

Prerequisites:


- Get Kony Studio. For the purpose of examining the project, a trial version is sufficient.

Follow these steps:

1. Launch Kony Studio.
2. Import the whole project of the GMC Showcase application from [GitHub](#) (in the GmcApiShowcase folder) to Kony Studio. You can either create a new empty workspace or import the project to an existing workspace.
 - a. Right-click in the Navigator tab and select **Import**.

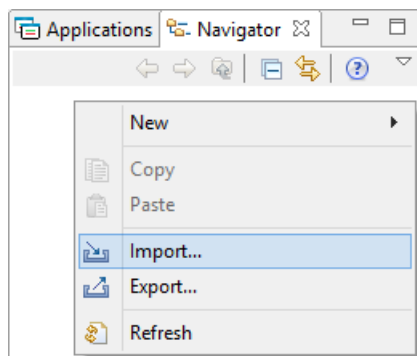

- b. Select *Projects from Git* as the import source.

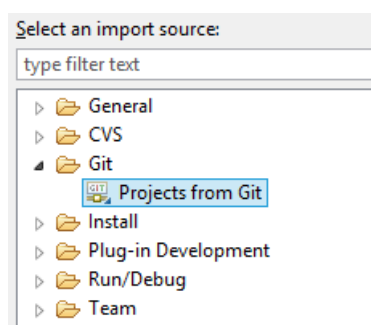

- c. Click on the **Clone** button and then specify the project location on the [GitHub](#).

Location

URI: Local file...


Host:

Repository path:

- d. Select the master branch.

Branches of https://github.com/gmcinspire/Kony-APIShowCaseApp:

type filter text

☒  master

- e. Specify a local storage location for the project.

Destination

Directory: Browse

Initial branch: ▼


- f. Select *Import Existing Projects*.

Wizard for project import

☒ Import Existing Projects


☐ Use the New Projects wizard

☐ Import as General Project


▶  Working directory - C:\Temp\Kony-APIShowCaseApp

3. Refresh the workspace and check the imported services.


- a. Right-click in the Applications tab and select **Refresh Workspace**.

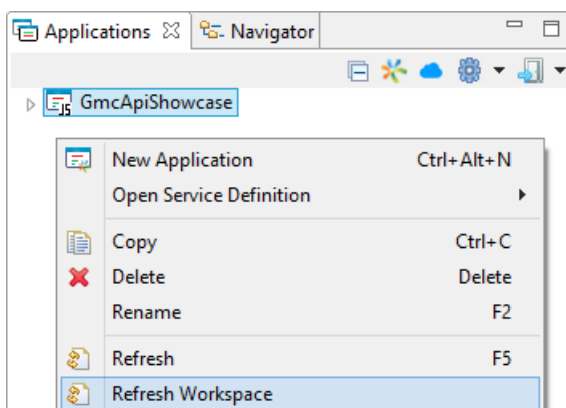


- b. Check the services pre-defined in the GmcApiShowcase project.

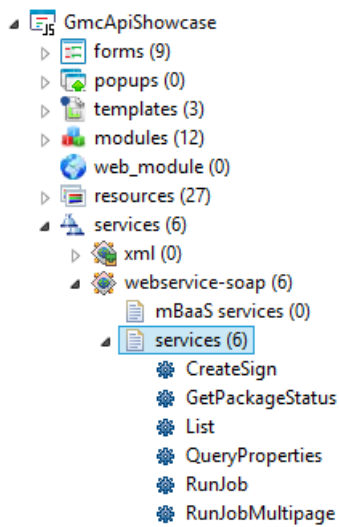

4. Build the project: Right-click on the project and select **Build | Clean and build**.

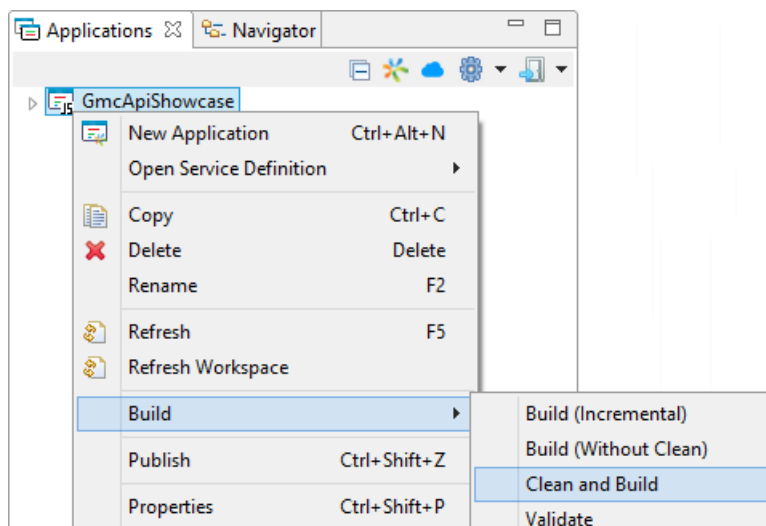

5. You can build the GMC Showcase application to your mobile device: Connect the mobile device to your computer and select the device in the list of emulators. Right-click on it and select **Build & Launch**.

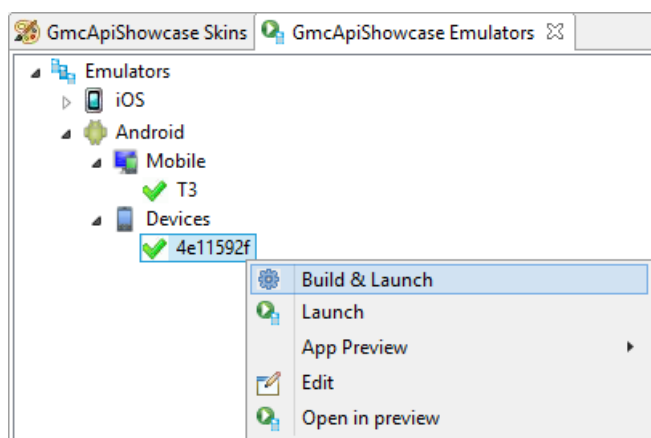

4.2 Your Own Kony Cloud


These are instructions for setting up the stage described in the [Your Own Kony Cloud](#) section.

Prerequisites:


- Get Kony Studio and an account on Kony Cloud. For the testing purposes, a trial version of both is sufficient.
- If you use an internal Kony Server instead of Kony Cloud, make sure the server is running.
- Go through steps in the previous stage.

Follow these steps:


1. Enter your license information.
 - a. Select **Help | About Kony License**.

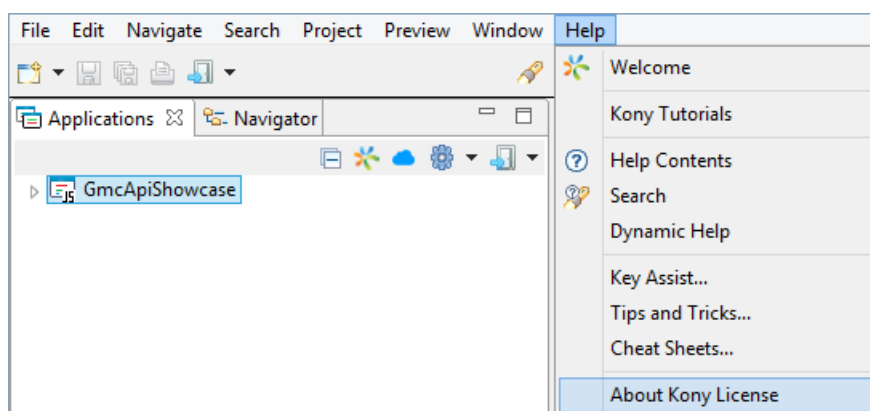


- b. Click on the **Manage License** button.

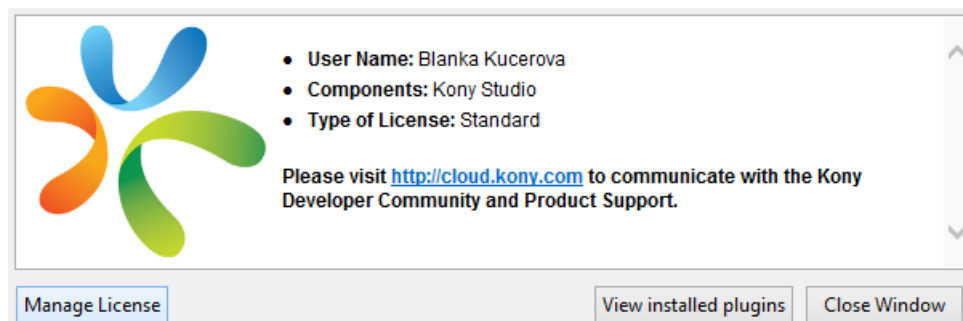


- c. Enter your license information.

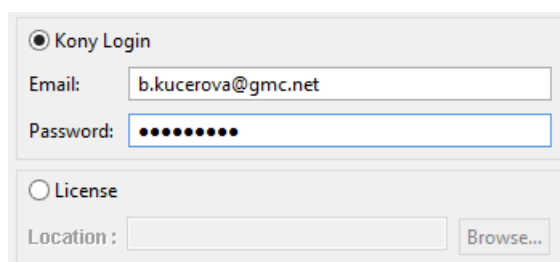


2. Set the URL of Kony Cloud.
 - a. Right-click on the GmcApiShowcase project and select **Properties**.

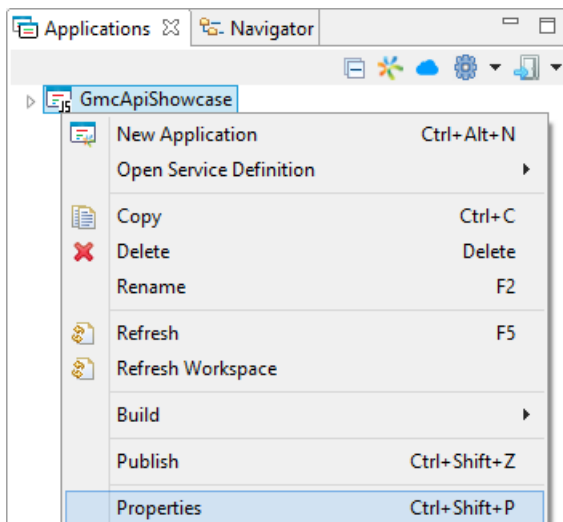


- b. In the Kony Server Details tab, click on the **Refresh**  icon. In the **Server** combo-box, select your URL on Kony Cloud.


Note If you use an internal Kony Server, click on the **Edit**  icon and add the server. Then select it in the combo-box.

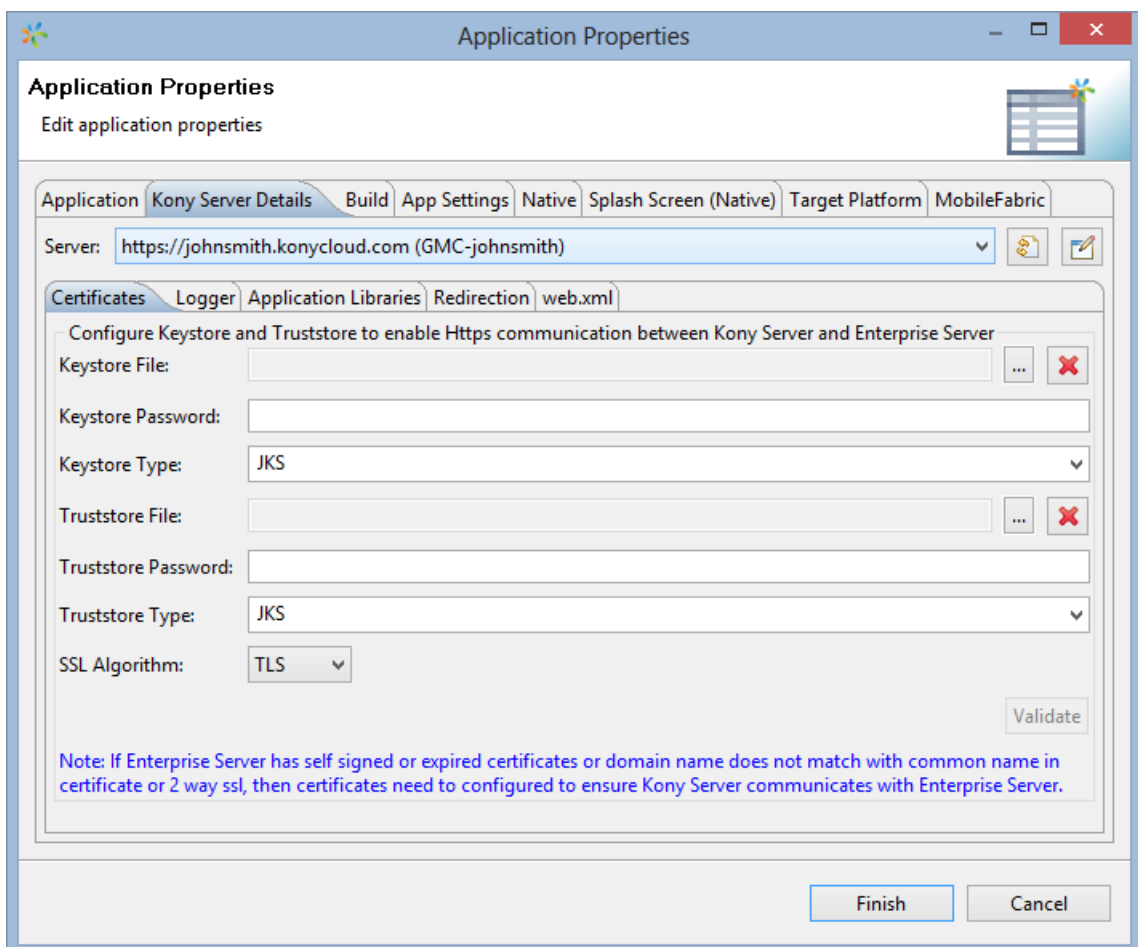

3. Publish the services to Kony Cloud.
- Right-click on the GmcApiShowcase project and select **Publish**.

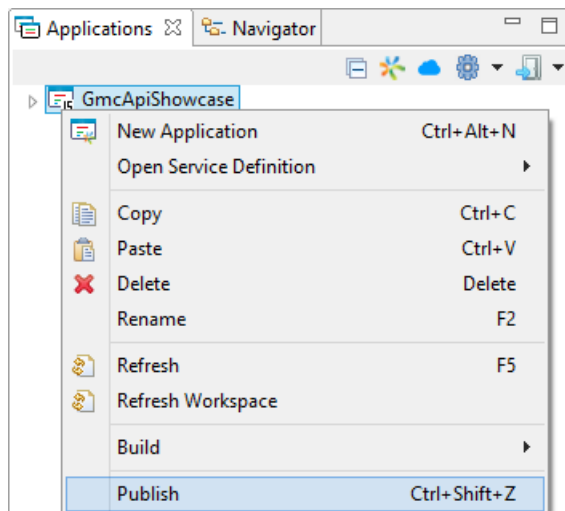

- b. In the **Target** field, select your account name on Kony Cloud. Below, select either *Full Publish* (e.g. if you publish the project for the first time) or *Update Services* (if you only want to replace existing services).

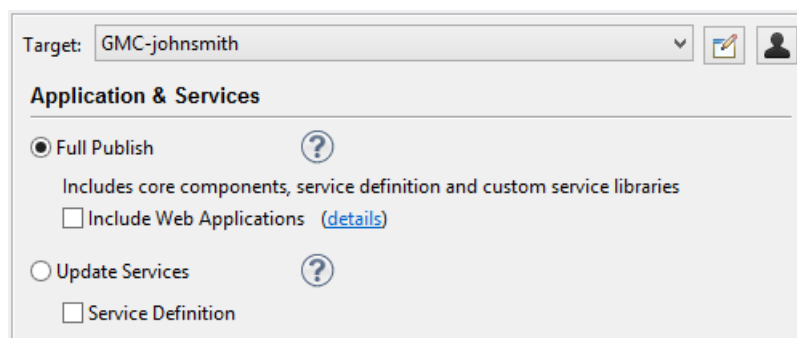

4. Check the project in Kony Cloud: <https://manage.kony.com/#/clouds/manage-clouds>


Clouds

[Manage Clouds](#)
[Manage VPN](#)


[+ Add a Kony Cloud](#)

Cloud Name	Current Usage	Administration
<p>johnsmith</p> <p>MobileFabric - Enterprise Apps - Trial</p> <p>Available - trial expires 12/15/2014</p> <p> Modify Rename </p> <p> Delete </p>	<p>0 active users</p>	<p> Management Services App Services Messaging Services </p>

5. When you have tested the pre-defined services, you can try to modify them (i.e. change their parameters). The modified services need to be published to Kony Cloud again.
 - This example shows how you can use a different output module than the one defined by default: In the RunJob service request, change the value of the `-o` command from *OutputTablet* to *OutputMobile*. The output will display different colors in texts and in the heading.

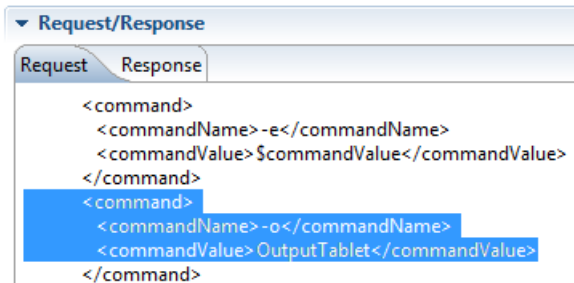

- This example shows how you can change the output format to Docx: Go to **modules | js | fProof.js** and change the *HTML* value to *Docx*. The **Proof HTML** button will provide output in the Docx format.

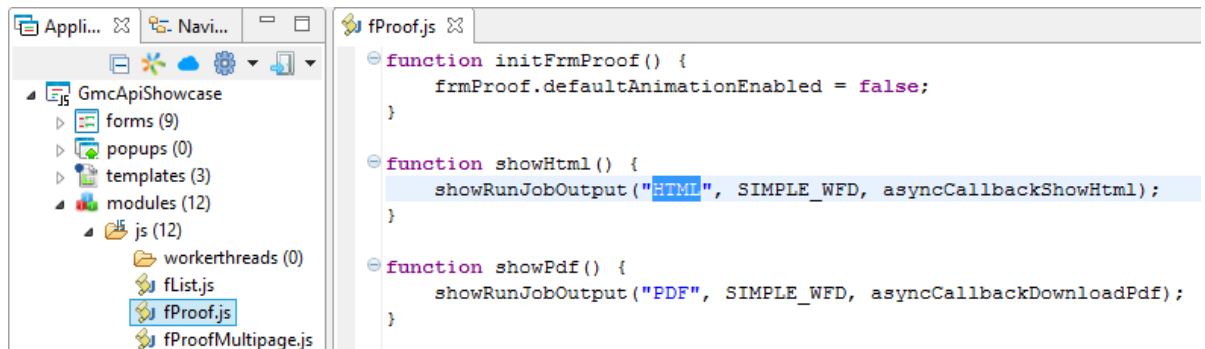

6. Like in the previous stage, you can build the GMC Showcase application to your mobile device.

4.3 Your Own Environment


These are instructions for setting up the stage described in the [Your Own Environment](#) section.

Prerequisites:

- Get Kony Studio and an account on Kony Cloud. For the testing purposes, a trial version of both is sufficient.
- If you use an internal Kony Server instead of Kony Cloud, make sure the server is running.
- Get your own installations of the GMC Inspire applications: Inspire Connect .NET, Inspire Production Server and Inspire Content Manager. For the testing purposes, demo versions are sufficient.
- Go through steps in the two previous stages.

Follow these steps:

1. Download the `listSampleData.pkg` file from [GitHub](#) (in the `SolutionData` folder) and import it to your Inspire Content Manager. The package contains directories used by the List Sample, as well as the sample WFD files.

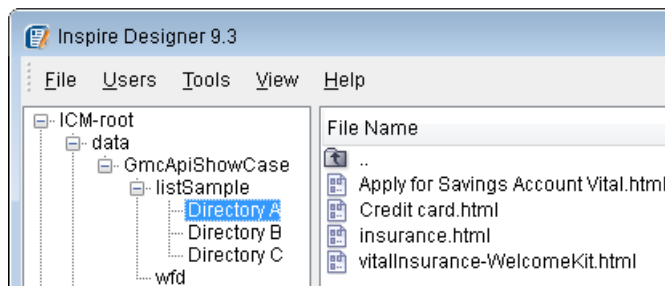


2. In Kony Studio, go to **modules | js | resources.js** and set the ICM paths to:
 - The folder with directories used in the List Sample.
 - The WFD files.

```
resources.js
var LIST_SAMPLE_DIRECTORY = "vcs:/data/GmcApiShowCase/listSample/";

var SIMPLE_WFD = "vcs:/data/GmcApiShowCase/wfd/mobileProof.wfd";
var DYNAMIC_WFD = "vcs:/data/GmcApiShowCase/wfd/mobileProofDynamicDocument.wfd";
var MULTIPAGE_WFD = "vcs:/data/GmcApiShowCase/wfd/mobileProofMultipage.wfd";
var SIGNING_DOCUMENT_WFD = "vcs:/data/GmcApiShowCase/wfd/mobileProofSigning.wfd";
```


3. Double-click on each of the pre-defined services. In the Define Service section, set the URL of the web service in your Inspire Connect .NET.

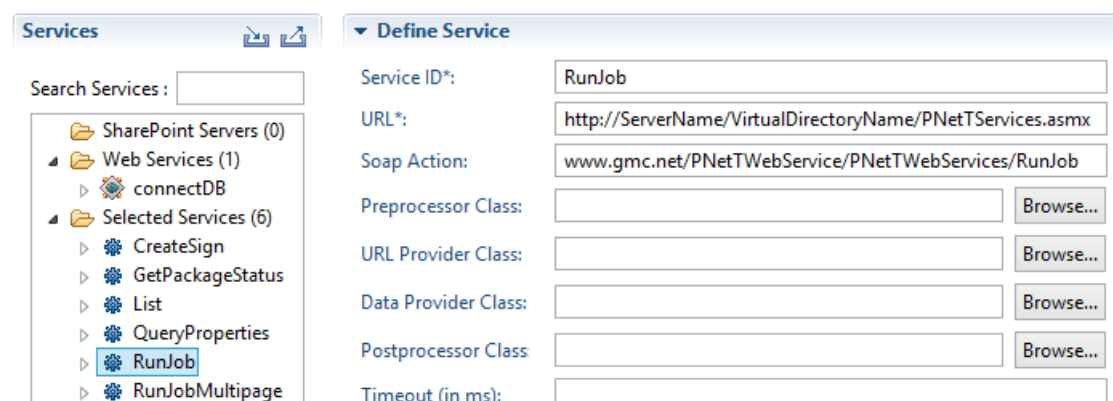


4. When you have tested the pre-defined services, you can [modify them](#) (i.e. change their parameters) or define your own services. Study the [Inspire Connect .NET Programming Guide](#) to learn about all the possibilities.
5. When you have tested the sample WFD files, you can modify them. Study the [Inspire Designer User Manual](#) to learn about all the possibilities.

This example shows how you can modify the `mobileProof.wfd` file and the GmcApiShowcase project to add a new text field for email address:

- a. In the WFD file, open the XML Data Input module. For the InputData element, create the email sub-element with the `#PCData` type.

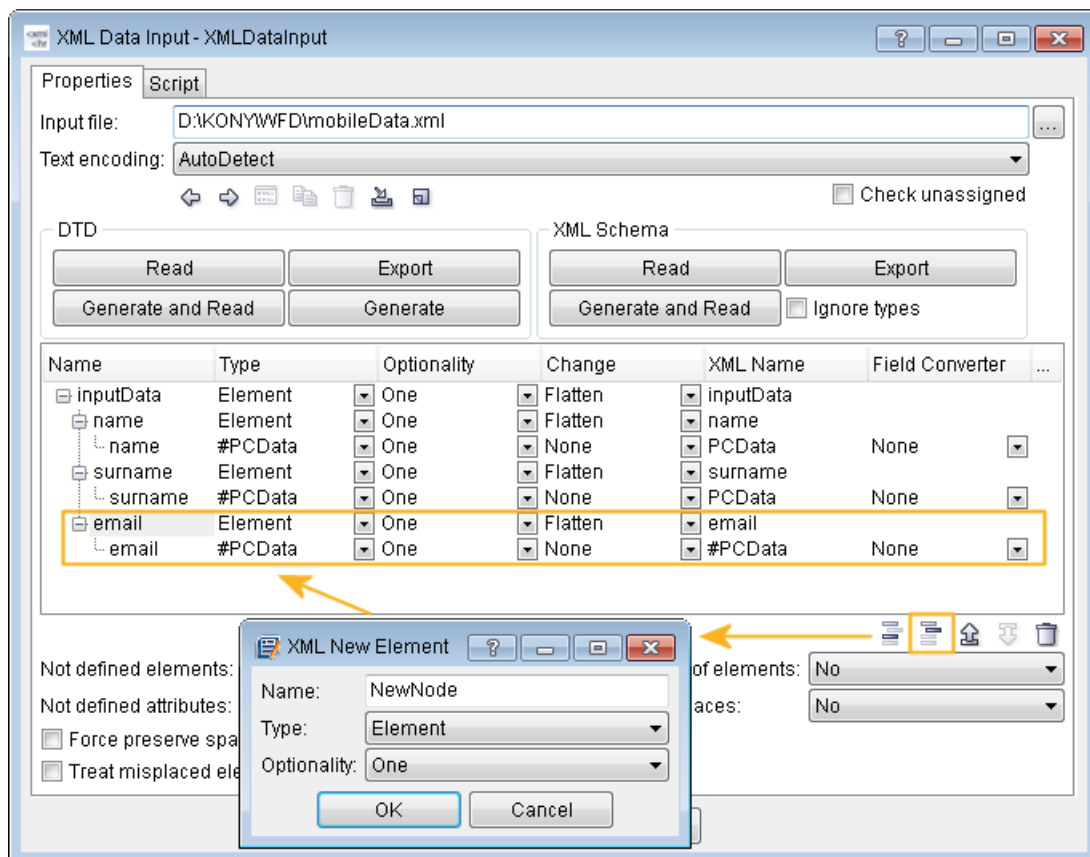


- b. Open the Layout module and add the email variable (and a text) to the main flow area.

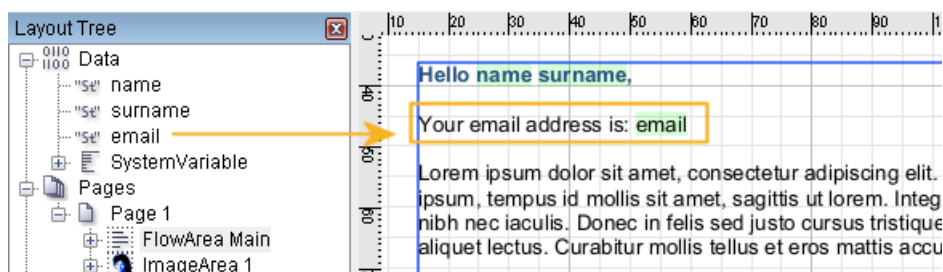

Save the modified WFD file.


- c. In Kony Studio, open the RunJob service. Add a new line to the request (an element with a variable):
`<email>$email</email>`.

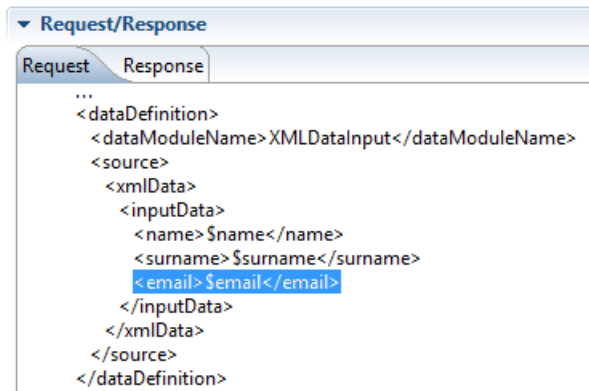

- d. Add the email input parameter for the RunJob service.

Http Headers Input Parameters Output Parameters Results						
Add						
ID	Test Value	Scope	Datatype	<input checked="" type="checkbox"/> Encode	Description	
corrId	vcs:/data/GmcApiShowCase/wfd/mobileProofDynamicDocument.wfd	request	string	true		
engine	HTML	request	string	true		
name	John	request	string	true		
surname	Smith	request	string	true		
email	j.smith@gmail.com	request	string	true		
...						

- e. In the source code which calls the RunJob service (i.e. in modules | js | fProof.js), add the email variable and parameter.

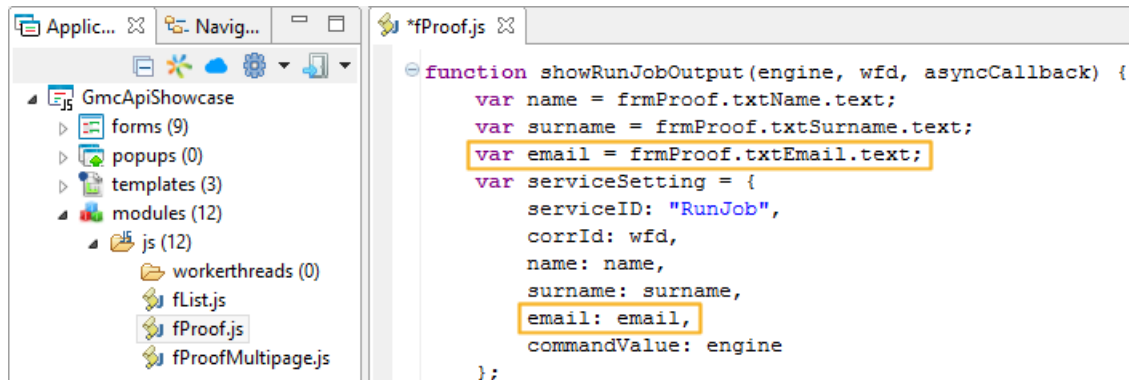

- Publish the modified services to Kony Cloud.
- Build your own mobile application to your mobile device.

5 GMC Mobile API

The GMC Mobile API provides these functionalities on mobile devices:

- **Document formatting** – see the [Proof Sample](#) and the [Multipage Proof Sample](#).


Production of documents is provided by the RunJob, RunJobMultipage and QueryProperties services defined in Kony and is performed by the PrintNetTServices web service of Inspire Connect .NET.

- **Repository handling** – see the [List Sample](#).

Handling of the GMC repository (i.e. Inspire Content Manager) is provided by the List service defined in Kony and is performed by the XmlDB web service of Inspire Connect .NET.

- **Document signing** – see the [Signing Sample](#).

Production and handling of documents intended for electronic signing is provided by the CreateSign and GetPackageStatus services defined in Kony and is performed by the DocumentSign web service of Inspire Connect .NET.

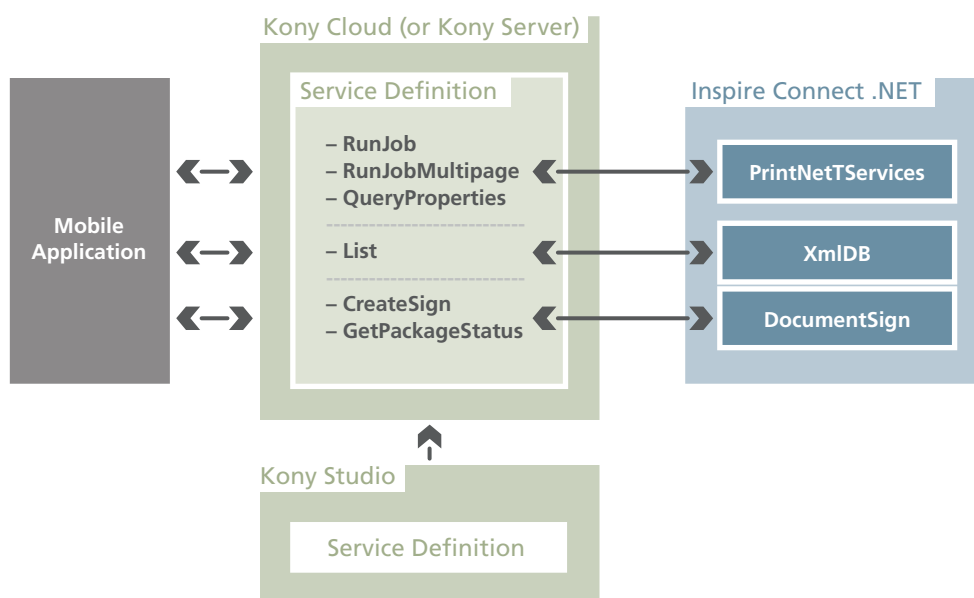

The GMC Mobile API determines how services of a mobile project should be defined in Kony so that they are compatible with the Inspire Connect .NET web services.

The services are defined in Kony Studio and the service definition is deployed (published) to Kony Cloud (or Kony Server).

The Inspire Connect .NET services use the SOAP format of messages.

5.1 Document Formatting

5.1.1 Calling the Service Definition

All services defined in Kony are called from the mobile device by this function:

```
kony.net.invokeServiceAsync(url, serviceSetting, callBack, info);
```

- `url` – URL of Kony Cloud or IP address of the internal Kony server.
- `serviceSetting` – String (in the JSON format) containing a list of input parameters, specific for each service.

Note This parameter is called `serviceSetting` for the Proof Sample, `inputParam` for the List Sample and `serviceDefinition` for the Signing Sample.

The Proof Sample uses these input parameters:

```
fProof.js
...
var serviceSetting = {
  serviceID: "RunJob",
  corrId: wfd,
  name: name,
  surname: surname,
  engine: engine
};
```

- `serviceID` – Identifier (a unique name) of the service (defined in Kony) that is called.
- `corrId` – Variable specifying the path to the WFD file that is processed.
- `name` – Variable specifying the name of a variable defined in the input module of the WFD file.
- `surname` – Variable specifying the name of a variable defined in the input module of the WFD file.
- `engine` – Variable specifying the format of the output file.

5.1.2 Service Definition in Kony

The definition of all services in Kony consists of:

- Defining which Connect .NET web service is called.
- Defining the request (with input parameters) sent to Inspire Connect .NET.
- Defining which part of the response (i.e. output parameters) is used and returned to the mobile device.

The RunJob service is defined this way:

- The RunJob service calls the PNetTServices web service of Inspire Connect .NET.

▼ Define Service

Service ID*:

URL*:

Soap Action:

- The RunJob service uses the following request and input parameters.

Http Headers		Input Parameters	Output Parameters	Results	
ID	Test Value	Scope	Datatype	<input checked="" type="checkbox"/> Encode	Description
corrid	vcs:/data/GmcApiShowCase/wfd/mobileProofDynamicDocument.wfd	request	string	true	
engine	HTML	request	string	true	
name	John	request	string	true	
surname	Smith	request	string	true	
...					

▼ Request/Response

Request **Response**

```

<soap:Envelope ... >
  <soap:Header>
    ...
  </soap:Header>
  <soap:Body>
    <RunJob xmlns="www.gmc.net/PNetTWebService/PNetTWebServices">
      <runWorkflowReq msgVersion="700">
        <workflowDefinition>
          <source>
            <correlationId>$corrid</correlationId>
          </source>
        </workflowDefinition>
        <dataDefinition>
          <dataModuleName>XMLDataInput</dataModuleName>
          <source>
            <xmlData>
              <inputData>
                <name>$name</name>
                <surname>$surname</surname>
              </inputData>
            </xmlData>
          </source>
        </dataDefinition>
        <command>
          <commandName>-e</commandName>
          <commandValue>$engine</commandValue>
        </command>
        <command>
          <commandName>-o</commandName>
          <commandValue>OutputMobile</commandValue>
        </command>
        <responseDefinition>
          <synchronous>true</synchronous>
          <responseType>temporaryUrl</responseType>
        </responseDefinition>
      </runWorkflowReq>
    </RunJob>
  </soap:Body>
</soap:Envelope>

```


- The RunJob service processes the following response and output parameters.

Http Headers	Input Parameters	Output Parameters	Results			
ID	XPath	Scope	Datatype	Collection ID	Record ID	Format
errors	*//RunJobResponse/runWorkFlowRes/ErrorCollection	response	string			None
url	*//RunJobResponse/runWorkFlowRes/source/url	response	string			None
errorCode	Error/ErrorCode	response	string	errors		None
errorMessage	Error/ErrorMessage	response	string	errors		None
...						

Request/Response	
Request	Response
Header	Body
	<pre> <soap:Envelope ... > <soap:Header> ... </soap:Header> <soap:Body> <RunJobResponse xmlns="www.gmc.net/PNetTWebService/PNetTWebServices"> <runWorkFlowRes ServerName="PNetTNetServerDSReader1"> <log>... </log> <source> <url>http://dynamiccontract.gmc.net/setup/Proof.axd?ext=.HTML&amp;size=554&amp;server=PNetT NetServerDSReader1&amp;spoolpath=98b5b33aa0e44499b84d0239de453a2d%2foutput.HTML&amp;j obid=0</url> </source> <JobId>0</JobId> </runWorkFlowRes> </RunJobResponse> </soap:Body> </soap:Envelope> </pre>

5.1.3 Calling the Inspire Connect .NET Method

Production of documents is ensured by the `RunJob` method of the `PrintNetTServices` web service in Inspire Connect .NET.

The method can return:

- URL of the output document.
- Binary data of the output document.
- Path to the output document in Inspire Content Manager.

The document design is defined in a WFD file. You can include variables in the document.

You can find all details about this method in the [Inspire Connect .NET Programming Guide](#) [↗](#) (RunJob Method section).

5.2 Repository Handling

5.2.1 Calling the Service Definition

All services defined in Kony are called from the mobile device by [the same function](#). The second parameter for the List Sample is called `inputParam`.

The List Sample uses these input parameters:

```
fList.js
...
var inputParam = {
  serviceID: "List",
  path: LIST_SAMPLE_DIRECTORY + directory
};
```

- `serviceID` – Identifier (a unique name) of the service (defined in Kony) that is called.
- `path` – Variable specifying the ICM path to the folder with the sample directories (its value is defined in the [resources.js](#) file) + variable specifying the directory name.

5.2.2 Service Definition in Kony

The List service is defined this way:

- The List service calls the XmlDB web service of Inspire Connect .NET.

Define Service	
Service ID*:	List
URL*:	http://ServerName/VirtualDirectoryName/dbs/xmlldb.asmx
Soap Action:	www.gmc.net/PNetTWebService/PNetTWebServices/List

- The List service uses the following request and input parameters.

Http Headers Input Parameters Output Parameters Results						
ID	Test Value	Scope	Datatype	<input checked="" type="checkbox"/> Encode	Description	
path	data:/GmcApiShowCase/listSample/Directory A	request	string	true		
...						

Request/Response

Request

```
<soapenv:Envelope ... >
  <soapenv:Header>
    ...
  </soapenv:Header>
  <soapenv:Body>
    <pnet:List>
      <!--Optional-->
      <pnet:ListReq ListType="Files" path="$path" recursive="false">
        <!--Optional-->
        <pnet:systemData Copy="true">
          <!--You may enter ANY elements at this point-->
        </pnet:systemData>
        <pnet:Columns>CorrelationID</pnet:Columns>
        <pnet:Columns>FullPath</pnet:Columns>
        <pnet:Columns>Title</pnet:Columns>
        <pnet:Columns>Description</pnet:Columns>
        <pnet:Columns>CardNumber</pnet:Columns>
      </pnet:ListReq>
    </pnet:List>
  </soapenv:Body>
</soapenv:Envelope>
```

- The List service processes the following response and output parameters.

Http Headers	Input Parameters	Output Parameters	Results						
ID	XPath	Scope	Datatype	Collection ID	Record ID	Format	Format Value	Description	
documents	//ListResponse/ListResult/Items/Rows	response	string			None			
corrid	//Cells[1]	response	string	documents		None			
fullPath	//Cells[2]	response	string	documents		None			
title	//Cells[3]	response	string	documents		None			
description	//Cells[4]	response	string	documents		None			
number	//Cells[5]	response	string	documents		None			
opstatus		response	string			None			
errmsg		response	string			None			
httpStatusCode		response	string			None			
...									

Request/Response	
Request	Response
Header	Body
	<pre> <soap:Envelope ... > <soap:Header> ... </soap:Header> <soap:Body> <ListResponse xmlns="www.gmc.net/PNetTWebService/PNetTWebServices"> <ListResult> <systemData/> <Items> <ColumnNames>CorrelationID</ColumnNames> <ColumnNames>FullPath</ColumnNames> <ColumnNames>Title</ColumnNames> <ColumnNames>Description</ColumnNames> <ColumnNames>CardNumber</ColumnNames> <Rows> <Cells>Apply for Savings Account Vital.html</Cells> <Cells>data:/GmcApiShowCase/listSample/Directory A/Apply for Savings Account Vital.html</Cells> <Cells>CREDIT CARD STATEMENT</Cells> <Cells>Please find details of your statement and pay a minimum amount of 25\$ this month.</Cells> <Cells>37*****7841</Cells> </Rows> <Rows> <Cells>Credit card.html</Cells> <Cells>data:/GmcApiShowCase/listSample/Directory A/Credit card.html</Cells> <Cells>CURRENT ACCOUNT STATEMENT</Cells> <Cells>You have a positive balance of 1500\$ on your current account.</Cells> <Cells>37*****7841</Cells> </Rows> ... </Items> <TotalCount>4</TotalCount> </ListResult> </ListResponse> </soap:Body> </soap:Envelope> </pre>

5.2.3 Calling the Inspire Connect .NET Method

Handling of the GMC repository (ICM) is ensured by the `List` method of the XmlDB web service in Inspire Connect .NET.

The method can return a list of files stored in ICM and their properties, i.e. ICM metadata.

Using other methods of the XmlDB web service, you can e.g. download files from ICM, upload files, change their location, delete them or set their properties.

You can find all details about these methods in the [Inspire Connect .NET Programming Guide](#) (Supported XmlDB Web Service Methods section).

5.3 Document Signing

The Signing Sample includes these steps:

1. A package (containing a PDF document to be signed) is created and sent to the e-signature provider server. The document is displayed to the user (signer).

The GMC Showcase application displays the document in an external browser, but it is also possible to display it within the mobile application.

2. The document can be signed.
3. The package status can be queried, i.e. the user can inquire whether the document has been signed already.

5.3.1 Calling the Service Definition

All services defined in Kony are called from the mobile device by [the same function](#). The second parameter for the Signing Sample is called `serviceDefinition`.


The Signing Sample uses these input parameters for package creation:

```
fSigning.js
...
var serviceDefinition = {
  serviceID: "CreateSign",
  corrId: SIGNING_DOCUMENT_WFD,
  clientName: clientName,
  clientSurname: clientSurname,
  packageName: "PackageFromShowCaseAPI",
  packageDescription: "Package from GMC - Kony API Showcase.",
  documentName: "SampleDocument",
  documentId: DOCUMENT_ID
};
...
var signer = {};
signer.signerId = SIGNER_ID;
signer.signerName = name;
signer.signerSurname = surname;
signer.signerEmail = EMAIL;
...
var signature = {};
signature.signerId = SIGNER_ID;
signature.signatureXPosition = "500";
signature.signatureYPosition = "900";
signature.signatureOnPage = "0";
signature.signatureHeight = "110";
signature.signatureWidth = "200";
```

- `serviceID` – Identifier (a unique name) of the service (defined in Kony) that is called.
- `corrId` – Variable specifying the path to the WFD file that is processed (its value is defined in the [re→sources.js](#) file).
- `clientName` – Variable specifying the name of a variable defined in the input module of the WFD file.
- `clientSurname` – Variable specifying the name of a variable defined in the input module of the WFD file.
- `packageName` – String specifying the name of the signing package sent to the e-signature provider server.
- `packageDescription` – String providing the package description.
- `documentName` – String specifying the name of the document included in the package.

- `documentId` – Variable specifying the document identifier within the package. In the GmcApiShowcase project, it is always `1`.
- `signer` – Variable specifying the signer who has to provide the electronic signature: the signer's ID (used for linking signers and signatures), name, surname and email address).
- `signature` – Variable specifying the signature: ID of the signer who has to provide the signature, index of the page on which the signature is placed and exact position of the signature within the page (on the X and Y axes).

For getting the package status, these parameters are used:

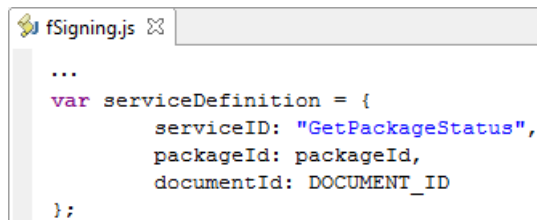

```

fSigning.js
...
var serviceDefinition = {
  serviceID: "GetPackageStatus",
  packageId: packageId,
  documentId: DOCUMENT_ID
};


```

- `serviceID` – Identifier (a unique name) of the service (defined in Kony) that is called.
- `packageId` – Variable specifying the identifier of the signing package posted on the e-signature provider server.
- `documentId` – Variable specifying the document identifier within the package. In the GmcApiShowcase project, it is always `1`.

5.3.2 Service Definition in Kony

The CreateSign service is defined this way:

- The CreateSign service calls the DocumentSign web service of Inspire Connect .NET.

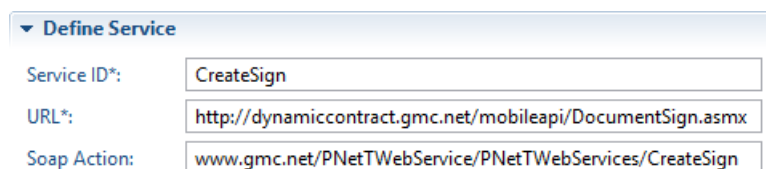

Define Service	
Service ID*:	CreateSign
URL*:	http://dynamiccontract.gmc.net/mobileapi/DocumentSign.asmx
Soap Action:	www.gmc.net/PNetTWebService/PNetTWebServices/CreateSign

- The CreateSign service uses the following request and input parameters.

Http Headers	Input Parameters	Output Parameters	Results
ID	Test Value	Scope	Datatype
clientName	John	request	string
clientSurname	Carter	request	string
corrid	vcs://data/GmcApiShowCase/wfd/mobileProofSigning.wfd	request	string
packageName	myPackage	request	string
packageDescription	myPackageDescription	request	string
documentName	myDocumentName	request	string
documentId	myDocumentId	request	string
signer	[[signerId='10', signerName = 'Johny', signerSurname = 'Rambo', signerEmail = 'fakemail@froodeco.net']]	request	collection
signature	[[signerId='10', signatureXPosition = '100', signatureYPosition = '100', signatureOnPage = '0', signatureHeight='100', signatureWidth='100']]	request	collection
...			

▼ Request/Response

Request	Response
Header	Body
	<pre> <soap:Envelope ... > <soap:Header> ... </soap:Header> <soap:Body> <CreateSign xmlns="www.gmc.net/PNetWebService/PNetWebServices"> <comCreateSignReq account="default" msgVersion="700"> <PackageInfo description="\$packageDescription" name="\$packageName"/> <Document id="\$documentId" name="\$documentName"> <RunRequest> <workFlowDefinition> <source> <correlationId>\$corrid</correlationId> </source> </workFlowDefinition> <dataDefinition> <dataModuleName>XMLDataInput1</dataModuleName> <source> <xmlData> <inputData> <name>\$clientName</name> <surname>\$clientSurname</surname> </inputData> </xmlData> </source> </dataDefinition> </RunRequest>#foreach \$signature <Signature signerId="\$signerId"> <Position height="\$signatureHeight" onPage="\$signatureOnPage" width="\$signatureWidth" x="\$signatureXPosition" y="\$signatureYPosition"/> </Signature>#end </Document>#foreach \$signer <Signer id="\$signerId"> <Name>\$signerName</Name> <Surname>\$signerSurname</Surname> <Email>\$signerEmail</Email> </Signer>#end</comCreateSignReq> </CreateSign> </soap:Body> </soap:Envelope> </pre>

- The CreateSign service processes the following response and output parameters.

Http Headers	Input Parameters	Output Parameters	Results					
ID	XPath	Scope	Datatype	Collection ID	Record ID	Format	Format Value	Description
packageId	//Package/@Id	response	string			None		
signers	//Package/Sign	response	string			None		
signerId	//@idSigner	response	string	signers		None		
token	//Token	response	string	signers		None		
errorCollection	//ErrorCollection	response	string			None		
errorCode	//Error/ErrorCode	response	string	errorCollection		None		
errorMessage	//Error/ErrorMessage	response	string	errorCollection		None		
...								

Request/Response	
Request	Response
Header	Body
	<pre> <soap:Envelope ... > <soap:Header> ... </soap:Header> <soap:Body> <CreateSignResponse xmlns="www.gmc.net/PNetTWebService/PNetTWebServices"> <comCreateSignRes ServerName="PNetTNetServerDSReader1"> <log> ... </log> <Package Id="6ec63adb-433c-4c72-bbf3-91abf3e64643"> <Sign idSigner="10"> <Token>NDZhNzg4YzAtY2UzYy00OWQ4LWlzYTQtNjliNTg3Nzc2MjUz</Token> </Sign> </Package> </comCreateSignRes> </CreateSignResponse> </soap:Body> </soap:Envelope> </pre>

5.3.3 Calling the Inspire Connect .NET Method

Document Signing is ensured by the `CreateSign` and `GetPackageStatus` methods of the DocumentSign web service in Inspire Connect .NET.

These methods are used for integration with the e-signature provider. The first one creates a package with a PDF document to be signed and sends the package to the e-signature provider server. Once the package is there, the second method can get the current status of the package, i.e. find out whether the document has been signed already.

The methods are internal and are not described in the Inspire Connect .NET documentation.


A GMC Inspire Applications

A.1 Inspire Designer

Inspire Designer is a variable-data composition software which formats documents from a range of data and design inputs. It supports various data channels (e.g. data files, databases, web services, social media) as well as all major document output formats, such as PDF, AFP, PCL, HTML, DOC. The whole document setup is stored in a workflow file (.WFD). This file contains the entire processing algorithm of a document, including its graphic layout and configuration of data inputs, data processing, impositioning and outputs.

Inspire Designer GUI

Inspire Designer features an installed desktop application used by document designers to create a WFD file. The visual environment provides the user with building blocks and tools required for designing, previewing and testing of a document. Once the document design is complete, production can be run manually from a production environment. However, this production can be neither automated nor integrated with other products and services.

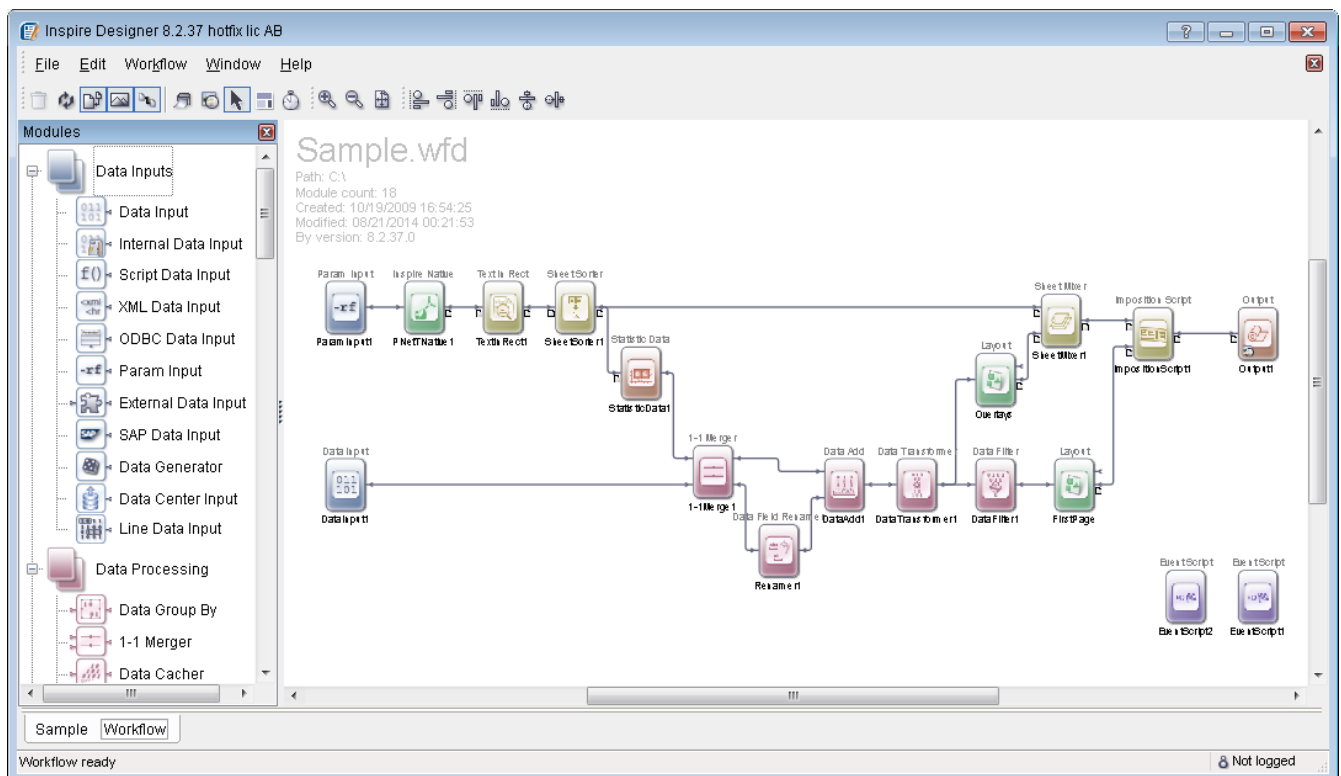

Inspire Production Server

Inspire Production Server (IPS) is Inspire Designer's production capabilities running as a service. Since the document production consumes significant amounts of processing power, this service is usually installed in several instances, each on a separate server. Other software (e.g. Inspire Connect) can communicate with these services to run the production of a WFD file using specific data and parameters.

Inspire Content Manager

Inspire Content Manager (ICM) is another component of Inspire Designer. It is installed as a service on a separate server. It provides storage and management of data for all Inspire products (only). Inspire products connect to this service as clients to retrieve data.

A.2 Inspire Connect .NET

Inspire Connect (IC) is a web application that integrates with Inspire Production Server and Inspire Content Manager services. It provides a SOAP API accessible via WSDL and also via IBM WebSphere messaging system. This API allows other Inspire and third-party applications to easily access the ICM storage and to run production of WFD files using IPS. Moreover, IC automatically manages and distributes the load among multiple IPS instances.

Inspire Connect is used for automatic processing of client application requests. It features two publicly supported web services:

- XmlDB Web Service

`http://ServerName/VirtualDirectoryName/dbs/XmlDB.asmx`

This service provides basic file and directory operations over the ICM storage. The service has dedicated methods for each type of operation, e.g. upload, download, copy, move, rename, create dir, set permissions.

- PrintNetTServices Web Service

`http://ServerName/VirtualDirectoryName/PNetTServices.asmx`

This is production web service that invokes IPS operations. The service has dedicated methods for each type of operation, e.g. run production, generate a preview, get WFD properties)


- DocumentSign Web Service

`http://ServerName/VirtualDirectoryName/DocumentSign.asmx`

This is a special service for production of signed PDF documents. Produced PDFs are automatically submitted to the e-signature provider server and the service returns URL of the uploaded document. Subsequently, this URL can be used to electronically sign the document or to check the document status.

The communication between these services and a client application is performed using XML request/response messages. The client application sends a web request to the service and calls one of its available methods. The request contains XML data, commands and parameters required for requested operation. Once the request has been processed by the web service, a response is sent back to the client application. The XML data in the response contain information about the result of the requested operation, e.g. log messages, requested values, paths to output files or even Base64-encoded output documents.

The syntax of XML data used for communication with these services is available in XSD and WSDL format in the `VirtualDirectoryName\Doc\` directory. Also, after entering the web service URL into a web browser, the service returns a list of available methods with sample requests and responses.

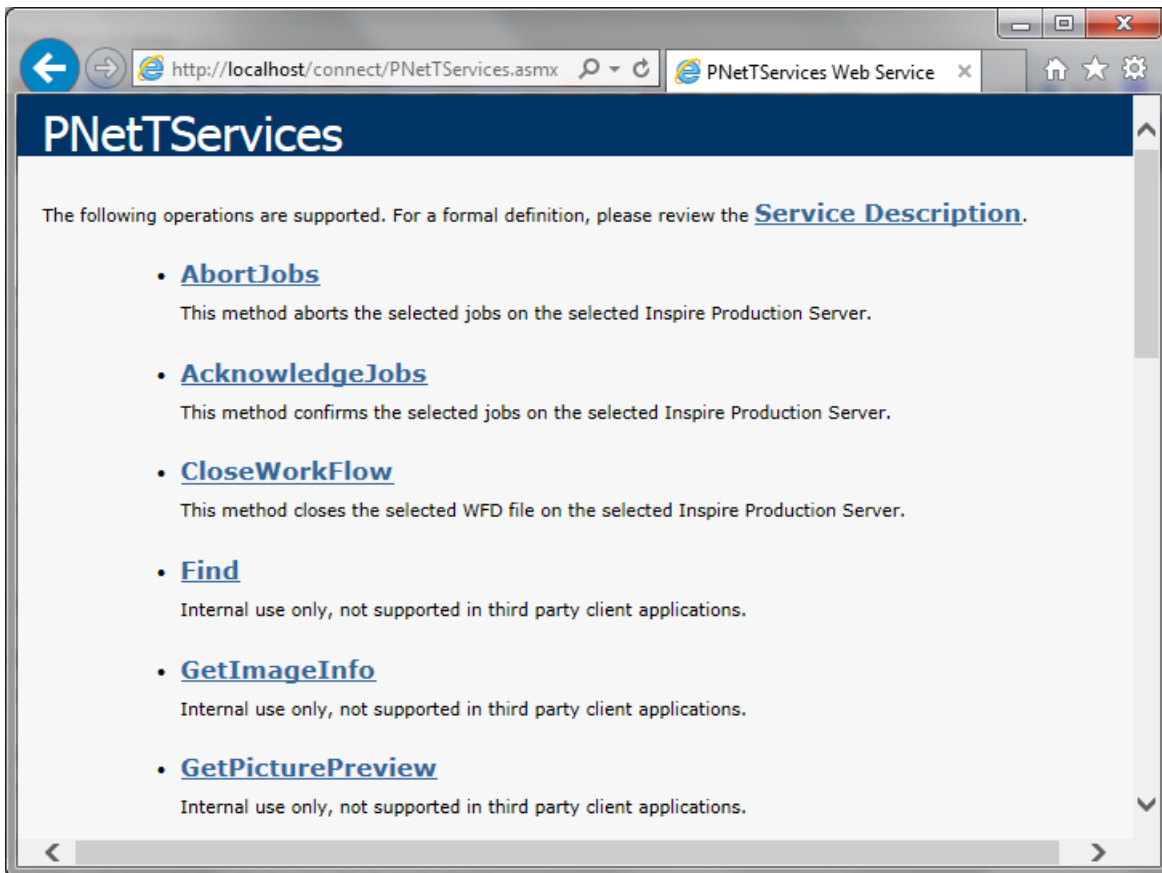

For parsing by client applications, the WSDLs are directly obtainable using the web service URL appended with `?WSDL` parameter (e.g. `http://ServerName/VirtualDirectoryName/dbs/XmlDB.asmx?WSDL`).

