


1 -

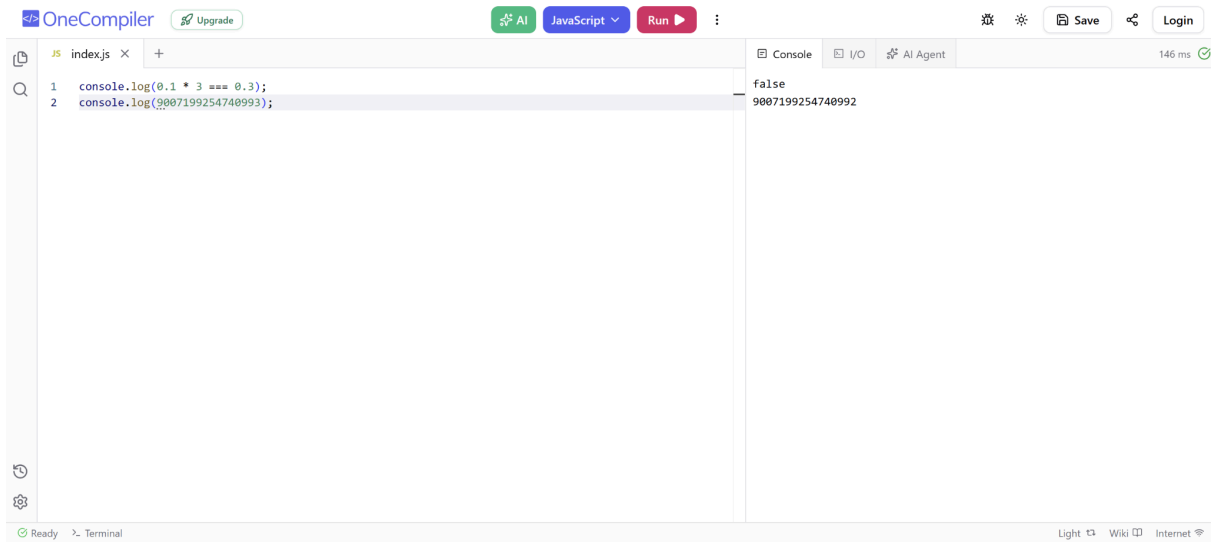

The image shows the OneCompiler web interface with JavaScript selected. The code in the editor is:


```
1 console.log(0.1 * 3 === 0.3);  
2 console.log(9007199254740993);
```

The console output on the right shows:

```
false  
9007199254740992
```

The interface includes a top bar with 'OneCompiler', 'Upgrade', 'AI', 'JavaScript', 'Run', 'Save', and 'Login' buttons. The bottom status bar shows 'Ready', 'Terminal', 'Light', 'Wiki', and 'Internet' icons.

2 -

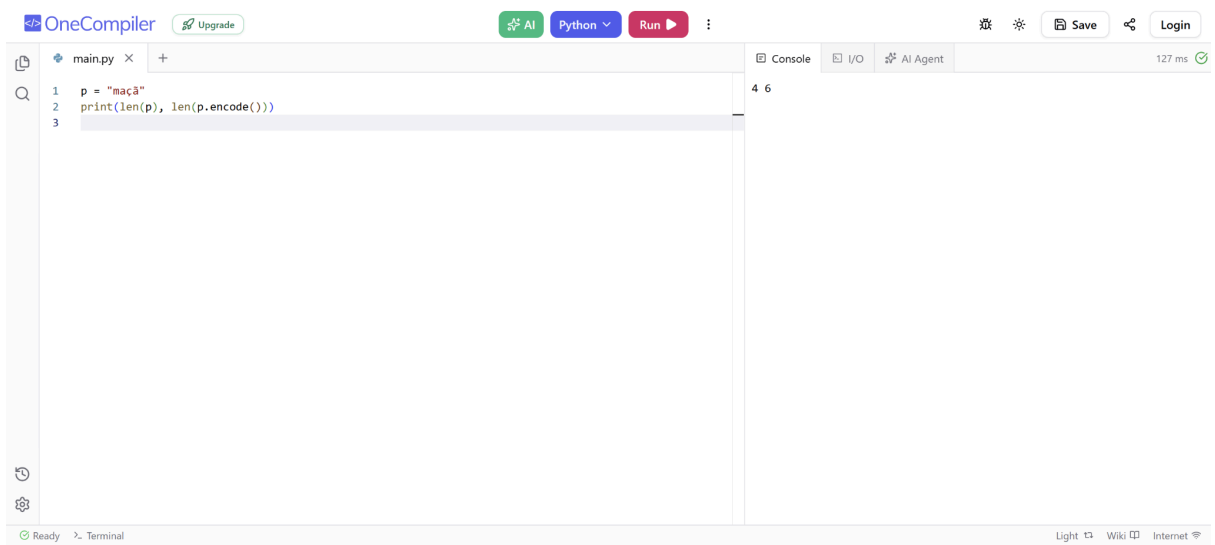

The image shows the OneCompiler web interface with Python selected. The code in the editor is:


```
1 p = "maçã"  
2 print(len(p), len(p.encode()))  
3
```

The console output on the right shows:

```
4 6
```

The interface includes a top bar with 'OneCompiler', 'Upgrade', 'AI', 'Python', 'Run', 'Save', and 'Login' buttons. The bottom status bar shows 'Ready', 'Terminal', 'Light', 'Wiki', and 'Internet' icons.

3 -

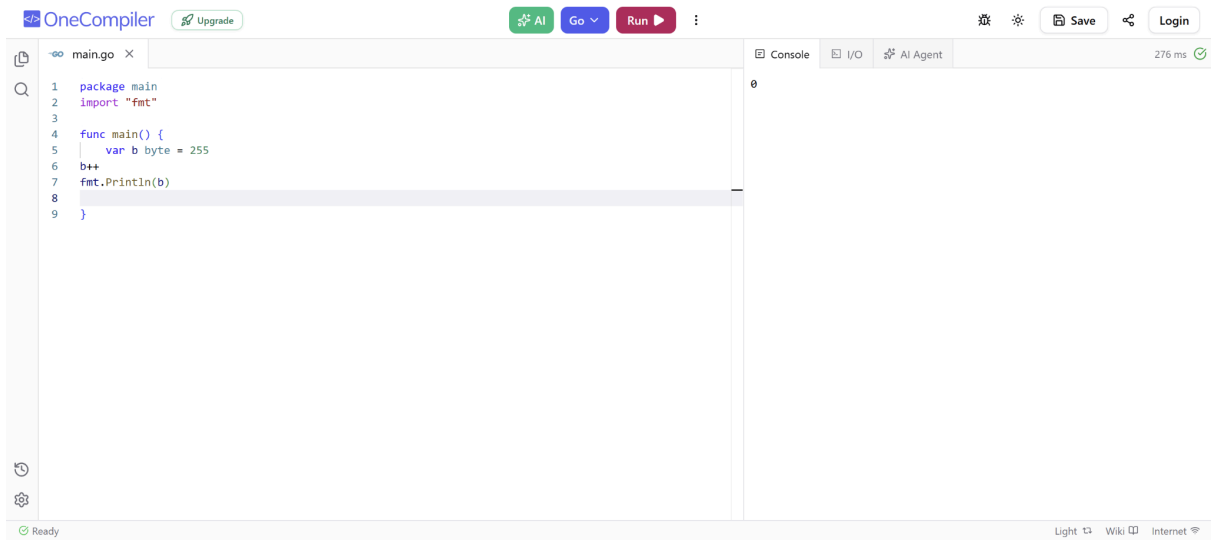


The screenshot shows the OneCompiler IDE with a Go file named 'main.go'. The code defines a package 'main', imports 'fmt', and has a 'main' function that declares a byte variable 'b' with the value 255, increments it with 'b++', and prints it using 'fmt.Println(b)'. The console on the right shows the output '0'. The status bar at the bottom indicates 'Ready'.

```
1 package main
2 import "fmt"
3
4 func main() {
5     var b byte = 255
6     b++
7     fmt.Println(b)
8 }
9
```

Console: 0

Ready

4 -

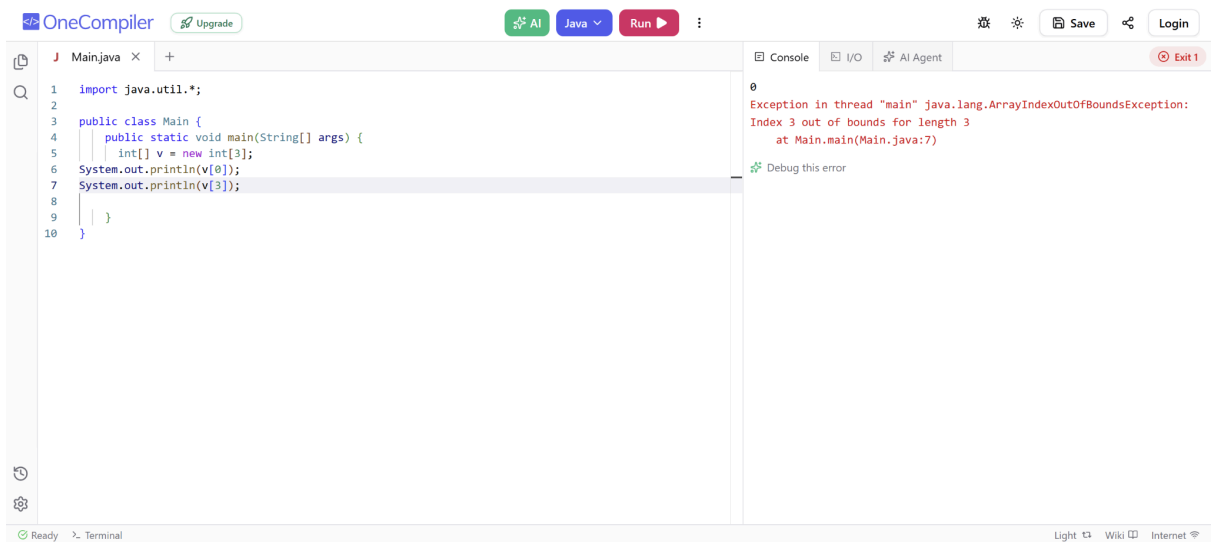

The screenshot shows the OneCompiler IDE with a Java file named 'Main.java'. The code imports 'java.util.\*', defines a 'Main' class, and has a 'main' method that creates an integer array 'v' of size 3, prints 'v[0]', and then attempts to print 'v[3]'. The console on the right shows an 'ArrayIndexOutOfBoundsException' error because index 3 is out of bounds for an array of length 3. The status bar at the bottom indicates 'Ready'.

```
1 import java.util.*;
2
3 public class Main {
4     public static void main(String[] args) {
5         int[] v = new int[3];
6         System.out.println(v[0]);
7         System.out.println(v[3]);
8     }
9 }
10
```

Console: Exception in thread "main" java.lang.ArrayIndexOutOfBoundsException: Index 3 out of bounds for length 3  
at Main.main(Main.java:7)

Ready

5 -

The screenshot shows the OneCompiler Rust IDE. The editor displays a Rust file named `HelloWorld.rs` with the following code:

```
1 fn main() {  
2     let s = String::from("oi");  
3     let t = s;  
4     println!("{}", s, t);  
5 }  
6
```

The console on the right shows a Rust compiler error:

```
error[E0382]: borrow of moved value: `s`  
--> HelloWorld.rs:4:19  
   |  
2  |     let s = String::from("oi");  
   |     - move occurs because `s` has type `String`, which does  
   |     not implement the `Copy` trait  
3  | let t = s;  
   |     - value moved here  
4  | println!("{}", s, t);  
   |                  ^ value borrowed here after move  
  
help: consider cloning the value if the performance cost is acceptable  
   |  
3  | let t = s.clone();  
   |     +++++++  
  
error: aborting due to 1 previous error  
  
For more information about this error, try `rustc --explain E0382`.  
  
Debug this error
```

The status bar at the bottom indicates "Ready".

6 -

The screenshot shows the OneCompiler C IDE. The editor displays a C file named `Main.c` with the following code:

```
1 #include <stdio.h>  
2 int main()  
3 {  
4     union { int i; float f; } u;  
5     u.f = 1.0f;  
6     printf("%d\n", u.i);  
7 }  
8
```

The console on the right shows the output of the program:

```
1065353216
```

The status bar at the bottom indicates "Ready" and "Terminal".