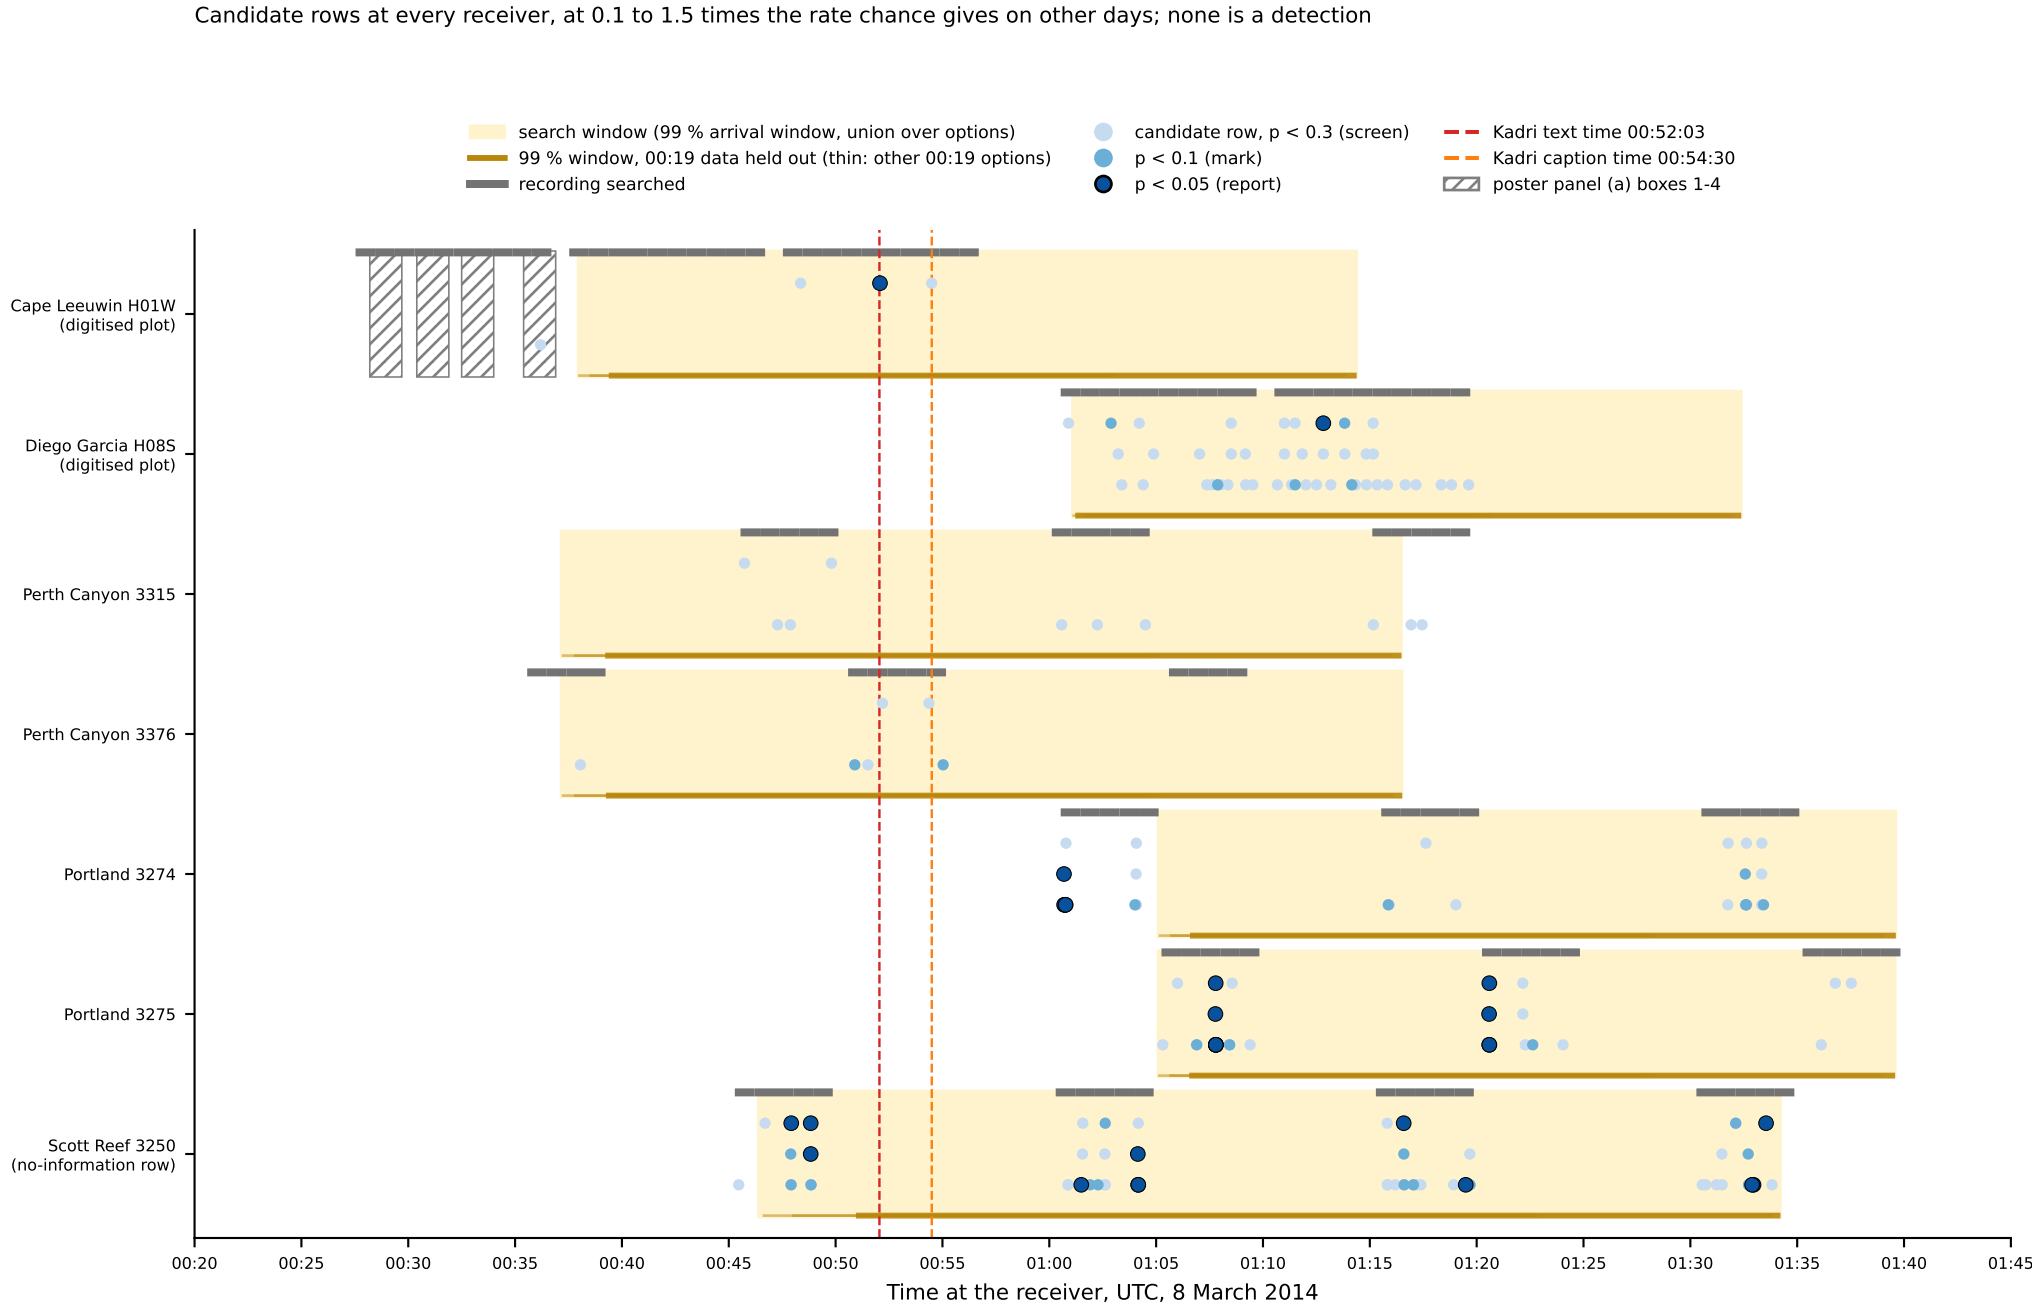

(i) What the chart shows: for each receiver, the time span in which the sound of an impact on the 7th arc would arrive (yellow), the recordings we hold (grey bars), and every time at which a detector statistic was in the top 30 % of its background (dots; darker = rarer). The red and orange lines are the two times Kadri gives for his main signal. The hatched boxes are the weak signals marked on his poster. Within each receiver's row the upper dots are the matched filter, the middle the energy ratio, the lower the band energy. The counts of dots run from one tenth of what chance gives on other days (Cape Leeuwin) and one fifth to one third (Perth Canyon) up to 1.5 times (Scott Reef; Portland 0.8-0.9); no dot is a detection.

(ii) Source posterior run J (74 seeds + northern supplement), 00:19 options D0' (held out, thick), D2, D3, D4, p = 0.5; windows = [q0.5, q99.5] of impact time + geodesic/c, c ~ N(1.482, 0.006) km/s (SOFAR; union over p in {0, 0.5, 1}). Detectors: envelope matchedfilter (KRAKEN templates), STA/LTA 2/30 s, band energy 2-5/5-10/10-20/20-40/5-40 Hz; 55 s windows; p = (k+1)/(n+1) against ~6,500 background windows of the same logger on 1-7, 9-15 March (3315 <- 3376, 3275 <- 3274; panels: emulated 3376 plot). H01W/H08S = DIGITISED Kadri (2024) Fig. 9 panels, not recordings. H08S raw-panel rows are airgun-dominated. Caveats C1 (propagation slope misfit) and C2 (coupling not calibrated). Pre-registration a4cdab0; PREDICTIVE, NOT CALIBRATED.