


MH370 known-flight WSPR controls
PHaRLAP-filtered residuals: common-aircraft-altitude propagation screen



Blind, epoch-partitioned selection; 25 km clustering, 25 km symmetric residualization, ≥ 3 independent links. Withheld aircraft references appear only in arc-time panels and were added after selection. Whole-window proximity uses the static arc-epoch reference; recovery uses the physical WSPR slot nearest the arc epoch and central-window truth evaluated at its midpoint. The same central-slot truth is reused as a reference in both controls; it is not aircraft truth at the shifted radio times. The orange line joins reported ACARS positions in time order in the arc-time panels only as post-selection context; positions between reports are not observed and the line does not enter selection or scoring. Latitude limits are symmetric about the withheld arc-time position for each row and identical across its three panels; pale-grey latitude bands lie outside the frozen candidate-search domain. The ruler at right is a north/south great-circle distance.

Control persistence is tested on source altitude-slice clusters across any height; only surviving sources are then collapsed into one event marker for display and counting. Marker size uses the feasible-set midrange as a geometry encoding, not evidential strength, and the audit CSV retains every source ID. Confirmatory recovery uses the surviving pre-collapse source centres and exact heights, not the displayed representative. Time-aligned recovery uses a 0.5 km primary altitude allowance because ACARS pressure altitude and modeled geometric ray height are not identical; sensitivities are 0.25, 0.5, 1 km.

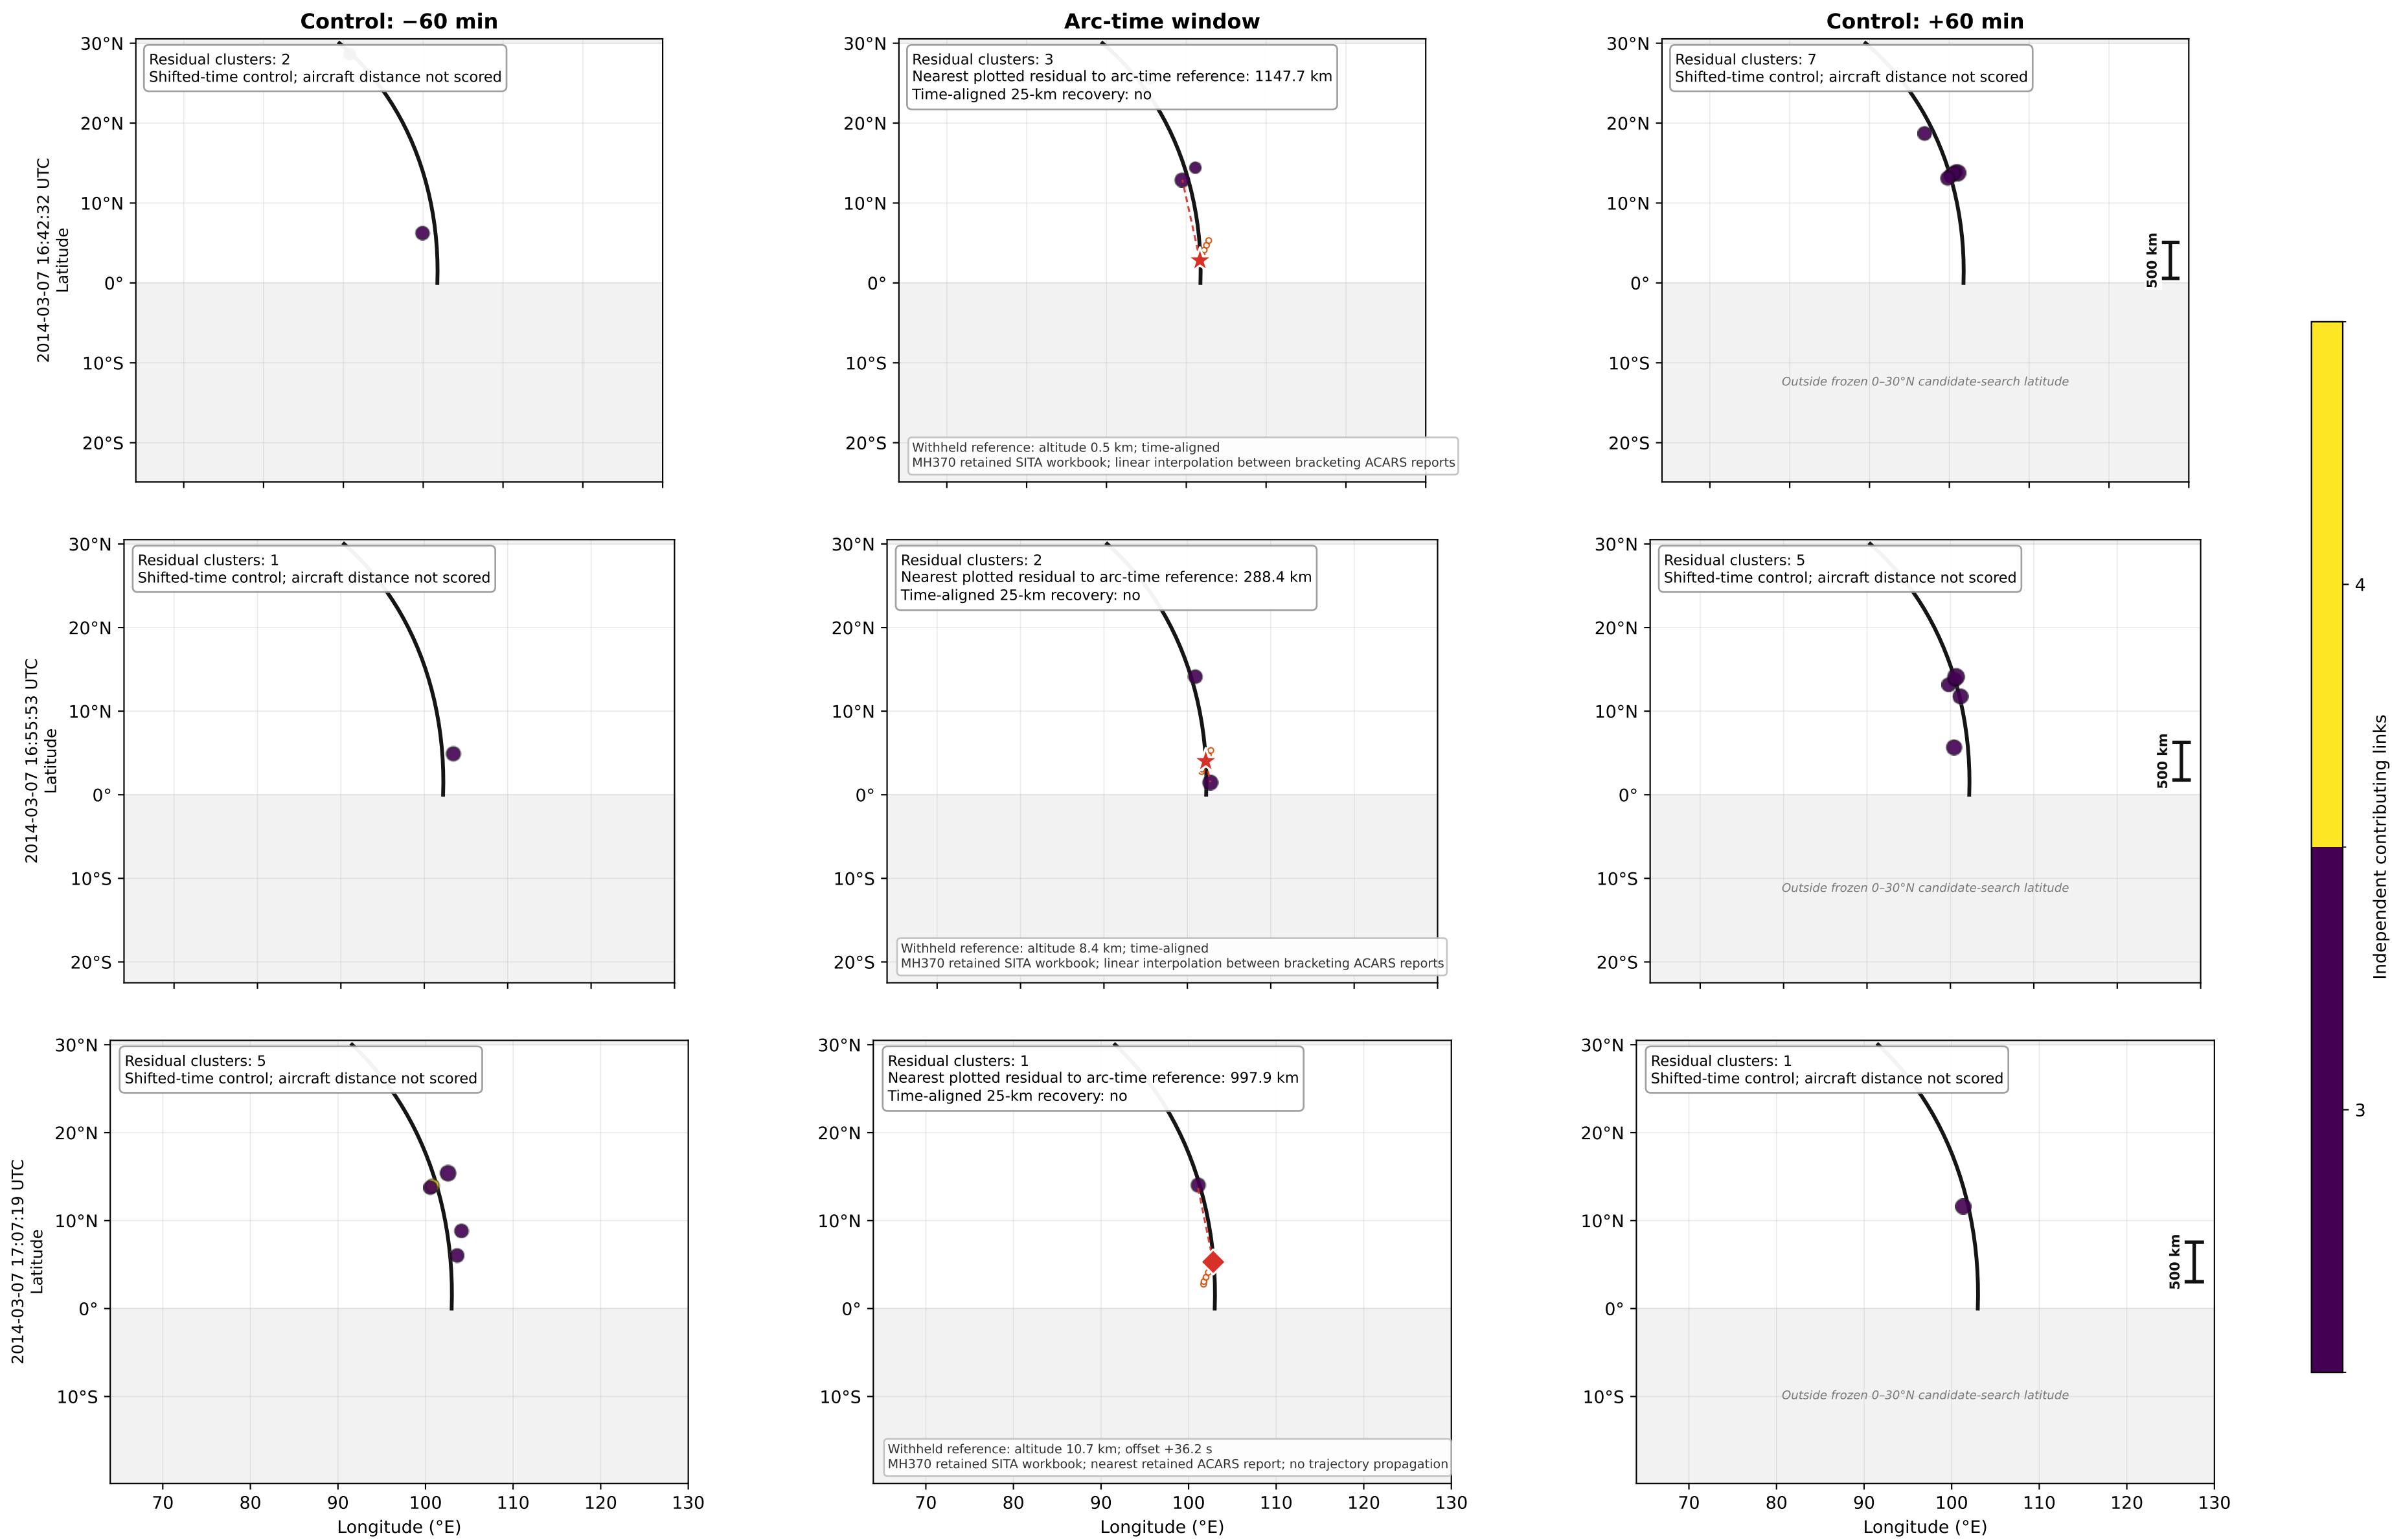