



CSA0501-DATABASE MANAGEMENT SYSTEMS

LAB EXPERIMENTS

DATE: 12/08/2026

EXPERIMENT 20 -- TRIGGER

AIM:

MYSQL STRING FUNCTIONS- REPLACE, REPEAT, REVERSE, RIGHT, LEFT, RPAD, LPAD

PROCEDURE:

1. Open **MySQL Workbench** and select your database.
2. Display the records from the student_cgpa table.
3. Apply REPLACE() to replace characters or words in student names.
4. Apply REPEAT() to repeat student names.
5. Apply REVERSE() to reverse the student names.
6. Apply RIGHT() and LEFT() to extract characters from student names.
7. Apply RPAD() and LPAD() to add characters to the right and left of student names.
8. Apply ASCII(), BIN(), and OCT() functions and display the results.
9. Verify the output successfully.

PROGRAM:

1. CREATE TABLE

```
CREATE TABLE student_cgpa (  
    reg_no VARCHAR(15) PRIMARY KEY,  
    student_name VARCHAR(50) NOT NULL,  
    department VARCHAR(20),  
    no_of_subs_pass INT,  
    no_of_subs_fail INT,  
    cgpa DECIMAL(3,2)  
);
```

Then Insert Values:

```
INSERT INTO student_cgpa  
(reg_no, student_name, department, no_of_subs_pass, no_of_subs_fail, cgpa)  
VALUES
```

```
( '192411123','Deepthi','CSE',22,2,8.71),
('192512121','Varun','IT',27,1,9.23),
('192312117','Aadhya','ECE',25,3,8.97),
('192411227','Dimple','CSE',31,0,9.37),
('192820896','Mohan','EEE',18,9,6.48),
('192411122','Yogitha','CSE',31,1,9.01),
( '192516871','Sadhya','IT',25,5,7.22),
('192111101','Rahul','MECH',30,12,5.14),
('192411010','Alekhy','CSE',35,2,9.01),
('192511135','Rahul','CIVIL',37,0,9.72);
```

```
SELECT * FROM student_cgpa;
```

OUTPUT:

reg_no	student_name	department	no_of_subs_pass	no_of_subs_fail	cgpa
192111101	Rahul	MECH	30	12	5.14
192312117	Aadhya	ECE	25	3	8.97
192411010	Alekhy	CSE	35	2	9.01
192411122	Yogitha	CSE	31	1	9.01
192411123	Deepthi	CSE	22	2	8.71
192411227	Dimple	CSE	31	0	9.37
192511135	Rahul	CIVIL	37	0	9.72
192512121	Varun	IT	27	1	9.23
192516871	Sadhya	IT	25	5	7.22
192820896	Mohan	EEE	18	9	6.48

#	Time	Action	Message	Duration / Fetch
1	22:41:47	CREATE TABLE student_cgpa (reg_no VARCHAR(15) PRIMARY KEY, student_name VARCHAR(50) NO...	0 row(s) affected	0.031 sec
2	22:44:31	INSERT INTO student_cgpa (reg_no, student_name, department, no_of_subs_pass, no_of_subs_fail, cgpa) VA...	10 row(s) affected Records: 10 Duplicates: 0 Warnings: 0	0.000 sec
3	22:46:18	SELECT * FROM student_cgpa LIMIT 0, 1000	10 row(s) returned	0.000 sec / 0.000 sec

2. REPLACE()

```
SELECT student_name,
REPLACE(student_name, 'a', '@') AS replaced_name
FROM student_cgpa;
```

OUTPUT:

student_name	replaced_name
Rahul	R@hul
Aadhya	A@dhy@
Alekhy	Alekhy@
Yogitha	Yogith@
Deepthi	Deepthi
Dimple	Dimple
Rahul	R@hul
Varun	V@run
Sadhya	S@dhy@
Kavya	K@vy@
Mohan	Moh@n

3. REPEAT()

```
SELECT student_name,  
       REPEAT(student_name, 2) AS repeated_name  
FROM student_cgpa;
```

OUTPUT:

Result Grid			Filter Rows:
	student_name	repeated_name	
▶	Rahul	RahulRahul	
	Aadhya	AadhyaAadhya	
	Alekhya	AlekhyaAlekhya	
	Yogitha	YogithaYogitha	
	Deepthi	DeepthiDeepthi	
	Dimple	DimpleDimple	
	Rahul	RahulRahul	
	Varun	VarunVarun	
	Sadhya	SadhyaSadhya	
	Kavya	KavyaKavya	
	Mohan	MohanMohan	

4. REVERSE()

```
SELECT student_name,  
       REVERSE(student_name) AS reversed_name  
FROM student_cgpa;
```


OUTPUT:

Result Grid			Filter Rows:
	student_name	reversed_name	
▶	Rahul	luhaR	
	Aadhya	ayhdaA	
	Alekhya	ayhkelA	
	Yogitha	ahtigoY	
	Deepthi	ihpteeD	
	Dimple	elpmiD	
	Rahul	luhaR	
	Varun	nuraV	
	Sadhya	ayhdaS	
	Kavya	ayvaK	
	Mohan	nahoM	

5. RIGHT()

```
SELECT student_name,  
RIGHT(student_name, 3) AS right_characters  
FROM student_cgpa;
```

OUTPUT:

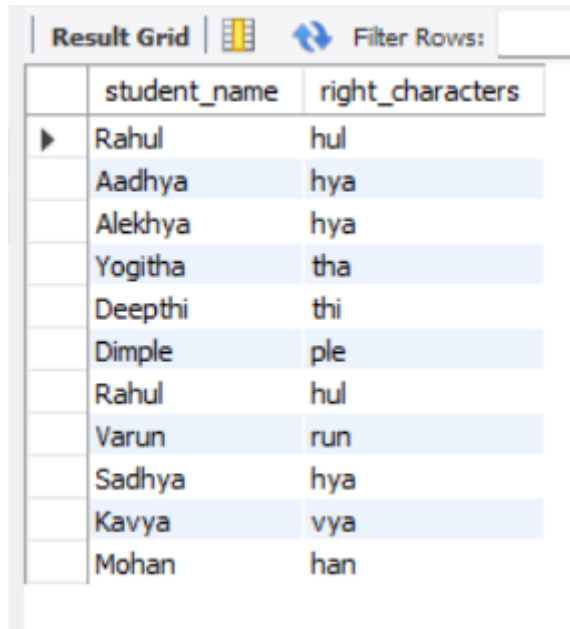


	student_name	right_characters
▶	Rahul	hul
	Aadhya	hya
	Alekhya	hya
	Yogitha	tha
	Deepthi	thi
	Dimple	ple
	Rahul	hul
	Varun	run
	Sadhya	hya
	Kavya	vya
	Mohan	han

6. LEFT()

```
SELECT student_name,  
LEFT(student_name, 3) AS left_characters  
FROM student_cgpa;
```

OUTPUT:

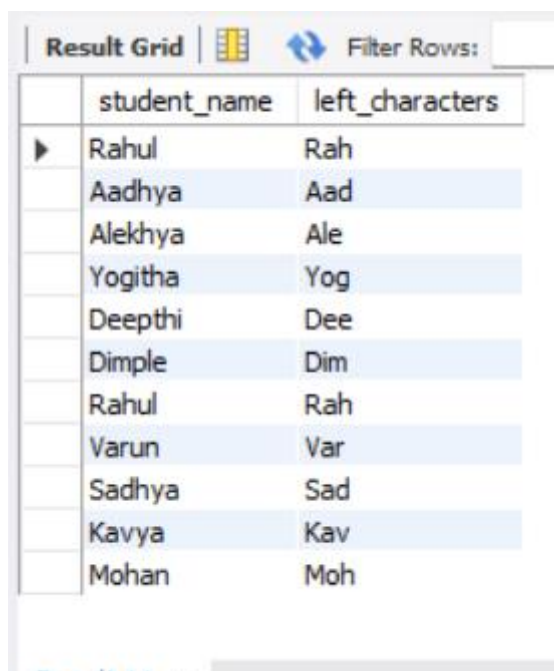


	student_name	left_characters
▶	Rahul	Rah
	Aadhya	Aad
	Alekhya	Ale
	Yogitha	Yog
	Deepthi	Dee
	Dimple	Dim
	Rahul	Rah
	Varun	Var
	Sadhya	Sad
	Kavya	Kav
	Mohan	Moh

7. RPAD()

```
SELECT student_name,  
RPAD(student_name, 15, '*') AS right_padded  
FROM student_cgpa;
```

OUTPUT:

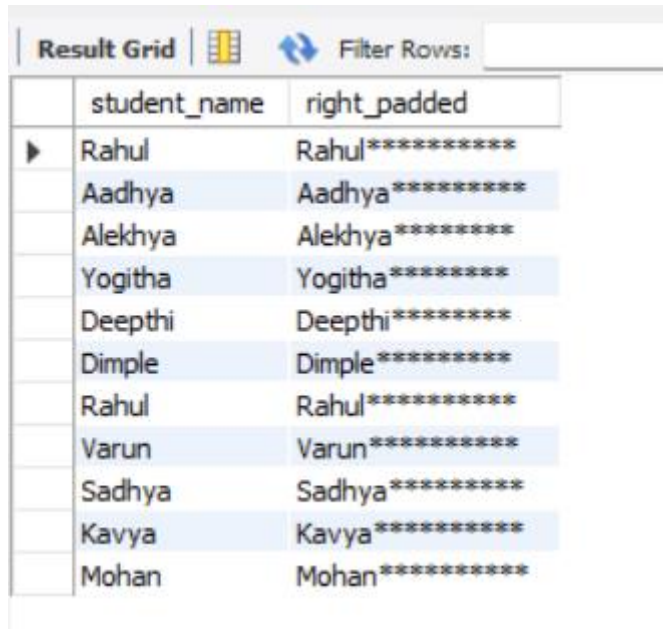


	student_name	right_padded
▶	Rahul	Rahul*****
	Aadhya	Aadhya*****
	Alekhya	Alekhya*****
	Yogitha	Yogitha*****
	Deepthi	Deepthi*****
	Dimple	Dimple*****
	Rahul	Rahul*****
	Varun	Varun*****
	Sadhya	Sadhya*****
	Kavya	Kavya*****
	Mohan	Mohan*****

8. LPAD()

```
SELECT student_name,  
LPAD(student_name, 15, '*') AS left_padded  
FROM student_cgpa;
```

OUTPUT:

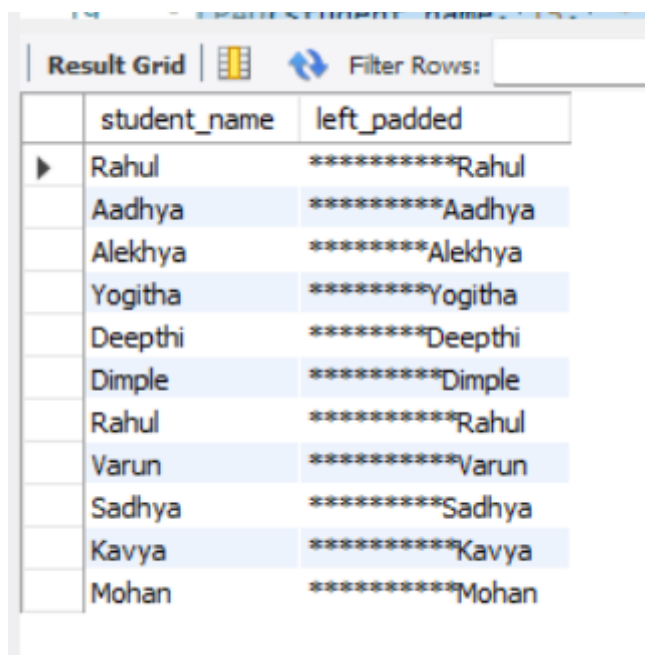


	student_name	left_padded
▶	Rahul	*****Rahul
	Aadhya	*****Aadhya
	Alekhya	*****Alekhya
	Yogitha	*****Yogitha
	Deepthi	*****Deepthi
	Dimple	*****Dimple
	Rahul	*****Rahul
	Varun	*****Varun
	Sadhya	*****Sadhya
	Kavya	*****Kavya
	Mohan	*****Mohan

9. ASCII()

```
SELECT student_name,  
ASCII(student_name) AS ascii_value  
FROM student_cgpa;
```

OUTPUT:

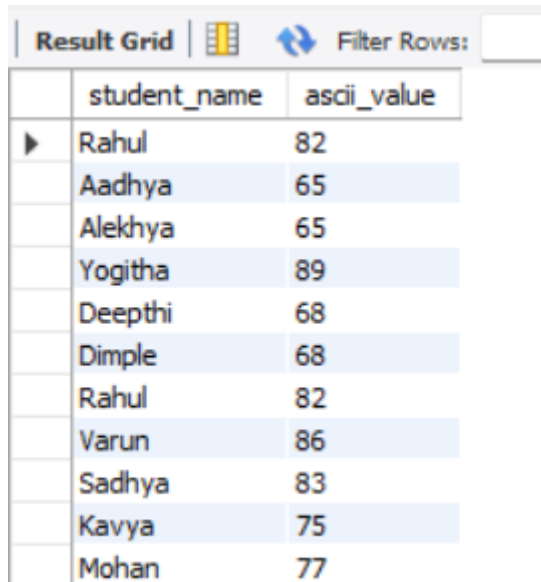


The screenshot shows a 'Result Grid' window with a 'Filter Rows' input field. The grid contains two columns: 'student_name' and 'ascii_value'. The data is as follows:

	student_name	ascii_value
▶	Rahul	82
	Aadhya	65
	Alekhya	65
	Yogitha	89
	Deepthi	68
	Dimple	68
	Rahul	82
	Varun	86
	Sadhya	83
	Kavya	75
	Mohan	77

10. BIN()

```
SELECT no_of_subs_pass,  
BIN(no_of_subs_pass) AS binary_value  
FROM student_cgpa;
```

OUTPUT:

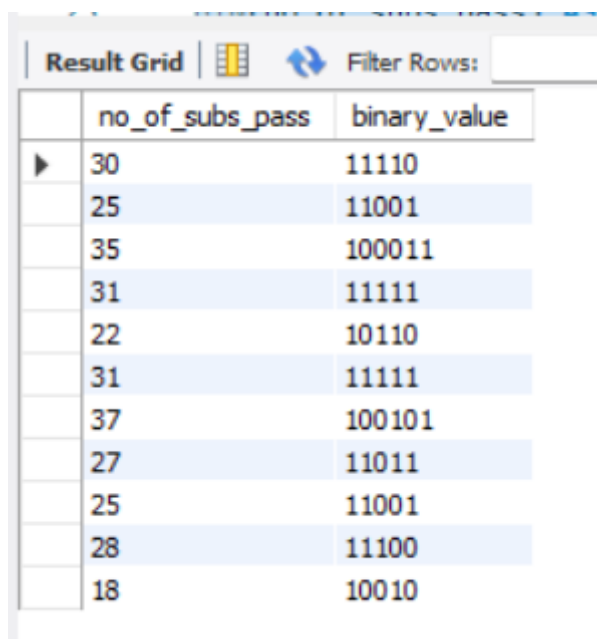


The screenshot shows a 'Result Grid' window with a 'Filter Rows' input field. The grid contains two columns: 'no_of_subs_pass' and 'binary_value'. The data is as follows:

	no_of_subs_pass	binary_value
▶	30	11110
	25	11001
	35	100011
	31	11111
	22	10110
	31	11111
	37	100101
	27	11011
	25	11001
	28	11100
	18	10010

11. OCT()

```
SELECT no_of_subs_pass,  
OCT(no_of_subs_pass) AS octal_value  
FROM student_cgpa;
```

OUTPUT:

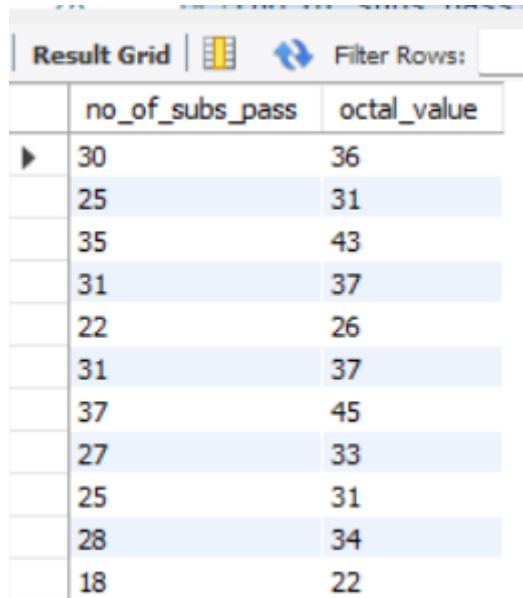

The screenshot shows a MySQL Result Grid window. At the top, there is a 'Result Grid' tab, a grid icon, a refresh icon, and a 'Filter Rows:' input field. Below this is a table with two columns: 'no_of_subs_pass' and 'octal_value'. The table contains 12 rows of data, with alternating rows highlighted in light blue and white. The data is as follows:

no_of_subs_pass	octal_value
30	36
25	31
35	43
31	37
22	26
31	37
37	45
27	33
25	31
28	34
18	22

RESULT: Thus, the MySQL String Functions such as **REPLACE**, **REPEAT**, **REVERSE**, **RIGHT**, **LEFT**, **RPAD**, **LPAD**, **ASCII**, **BIN**, and **OCT** were successfully implemented using the student_cgpa table.