



## Example with default package style settings

The default settings for the styling in the package, that is provided if the properties are left unset by the writer in the function call.

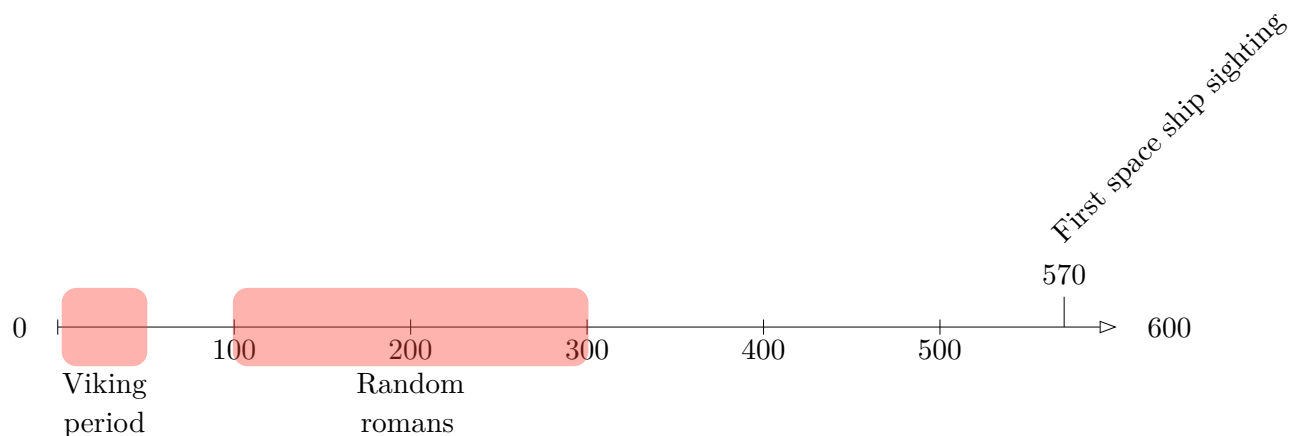


## Example with day and month fields

In previous example it is only the year field that is being set for the events, here the day and month field are also set.

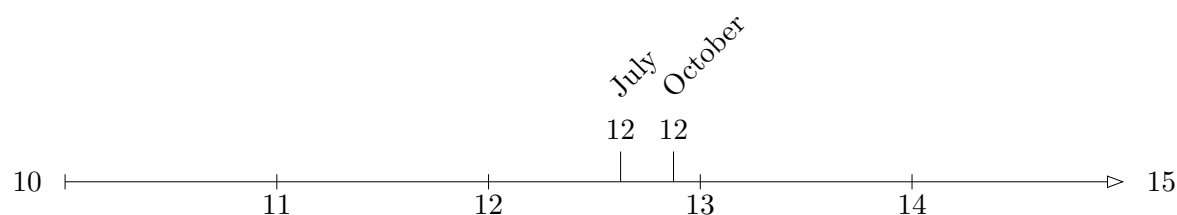

## Example with setting alternative colors for the event spans

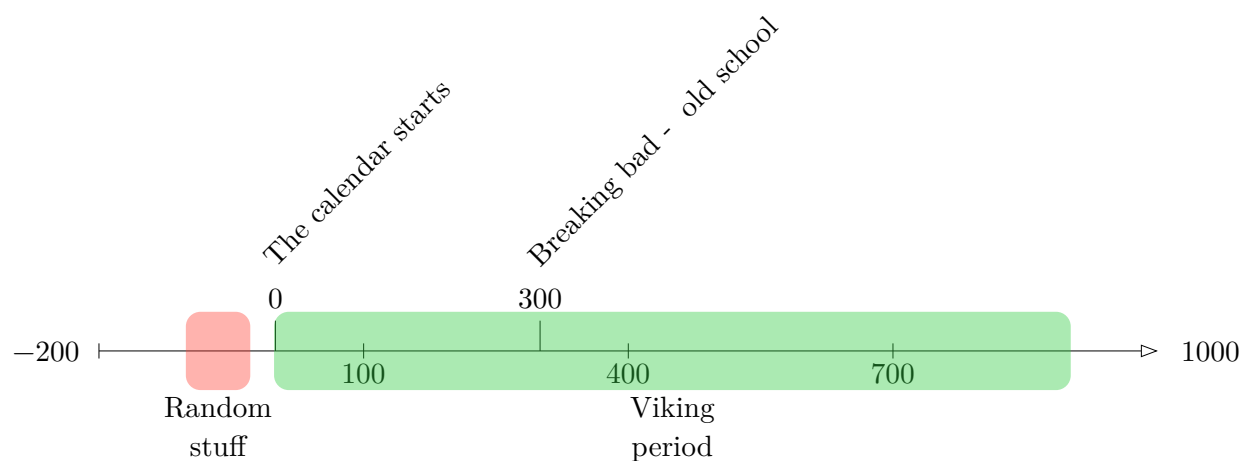

## Examples of alternative spannheights

