

# **GNUe Forms: A Developer's Introduction**

*A Guide to Programming with GNUe Forms*

Version 0.5.0

Written by Jason Cater

Copyright © 2000-2003 Free Software Foundation.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, published by the Free Software Foundation; with the Invariant Sections being *GNU Free Documentation License*, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled *GNU Free Documentation License*.

# Table of Contents

---

<b>Introduction.....</b>	<b>7</b>
Structuring the Database.....	7
Designing the Form.....	7
Planning for Security.....	7
<b>Basic Concepts.....</b>	<b>8</b>
Data Sources.....	8
Blocks and Fields.....	8
Pages and Visual Elements.....	8
Designing for Multiple Architectures.....	8
<b>Creating your First Form.....</b>	<b>9</b>
Preliminary Steps.....	9
Creating the Empty Form.....	10
Creating the Data Sources.....	10
Creating the Logic Structure.....	11
Creating the Layout.....	12
Running the Form.....	14
Where To Go Next.....	14
<b>Understanding Data Sources.....</b>	<b>15</b>
Table-Bound Data Sources.....	15
Static Data Sources.....	15
Defining Conditions.....	15
Linking Data Sources via Master/Detail.....	16
Defining Master/Detail Data Sources.....	16
Master/Detail Considerations.....	16
Advanced Relationships.....	16
Master/Detail/Detail.....	16
Reverse Master/Detail.....	16
<b>Understanding Events and Triggers.....</b>	<b>17</b>
Form's Event Model.....	17
Named Triggers verses Embedded Triggers.....	17
The Trigger Namespace.....	17
Global Names.....	17
Form-level Triggers.....	18
On-Startup.....	18
On-Activate.....	18
On-Exit.....	19
Pre-Commit.....	19
Post-Commit.....	19
Block-level Triggers.....	19
Pre-Query.....	19
Post-Query.....	19

Pre-Change.....	20
Pre-Insert.....	20
Pre-Update.....	20
Pre-Delete.....	20
Pre-Commit.....	21
Post-Commit.....	21
On-NewRecord.....	21
Pre-FocusIn.....	21
Pre-FocusOut.....	22
Post-FocusOut.....	22
Field-level Triggers.....	22
Pre-FocusIn.....	22
Post-FocusIn.....	22
Pre-FocusOut.....	22
Post-FocusOut.....	22
Post-Query.....	22
Pre-Modify.....	22
Pre-Insert.....	22
Pre-Update.....	22
Pre-Delete.....	23
Pre-Commit.....	23
Post-Commit.....	23
Pre-Change.....	23
Post-Change.....	23
Page-level Triggers.....	23
Pre-FocusIn.....	23
Post-FocusIn.....	23
Pre-FocusOut.....	23
Post-FocusOut.....	23
Entry-level Triggers.....	23
Pre-FocusIn.....	23
Post-FocusIn.....	23
Pre-FocusOut.....	23
Post-FocusOut.....	24
Button-Level Triggers.....	24
On-Action.....	24
Pre-FocusIn.....	24
Post-FocusIn.....	24
Pre-FocusOut.....	24
Post-FocusOut.....	24
Post-Change.....	24
<b>Working with Fields.....</b>	<b>25</b>
Typecasting Fields.....	25
Default Values.....	25
Formatting Fields with Masks.....	25
Formatting Numeric Fields.....	25

Formatting Date/Time Fields.....	25
Formatting Text Fields.....	28
Dropdown Fields.....	28
Check boxes.....	28
<b>Creating and Using Libraries.....</b>	<b>29</b>
Overview.....	29
<b>Integration with GNUe Tools.....</b>	<b>30</b>
Running Reports from Forms.....	30
Running Forms from Navigator.....	30
<b>Advanced Topics.....</b>	<b>31</b>
Runtime Parameters.....	31
External Python Modules.....	32
Designing for Multiple Interfaces.....	32
<b>A Brief Introduction to Python.....</b>	<b>34</b>
The Basics.....	34
Variables and Expressions.....	34
Control Structures.....	34
Tuples, Lists, and Dictionaries... oh, my!.....	34
<b>Trigger Recipes.....</b>	<b>35</b>
Timestamping a Record prior to a Commit.....	35
Stamping a Record with User's Login prior to a Commit.....	35
Auto-Populating an Entry from a Sequence.....	36
<b>Appendix A: Trigger Hierarchy.....</b>	<b>37</b>
<b>Appendix B: Form Elements.....</b>	<b>38</b>
Form Tags.....	38
form.....	38
Connection Tags.....	38
connection.....	38
Datasource Tags.....	39
datasource.....	39
add.....	39
and.....	39
between.....	39
cconst.....	40
cfield.....	40
condition.....	40
cparam.....	40
div.....	40
eq.....	40
ge.....	40

gt.....	41
le.....	41
like.....	41
lt.....	41
mul.....	41
ne.....	41
negate.....	41
not.....	42
notbetween.....	42
notlike.....	42
notnull.....	42
null.....	42
or.....	42
staticset.....	42
staticsetfield.....	42
staticsetrow.....	43
sub.....	43
Dialog Tags.....	43
dialog.....	43
Layout Tags.....	43
layout.....	43
box.....	44
button.....	44
entry.....	44
image.....	45
label.....	45
page.....	45
scrollbar.....	46
Logic Tags.....	46
logic.....	46
block.....	46
field.....	47
Menu Tags.....	48
menu.....	48
Options Tags.....	49
options.....	49
author.....	49
description.....	49
name.....	49
option.....	49
tip.....	50
version.....	50
Parameter Tags.....	50
parameter.....	50
Trigger Tags.....	50
trigger.....	50
Import Tags.....	51

import-block.....	51
import-button.....	51
import-datasource.....	52
import-dialog.....	52
import-field.....	53
import-layout.....	54
import-logic.....	54
import-page.....	54
import-trigger.....	55
<b>Appendix C: Form Objects.....</b>	<b>56</b>
Form.....	56
getParameter().....	56
setParameter().....	56
getFocus().....	56
setFocus().....	57
setStatusText().....	57
showMessage().....	57
commit().....	58
close().....	58
getAuthenticatedUser().....	58
Datasource.....	59
createResultSet().....	59
simpleQuery().....	59
delete().....	59
Block.....	59
clear().....	59
gotoRecord().....	60
newRecord().....	60
nextRecord().....	60
prevRecord().....	61
deleteRecord().....	61
parent.....	61
Entry.....	62
allowedValues().....	62
autofillBySequence().....	62
isEmpty().....	62
set().....	63
get().....	63
resetForeignKey().....	63
parent.....	63
readonly.....	64
<b>Appendix D: Data Objects.....</b>	<b>65</b>
Result Set.....	65
xxxx().....	65
Record Set.....	65

xxxx().....	65
<b>Appendix E: Sample Librarian Schema.....</b>	<b>66</b>
<b>Appendix F: Glossary.....</b>	<b>67</b>
<b>Appendix G: GNU Free Documentation License.....</b>	<b>68</b>



# Introduction

---

This section briefly introduces the process of designing an application using GNUe Forms.

BLAH, BLAH, BLAH...

Before designing an application for Forms, the developer should be somewhat familiar with a few key concepts:

- *Database Design* - This guide does not delve into database design. It is assumed the developer can either create his own tables, or has an existing set of tables to work with.
- *Python Scripting* - GNUe uses Python for scripting/event support. Any level of serious applications programming will require some level of Python. There is a short section entitled "A Brief Introduction to Python" in this guide that can serve as a starting point.
- *XML* - GNUe extensively uses XML for its internal storage format. While it is possible to create GNUe applications via Designer without interacting with the XML formats, a good, solid understanding of XML basics would definitely be useful.

## Structuring the Database

TODO

## Designing the Form

TODO

## Planning for Security

TODO

# Basic Concepts

---

TODO

## Datasources

Since GNUe Forms was designed from the ground up to manipulate database data, it must have some way to tie the graphical elements to database tables. This is where a `datasource` comes into play.

A `datasource` provides a link to a database table or some similar data store.

[TODO: EXPAND]

`Datasources` are portable from one GNUe tool to another. A `datasource` that is usable in forms should also be usable in a report.

## Blocks and Fields

A `datasource` provides a link to a table, but Forms needs more information than a simple reference to meaningfully interface with an end user. A `block` is the first step to making `datasources` suitable for such user interaction. At its most basic level, a `block` contains instructions on how Forms should interact with a `datasource`.

Any `datasources` that are to interact with a user must have a single corresponding `block`. `Datasources` that are only used internally and not for displaying data will not normally have an associated `block`, although the developer may choose to do so.

A field is ....

## Pages and Visual Elements

TODO

Layout Management

TODO

## Triggers

TODO

## Designing for Multiple Interfaces

TODO

## Designing for Multiple Databases

TODO

# Creating your First Form

---

In this chapter, we will create our first full-featured form -- a postal code lookup table.

[TODO: EXPAND]

[TODO: REPLACE THE POSTAL CODE EXAMPLE WITH LIBRARIAN]

## Preliminary Steps

[TODO: INTRO]

First, we need to create a test table. Using your database of choice, create a table named `zipcodes`, with three appropriately sized fields, `zipcode`, `city`, and `state`. In PostgreSQL, SAP-DB, and others, the following statement will work:

```
create table zipcodes (
    zipcode varchar(5),
    city varchar(30),
    state varchar(2) );
```

For other databases, create a similarly structured table.

Next, if you have not done so yet, setup your `connections.conf` file to point to your database. Our examples will use a connection called `tutorial`. An example entry:

```
[tutorial]
comment = Tutorial Database
provider = psycopg
host = localhost
dbname = mydb
```

Of course, your entry will probably look different. This example is using the PostgreSQL `psycopg` driver, connecting to a database named `mydb` running on the local machine. See the *Forms Installation Guide* for information on the location and syntax of this file.

If you already have a connection for the database you will be using, simply add an `alias = tutorial` line to the appropriate section. Example:

```
[dev]
comment = Foobar Development
provider = psycopg
host = dbserver
dbname = mydb
alias = tutorial
```

We are going to create a form that looks something like:

```

01234567890123456789012345678901234567890
|-----+-----+-----+-----|
    Zip Code:  [____]
    City Name: [_____]
    State:      [__]
  
```

The ruler is simply for our layout reference. We will come back to it later.

[\[TODO: EXPAND\]](#)

For the sake of completeness, each step involved in creating the form will be repeated, once using GNUe Designer, and once using hand-edited XML. GNUe Designer also has several feature-complete "Builder wizards" that can automatically build a form identical to the one we are describing. However, the point of this section is to learn the basics of form creation, and such a wizard isn't going to help accomplish that goal. [\[TODO: POINT TO A GUIDE ON WIZARDS?\]](#)

## Creating the Empty Form

Forms are stored natively in an XML format. [\[TODO: EXPAND\]](#)

*Via GNUe Designer:*

By default, GNUe Designer will start up with an empty form. You may also create a new form by selecting `File | New | Form`.

[\[TODO: CHANGE THE TITLE OF THE FORM\]](#)

*Via a Text Editor:*

We need to create an XML shell for our form. Using your favorite text editor, create a file called `firstform.gfd` with a basic XML shell:

```

<?xml version="1.0"?>
<form title="My First Form">
</form>
  
```

The first line identifies this as an XML file conforming to XML version 1.0. This is needed in order to conform to XML standards.

The `<form>` tag denotes the start of our form definition. Our entire form definition will end up between the `<form ...>` and `</form>` lines.

## Creating the Datasources

Our sample form will use a single table - `zipcodes`. To access this table in Forms, we need to associate it with a datasource. We will call this datasource `MyDS`.

*Via GNUe Designer:*

From the menu, select `Edit | Insert | Datasource...` to run the datasource wizard. The first step of the datasource wizard asks for your connection. Select tutorial.

This is the connection we setup in the first part of this section. Click `Next . . .` You may be asked to log in. Provide a valid database username and password.

*Via a Text Editor:*

After the `<form . . .>` tag, add a `<datasource>` tag. It will need three attributes: `name`, `connection`, and `table`.

- `name`: All referencable objects in GNUe need a unique name. We will name our `datasource` `MyDS`.
- `connection`: This is the name of the connection we set up in the first part of this section. If you used our example entry, then this is called `tutorial`.
- `table`: This should be the name of the table we will be referencing. Once again, if you used our example table create script, this will be `zipcodes`.

We can now add our `datasource` tag:

```
<?xml version="1.0"?>
<form title="My First Form">

    <!-- A datasource for the tutorial.zipcodes table -->
    <datasource name="MyDS" connection="tutorial"
               table="zipcodes"/>

</form>
```

## Creating the Logic Structure

[TODO: EXPLAIN THE LOGIC SECTION AND TAG]

Blocks are the display equivalent of datasources. Since we are working with a single `datasource`, we will correspondingly have a single block. Since this is tied to the `zipcodes` table, we will call this block `ZipBlock`.

*Via GNUe Designer:*

An empty form created by GNUe Designer automatically has a single, empty page. If we were to add more pages, this could be accomplished by selecting `Edit | Insert | Page`. However, this example uses a single page, so we do not need to do anything for this step.

*Via a Text Editor:*

After our recently added `<datasource>` tag, we need a `<logic>` tag. Inside this tag, we will create a `<block>` tag.

*Block-specific attributes:*

- `name`: Set this to a unique name that we will later refer back to.
- `datasource`: The name of the `datasource` that this block is tied back to. If no `datasource` is specified, then the block will be considered an *unbound* block.

*Field-specific attributes:*

- `name`: Set this to a unique name that we will later refer back to.
- `field`: Set this to the name of the corresponding field in the database.

- **case:** This can be set to any one of mixed, upper, or lower to force case convention. For example, if set to `upper`, then all lower case input characters will be converted to uppercase. Note that this only applies to data input from the user. Setting this field will not convert existing data that is queried. The default value is `mixed`.

```
<?xml version="1.0"?>
<form title="My First Form">

  <!-- A datasource for the tutorial.zipcodes table -->
  <datasource name="MyDS" connection="tutorial"
    table="zipcodes"/>

  <!-- Start of our logic code -->
  <logic>
    <!-- The base block for our zipcodes table -->
    <block name="ZipBlock" datasource="MyDS">
      <field name="zipentry" field="zipcode"
        max_length="5" />
      <field name="cityentry" field="city"
        max_length="30" />
      <field name="statefield" field="state"
        max_length="2" case="upper" />
    </block>
  </logic>
</form>
```

.....

## Creating the Layout

Forms contains its layout logic in units called *pages*. Only a single page is normally seen any given time by the end user. Our simple form will need one page. We will call it `MyPage`.

Given the layout grid we created earlier, we see that our form will be 40 characters wide and 7 lines high. For simplicity's sake, we are using a simple character based layout, identified as `GNUe:Layout:Char`. In the future, forms will support other layout styles.


Again, looking back at our earlier layout grid, we have three labels and three entries. Each label starts in column two and each entry starts in column 13. Each pair of label/entry skips a row, with the first pair being on row 1.

This gives us enough information to create our display layout.

*Via GNUe Designer:*

An empty form created by GNUe Designer automatically has a single, empty page. If we were to add more pages, this could be accomplished by selecting `Edit | Insert | Page`. However, this example uses a single page, so we do not need to do anything for this step.

[TODO]

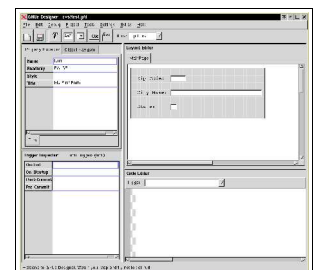

*Via a Text Editor:*

After our recently added `<logic>` tag, we need a `<layout>` tag. This tag will contain our pages. This layout tag needs a special attribute `-- xmlns:c="GNUE:Layout:Char"`. Without going into too much detail for our starter form, suffice it to say this attribute establishes our layout manager. We will be using character-cell based (fixed-positioning) layout. Any positioning-specific tags (`x`, `y`, `width`, `height`) will be prefixed with a `c:` to denote that they are for the character-cell layout manager. The choice of `c` as the prefix is completely arbitrary -- `cr`, `ch`, `Char`, or even `foobar` could be used -- as the important part is the identifier `GNUE:Layout:Char`.

This new `<layout>` tag will contain our form's pages. This example uses a single page. Correspondingly, we will need a single `<page>` tag. It will have a single attribute, `name`, that will be the name of our page object.

Add a `<label>` tag for each label with the three attributes `c:x`, `c:y`, and `text`. Also add an `<entry>` tag for each entry. An `<entry>` tag will have the `field`, `block`, `c:x`, `c:y`, and `c:width` attributes.

#### *Label and Entry attributes:*

- `c:x`, `c:y`: These are coordinates relative to the current page.

#### *Label-specific attributes:*

- `text`: This is the text to display as a label.

#### *Entry-specific attributes:*

- `block`: Set this to the name of the corresponding block.
- `field`: Set this to the name of the corresponding field in the block. This should be the name associated with the `<field>` tag, not the field name as stored in the database.
- `c:width`: This sets the displayed width of the entry widget. This does not serve the same function as the field's `max_width` attribute. If a field's value is larger than the entry's width, then only part of the value will be visible.

```
<?xml version="1.0"?>
<form title="My First Form">

  <!-- A datasource for the tutorial.zipcodes table -->
  <datasource name="MyDS" connection="tutorial"
             table="zipcodes"/>

  <!-- Start of our logic code -->
  <logic>
    <!-- The base block for our zipcodes table -->
    <block name="ZipBlock" datasource="MyDS">
      <field name="zipentry" field="zipcode"
            max_length="5" />
      <field name="cityentry" field="city"
            max_length="30" />
      <field name="statefield" field="state"
            max_length="2" case="upper" />
    </block>
  </logic>

  <!-- Start of our layout code -->
  <layout xmlns:c="GNUE:Layout:Char"
         c:width="40" c:height="7">
    <page name="MainPage">
      <label c:x="2" c:y="1" text="Zip Code:"/>
```

```

<entry c:x="13" c:y="1" c:width="5"
      block="ZipBlock" field="zipcode"/>
<label c:x="2" c:y="3" text="City Name:"/>
<entry c:x="13" c:y="3" c:width="30"
      block="ZipBlock" field="city"/>
<label c:x="2" c:y="5" text="State:"/>
<entry c:x="13" c:y="5" c:width="2"
      block="ZipBlock" field="state"/>



</page>
</layout>
</form>

```

.....

## Running the Form

TODO

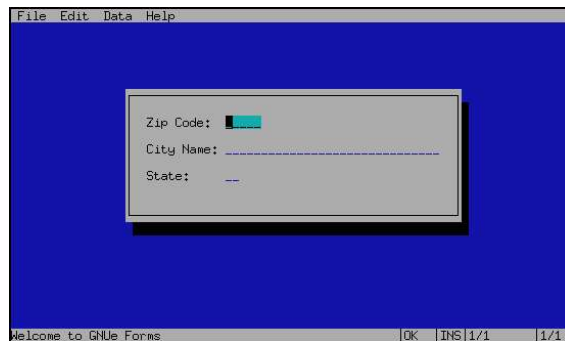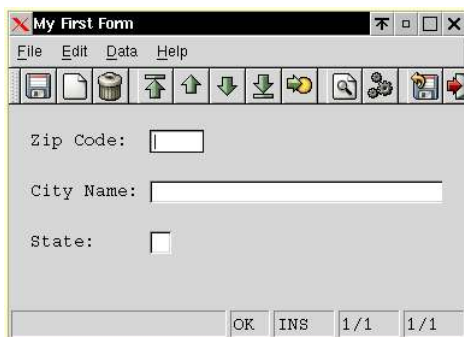

[TODO: INSERT PIC OF WIN32 FORM]

[TODO: INSERT PIC OF HTML FORM]

## Where To Go Next

[TODO: WELL, HOME \*IS\* WHERE THE HEART'S AT]



# Understanding Datasources

---

A Datasource links data to our form. Usually, a datasource points to a table if using a relational database, or a data object if using an object database. A form can have several datasources if pulling data from multiple locations, or no datasources at all if the form does not reference outside data.

If a form does not have a datasource, a *virtual datasource* is created. The *commit*, *rollback*, and *query* functions do not serve a purpose against virtual datasources. This is particularly useful for *action forms* that simply cause actions to occur, but do not directly manipulate data.

Datasources can be linked to each other in a *master/detail* fashion via a foreign key. In essence, each time the *master* datasource changes, the *detail* datasource is automatically requered to bring up records related to the *master*. See the section on master/detail relationships for more information.

## Table-Bound Datasources

The most common datasource is one that is bound to an individual table or view.

## Static Datasources

TODO

```
<datasource name="AvailDS" type="static">
  <staticset fields="id,descr">
    <staticsetrow>
      <staticsetfield name="id" value="A"/>
      <staticsetfield name="descr"
        value="Available"/>
    </staticsetrow>
    <staticsetrow>
      <staticsetfield name="id" value="N"/>
      <staticsetfield name="descr"
        value="Not Available"/>
    </staticsetrow>
    <staticsetrow>
      <staticsetfield name="id" value="B"/>
      <staticsetfield name="descr"
        value="Backordered"/>
    </staticsetrow>
  </staticset>
</datasource>
```

TODO

## Defining Conditions

Form's datasources support conditions. Conditions place restrictions on the records returned by a datasource. For those familiar with SQL, a condition translates directly into a *WHERE* clause.

```

<datasource connection="test" table="reps">
  <condition>
    <or>
      <eq>
        <cfield name="active"/>
        <cconst value="Y"/>
      </eq>
      <gt>
        <cfield name="sales_ytd"/>
        <cconst value="0"/>
      </gt>
    </or>
  </condition>
</datasource>

```

In this example, we are basically only allowing records from the `reps` table where the representative is either active (`active = 'Y'`) or had sales this year.

## Linking Datasources via Master/Detail

TODO

### Defining Master/Detail Datasources

TODO

### Master/Detail Considerations

TODO

## Advanced Relationships

TODO

### Master/Detail/Detail

TODO

### Reverse Master/Detail

TODO

# Understanding Events and Triggers

---

TODO

## Form's Event Model

TODO

## Named Triggers verses Embedded Triggers

TODO

## The Trigger Namespace

### Global Names

GNUE Forms supports the Python `global` construct, which can be used by the developer to define global variables and methods, or import modules globally. For example, assume the following code chunk is a form's On-Startup trigger:

```
##
## On-Startup [Form]
##

# We want to give our other triggers
# access to these three objects.
global math, myfunc, DEBUG

# We will use the math module a lot
# in our other triggers
import math

# A handy function
def myfunc(n1,n2):
    return n1+n2

# Are we in DEBUG mode?
# Enquiring triggers want to know...
DEBUG = 1

# This is an example of a non-global name.
# Only our On-Startup trigger sees this.
test = 2
```

Because Forms executes On-Startup before any other triggers, all other triggers within this form can now see `math`, `myfunc`, and `DEBUG`.

For example, an On-Change trigger could now do:

```
##
## On-Change (MyEntry)
##
if DEBUG:
    print "Starting value: %s" % self.get()
```

```

computed = myfunc(self.get(), 12)
AnotherEntry.set(math.floor(computed))

```

Note that if another trigger wanted to globally change the values of `math`, `myfunc`, or `DEBUG`, they would also have to use the `global` construct. The following section of code would only change `DEBUG` for this single execution of `On-Change`:

```

##
## On-Change (MyEntry)
##
DEBUG = 0

# ... other code ...

```

The `other code` in this example would see `DEBUG` as being 0, but once the trigger was completed, `DEBUG` would return to being 1 for all future triggers. Now, suppose the trigger had instead looked like:

```

##
## On-Change (MyEntry)
##
global DEBUG
DEBUG = 0

# ... other code ...

```

Now, this trigger and all future triggers will see `DEBUG` as 0.

## Form-level Triggers

A Form-level trigger is defined as an object that is activated at the form-level and is defined as a child of the form object.

The following form level triggers are defined.

### On-Startup

The `On-Startup` trigger is executed once during the lifetime of a Form's instance. This happens after all the objects have been initialized and initially populated.

Suggested uses for `On-Startup`:

- Setting initial flags.
- Marking variables or common functions/modules as:

### On-Activate

The `On-Activate` trigger is executed each time a form or dialog is activated. For a normal form, the difference between `On-Activate` and `On-Startup` is very nominal. However, for dialog-style forms, the difference is more pronounced. `On-Startup` will only be executed once in the form's life, whereas `On-Activate` is called every time the dialog is instantiated and displayed.

For non-dialog forms, we recommend you use `On-Startup`.

Suggested uses for `On-Activate`:

- Useful for adjusting dialogs based upon parameters passed in by the calling form.

## On-Exit

The `On-Exit` trigger is executed when either the user or a trigger requests that a form closes.

Suggested uses for `On-Exit`:

- Wishing the user best of luck?

## Pre-Commit

The `Pre-Commit` trigger is executed before a form-level commit occurs.

Suggested uses for `Pre-Commit`:

- Perform form-level validation of data (??)
- [ [TODO: ???](#) ]

## Post-Commit

The `Post-Commit` trigger is executed after a form-level commit occurs.

Suggested uses for `Post-Commit`:

- [ [TODO: ???](#) ]

## Block-level Triggers

All block-level triggers are executed on a per-record basis. That is, a trigger would get executed once for every applicable record, not just once for the entire block.

### Pre-Query

The `Pre-Query` trigger is executed before a query against the database occurs. This trigger is unique from all other triggers in that it is called while the form is in *query* mode -- ie., the same mode as selecting `Data | Enter Query` from the menu. This means that any field changes made by this trigger don't actually modify a record, but instead are used as query conditionals.

Suggested uses for a block-level `Pre-Query` trigger:

- Adding custom conditions to a query that are more complex than can be represented by a field's `queryDefault` property.

### Post-Query

The `Post-Query` trigger is executed after a query occurs on a record. A block-level `Post-Query` is executed once for each record that was loaded from a database. `Post-Query` is the counter-part to `On-NewRecord` in that one or the other should be executed for every displayed record.

*NOTE:* `Post-Query` is only fired as a record is loaded from the database. This implies that, with GNUe's caching system, if only 10 records are displayed on screen at a time out

of a table of 100 records, then only the first 10 or so records will have `Post-Query` fired. It is guaranteed, however, that by the time a the user can see a loaded record or before another trigger can be fired against a loaded record, `Post-Query` has already been called. It is possible to get around this by, at some point [\[TODO: WHERE?\]](#), calling `block.lastRecord()` and (optionally, if needed) `block.firstRecord()`.

Suggested uses for a block-level `Post-Query` trigger:

- Populating non-database (automaticall calculated) fields.
- Resetting user-defined flags

## Pre-Change

The `Pre-Change` trigger is executed before a record is initially modified -- i.e., when the first field of a record is set to a new value. At the time the `Pre-Change` record is called, the modified field will still contain the old value.

Suggested uses for a block-level `Pre-Change` trigger:

- [\[TODO: A GOOD EXAMPLE?\]](#)

## Pre-Insert

The `Pre-Insert` trigger is executed before a commit occurs on a record that is pending an insertion. A block-level `Pre-Insert` is executed once for each inserted record and is fired prior to the `Pre-Commit` trigger.

Suggested uses for a block-level `Pre-Insert` trigger:

- Stamping records with a creation date or created-by value
- Setting a primary key's value
- Setting other hidden, but pertinent, fields with default or pre-calculated values
- Storing historical information in transaction tables

## Pre-Update

The `Pre-Update` trigger is executed before a commit occurs on a record that is pending an update. A new or deleted record is not considered "updated" for the purpose of this trigger. A block-level `Pre-Commit` is executed once for each changed record and is fired prior to the `Pre-Commit` trigger.

Suggested uses for a block-level `Pre-Update` trigger:

- Stamping records with a modification date or modified-by value
- Setting hidden, but pertinent, fields with default or pre-calculated values
- Storing historical information in transaction tables

## Pre-Delete

The `Pre-Delete` trigger is executed before a commit occurs on a record that is pending a deletion. A block-level `Pre-Commit` is executed once for each record that has pending deletion. A block-level `Pre-Delete` fires prior to a `Pre-Commit` trigger.

Suggested uses for a block-level `Pre-Delete` trigger:

- [\[TODO: A GOOD EXAMPLE?\]](#)

- Storing historical information in transaction tables

## Pre-Commit

The `Pre-Commit` trigger is executed before a commit occurs on a record. A block-level `Pre-Commit` is executed once for each record that has pending changes, including new and deleted records. A block-level `Pre-Commit` fires prior to a Field's `Pre-Commit` trigger, but after the `Pre-Insert`, `Pre-Update`, and `Pre-Delete` triggers.

Suggested uses for a block-level `Pre-Commit` trigger:

- Stamping modified records with a date or modified-by value
- Setting hidden, but pertinent, fields with default or pre-calculated values
- Storing historical information in transaction tables

## Post-Commit

The `Post-Commit` trigger is executed after a commit occurs on a record. A block-level `Post-Commit` is executed once for each record that had pending changes, including new and deleted records. A block-level `Post-Commit` fires after a Field's `Post-Commit` trigger.

If a `Post-Commit` trigger modifies the values in a record, then the record will be, once again, pending changes. Typically a `Post-Commit` trigger would not modify any values and you could create an unsavable form.

Suggested uses for a block-level `Post-Commit` trigger:

- Resetting user-defined flags or non-database fields.

## On-NewRecord

The `On-NewRecord` trigger is executed when a record is initially created. This trigger is executed once for each new record at the time of creation in the form.

Suggested uses for a block-level `On-NewRecord` trigger:

- Setting default values

## Pre-FocusIn

The `Pre-FocusIn` trigger is executed as a new record is focused in a block. It is recommended that unless you have a specified understanding of the intention of forms, use `Post-FocusIn` instead of `Pre-FocusIn` as the latter trigger's behavior may change at some point to better reflect record focus.

Suggested uses for a block-level `Pre-FocusIn` trigger:

- [ [TODO: ???](#) ]

## Post-FocusIn

The `Post-FocusIn` trigger is executed as a new record is focused in a block. This may be triggered by a user navigating to a different record or by creating a new record. The actual record change has occurred when this trigger is fired.

Suggested uses for a block-level `Post-FocusIn` trigger:

- [ [TODO: ???](#) ]

**Pre-FocusOut**

The `Pre-FocusOut` trigger is executed as a different record is about to be focused in a block. This may be triggered by a user navigating to a different record or by creating a new record. The actual record change has not occurred when this trigger is fired.

Suggested uses for a block-level `Pre-FocusOut` trigger:

- [ [TODO: ???](#) ]

**Post-FocusOut**

The `Post-FocusOut` trigger is executed as a new record is focused in a block. It is recommended that unless you have a specified understanding of the internals of forms, use `Pre-FocusOut` instead of `Post-FocusOut` as the latter trigger's behavior may change at some point to better reflect record focus.

Suggested uses for a block-level `Post-FocusOut` trigger:

- [ [TODO: ???](#) ]

**Field-level Triggers**

TODO

**Pre-FocusIn**

TODO

**Post-FocusIn**

TODO

**Pre-FocusOut**

TODOglimpse

**Post-FocusOut**

TODO

**Post-Query**

TODO

**Pre-Modify**

TODO

**Pre-Insert**

TODO

**Pre-Update**

TODO



**Pre-Delete**

TODO

**Pre-Commit**

TODO

**Post-Commit**

TODO

**Pre-Change**

TODO

**Post-Change**

TODO

**Page-level Triggers**

TODO

**Pre-FocusIn**

TODO

**Post-FocusIn**

TODO

**Pre-FocusOut**

TODO

**Post-FocusOut**

TODO

**Entry-level Triggers**

TODO

**Pre-FocusIn**

TODO

**Post-FocusIn**

TODO

**Pre-FocusOut**

TODO

## **Post-FocusOut**

TODO

## **Button-Level Triggers**

Buttons have a special relationship with triggers.

### **On-Action**

This trigger is run when the user activates (e.g., clicks) a button.

Suggested uses for an `On-Action` trigger:

- Perform a calculation
- Navigate to another section of the form
- Open another form

### **Pre-FocusIn**

TODO

### **Post-FocusIn**

TODO

### **Pre-FocusOut**

TODO

### **Post-FocusOut**

TODO

### **Post-Change**

TODO

# Working with Fields

---

TODO

## Typecasting Fields

TODO

## Default Values

TODO

## Formatting Fields with Masks

[ NOTE: FORMAT MASKS ARE NOT YET COMPLETELY FUNCTIONAL! THIS SECTION REFLECTS THE INTENDED SUPPORT ]

Forms supports two types of format masks: display masks and input masks. A display mask defines how the field data will be formatted for display. An input mask defines how the user will edit a field's value. Input mask elements are a subset of display mask elements -- in other words, all input masks can also be used as display masks, but not all display masks can be used as input masks.

Note: if first character of a format is '&', then rest of date defines a preset format (settable by developer? in gnue.conf or geas?).

e.g., in gnue.conf:

```
FormatDate_longdate = "A, b d, Y"
```

Then, in the client, the format string could be: `&longdate`

This allows reuse of common format masks throughout the application.

## Formatting Numeric Fields

TODO

## Formatting Date/Time Fields

Element	Input?	Description
\	Yes	Next character is a literal
a	Yes	Abbreviated weekday name (Sun..Sat)
A		Full weekday name (Sunday..Saturday)

b	Yes	Abbreviated month name (Jan..Dec)
B		Full month name (January..December)
c		Century (20,21)
d	Yes	Day of month, left padded with zeros (01..31)
D		Day of month, non-padded (1..31)
h	Yes	Hour (24-hour format), left padded with zeros (00..23)
H		Hour (24-hour format), non-padded (0..23)
g	Yes	Hour (12-hour format), left padded with zeros (01..12)
G		Hour (12-hour format), non-padded (1..12)
j	Yes	Day of year, left padded with zeros (001..366)
J		Day of year, non-padded (1..366)
m	Yes	Month, left padded with zeros (01..12)
M		Month, non-padded (1..12)
i	Yes	Minute, left padded with zeros (01..59)
I		Minute, non-padded (1..59)
p	Yes	am/pm designation (lowercase)

P		AM/PM designation (uppercase)
s	Yes	Seconds, left padded with zeros (00..59)
S		Seconds, non-padded (0..59)
u	Yes	Week number of year with Sunday as first day of week, left padded with zeros (01..52)
U		Week number of year with Sunday as first day of week, non-padded (1..52)
v	Yes	Week number of year with Monday as first day of week, left padded with zeros (01..52)
V		Week number of year with Monday as first day of week, non-padded (1..52)
w	Yes	Day of week with Sunday as first day of week (0=Sunday) (0..6)
W	Yes	Day of week with Monday as first day of week (0=Monday) (0..6)
y	Yes	Year (1900..2100)

Y	Yes	Year, using 2-digit notation (00..99) When used as an input mask, forms tries to reasonably guess the century. (TODO: Elaborate)
---	-----	--

Predefined literals: "/-.:, "

Examples: 01/01/2001: "m/d/y" Friday, June 1, 2001: "A, b d, Y"

### Formatting Text Fields

TODO

### Dropdown Fields

TODO

### Check boxes

TODO

# Creating and Using Libraries

---

## Overview

TODO

## **Integration with GNUe Tools**

---

### **Running Reports from Forms**

TODO

### **Running Forms from Navigator**

TODO



## Advanced Topics

---

This section describes advanced forms concepts. [\[TODO: EXPAND\]](#)

### Runtime Parameters

Forms supports runtime parameters that can be passed to a form instance at startup. Parameters are mainly useful for specifying conditions in datasources, but can also be accessed via triggers. This allows the perceived behavior of a form to be altered only by passing a parameter.

A good example is a form designed to service two divisions of a company. While you could offer an opening dialog that asks the user which division he wants to work on, an alternative is to modify his startup script to tell the form which division he works with. This especially works well when the worker only belongs in one division and will never need access to any others.

Note that in the above example, though, parameters are not a good substitute for access security. This example would strictly be for convenience, not security.

Parameters must be defined, with a default value, using the `<parameter>` tag:

```
<form>
  <parameter name="division" default="101"/>
  ...
</form>
```

Once defined, parameters can be passed to forms in one of two ways. The first is via the command line. Parameters can be passed in the format `parameter=value` on the command line appearing after the name of the form. For example:

```
gnue-forms myform.gfd division=101
```

Alternately, if the form is being called from another form, the trigger would look like:

```
## Run "myform.gfd"
form.runForm( 'myform.gfd', { 'division' : 101 } )
```

That is, the parameters would be passed to `runForm` as a Python dictionary. Once passed to the form, parameters can be used in one of two ways: via trigger code or as a parameter to a datasource condition.

First, triggers can access parameters using the `form.getParameter()` method. This method takes one argument, the case-insensitive parameter name. It returns the requested parameter, or the default value if no parameter was passed on startup.

```
## Get the "company" parameter
division = form.getParameter('division')
```

Conditions are also a good place for parameters. Take the following fragment:

```

<datasource name="dtsExsample" table="sales"
            connection="sales" />
  <condition>
    <eq>
      <cfield name="division" />
      <cparam name="division" />
    </eq>
  </condition>
</datasource>

```

With this in place, whenever the table `sales` is queried, the only records returned are the ones where the field `division` matches the parameter `division`. Note that if this `datasource` will also be used for inserting new rows, a `Pre-Insert` trigger is needed to set the `division` field:

```

##
## Pre-Insert [SalesBlock]
DivisionEntry.set(form.getParameter('division'))

```

## External Python Modules

Python triggers have full access to your installed Python modules. For example, if your project needs the `twofish` cryptographic module, you can install it normally and do an `import twofish` in your triggers.

Alternately, GNUe's `gnue.conf` file supports an `ImportPath` directive. You can have this point to a directory containing your custom python modules.

## Designing for Multiple Interfaces

A form definition, when designed within reasonable guidelines, can be run on a plethora of system architectures and a wide variety of user interfaces. By using the approach taken in this guide, most of your forms will, by default, run on a graphical workstation (X11, Windows, Mac), in a text-based session (telnet or ssh), or via a web browser (HTML). This section highlights a few key compatibility issues.

This list, while not exhaustive, should give you a good idea of common portability pitfalls. As with all things in GNUe, you will always have a choice on how to implement your application. GNUe is not about forcing rules on developers, but about providing viable options. There will be instances where the following suggestions simply are not feasible or practical. In any event, these are simply suggestions on getting the most out of Forms.

- **Images**

Do not make your application dependent on displayed images. It would be acceptable, and appropriate, to display pictures for informational purposes. For example, when doing parts lookups, it would be appropriate to display a picture of the part for reference use. However, it would be normally be inappropriate to prevent the form from working if this image could not be displayed. (TODO: Better example?)

- **OS-specific trigger code**

Python, the default trigger language, provides an extensive library of cross-platform functions. For example, it provides a library of file-access routines that work on all its

supported platforms. This is really a broad category as trigger code has all the power of Python behind it.

- **Custom widgets**

It is often tempting to use a new whiz-bang widget available on a certain platform/widget set. This will surely make your application hard to migrate to other platforms/interfaces, as well as restrict your ability to upgrade to a newer Forms version. Form's widget-set was carefully selected to be as multi-platform-friendly as possible, while still providing all the functionality most forms will need. If your application widgets are not supported by forms, there's a good chance that your form could be more functional with a slight rethinking of its design. Remember: a goal of Forms is to be usable on as many platforms as possible, not to exploit all the features of a particular platform.

# A Brief Introduction to Python

---

While GNUe Forms will eventually support a plethora of scripting languages, the default, and best-supported, language will always be Python. Python is a .....

If you do not know Python, don't worry! Python is one of the simplest languages to pick up. ....

Once multi-language support is added, the developer will be able to write triggers in Python, Perl, Ruby, Scheme, or possibly even Basic. ....

While Python is easy to learn, this section assumes that you know at least one programming language. It is beyond the scope of this guide to cover basic programming concepts. There are several excellent Python tutorials for those beginning programming available on the Web. Go to <http://www.python.org/doc/> for a listing of available tutorials. They have docs for every stage of python programming, from new-to-programming to seasoned veteran.

## The Basics

The first thing most people notice about Python is its reliance on whitespace for grouping.

## Variables and Expressions

```
x = 1
```

## Control Structures

```
if x == 1:
    print "Yip"
```

```
for f in (1,2,3):
    print f
```

```
for f in range(4):
    print f
```

```
n = 1
while n < 10:
    n += 1
```

## Tuples, Lists, and Dictionaries... oh, my!

TODO

# Trigger Recipes

---

Over the course of writing a complex application, you will encounter a few situations where you will need a trigger to perform a common task. This section lists several

## Timestamping a Record prior to a Commit

To automatically fill an entry with a timestamp retrieved from the database, you can use the `datasource` extension `getTimestamp()`. create a `Pre-Commit` trigger on that block. For example,

```
##
## Pre-Commit [MyBlock]
##

self.MyTimeField.set(MyDS.extensions.getTimestamp())
```

This example assumes your entry is named `MyTimeField` and your `datasource` is called `MyDS`.

As noted elsewhere in this guide, `Pre-Commit` is run prior to saving changes to the database regardless of whether the record in question is being inserted, updated, or deleted. If you want to timestamp only new records, you can use the same code listed above, only inside a `Pre-Insert` trigger. Similarly, if you only want to timestamp modifications, you can use a `Pre-Update` trigger.

At this point, you may be asking why did we go through `MyDS` to get to a database timestamp. After all, `MyDS` corresponds to a table, not to a database. [\[TODO: PROVIDE AN EXPLANATION\]](#)

By using a timestamp retrieved from the database server, you do not have to worry about differences in the client machines' times. If you would prefer to have the client's time, you can use python's `time` module.

## Stamping a Record with User's Login prior to a Commit

To automatically fill an entry with the user's login name, you can use `form.getAuthenticatedUser()` and creating a `Pre-Insert` trigger on that block. For example,

```
##
## Pre-Insert [MyBlock]
##

self.CreatedBy.set(form.getAuthenticatedUser())
```

This example assumes your entry is named `CreatedBy`. As noted elsewhere in this guide, `Pre-Insert` is run prior to saving a new record to the database.

This method is commonly called alongside the timestamping recipe above. Together, a `Pre-Insert` trigger to stamp a new record might look like:

```
##
## Pre-Insert [MyBlock]
##

self.CreatedBy.set(form.getAuthenticatedUser())
self.CreatedOn.set(MyDS.extensions.getTimestamp())
```

See the recipe for timestamping for more information on usage of `getTimestamp()`.

## Auto-Populating an Entry from a Sequence

To automatically fill an entry with a value from a sequence, you can create a Pre-Insert trigger on that entry. For example,

```
##
## Pre-Insert [MyEntry]
##

self.set(MyDS.extensions.getSequence("MySequence"))
```

This example assumes your entry is named `MyEntry`, your datasource is called `MyDS`, and the sequence name as stored in the database is `MySequence`. Note that `MyEntry` and `MyDS` are both names originating in your form, whereas `MySequence` is a name originating in your database.

At this point, you may be asking why did we go through `MyDS` to get to a database sequence. After all, `MyDS` corresponds to a table, not to a database. [\[TODO: PROVIDE AN EXPLANATION\]](#)

## Appendix A: Trigger Hierarchy

---

Forms supports

## Appendix B: Form Elements

---

[TODO: INTRODUCTION]

### Form Tags

#### form

No DESCRIPTION PROVIDED

##### Attributes

<i>Attribute</i>	<i>Values</i>	<i>Default</i>	<i>Description</i>
name	<i>text</i>		A unique ID for the form.
readonly	Y, N	N	If set to Y, then no modifications to data by the end user will be allowed. The form will become a query-only form.
style	dialog		No DESCRIPTION PROVIDED
title	<i>text</i>	Untitled Form	The title of the form.

##### Child Nodes

connection, datasource, dialog, import-datasource, import-dialog, import-layout, import-logic, import-trigger, layout, logic, menu, options, parameter, trigger

### Connection Tags

#### connection

No DESCRIPTION PROVIDED

##### Attributes

<i>Attribute</i>	<i>Values</i>	<i>Default</i>	<i>Description</i>
name	<i>text</i>		No DESCRIPTION PROVIDED
provider	<i>text</i>		No DESCRIPTION PROVIDED
comment	<i>text</i>		No DESCRIPTION PROVIDED
dbname	<i>text</i>		No DESCRIPTION PROVIDED
host	<i>text</i>		No DESCRIPTION PROVIDED
service	<i>text</i>		No DESCRIPTION PROVIDED



## Datasource Tags

### **datasource**

No DESCRIPTION PROVIDED

#### *Attributes*

<i>Attribute</i>	<i>Values</i>	<i>Default</i>	<i>Description</i>
<b>name</b>	<i>text</i>		No DESCRIPTION PROVIDED
cache	<i>number</i>	5	No DESCRIPTION PROVIDED
connection	<i>text</i>		No DESCRIPTION PROVIDED
detaillink	<i>text</i>		No DESCRIPTION PROVIDED
distinct	Y, N	N	No DESCRIPTION PROVIDED
explicitfields	<i>text</i>		No DESCRIPTION PROVIDED
master	<i>text</i>		No DESCRIPTION PROVIDED
masterlink	<i>text</i>		No DESCRIPTION PROVIDED
order_by	<i>text</i>		No DESCRIPTION PROVIDED
prequery	Y, N	N	No DESCRIPTION PROVIDED
primarykey	<i>text</i>		No DESCRIPTION PROVIDED
table	<i>text</i>		No DESCRIPTION PROVIDED
type	<i>text</i>	object	No DESCRIPTION PROVIDED

#### *Child Nodes*

condition, staticset

### **add**

No DESCRIPTION PROVIDED

#### *Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

### **and**

No DESCRIPTION PROVIDED

#### *Child Nodes*

and, between, conditions, eq, ge, gt, le, like, lt, ne, negate, not, notbetween, notlike, notnull, null, or

### **between**

No DESCRIPTION PROVIDED

#### *Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

**cconst**

No DESCRIPTION PROVIDED

*Attributes*

<i>Attribute</i>	<i>Values</i>	<i>Default</i>	<i>Description</i>
<b>value</b>	<i>text</i>		No DESCRIPTION PROVIDED

**cfield**

No DESCRIPTION PROVIDED

*Attributes*

<i>Attribute</i>	<i>Values</i>	<i>Default</i>	<i>Description</i>
<b>name</b>	<i>text</i>		No DESCRIPTION PROVIDED

**condition**

No DESCRIPTION PROVIDED

*Child Nodes*

and, between, eq, ge, gt, le, like, lt, ne, negate, not, notbetween, notlike, notnull, null, or

**cparam**

No DESCRIPTION PROVIDED

*Attributes*

<i>Attribute</i>	<i>Values</i>	<i>Default</i>	<i>Description</i>
<b>name</b>	<i>text</i>		No DESCRIPTION PROVIDED

**div**

No DESCRIPTION PROVIDED

*Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

**eq**

No DESCRIPTION PROVIDED

*Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

**ge**

No DESCRIPTION PROVIDED

### *Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

### **gt**

No DESCRIPTION PROVIDED

### *Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

### **le**

No DESCRIPTION PROVIDED

### *Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

### **like**

No DESCRIPTION PROVIDED

### *Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

### **lt**

No DESCRIPTION PROVIDED

### *Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

### **mul**

No DESCRIPTION PROVIDED

### *Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

### **ne**

No DESCRIPTION PROVIDED

### *Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

### **negate**

No DESCRIPTION PROVIDED

### *Child Nodes*

and, between, conditions, eq, ge, gt, le, like, lt, ne, negate, not, notbetween, notlike, or

## not

No DESCRIPTION PROVIDED

### Child Nodes

and, between, conditions, eq, ge, gt, le, like, lt, ne, negate, not, notbetween, notlike, notnull, null, or

## notbetween

No DESCRIPTION PROVIDED

### Child Nodes

add, cconst, cfield, cparam, div, mul, sub

## notlike

No DESCRIPTION PROVIDED

### Child Nodes

add, cconst, cfield, cparam, div, mul, sub

## notnull

No DESCRIPTION PROVIDED

## null

No DESCRIPTION PROVIDED

## or

No DESCRIPTION PROVIDED

### Child Nodes

and, between, conditions, eq, ge, gt, le, like, lt, ne, negate, not, notbetween, notlike, notnull, null, or

## staticset

No DESCRIPTION PROVIDED

### Attributes

Attribute	Values	Default	Description
fields	text		No DESCRIPTION PROVIDED

### Child Nodes

staticsetrow

## staticsetfield

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>name</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>value</b>	<i>text</i>		No DESCRIPTION PROVIDED

**staticsetrow**

No DESCRIPTION PROVIDED

*Child Nodes*

staticsetfield

**sub**

No DESCRIPTION PROVIDED

*Child Nodes*

add, cconst, cfield, cparam, div, mul, sub

**Dialog Tags****dialog**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>name</b>	<i>text</i>		A unique ID for the form.
<b>readonly</b>	Y, N	N	If set to Y, then no modifications to data by the end user will be allowed. The form will become a query-only form.
<b>style</b>	dialog	dialog	No DESCRIPTION PROVIDED
<b>title</b>	<i>text</i>	Untitled Form	The title of the form.

**Layout Tags****layout**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>tabbed</b>	bottom, left, right, top		Allows a form to convert it's pages as notebook tabs. Allowed values are left, right, bottom, top.

*Child Nodes*

import-page, page

**box**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
focusorder	<i>number</i>		No DESCRIPTION PROVIDED
label	<i>text</i>		An optional text label that will be displayed on the border.
name	<i>text</i>		No DESCRIPTION PROVIDED

**button**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
focusorder	<i>number</i>		No DESCRIPTION PROVIDED
label	<i>text</i>		The text that should appear on the button
name	<i>text</i>		A unique ID for the widget. Useful for importable buttons.

**entry**

An entry is the visual counterpart to a field.

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>block</b>	<i>text</i>		The name of the block that this ties to.
<b>field</b>	<i>text</i>		The name of the field that this ties to.
focusorder	<i>number</i>		No DESCRIPTION PROVIDED
hidden	Y, N	N	If defined the entry widget will not be displayed on the form. This is usefull for fields the user doesn't need to know about that you wish to update via triggers.
name	<i>text</i>		The unique ID of the entry.
navigable	Y, N	Y	It false, the user will be unable to navigate to this entry. Triggers can still alter the value.
rowSpacer	<i>number</i>		No DESCRIPTION PROVIDED
rows	<i>number</i>		No DESCRIPTION PROVIDED

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
style	checkbox, default, dropdown, label, password	default	The style of entry widget requested. Currently either <code>text</code> , <code>label</code> , <code>checkbox</code> , or <code>dropdown</code> . To use <code>dropdown</code> you are required to use both the <code>fk_source</code> , <code>fk_key</code> , and <code>fk_description</code> attributes. The <code>label</code> style implies the <code>readonly</code> attribute.

## image

NO DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>block</b>	<i>text</i>		The name of the block that this ties to.
<b>field</b>	<i>text</i>		The name of the field that this ties to.
focusorder	<i>number</i>		NO DESCRIPTION PROVIDED
name	<i>text</i>		NO DESCRIPTION PROVIDED
type	BINARY, URL	URL	NO DESCRIPTION PROVIDED

## label

NO DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>text</b>	<i>text</i>		The text to be displayed.
alignment	center, left, right	left	The justification of the label. Can be one of the following: <code>left</code> , <code>right</code> , or <code>center</code> . Requires that the <code>width</code> attribute be set.
name	<i>text</i>		The unique ID of the label.
rowSpacer	<i>number</i>		Overrides the <code>rowSpace</code> setting defined at the block level.
rows	<i>number</i>		Overrides the <code>rows</code> setting defined at the block level.

## page

NO DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
caption	<i>text</i>		For tabbed or popup pages, this contains the caption to use for the page.

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
name	<i>text</i>		A unique ID for the widget. This is only useful when importing pages from a library.
style	normal	normal	The type of page when importing pages from a library.
transparent	Y, N	N	If set, then you can tab out of the page via next- or previous-field events. Makes navigation in mutlipage forms easier. If false, focus stays within a page until user explicitly moves to another page

### Child Nodes

box, button, entry, image, import-button, label, scrollbar

### scrollbar

No DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>block</b>	<i>text</i>		The block to which this scrollbar scrolls.

## Logic Tags

### logic

No DESCRIPTION PROVIDED

### Child Nodes

block, import-block

### block

No DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>name</b>	<i>text</i>		A unique ID for the widget. The name of the widget. No blocks can share the same name without causing namespace collisions in user triggers.
datasource	<i>text</i>		The name of a datasource (defined in by a <datasource> tag.) that provides this block with it's data.
restrictDelete	Y, N	N	If set then the user will be unable to request that a record be deleted via the user interface.



<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
restrictInsert	Y, N	N	If set then the user will be unable to request that new records be inserted into the block.
rowSpacer	<i>number</i>		Adjusts the vertical gap of this number of rows between duplicated widgets. Serves the same purpose as some of the gap attributes on individual widgets.
rows	<i>number</i>		Any widgets inside the block will display this number of copies in a verticle column. Simulates a grid entry system.
transparent	Y, N	Y	If set, then you can tab out of the block via next- or previous-field events. Makes navigation in mutliblock forms easier. If false, focus stays within a block until user explicitly moves to another block

### Child Nodes

field, import-field

### field

No DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>name</b>	<i>text</i>		The unique ID of the entry. Referenced in master/detail setups as well as triggers.
case	lower, mixed, upper	mixed	No DESCRIPTION PROVIDED
default	<i>text</i>		The default value for any new records created. If the field is visible the user can override the value.
displaymask	<i>text</i>		No DESCRIPTION PROVIDED
editOnNull	Y, N	N	No DESCRIPTION PROVIDED
field	<i>text</i>		The name of the field in the datasource to which this widget is tied.
fk_description	<i>text</i>		No DESCRIPTION PROVIDED
fk_key	<i>text</i>		No DESCRIPTION PROVIDED
fk_refresh	change, commit, startup	startup	No DESCRIPTION PROVIDED
fk_source	<i>text</i>		No DESCRIPTION PROVIDED
formatmask	<i>text</i>		No DESCRIPTION PROVIDED

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
ignoreCaseOnQuery	Y, N	N	If defined the entry widget ignores the case of the information entered into the query mask.
inputmask	<i>text</i>		NO DESCRIPTION PROVIDED
ltrim	Y, N	N	Trim extraneous space at beginning of user input.
max_length	<i>number</i>		The maximum number of characters the user is allowed to enter into the entry.
min_length	<i>number</i>	0	The minimum number of characters the user must enter into the entry.
queryDefault	<i>text</i>		The form will be populated with this value automatically when a query is requested. If the field is visible the user can still override the value.
readonly	Y, N	N	If defined the user will be unable to alter the contents of this entry. Triggers can still alter the value.
required	Y, N	N	This object cannot have an empty value prior to a commit.
rtrim	Y, N	Y	Trim extraneous space at end of user input.
sloppyQuery	<i>text</i>		When set, whatever value the user enters for the query mask is rewritten with % between each character. Thus example would be queried as %e%x%a%m%p%l%e%
typecast	date, number, text	text	The type of data the entry widget will accept. Possible values are text, number, date.
value	<i>text</i>		NO DESCRIPTION PROVIDED

## Menu Tags

### menu

NO DESCRIPTION PROVIDED

#### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>name</b>	<i>text</i>		NO DESCRIPTION PROVIDED
enabled	Y, N	N	NO DESCRIPTION PROVIDED
event	<i>text</i>		NO DESCRIPTION PROVIDED
label	<i>text</i>		NO DESCRIPTION PROVIDED
leader	<i>text</i>		NO DESCRIPTION PROVIDED
location	<i>text</i>		NO DESCRIPTION PROVIDED

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
trigger	<i>text</i>		No DESCRIPTION PROVIDED
type	<i>text</i>		No DESCRIPTION PROVIDED

## Options Tags

### options

No DESCRIPTION PROVIDED

#### Child Nodes

author, description, name, option, tip, title, version

### author

No DESCRIPTION PROVIDED

#### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
name	author	author	No DESCRIPTION PROVIDED
value	<i>text</i>		No DESCRIPTION PROVIDED

### description

No DESCRIPTION PROVIDED

#### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
name	descript ion	descript ion	No DESCRIPTION PROVIDED
value	<i>text</i>		No DESCRIPTION PROVIDED

### name

No DESCRIPTION PROVIDED

#### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
name	name	name	No DESCRIPTION PROVIDED
value	<i>text</i>		No DESCRIPTION PROVIDED

### option

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>name</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>value</b>	<i>text</i>		No DESCRIPTION PROVIDED

**tip**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>name</b>	<i>tip</i>	<i>tip</i>	No DESCRIPTION PROVIDED
<b>value</b>	<i>text</i>		No DESCRIPTION PROVIDED

**version**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>name</b>	<i>version</i>	<i>version</i>	No DESCRIPTION PROVIDED
<b>value</b>	<i>text</i>		No DESCRIPTION PROVIDED

**Parameter Tags****parameter**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>name</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>default</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>description</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>required</b>	Y, N	N	No DESCRIPTION PROVIDED
<b>type</b>	<i>text</i>	<i>char</i>	No DESCRIPTION PROVIDED

**Trigger Tags****trigger**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
language	python	python	No DESCRIPTION PROVIDED
name	text		No DESCRIPTION PROVIDED
src	text		No DESCRIPTION PROVIDED
type	text		No DESCRIPTION PROVIDED

**Import Tags****import-block**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>library</b>	text		No DESCRIPTION PROVIDED
<b>name</b>	text		A unique ID for the widget. The name of the widget. No blocks can share the same name without causing namespace collisions in user triggers.
datasource	text		The name of a datasource (defined in by a <datasource> tag.) that provides this block with it's data.
restrictDelete	Y, N	N	If set then the user will be unable to request that a record be deleted via the user interface.
restrictInsert	Y, N	N	If set then the user will be unable to request that new records be inserted into the block.
rowSpacer	number		Adjusts the vertical gap of this number of rows between duplicated widgets. Serves the same purpose as some of the gap attributes on individual widgets.
rows	number		Any widgets inside the block will display this number of copies in a verticle column. Simulates a grid entry system.
transparent	Y, N	Y	If set, then you can tab out of the block via next- or previous-field events. Makes navigation in mutliblock forms easier. If false, focus stays within a block until user explicitly moves to another block

**import-button**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>library</b>	<i>text</i>		No DESCRIPTION PROVIDED
focusorder	<i>number</i>		No DESCRIPTION PROVIDED
label	<i>text</i>		The text that should appear on the button
name	<i>text</i>		A unique ID for the widget. Useful for importable buttons.

**import-datasource**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>library</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>name</b>	<i>text</i>		No DESCRIPTION PROVIDED
cache	<i>number</i>	5	No DESCRIPTION PROVIDED
connection	<i>text</i>		No DESCRIPTION PROVIDED
detaillink	<i>text</i>		No DESCRIPTION PROVIDED
distinct	Y, N	N	No DESCRIPTION PROVIDED
explicitfields	<i>text</i>		No DESCRIPTION PROVIDED
master	<i>text</i>		No DESCRIPTION PROVIDED
masterlink	<i>text</i>		No DESCRIPTION PROVIDED
order_by	<i>text</i>		No DESCRIPTION PROVIDED
prequery	Y, N	N	No DESCRIPTION PROVIDED
primarykey	<i>text</i>		No DESCRIPTION PROVIDED
table	<i>text</i>		No DESCRIPTION PROVIDED
type	<i>text</i>	object	No DESCRIPTION PROVIDED

**import-dialog**

No DESCRIPTION PROVIDED

*Attributes*

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
<b>library</b>	<i>text</i>		No DESCRIPTION PROVIDED
name	<i>text</i>		A unique ID for the form.
readonly	Y, N	N	If set to Y, then no modifications to data by the end user will be allowed. The form will become a query-only form.
style	dialog	dialog	No DESCRIPTION PROVIDED
title	<i>text</i>	Untitled Form	The title of the form.

**import-field**

No DESCRIPTION PROVIDED

*Attributes*

<i>Attribute</i>	<i>Values</i>	<i>Default</i>	<i>Description</i>
<b>library</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>name</b>	<i>text</i>		The unique ID of the entry. Referenced in master/detail setups as well as triggers.
<b>case</b>	lower, mixed, upper	mixed	No DESCRIPTION PROVIDED
<b>default</b>	<i>text</i>		The default value for any new records created. If the field is visible the user can override the value.
<b>displaymask</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>editOnNull</b>	Y, N	N	No DESCRIPTION PROVIDED
<b>field</b>	<i>text</i>		The name of the field in the datasource to which this widget is tied.
<b>fk_description</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>fk_key</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>fk_refresh</b>	change, commit, startup	startup	No DESCRIPTION PROVIDED
<b>fk_source</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>formatmask</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>ignoreCaseOnQuery</b>	Y, N	N	If defined the entry widget ignores the case of the information entered into the query mask.
<b>inputmask</b>	<i>text</i>		No DESCRIPTION PROVIDED
<b>ltrim</b>	Y, N	N	Trim extraneous space at beginning of user input.
<b>max_length</b>	<i>number</i>		The maximum number of characters the user is allowed to enter into the entry.
<b>min_length</b>	<i>number</i>	0	The minimum number of characters the user must enter into the entry.
<b>queryDefault</b>	<i>text</i>		The form will be populated with this value automatically when a query is requested. If the field is visible the user can still override the value.
<b>readonly</b>	Y, N	N	If defined the user will be unable to alter the contents of this entry. Triggers can still alter the value.
<b>required</b>	Y, N	N	This object cannot have an empty value prior to a commit.

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
rtrim	Y, N	Y	Trim extraneous space at end of user input.
sloppyQuery	<i>text</i>		When set, whatever value the user enters for the query mask is rewritten with % between each character. Thus example would be queried as %e%x%a%m%p%l%e%
typecast	date, number, text	text	The type of data the entry widget will accept. Possible values are text, number, date.
value	<i>text</i>		No DESCRIPTION PROVIDED

## import-layout

No DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
library	<i>text</i>		No DESCRIPTION PROVIDED
tabbed	bottom, left, right, top		Allows a form to convert it's pages as notebook tabs. Allowed values are left, right, bottom, top.

## import-logic

No DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
library	<i>text</i>		No DESCRIPTION PROVIDED

## import-page

No DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
library	<i>text</i>		No DESCRIPTION PROVIDED
caption	<i>text</i>		For tabbed or popup pages, this contains the caption to use for the page.
name	<i>text</i>		A unique ID for the widget. This is only useful when importing pages from a library.
style	normal	normal	The type of page when importing pages from a library.



<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
transparent	Y, N	N	If set, then you can tab out of the page via next- or previous-field events. Makes navigation in mutlipage forms easier. If false, focus stays within a page until user explicitly moves to another page

## import-trigger

NO DESCRIPTION PROVIDED

### Attributes

<b>Attribute</b>	<b>Values</b>	<b>Default</b>	<b>Description</b>
library	<i>text</i>		NO DESCRIPTION PROVIDED
language	python	python	NO DESCRIPTION PROVIDED
name	<i>text</i>		NO DESCRIPTION PROVIDED
src	<i>text</i>		NO DESCRIPTION PROVIDED
type	<i>text</i>		NO DESCRIPTION PROVIDED

## Appendix C: Form Objects

---

TODO

### Form

#### **getParameter()**

*Syntax:*

```
getParameter ( parameter )
```

*Description:*

Returns a runtime parameter, or the default value of such if the user did not pass the requested runtime parameter. See **Runtime Parameters** on page 31 for more information.

*Example:*

```
# Get the runtime parameter "company"
company = form.getParameter( "company" )
```

#### **setParameter()**

*Syntax:*

```
setParameter ( parameter, value )
```

*Description:*

Changes the value of a runtime parameter. See **Runtime Parameters** on page 31 for more information.

*Example:*

```
# Set the runtime parameter "company" to "101"
form.setParameter( "company", "101" )
```

#### **getFocus()**

*Syntax:*

```
getFocus ( object )
```

*Description:*

Request that the current focus be given to *object*. If *object* is a block or a page, then focus will be given to the first navigable entry on that page or block. All appropriate `Pre-FocusOut`, `Pre-FocusIn`, `Post-FocusOut`, and `Post-FocusIn` triggers will be executed. If `setFocus` is called on a non-navigable item (such as a label), the call is ignored and focus does not change.

*Example:*

```
# Request that MyEntry gets the current focus
form.setFocus(MyEntry)
```

## **setFocus()**

*Syntax:*

```
setFocus ( object )
```

*Description:*

Request that the current focus be given to *object*. If *object* is a block or a page, then focus will be given to the first navigable entry on that page or block. All appropriate `Pre-FocusOut`, `Pre-FocusIn`, `Post-FocusOut`, and `Post-FocusIn` triggers will be executed. If `setFocus` is called on a non-navigable item (such as a label), the call is ignored and focus does not change.

*Example:*

```
# Request that MyEntry gets the current focus
form.setFocus(MyEntry)
```

## **setStatusText()**

*Syntax:*

```
setStatusText ( text )
```

*Description:*

For user interfaces that support a status bar, or some textual equivalent, set the displayed text. For interfaces without a status bar equivalent, this function is meaningless.

*Example:*

```
# Tell the user how great they are
form.setStatusText("Dude, you are the best user ever!")
```

## **showMessage()**

*Syntax:*

```
showMessage ( text )
```

*Description:*

Description goes here.

*Example:*

```
# Code Sample
```

## **commit()**

*Syntax:*

```
commit()
```

*Description:*

Description goes here.

*Example:*

```
# Code Sample
```

## **close()**

*Syntax:*

```
close()
```

*Description:*

Description goes here.

*Example:*

```
# Exit the current form
form.close()
```

## **getAuthenticatedUser()**

*Syntax:*

```
getAuthenticatedUser([connection])
```

*Description:*

Description goes here.

*Example:*

```
# Set "modified_by" to the current user's login
modified_by.set(form.getAuthenticatedUser())
```

## Datasource

### createResultSet()

*Syntax:*

```
createResultSet( [ conditions ] , [ readOnly ] )
```

*Description:*

Description goes here.

*Example:*

```
# Code Sample
```

### simpleQuery()

*Syntax:*

```
simpleQuery( dictionary )
```

*Description:*

Description goes here.

*Example:*

```
# Code Sample
```

### delete()

*Syntax:*

```
delete()
```

*Description:*

Description goes here.

*Example:*

```
# Code Sample
```

## Block

### clear()

*Syntax:*

```
clear()
```

*Description:*

Clears the current block with an empty result set.

*Example:*

```
# Clear out MyBlock
MyBlock.clear()
```

**gotoRecord()***Syntax:*

```
gotoRecord(index)
```

*Description:*

Move to the record indicated by *index*. If *index* is negative, then move relative to the last record. Records are numbered beginning with 0.

*Example:*

```
# Go to the second record in this block
MyBlock.gotoRecord(1)

# Go to the last record in this block
MyBlock.gotoRecord(-1)
```

**newRecord()***Syntax:*

```
newRecord()
```

*Description:*

Inserts a new record immediately following the current record. This new record will then become the current record. The `On-NewRecord` trigger is executed for the newly created record and any default values are recorded.

*Example:*

```
# Code Sample
MyBlock.newRecord()
```

**nextRecord()***Syntax:*

```
nextRecord()
```

*Description:*

Navigate to the next record. If the block is currently on the last record, then this method returns 0 (false). Otherwise it returns 1 (true).

*Example:*

```
# Move to the next record
MyBlock.nextRecord()
```

**prevRecord()***Syntax:*

```
prevRecord()
```

*Description:*

Navigate to the previous record. If the block is currently on the first record, then this method returns 0 (false). Otherwise it returns 1 (true).

*Example:*

```
# Move to the previous record
MyBlock.prevRecord()
```

**deleteRecord()***Syntax:*

```
deleteRecord()
```

*Description:*

Mark the current record as *deleted*. On the next save, this record will be permanently removed.

*Example:*

```
# Code Sample
MyBlock.deleteRecord()
```

**parent***Description:*

This read-only property contains the parent container of this block. The parent container is usually a page.

*Example:*

```
# Get MyBlock's parent page
page = MyBlock.parent
```

## Entry

### allowedValues()

#### Syntax:

```
allowedValues()
```

#### Description:

Returns a tuple containing valid values for this entry. This call will only return a set when a `fk_source` has been specified for the entry.

#### Example:

```
# Code Sample
if 'Test' not in MyEntry.allowedValues():
    MyEntry.set(None)
```

### autofillBySequence()

#### Syntax:

```
autofillBySequence(sequence)
```

#### Description:

Description goes here.

#### Example:

```
# Code Sample
```

### isEmpty()

#### Syntax:

```
isEmpty()
```

#### Description:

Returns true if the current entry is considered empty. Empty is usually associated with a blank, or null, value.

#### Example:

```
# Set MyEntry to 0 if it has no other value.
if MyEntry.isEmpty():
    MyEntry.set(0)
```



**set()***Syntax:*`set ( value )`*Description:*

Description goes here.

*Example:*

```

| # Code Sample

```

**get()***Syntax:*`get ( )`*Description:*

Description goes here.

*Example:*

```

| # Code Sample

```

**resetForeignKey()***Syntax:*`resetForeignKey( )`*Description:*

Description goes here.

*Example:*

```

| # Code Sample

```

**parent***Description:*

This read-only property contains the parent container of this entry. The parent container will typically be a block, unless container boxes are used.

*Example:*

```
# Get this entry's parent block  
block = self.parent
```

## **readonly**

*Description:*

Description goes here.

*Example:*

```
# Set MyEntry to be readonly if not already  
if not MyEntry.readonly:  
    MyEntry.readonly = 1
```

## Appendix D: Data Objects

---

TODO

### Result Set

**xxxx()**

*Syntax:*

```
getParameter(parameter)
```

*Description:*

Description....

*Example:*

```
# Get the runtime parameter "company"
company = form.getParameter("company")
```

### Record Set

**xxxx()**

*Syntax:*

```
getParameter(parameter)
```

*Description:*

Description....

*Example:*

```
# Get the runtime parameter "company"
company = form.getParameter("company")
```

## Appendix E: Sample Librarian Schema

---

[TODO: ADD EXAMPLE SCHEMA EXPLANATIONS]

## Appendix F: Glossary

---

database

datasource

entry

field

python

# Appendix G: GNU Free Documentation License

---

## GNU Free Documentation License

Version 1.2, November 2002

*Copyright (C) 2000, 2001, 2002 Free Software Foundation, Inc.  
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA*

*Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.*

### 0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

### 1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released

under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some wordprocessors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

## 2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical

measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

### 3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

### 4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- a) Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- b) List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- c) State on the Title page the name of the publisher of the Modified Version, as the publisher.



- d) Preserve all the copyright notices of the Document.
- e) Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- f) Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- g) Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- h) Include an unaltered copy of this License.
- i) Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
- j) Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- k) For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- l) Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- m) Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- n) Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- o) Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the

same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

## **5. COMBINING DOCUMENTS**

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

## **6. COLLECTIONS OF DOCUMENTS**

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

## **7. AGGREGATION WITH INDEPENDENT WORKS**

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

## **8. TRANSLATION**

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document,

and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

## **9. TERMINATION**

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

## **10. FUTURE REVISIONS OF THIS LICENSE**

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <http://www.gnu.org/copyleft/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

# Alphabetical Index

## **C**

Custom widgets 33

## **D**

Datasource 10-13, 35, 36

Designer 7, 10-12

## **G**

GetSequence 36

GetTimestamp 35

## **P**

Pre-Commit 35

Pre-Insert 35, 36

Python 7, 32-34

## **S**

Sequence 36

## **T**

Timestamp 35

## **X**

Xml 12, 13