

See diff here, Oct. 3, 2014 commit:

<https://github.com/go-bunny-go/OpenID-Connect-Java-Spring-Server/compare/mitreid-connect:master...master>


openid-connect-server-webapp/src/main/webapp/WEB-INF/tags/topbar.tag

1. Capitalize "i" in "Log In"

```
<a id="loginButton" href="login" data-toggle="collapse" data-target=".nav-collapse"><i class="icon-lock icon-white"></i> Log in</a>
```

change to:

```
<a id="loginButton" href="login" data-toggle="collapse" data-target=".nav-collapse"><i class="icon-lock icon-white"></i> Log In</a>
```

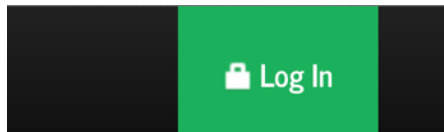


1. Capitalize "o" in "Log Out"
2. Remove "x" icon preceding "Log Out"

```
<li><a href="logout" data-toggle="collapse" data-target=".nav-collapse"><i class="icon-remove"></i> Log out</a></li>
```

change to:

```
<li><a href="logout" data-toggle="collapse" data-target=".nav-collapse">Log Out</a></li>
```

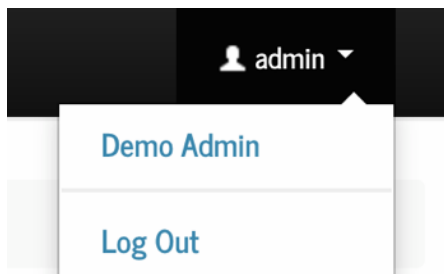

openid-connect-server-webapp/src/main/webapp/WEB-INF/views/login.jsp

1. Capitalize "i" in Log In - all <h2>

openid-connect-server-webapp/src/main/webapp/resources/template/client.html

1. Remove edit icon

```
<th>Client</th>
<th>Information</th>
<th><i class="icon-edit"></i></th>
```

change to:

```
<th>Client</th>
<th>Information</th>
<th></th>
```

openid-connect-server-webapp/src/main/webapp/resources/template/whitelist.html

1. Remove edit icon

```
<th>Client</th>
<th>Scopes</th>
<th><i class="icon-edit"></i></th>
```

change to:

```
<th>Client</th>
<th>Scopes</th>
<th></th>
```

openid-connect-server-webapp/src/main/webapp/resources/template/dynreg.html

1. Remove -OR-
2. Change span classes for each <div>
3. Add class "text-center" to <div>s for "Register a New Client" and "Edit an Existing Client"
4. Add
 after <div class="row-fluid">
5. Capitalize words in the buttons
6. Change <button> classes

```

<div class="row-fluid">
  <div class="span5 well">
    <button class="btn btn-large" id="newreg">Register a new
      client</button>
  </div>
  <div class="span2 text-center">
    <strong> - OR - </strong>
  </div>
  <div class="span5 well">
    <input type="text" id="clientId" placeholder="Enter Client ID">
    <input type="text" id="regtoken" placeholder="Enter Registration
      Access Token">
    <button class="btn btn-large" id="editreg">Edit an existing
      client</button>
    <span class="help-block">Paste in your client ID and
      registration access token to access the client.</span>
  </div>

```

change to:

```

<div class="row-fluid">
<br />
  <div class="span3 well text-center">
    <button class="btn btn-primary" id="newreg">Register a New
      Client</button>
  </div>
  <div class="span1"></div>
  <div class="span4 well text-center">
    <input type="text" id="clientId" placeholder="Enter Client
      ID">
    <input type="text" id="regtoken" placeholder="Enter
      Registration Access Token"><br />
    <button class="btn btn-primary" id="editreg">Edit an Existing
      Client</button>
    <span class="help-block">Paste in your client ID and
      registration access token to access the client.</span>
  </div>

```

[Home](#) / Client Registration

Register a New Client

Enter Client ID

Enter Registration Access Token

Edit an Existing Client

openid-connect-server-webapp/src/main/webapp/resources/template/rsreg.html

1. Remove -OR-
2. Change span classes for each <div>
3. Add class "text-center" to <div>s for "Register a New Protected Resource" and "Edit an Existing Protected Resource"
4. Add
 after <div class="row-fluid">
5. Capitalize words in the buttons
6. Change <button> classes

```
<div class="row-fluid">
<div class="span5 well">
    <button class="btn btn-large" id="newreg">Register a new protected
    resource</button>
</div>
<div class="span2 text-center">
    <strong> - OR - </strong>
</div>
<div class="span5 well">
    <input type="text" id="clientId" placeholder="Enter Resource ID">
    <input type="text" id="regtoken" placeholder="Enter Registration
    Access Token">
    <button class="btn btn-large" id="editreg">Edit an existing
    protected resource</button>
    <span class="help-block">Paste in your ID and registration access
    token to access the resource's properties.</span>
</div>
```

change to:

```
<div class="row-fluid">
<br />
<div class="span4 well text-center">
    <button class="btn btn-primary" id="newreg">Register a New
    Protected Resource</button>
</div>
<div class="span1"></div>
<div class="span4 well text-center">
    <input type="text" id="clientId" placeholder="Enter Resource ID">
    <input type="text" id="regtoken" placeholder="Enter Registration
    Access Token"><br />
    <button class="btn btn-primary" id="editreg">Edit an Existing
    Protected Resource</button>
    <span class="help-block">Paste in your ID and registration access
    token to access the resource's properties.</span>
</div>
```

[Home](#) / Protected Resource Registration[Register a New Protected Resource](#)[Edit an Existing Protected Resource](#)

<openid-connect-server-webapp/src/main/webapp/resources/template/whitelist.html>

1. Remove edit icon

```
<th>Client</th>
<th>Scopes</th>
<th><i class="icon-edit"></i></th>
```

change to:

```
<th>Client</th>
<th>Scopes</th>
<th></th>
```