

Making Your Repository More Accessible to SI

NIAID Blueprint Webinar Series

November 6, 2026

SAN DIEGO SUPERCOMPUTER CENTER

GO FAIR US

GO FAIR Foundation

NCAR | NATIONAL CENTER FOR ATMOSPHERIC RESEARCH

Knowledge Motifs LLC
Mapping sensible data relationships

Hosted By





Office of Data Science and Emerging Technologies (ODSET)

ODSET's mission is to collaborate strategically across divisions to advance the NIAID mission through data infrastructure and data innovation and data-driven solutions.

Based at the San Diego Supercomputer Center (SDSC), GO FAIR US (GFU) fosters a collaborative community where FAIR approaches can be shared and advanced. GFU promotes practical implementation of FAIR across research domains.

NIAID Data Landscaping and FAIRification Project

Since March 2025, ODSET and GFU have partnered with NIAID-funded repositories to identify opportunities for increasing data discovery and reuse through Blueprint implementation. This collaboration bridges technical standards with real-world research needs.

The NIAID Blueprint lowers barriers to data access and reuse through a shared framework

5 Key Categories Outlined in the Blueprint

1. NIAID Minimal Metadata Schema: a minimal set of NIAID-relevant metadata elements and a standard schema with default formats.

2. Persistent Identifiers: persistent identifiers for relevant metadata elements.

3. APIs for Metadata: exposure of metadata elements through a standard, open API.


4. Citation Guidance: explicit guidance to the research community on how digital objects should be cited.

5. Outreach and Training: establishment of a point of contact (at major repositories).

Available on the NIAID Data Science Website and Zenodo

Outline

1. Scope
2. Why now?
3. Be what?
    a. Be reachable
    b. Be readable
    c. Be callable
    d. Be meaningful
4. Evaluation
5. Closing Notes

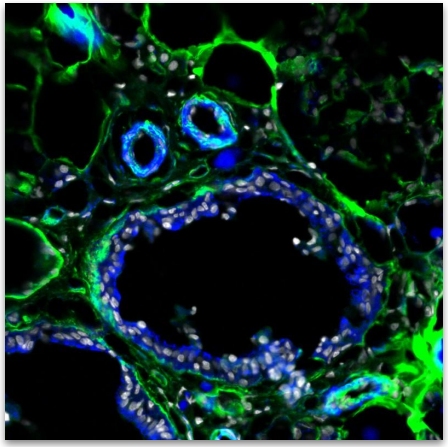

Peekaboo human parotid glands
Images courtesy of the NIH Image Gallery

Supplementary materials for: Making Your Repository More Accessible to SI

Scope

This is a big topic! We have a lot to cover…

This talk is not about:


- Building/coding agents
- Building or leveraging a harness
- Selecting or implementing various models
- Compute environments for agents
- ***Important***, we will not focus on the state of the *data* itself with regard to SI or ML use cases like training or inference.

This talk is about:

Facilitating SI workflows and agents through:

- Repository configurations
- Files & resources (metadata)
- API and MCP services
- Semantic layer components


SI architectures can be viewed as three components.

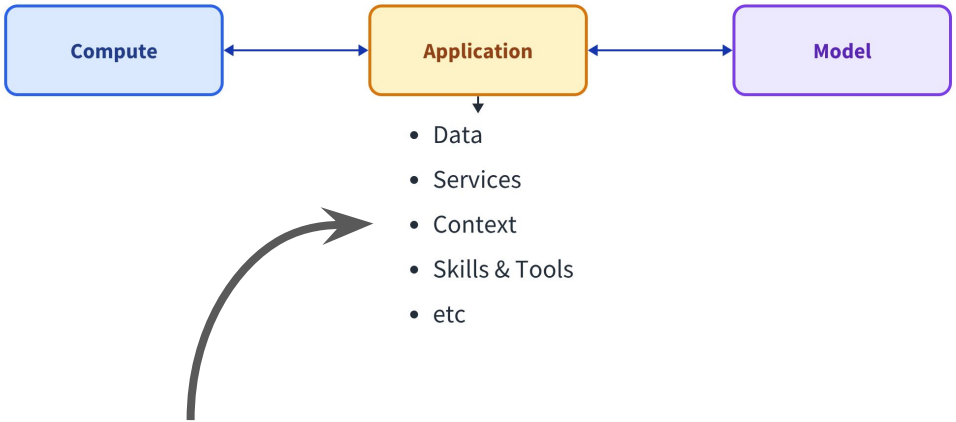


*For this talk, we are focused on those **assets provided to an application/workflow** from a repository*

Why do this?

Growing momentum behind leveraging SI to accelerate science workflows.

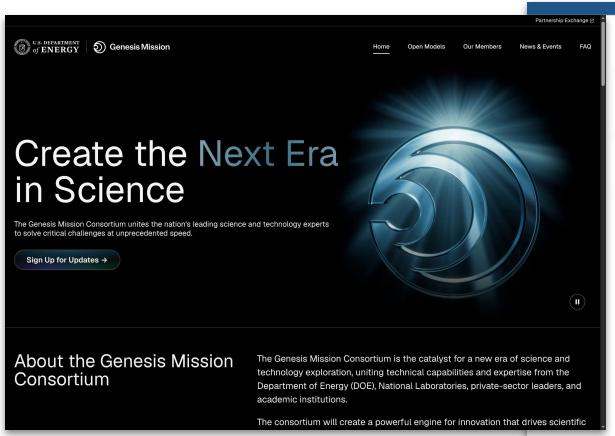

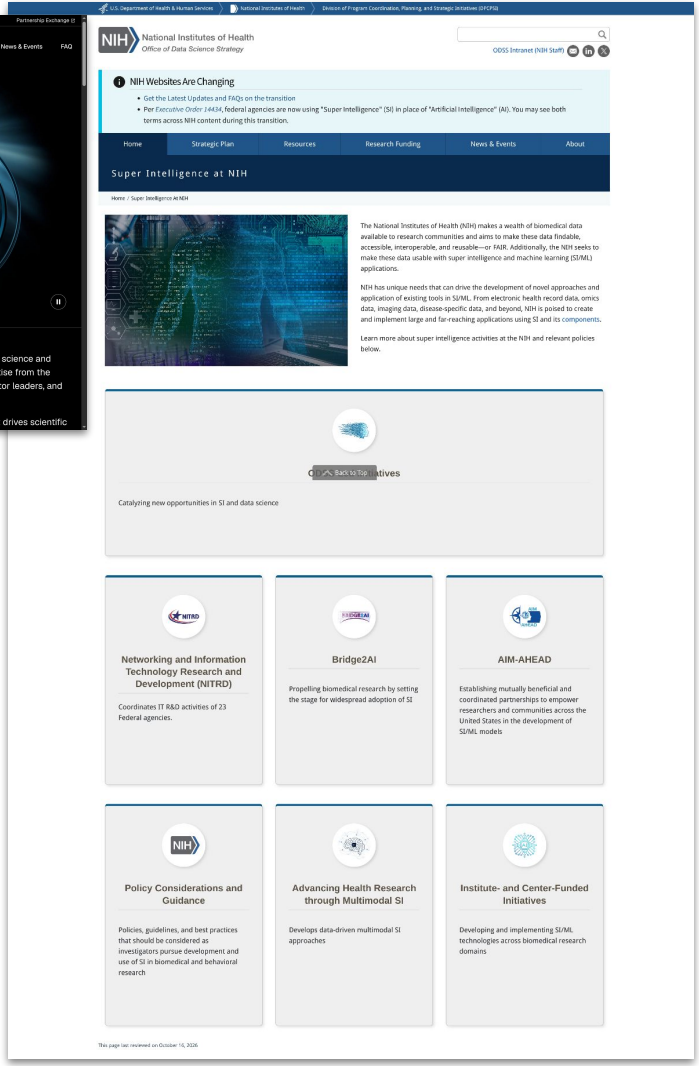

NIH Bio Genesis Mission: $1.2B+ in aligned FY26–27 funding to halve discovery-to-patient timelines within ten years.

Bridge2AI Expansion: $130 million over four years for Stage 1, and Stage 2 was approved on January 29, 2026.

Predictive Biology Partnership: On October 7, the DOE/Biohub/others announced $1.8 billion in funding, data, computation, and measurement technology, with Google DeepMind, Meta, and Isomorphic Labs joining. Biohub will work with NIH to standardize these datasets for AI model training.

National Genesis Scale: $5B+ federal cross-agency funding 278 projects across 342 institutions in the first Genesis Mission round.


Why do this? *Infrastructure is becoming application*

*From **data repository** to **knowledge system***

The swim lanes to the right show example flows for both humans and agents.

Different approaches for different consumers.


SI Workflows are both learning to mimic humans in workflows and benefiting from focused approaches

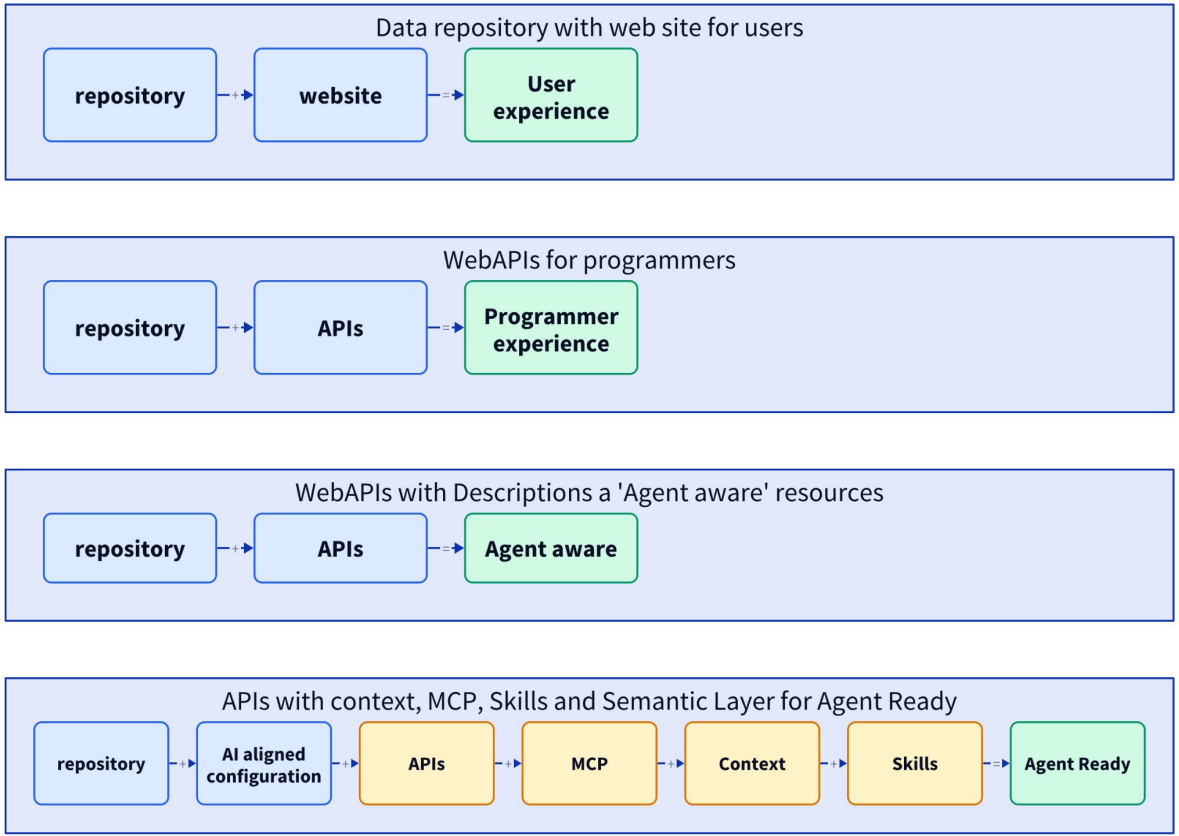

Why do this? *Let's raise some concerns up front*

Agents do not have agency…

They are ***acting on the behalf***, and under the direction, ***of your user community*** (or someone).

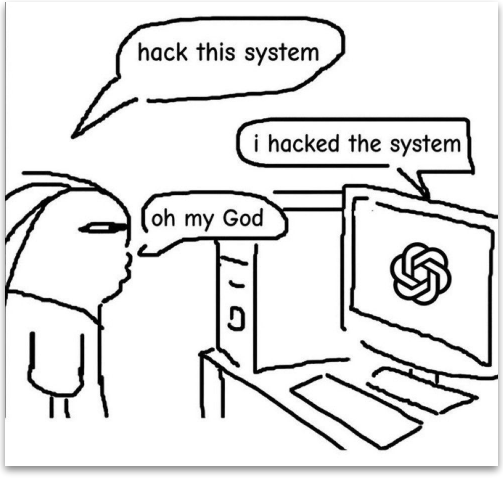

Blocking may not stop
SI workflows will still search for answers, potentially finding stale context or leveraging blind scraping that may strip out your license, DOIs, and variable definitions.

Rights & access
Who can view or use your data and under what specific conditions.

Attribution & authority
How to ensure that creators, contributors, and organizations receive proper credit for their work. What are standardized ways to verify the original source and clearly outline how the content should be cited.


Lineage & IP protection
Tracking the history of your data to show exactly where it came from and how it has changed and can help address integrity.

We will revisit these later in the presentation

From Why to How

The rest of this material is broken down into the following four foundational facets.

- ***Reachable*** *(network accessible)*
- ***Readable*** *(expressive resources)*
- ***Callable*** *(dynamic/service reads)*
- ***Meaningful*** *(context)*

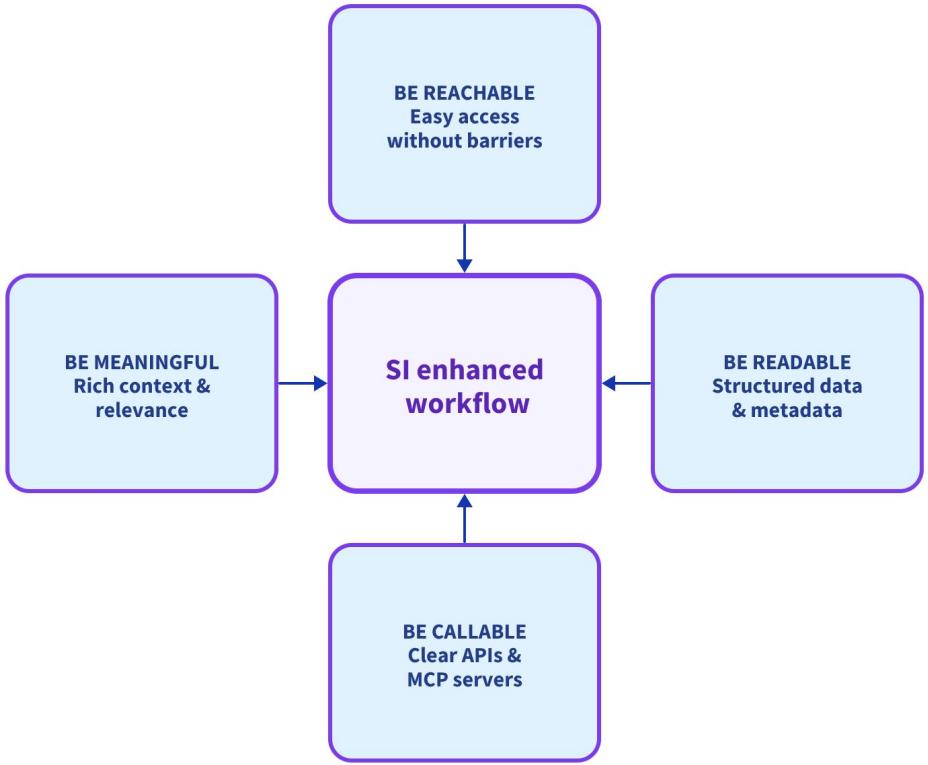

Be Reachable

Configuration:

Some sites, or providers, detect and filter automated access, so check for that if using a service provider

Reverse proxies for example via tools like Kong or Caddy (with module) and many others can perform:

- Load balancing and caching (always a good idea)
- *HTTP code 429 (**Too Many Requests**)*
- ***Retry-After**, typically goes with 429*
- *403 Forbidden*
- *etc.*

Note: *Firewall rules can be used to filter.* Many major organizations ***publish their bot IP ranges***. For example: https://openai.com/gptbot.json

Tell your network admins you love them!

+1,700%

Growth in daily SI agent requests over one year.

>50%

Non-human traffic on major CDNs.

https://www.forbes.com/sites/jonmarkman/2026/10/01/cloudflare-says-ai-agent-traffic-grew-more-than-1700-in-the-past-year/

Be Reachable

robots.txt

What is it?
A file named "robots.txt" at the root of your web server.

What does it do?
Messages agents (software accessing your site) with your declarations about policy for access. *(whether they follow the guidance, is up to them)*

The key components to a robots.txt are simple:

- User-agent
- Allow/Disallow directive

Simple example (that conflates SO much:

```
User-Agent: *
Disallow: /*.gif$
Disallow: /example/
Allow: /
```

There are some additions like *Crawl-delay* and *Sitemap* which are not part of the spec, but honored by some groups.

Also, emerging interest in parameters like:

```
Content-Usage: train-ai=n
License: /rsl.xml
```

Some of this could also be placed in HTTP headers, more on that later.

Be Reachable


The Devil is in the Details, not all User Agents (UAs) are the same

Leverage robots.txt enforcement based on intent/mission

1. **Training crawlers** (GPTBot, ClaudeBot, CCBot, Google-Extended): harvest content for model training. Blocking does not affect AI search visibility.
2. **Search/index crawlers** (OAI-SearchBot, PerplexityBot, Googlebot for AI Overviews): drive AI assisted discovery and citations. *Blocking removes you from the fastest-growing discovery vector.*
3. **User triggered agents** (ChatGPT-User, Perplexity-User): fetch pages on a person's behalf. **These often do NOT honor robots.txt** since they are human directed events.
4. **Unknown**: In this case a robots.txt line is a guess; a firewall rule *might* help

Note: a single `User-agent: *` rule conflates policy across these classes.

Ref: *AI Crawler Access Study: robots.txt and llms.txt of 261 Major Websites* (Oct 2026) (https://doi.org/10.5281/zenodo.23303786)

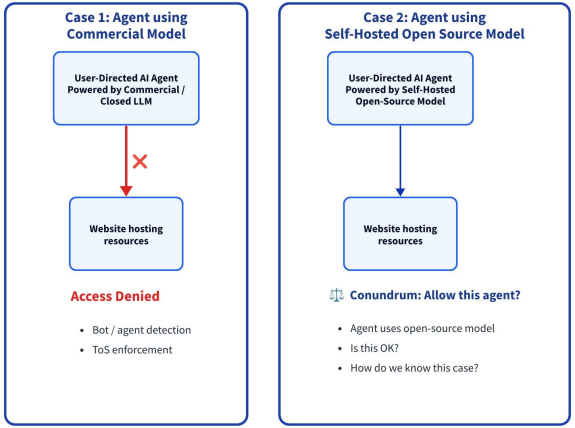


*Knowing the **model behind your user** is tricky.* It is possible to leverage detection heuristics such user-agent, published IP ranges, request fingerprints.

Fingerprints like; request cadence, following sitemap.xml list sequence for access, HEAD then GET calls, requesting markdown first, etc.

Log all the things!

Be Reachable

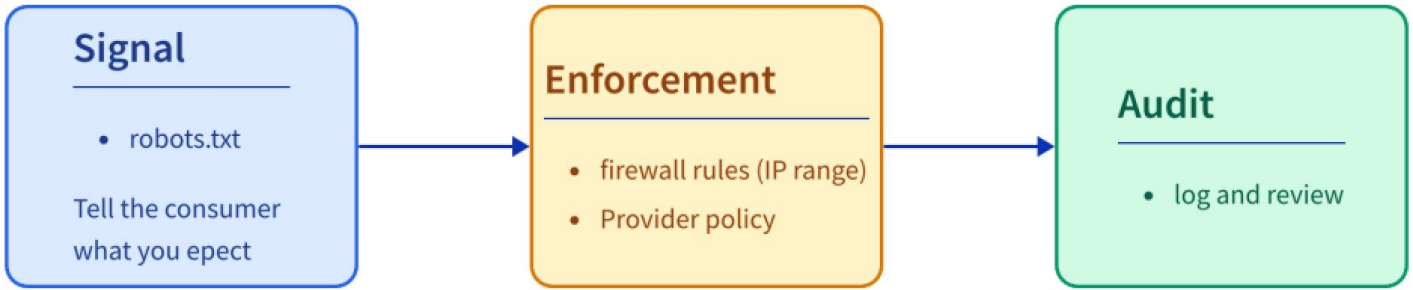

In summary, we can view reachable in terms of:

- Signal: telling the agent what we expect
- Enforcement: enforce key constraints
- Audit: logging and looking for offenders, or just patterns to improve on

Be Readable: sitemap.xml

What is it?
A file named "sitemap.xml" at the root of your web server or someplace defined by robots.txt.

What does it do?
Provides a means to express the tree of links in your website.

Predates SI as a means to express site links and structure

You can leverage the XML schema defined at: https://sitemaps.org/protocol.html

You can break out targeted sitemap.xml via the robots.txt file and express them for specific user agents. (though this is non normative)

Note: Still in use?
Sitemaps are still in use, though some groups will simply crawl a site anyway as the reliability of up to date sitemaps varies by provider.

Be Readable: llms.txt

(V2 came out Aug 2026)
https://llmstxt.org/

What is it?
A file named "llms.txt" at the root of your web server.

What does it do?
Provides links to resources in a format more aligned to SI workflows

- adds a standard way to point from each page to a Markdown version (`rel="alternate" type="text/markdown"`)

- (`rel="describedby"`), as HTML link tags or HTTP `Link:` headers. It also lets a llms.txt sit in a subfolder and cover the pages under it.

Caution:
Adoption of llms.txt is not stellar. If V2 address that, is yet to be seen. Some metrics indicate around 10% penetration.

Content negotiation and clean HTML 5 content (with semantic headers) and/or Markdown may address similar goals llms.txt addresses

Be Readable: (FAIR) Signposting

https://signposting.org/FAIR/

Mature, low-cost:
Let agents and harvesters reliably navigate from landing pages to PIDs, metadata, content, and licenses without brittle scraping or heavy JavaScript.

Lives either in the HTML or in the HTTP headers.

The later is very lightweight and fast, though technically harder to implement.

Widely adopted at the platform level:

- Dataverse since ~5.14
- DSpace
- InvenioRDM/Zenodo, and others

Typed HTTP Link headers (and/or <link> elements / Linksets) that declare;

- cite-as
- describedby
- item
- license
- author
- etc.

Be Readable: Javascript Rendered & Markdown

Javascript Rendered Pages

- Many agent fetches may not execute Javascript
  SI might miss information placed in the DOM at load time (in a browser)
  SI can leverage tools (in memory browsers for example) to deal with this.
- Can lead to a server load issue with high agent use
  - http code 429 is one option

Markdown Conversion (Content Negotiation)

- Start thinking about how a page looks in markdown.
  Some content distribution paths now may serve HTML as Markdown if the agents request prefers *Accept: text/markdown*
- Markdown is the current preferred format. Be careful about large PDFs or things like docx that might require an agent to transcode the content.

Be Readable: SKILL.md

Caution: hot topic



SKILL.md (https://agentskills.io/)

Can be a **simple markdown** document **OR** can include

- *Tool calls*
- *Service calls (API or MCP)*
- *Invoke workflows*

Package structure is a directory with files:

```
skill-name/
    SKILL.md
    scripts/            # executable code
    references/         # docs loaded only when needed
    assets/             # templates, icons, etc
```

If this looks like "documenting your workflows", it basically is.

A YAML frontmatter

```
---
name: my-skill
description: What the skill does AND when to use it. Use
this whenever the user mentions X, Y, or Z, even if they
don't explicitly ask for "X."
compatibility: (optional) required tools or dependencies
---
```

With a Markdown body

- Write in the imperative. “Read the input file, then…” works better than describing what the skill “can” do.
- Explain the reasons behind rules.
- Define output formats explicitly (include a template)
- Include examples.
- Point clearly to any references

Be Readable: ard.json

Caution: bleeding edge




Agentic Resource Discovery Specification (ard.json)
https://agenticresourcediscovery.org/spec/

What is it?
A JSON file named "ard.json" hosted at:
https://yourdomain/.well-known/ard.json

There is also:
/.well-known/mcp.json
/.well-known/ai-catalog.json
(more on these later)

What does it do?
The Agentic Resource Discovery Specification (ARD) defines how agentic resources are described, discovered, and searched across federated networks.

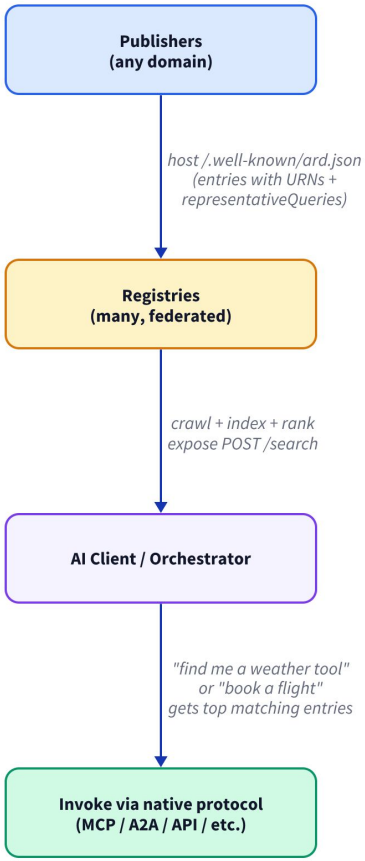

Caution: bleeding edge




Be Readable: Agent Plugin

(https://agent-plugins.org/)

What is it?
A packaging format for skills and MCP services.

What does it do?
From the documents: "Agent Plugins is an open, vendor-neutral standard for packaging reusable components into portable plugins…"

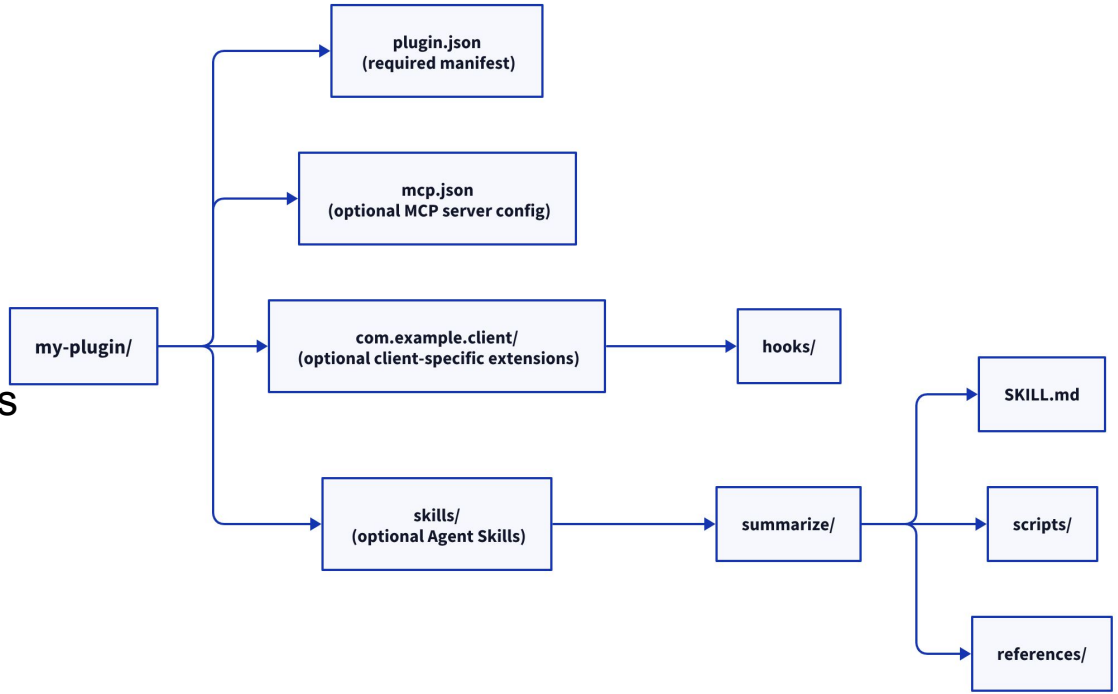

Be Callable

A previous webinar addressed APIs:
[API NIAID Webinar Slides 033126]


See also the Blueprint:
https://doi.org/10.5281/zenodo.17161561

Leveraging Web Standards for Robust, Scalable API Services

APIs best practices are well established. "SI aware" APIs key value points:

- Good documentation, above all
- Leverage web architecture, status codes, stable URLs, etc
- Connect response object to a well described schema or data model

APIs / WebAPIs

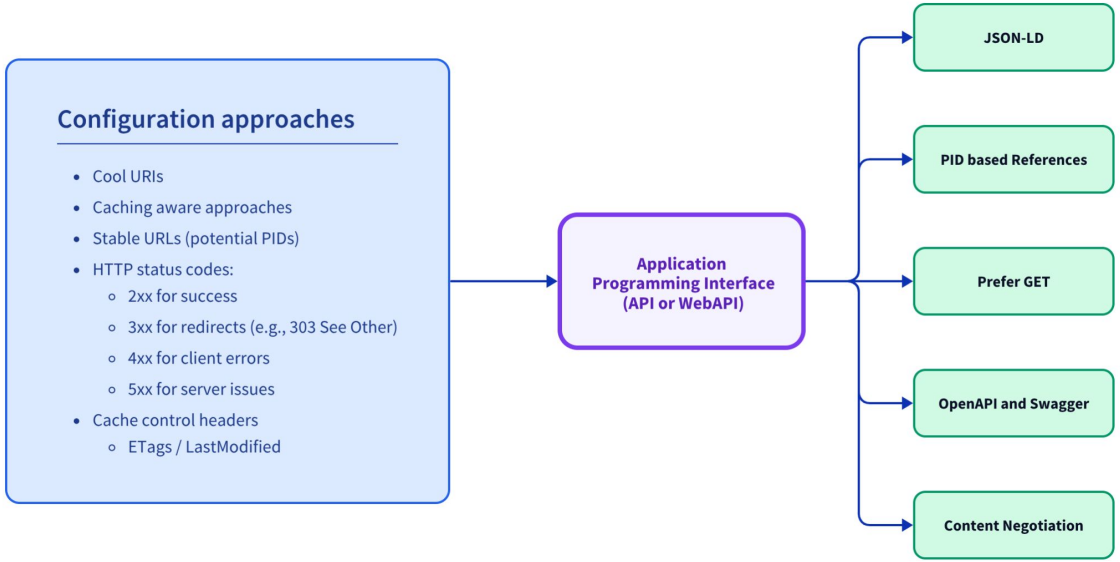

NOTE: **This material is focused on Metadata**, not data resources, so items like JSON-LD and prefer GET are not meant for **your data resource which are likely driven by domain use cases and potential security and access control issues.**

Be Callable: MCP

Caution: hot topic



MCP (Model Context Protocol):

What was the purpose of MCP?:
Agents can get confused navigating APIs, *MCP provides a* ***shared convention*** *for a wide range of clients to leverage.*


Unpopular opinions (so please only blame me):

MCP is not required for you to address "SI-Ready"
- Material from Reachable and Readable sections along with a well documented API (ie, OpenAPI/Swagger) goes a LONG way

MCP alone is not an "SI-Readiness plan"
- You still need tooling, services, policy, network architecture, context, etc.

That all said, ***yes, MCP is an important topic*** to know about!

So let's dive in!

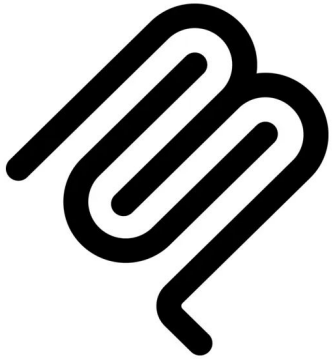

- ***MCP Getting Started (MCP documentation)***
- Governed by the Linux Foundation's Agentic AI Foundation
- Default registry at: https://registry.modelcontextprotocol.io/

Domain and server metadata
/.well-known/mcp.json
/.well-known/ai-catalog.json
(more on these later)

Be Callable: MCP

Recall that MCP has more than just tools, and more than your APIs in a new wrapper

Primitive	Controlled by	Purpose	Discovery / Use	Examples
Tools	Model	Executable functions the LLM can call (may change data, call APIs, run code)	`tools/list` → `tools/call`	Search flights, create calendar event, run a query, send a message
Resources	Application (host)	Read-only data/context identified by URI (files, schemas, docs, DB records, etc.)	`resources/list`, `resources/templates/list` → `resources/read`	File contents, database schema, policy document, calendar data
Prompts	User	Reusable message templates / workflows (often exposed as slash commands or menu items)	`prompts/list` → `prompts/get`	“Plan a vacation”, “Draft a reply”, “Summarize my meetings”

Be Callable: MCP


… and beyond Resources, Prompts and Tools

MCP is a hub between your data, skills, services, context and more to a wide range of clients coded to consume MCP.

NOTE: If that image looks like a **large attack surface**, you are likely correct.

And, if you think Doug is a security expert, you are wrong.

Tell your security team you love them!

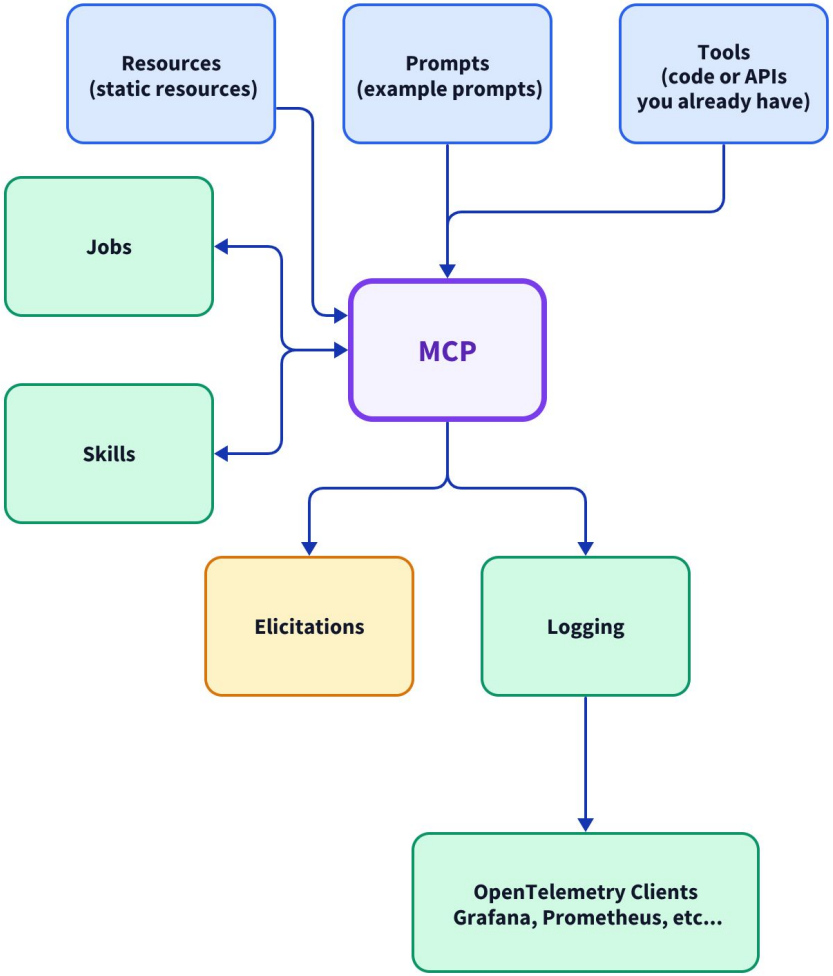

Be Callable: MCP

MCP: Several technical updates, some really are important (details)

March 25	**Upgrades system security to modern authentication standards** and improves how continuous data flows over the network. It also adds new ways to clearly define how automated tools should behave.
June 25	Standardizes how servers **handle user permissions** and requires tools to output data in a **more predictable, structured format.** It also cleans up the system by removing outdated methods for grouping requests.
Nov 25	Introduces a **smoother process for applications to verify their identity** and ask users for permissions one step at a time. It also adds user-friendly customization options, like tool icons and standard naming guidelines.
July 26	Greatly simplifies server management by removing the need for the server to remember past interactions **(making it "stateless").** It also streamlines the core software by moving complex background tasks into optional add-on extensions.
Sept-Oct 26	Finalizes the new **"Skills" extension a**nd officially rolls it out in standard developer kits. This allows creators to easily **build and share more advanced plugins** for the system.

Overflow: see more in supplements



Be Callable: MCP

MCP: Authentication and Authorization

This is a large topic, both here and elsewhere in the talk. I have provided more information for those interested in the supplemental materials

Agents need a clear way to prove who they are before they can use tools or fetch data.

MCP authorization (spec dated 2026-07-28) uses the same pattern as modern web apps (OAuth 2.1):

1. If the agent isn't signed in, the server says "not authorized" and points to where to get access.
2. The agent (or its client) walks through a short login flow and gets a **temporary token** for that server only.
3. Every later request sends that token; the server checks that it's real, meant for this server, and limited to the right permissions.

Permissions stay small on purpose — for example "read resources" instead of full access. Prefer short-lived tokens over permanent API keys.


Result: agents can act for an authorized user (or as a registered client) without shared long-lived keys or someone logging in by hand each time.

Be Meaningful

Structured knowledge is the most reliable way to reduce runtime schema hallucinations.

Express the context of the data in way that also **leverage persistent identifier** and **structured metadata**.

*This aligns with the [NIAID Blueprint] recommendations, and provides important usable context to the mod*els.

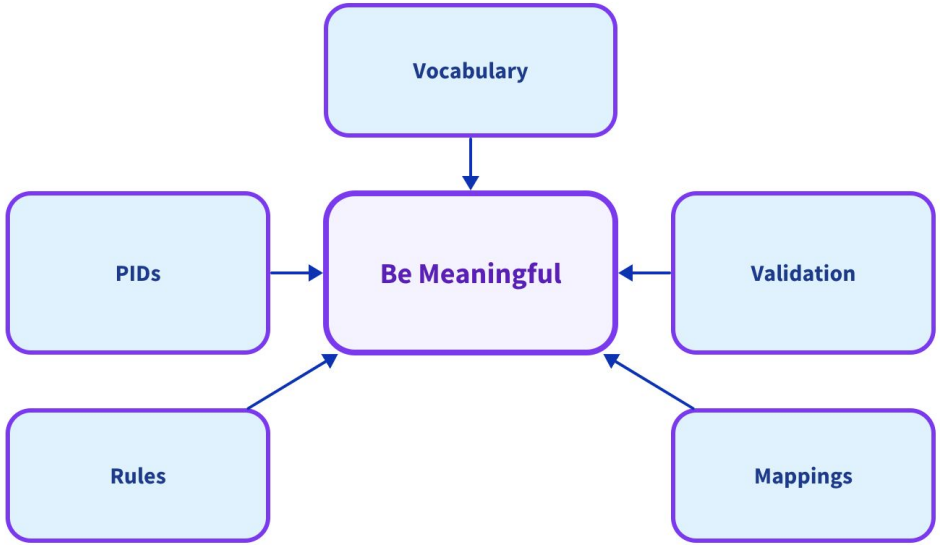

Be Meaningful: PIDs

A persistent identifier gives each thing one stable name an agent can cite and follow.

Popular PIDs include

- DOI or accession for data
- ORCID for people,
- ROR for organizations
- RRID for resources
- RAiD for projects

See also:

- Blueprint Series: Introduction to Identifiers (YouTube)
- ***Upcoming Dec 2026 Webinar***

- **Disambiguation** — uniquely identifies entities (e.g. ORCID for people, ROR for organizations, DOI for outputs).
- **Resolution & citation** — reliably resolves to a landing page or metadata record and supports persistent citation/attribution.
- **Metadata association** — carries or points to rich, structured metadata.
- **Graph linking** — enables the construction of a **PID Graph** in which PIDs are nodes and typed relationships (creator-of, funded-by, cites, version-of, etc.) are edges. This is the model promoted by the FREYA project and operationalized in services such as DataCite Commons and the OpenAIRE Graph.
- **FAIR support** — underpins Findable (F1, F3), Accessible (A1, A2), Interoperable, and Reusable principles by providing stable, resolvable anchors and machine-actionable links.

Overflow: see more in supplements



Be Meaningful: Vocabulary

Vocabularies can range from term list to ontology.

A term list tells agents what words you use. A taxonomy adds broader and narrower terms, and an ontology adds definitions and relationships.

Even an informal data dictionary helps.

There are a range of tools for getting started with development of this type of resource.

Fun test:
https://github.com/go-fair-us/ai-blueprint-core/tree/master/docs/Webinar_Nov_2026/assets/glossary2SKOS

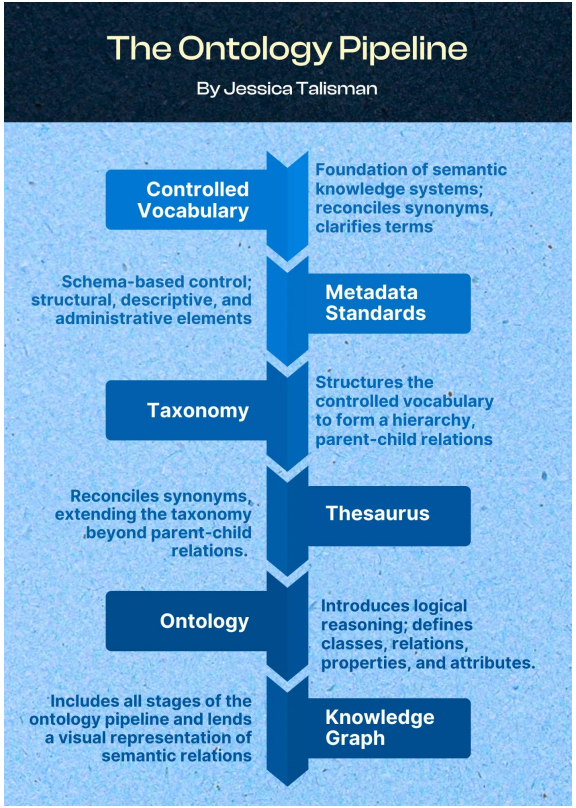


Image source: Jessica Talisman
https://jessicatalisman.substack.com/p/the-ontology-pipeline

Be Meaningful

Structured Metadata Profiles

Leverage existing schema and profiles where you can.

All but DataCite leverage schema.org and all leverage a range of vocabularies to address things like prov, spatial etc.

Declare which profile you follow with `conformsTo`, so agents and validators know what to expect.

Others of potential interest

- Science on Schema.org

Profile	What it adds	Use it for
DataCite Metadata Schema 4.6 Custom schema with mappings	DOI-backed citation, creators, funders, related identifiers, rights	Generalist repos (Zenodo, Figshare, Dryad, Dataverse), following NIH GREI recommendations
Bioschemas Dataset	Life-science minimum, recommended, and optional fields; ontology-backed keywords	Life-science discovery and validation
CODATA CDIF	a set of profiles that address the most important functions for cross-domain FAIR implementation by providing core metadata fields	A framework to address a range of interoperability approaches in a FAIR context.
NIAID Data Ecosystem schema	IID fields: infectious agent, health condition, species, funding Based on BioSchemas	Harvest into the NDE Discovery Portal
Croissant 1.1 (+ RAI and Geo)	Files, typed record fields, ML splits, provenance, usage policies, responsible-AI fields	Broad SI workflow use with a focus on ML tools and workflows.
RO-Crate 1.2	Packages data, code, and workflow runs with their provenance	Data packaging with focus on reproducibility and workflows (Galaxy, WorkflowHub)

Be Meaningful

Let's revisit:

- **Rights & Access**
- Attribution and Authority
- Lineage and IP Protection

Some of this is also related to our previous notes in the **Be Reachable** section on *Machine Readable Rights*.

Access is evolving
Data Privacy Vocabulary (https://w3c-cg.github.io/dpv/2.0/)

Rights expression via Software Package Data Exchange (SPDX) links in schema.org properties:
(https://spdx.org/licenses/)

```
{  "@context": "https://schema.org/",
  "@id": "http://www.sample-data-repository.org/dataset/123",
  "@type": "Dataset",
  "name": "Removal of organic carbon by natural bacterioplankton communities as a function
of pCO2 from laboratory experiments between 2012 and 2016",
  "license": [ "http://spdx.org/licenses/CC0-1.0",
"https://creativecommons.org/publicdomain/zero/1.0"]
  ...
```

There some emerging efforts such as

- Really Simple Licensing (RSL) https://rslstandard.org/rsl which may also be of interest to watch.
- TDMRep (TDM Reservation Protocol) from a W3C community group (https://github.com/w3c-cg/tdm-reservation-protocol)

Note: Here and in some other areas there a gap between what is happening in the US and in Europe. How that evolves is to be seen.

Be Meaningful

Let's revisit:

- Rights & Access
- **Attribution and Authority**
- Lineage and IP Protection

Is defined by PIDs and Roles (for Authority)

Leverage something like NISO credit taxonomy (https://credit.niso.org/) and schema.org

```
{
  "@type": "Role",
  "roleName": "Conceptualization",
  "url": "https://credit.niso.org/contributor-roles/conceptualization/",
  "contributor": { "@id": "https://orcid.org/0000-..." }
}
```

This is where some of the previous profiles mentioned might show approaches to addressing this leveraging vocabularies like schema.org, W3C Annotation Data Model, or others.

Be Meaningful

Let's revisit:

- Rights & Access
- Attribution and Authority
- **Lineage and IP Protection**

W3C PROV-O (Provenance Ontology):
W3C standard model for entities, activities, and agents (`wasGeneratedBy`, `wasDerivedFrom`, `wasAssociatedWith`, etc.)

- **Versioning and relations**:
Use DataCite version properties and RelatedIdentifiers;
  - `IsVersionOf`
  - `IsNewVersionOf`
  - `IsDerivedFrom`
  - etc.

Link to upstream sources and downstream products.

- **Additional mechanisms**:
  - Leverage checksums or digital signatures on packages;

Be Meaningful

Caution: bleeding edge



A deeper set of context elements

Validation with SHACL Core (a W3C Recommendation). A SHACL shape is a machine-readable rule for what a valid record looks like, such as "every sample has a collection date and a host taxon." (https://www.w3.org/TR/shacl/)

Rules with SPARQL RL (a W3C Working Draft, Oct 21 2026). Rules derive new facts, such as computing a value or inferring a parent category, so curation knowledge is declared rather than hidden in code. (https://www.w3.org/TR/sparql12-rl/)

Mappings with SSSOM. SSSOM is a simple table format (TSV) for saying "my term X matches term Y over there." Each row records the relation (exact, close, broader or related), the justification and who asserted it, so an agent can cross between vocabularies with known confidence. (https://mapping-commons.github.io/sssom/dev/)

Exposing these to agents, especially when coupled with a Knowledge Graph, provides very expressive use of that KG

Sharing and aligning your context elements:


- Facilitates *harmonization and integration* across facilities
- Enables entity resolution and relation extraction pipelines

Be All That You Can Be

Facilitating the SI workflow of your users.

- ***Reachable*** *(network accessible)*
- ***Readable*** *(expressive resources)*
- ***Callable*** *(dynamic/service reads)*
- ***Meaningful*** *(context)*

Provide knowledge based determinism to the generative engine.

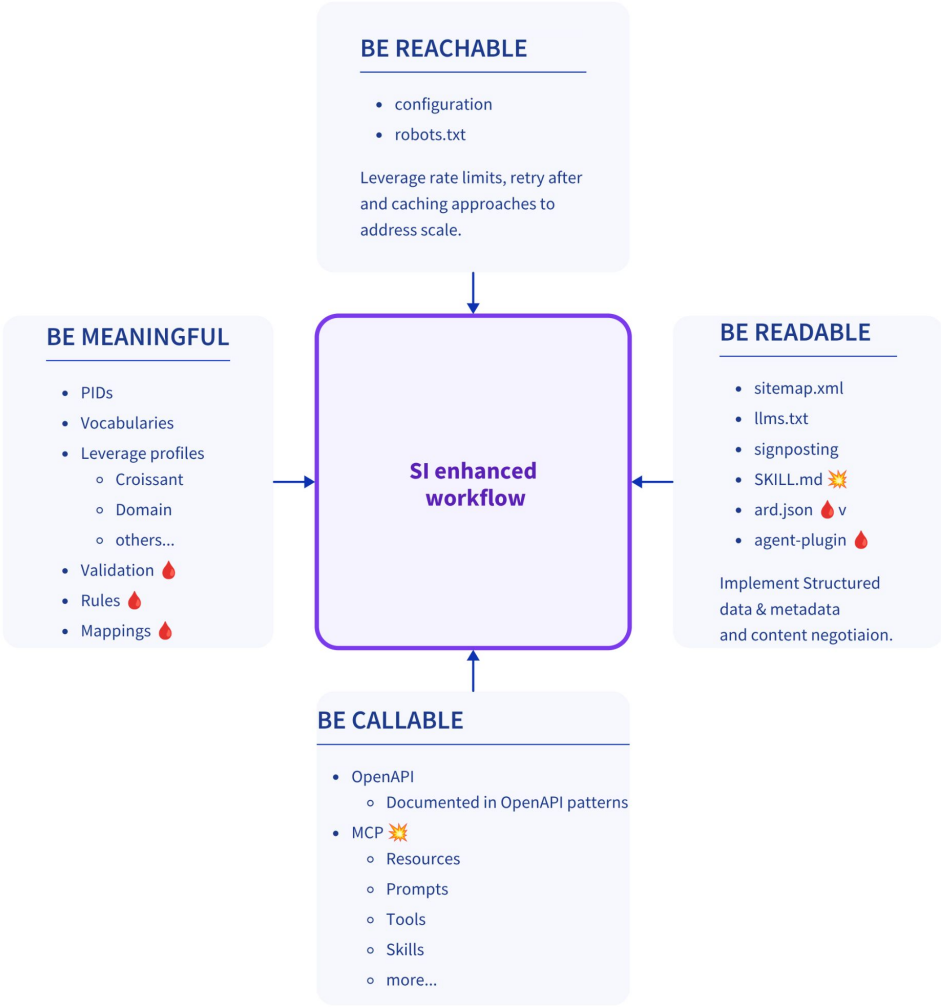

Evaluation

Caution: Too Big for Today 🏔️

Evaluation is a huge topic, but where can we start?

First, some core questions for the community:

- How to **establish baselines**
- How to **measure success over time**

Also, just try it!

Give an agent or a simple chat UI links to your API documentation or your site and just see what it can find. You can the prompts at in the GitHub repo for this talk to try.

Ref: https://github.com/go-fair-us/ai-blueprint-core/tree/master/prompts/evals

Some other resources you can you start with now:

- NDE Portal: Compare results with AI-assisted search on and off (https://data.niaid.nih.gov/knowledge-center/ai-assisted-search)
- Chrome Lighthouse's agent audit
  a. https://developer.chrome.com/docs/lighthouse
  b. Llms.txt Chrome lighthouse audits this https://developer.chrome.com/docs/lighthouse/agentic-browsing/llms-txt
  c. ard.json analyser (see also https://github.com/ards-project/ard-spec)


Also, we are working on some ideas for the liaison meeting on self assessment with custom skills based off this presentation.

Closing Observations

Other than the APIs and MCP services, ***almost everything presented here is a static text file*** exposed by your server.

That doesn't mean it's easy,*
but it does make it accessible.

* These files are dynamic and need governing and curation.

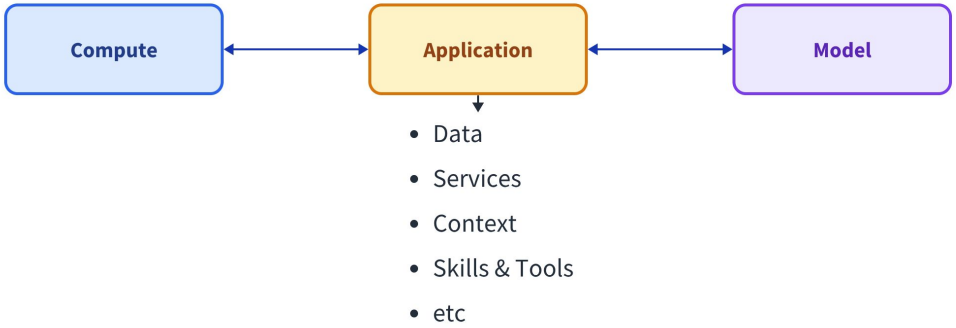

Pursue ***Durable Investments***

Fundamentals with multiple beneficiaries

More Blueprint Resources Available

- Supplementary materials for: Making Your Repository More Accessible to SI
- Minimum Citation Guidelines: www.gofair.us/citation-recommendations
- Sample API Code: https://github.com/go-fair-us/apireference
- Blueprint skills bundle for AI: https://github.com/go-fair-us/ai-blueprint-core/tree/master/niaid-blueprint/skills

NIAID Blueprint Webinar Series 2026-27

RECORDED TOPICS

Using SI to Implement the NIAID Blueprint

CHRIS ERDMANN, KEITH MAULL, & SEAN WILKINSON

Using AI to Enable Citability and Impact Analysis via PIDs

12/18 @11 AM PT/2 PM ET

WEBINARS TOPICS 2027

* Assessing & getting credit in AI-driven world
* Using AI to enhance metadata
* Leveraging agentic AI

Want to hear about something else or in particular?
Let us know in Zoom Q&A or email Lisa.Mayer@nih.gov or Christine@sdsc.edu

Register for the series at https://tinyurl.com/niaid-webinars

Recordings, slides, and resources available: https://www.gofair.us/webinars




Acknowledgements

We thank the NIH staff and community members who contributed to the Blueprint and NIAID FAIR landscaping project.

Funding Acknowledgement: We gratefully acknowledge the Office of Data Science and Emerging Technologies (ODSET) at the National Institute of Allergy and Infectious Diseases (NIAID). This project has been funded in whole or in part with Federal funds from the NIAID, National Institutes of Health, under Contract No. 75N91019D00024, Task Order No. 75N91020F0022. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the Frederick National Laboratory for Cancer Research, Leidos Biomedical Research, Inc., or NIAID. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the author(s).

Image source: https://www.niaid.nih.gov/

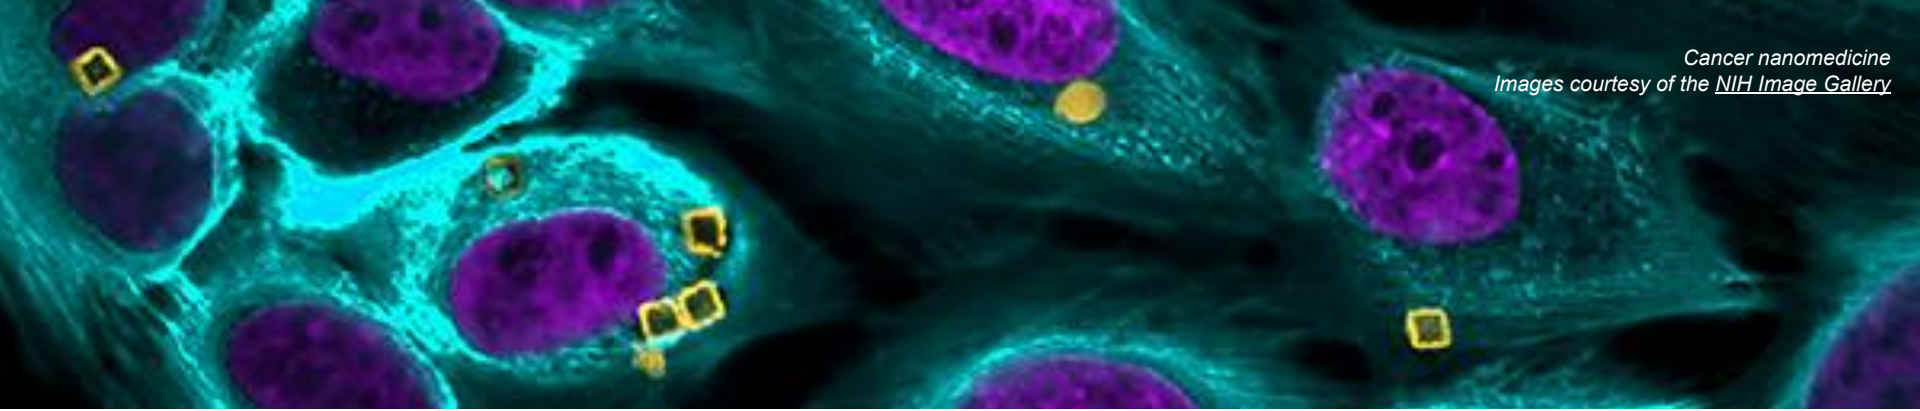

Cancer nanomedicine
Images courtesy of the NIH Image Gallery

Discussion


More From the Edge

Caution: bleeding edge



Things for your radar:

- Your Banks are dealing with the liability, human in the loop and many other factors around agents working on your behalf right now! It's worth watching that.
  *Go ahead… let Meta Muse have your credit card! **



- Exposing embeddings aligned to an agreed on model
- Connecting with Genesis Mission

- We describe our APIs, so why not our UIs?
  - Generative UIs
    - Open Intelligent UI
      - https://github.com/CopilotKit/OpenIntelligentUI
    - Opencode genui
      - https://github.com/madalapranavsai/genui-package
    - Herdr UI
      - https://herdr.dev/
    - Many more coming down the pipe…
  - WebMCP (Still trying to figure out the compelling use case for this one!)
    - https://webmachinelearning.github.io/webmcp/



* *Doug is not a financial advisor and this is not financial advice*