

Task 1: Gitea Local Setup & Understanding

The main goal of Task 1 was to understand the Gitea project structure, set up the required development environment, build Gitea from source, and run it locally without using Docker.

First, the official Gitea repository was forked to my GitHub account and cloned locally. The fork was configured as the origin remote and the official Gitea repository was added as upstream. A separate gitea-task-1 branch was created for the work.

After cloning the project, the development documentation was reviewed to identify the required tools and versions. The environment was configured using MSYS2 UCRT64. The required tools were verified as:

- Go 1.27.0
- Node.js 24.15.0
- npm 11.12.1
- pnpm 11.22.0
- GNU Make 4.4.1

Some tools were initially available in Git Bash but not in the MSYS2 UCRT64 terminal, so the PATH configuration was adjusted and the tools were verified again.

The project dependencies were then installed and Gitea was built from source using:

- After the build completed successfully, Gitea was started locally using:

```
./gitea web
```


The application started successfully on:

```
http://localhost:3000
```

The browser was then used to verify that the Gitea Initial Configuration page was loading correctly.


Gitea Initial Configuration

The first screenshot shows the Initial Configuration page with the database and general configuration sections. This confirmed that the locally built Gitea application was running correctly and ready for initial configuration.

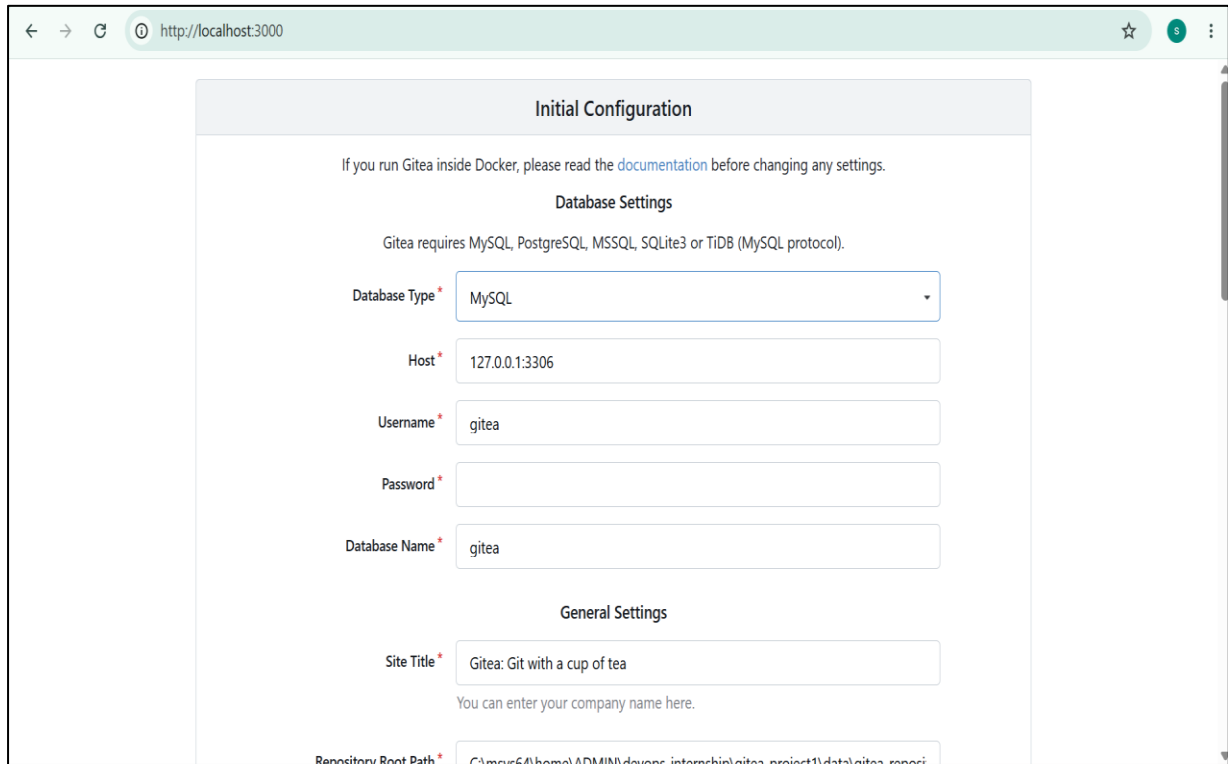


The screenshot shows the 'Initial Configuration' page of Gitea in a web browser at <http://localhost:3000>. The page has a light gray header with the title 'Initial Configuration'. Below the header, there is a note: 'If you run Gitea inside Docker, please read the [documentation](#) before changing any settings.' The page is divided into two main sections: 'Database Settings' and 'General Settings'. In the 'Database Settings' section, there are five form fields: 'Database Type' (a dropdown menu set to 'MySQL'), 'Host' (text input '127.0.0.1:3306'), 'Username' (text input 'gitea'), 'Password' (empty text input), and 'Database Name' (text input 'gitea'). The 'General Settings' section has two visible form fields: 'Site Title' (text input 'Gitea: Git with a cup of tea') and 'Repository Root Path' (text input 'C:\msys64\home\ADMIN\devops-internship\gitea-project1\data\gitea-repos'). Below the 'Site Title' field, there is a hint: 'You can enter your company name here.'

The next screenshot shows the general server settings, including the local Gitea Base URL, log path, and optional settings.

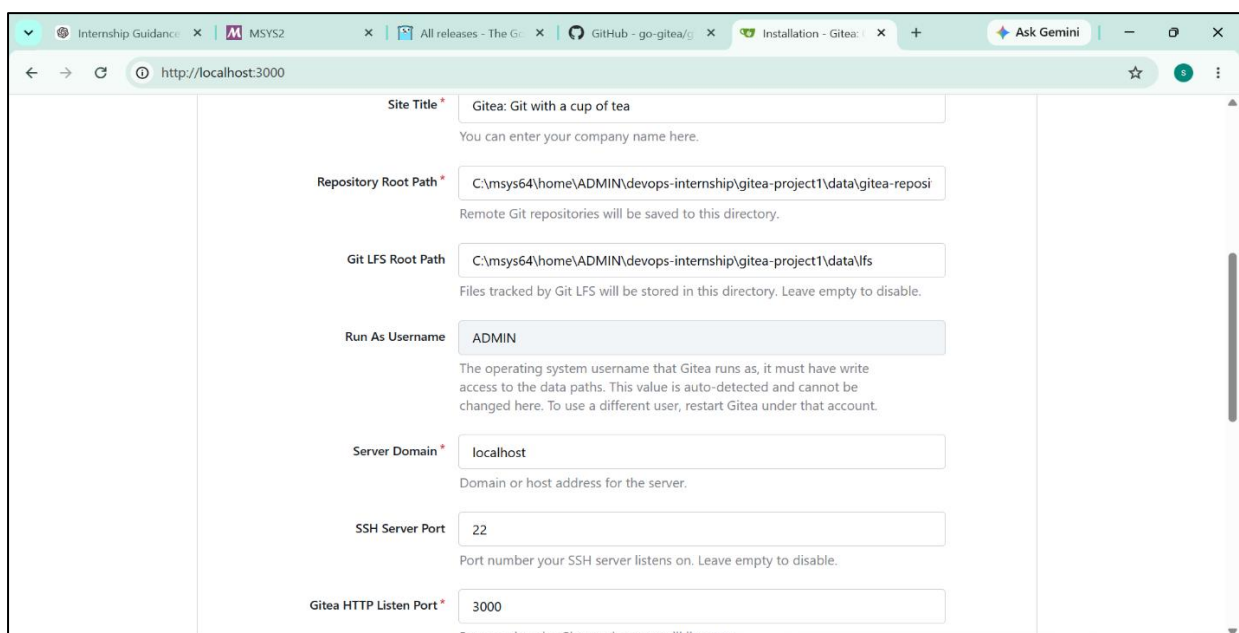

The screenshot shows the 'General Settings' page of Gitea in a web browser at <http://localhost:3000>. The page has a light gray header with the title 'General Settings'. Below the header, there are several form fields and sections. The 'Site Title' field is set to 'Gitea: Git with a cup of tea', with a hint 'You can enter your company name here.' below it. The 'Repository Root Path' field is set to 'C:\msys64\home\ADMIN\devops-internship\gitea-project1\data\gitea-repos', with a hint 'Remote Git repositories will be saved to this directory.' below it. The 'Git LFS Root Path' field is set to 'C:\msys64\home\ADMIN\devops-internship\gitea-project1\data\lfs', with a hint 'Files tracked by Git LFS will be stored in this directory. Leave empty to disable.' below it. The 'Run As Username' field is set to 'ADMIN', with a hint 'The operating system username that Gitea runs as, it must have write access to the data paths. This value is auto-detected and cannot be changed here. To use a different user, restart Gitea under that account.' below it. The 'Server Domain' field is set to 'localhost', with a hint 'Domain or host address for the server.' below it. The 'SSH Server Port' field is set to '22', with a hint 'Port number your SSH server listens on. Leave empty to disable.' below it. The 'Gitea HTTP Listen Port' field is set to '3000', with a hint 'Port number the Gitea web console will listen on.' below it.

The final screenshot shows the repository root path, Git LFS path, running user, server domain, SSH port, and Gitea HTTP port. The application was configured for local development using localhost and port 3000.

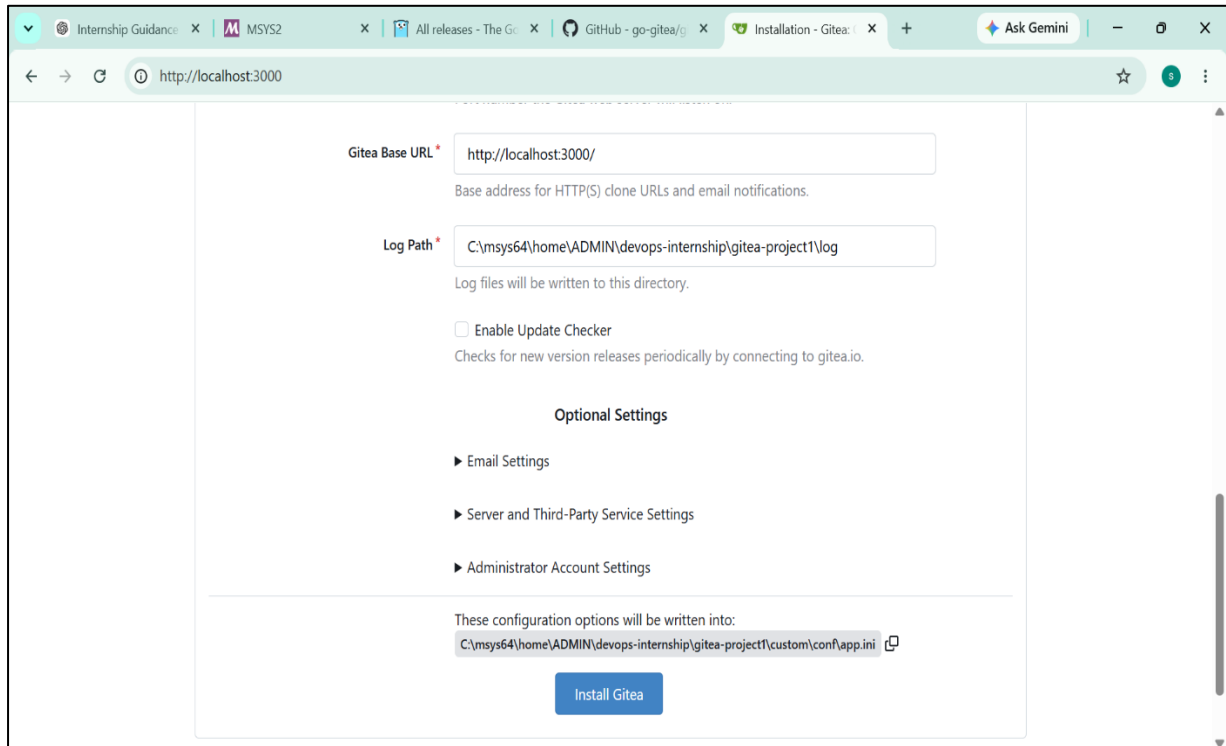

Docker was not used for this setup. The Gitea source repository's existing Docker-related files were left unchanged because they are part of the project source; the application itself was built and run directly from the local source.

Git and PR Workflow

The work was kept on the gitea-task-1 branch. After completing the task, the Task 1 documentation was added to the repository, committed, and pushed to my fork.

The pull request will be created from:

Gilakarabhavish/gitea-project1

gitea-task-1

to:

go-gitea/gitea

main

Result

Gitea was successfully built from source and verified locally at <http://localhost:3000>. The development environment, project structure, Git workflow, and local Gitea setup were successfully understood and documented.

Status

Task 1 completed successfully.