

database when the host closes. Reopening a temporary file in a second host is the acceptance test for persistence.

Permissions and credentials

Descriptors need explicit additional scopes and event subscriptions. Generate bot scopes from declared capabilities and verify manifests in tests. Admin/user-token methods must not reuse a bot token accidentally. Store an optional user/admin credential separately if the implemented counterpart needs it, and choose credentials in Go by service method.

The manifest is remote state. Startup already updates it by default and reports changed permissions. Treat missing installed scopes as an operational failure with an install instruction; do not fabricate successful API results.

6. Concrete data-flow examples

A review button needs both routing identity and record identity. Put a stable handler name in the action ID and the record ID in the value. Verify workspace and authorization before changing the record. Build the next UI from the updated application state.

```
on review.verify(action):
    entryID = parse action.value
    actor = invocation.userId
    entry = store.load(workspace, entryID)
    reject missing entry or unauthorized actor
    store.markVerified(workspace, entryID, actor)
    nextView = renderReview(store.currentQueue(workspace))
    replace originating message with nextView
```

For a modal edit, private metadata can identify the original record and message. It is application context, not proof of authorization. Revalidate the record and actor on submission. A process restart may remove transient UI state; a clear reopen instruction is sufficient.

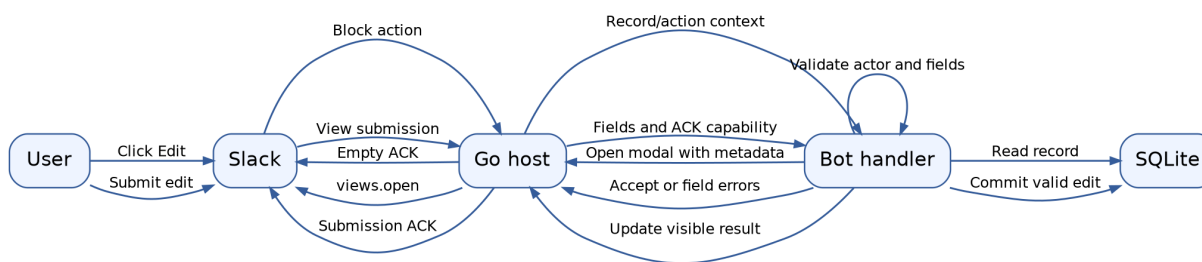


Figure 2: Review edit sequence

Review/edit sequence rendered with Graphviz for print readability.

The ordering of acceptance and persistence is an application decision. A short local transaction may finish before acceptance; a slow operation should accept promptly and report later failure explicitly. Do not hold the ACK indefinitely during history retrieval or file upload.

7. API reference and archived evidence

The ticket's sources folder contains Defuddle extracts plus URL/hash metadata in `index.json`. Some generated documentation omits method fact tables during extraction; confirm token