


Fluxion “count” is registered with the multiplicity “uid”, specifying to allocate one context per “uid”.

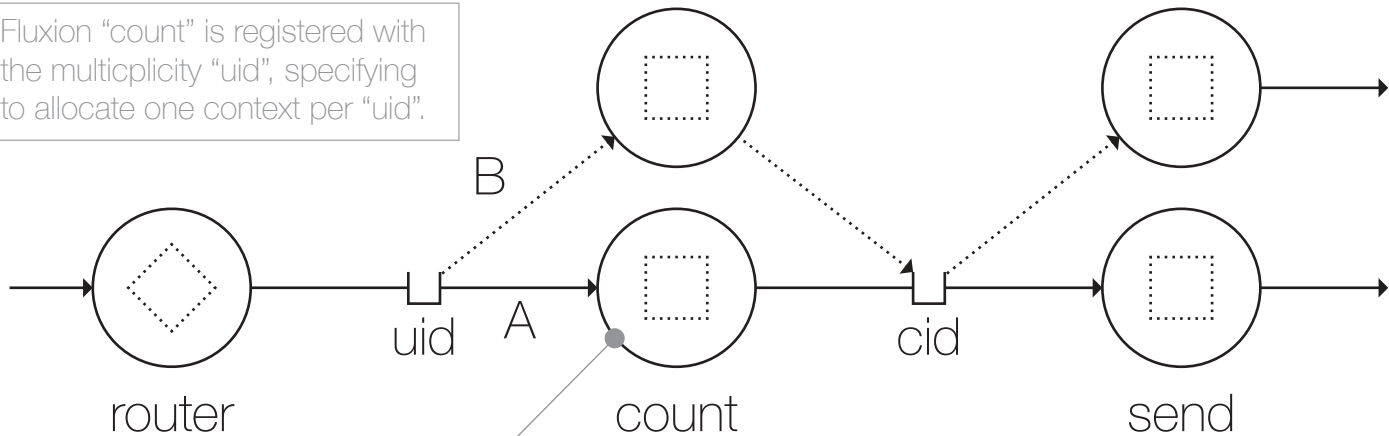

Fluxion “count” is called with the context of A when receiving a message with “A” multiplicity