


1) Promise.all Settled →
↳ rejected

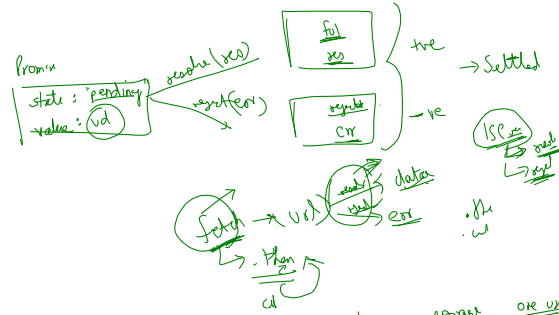

github → to get avatar → promise one user
 {
 goodshndak694
 vohmupumar
 your user
 } → get 1 of these
 promises

3, 30
 versions = [x, b, 9, 2, 8]
 ⇒ fetch(-----) → promise
 { p1, p2, p3, p4 }
 [1, 2, 3].map(nm ⇒ 2x nm)
 [2, 4, 6, 8]
 [x3, x4, x5, x6]

```

let username = ["goodshndak694", "vohmupumar", "youruser", "helluser"];
let allGithubRequests = username.map(name => fetch(`https://api.github.com/users/${username}`));
const {map, all} = Promise.prototype;
const allGithubRequests = allGithubRequests.map(fetch);
return Promise.all(allGithubRequests.map(fetch) => results.map(result));
  
```

allGithubRequests [1, 2, 3, 4] → Promise.all
 [x1, x2, x3, x4] → can