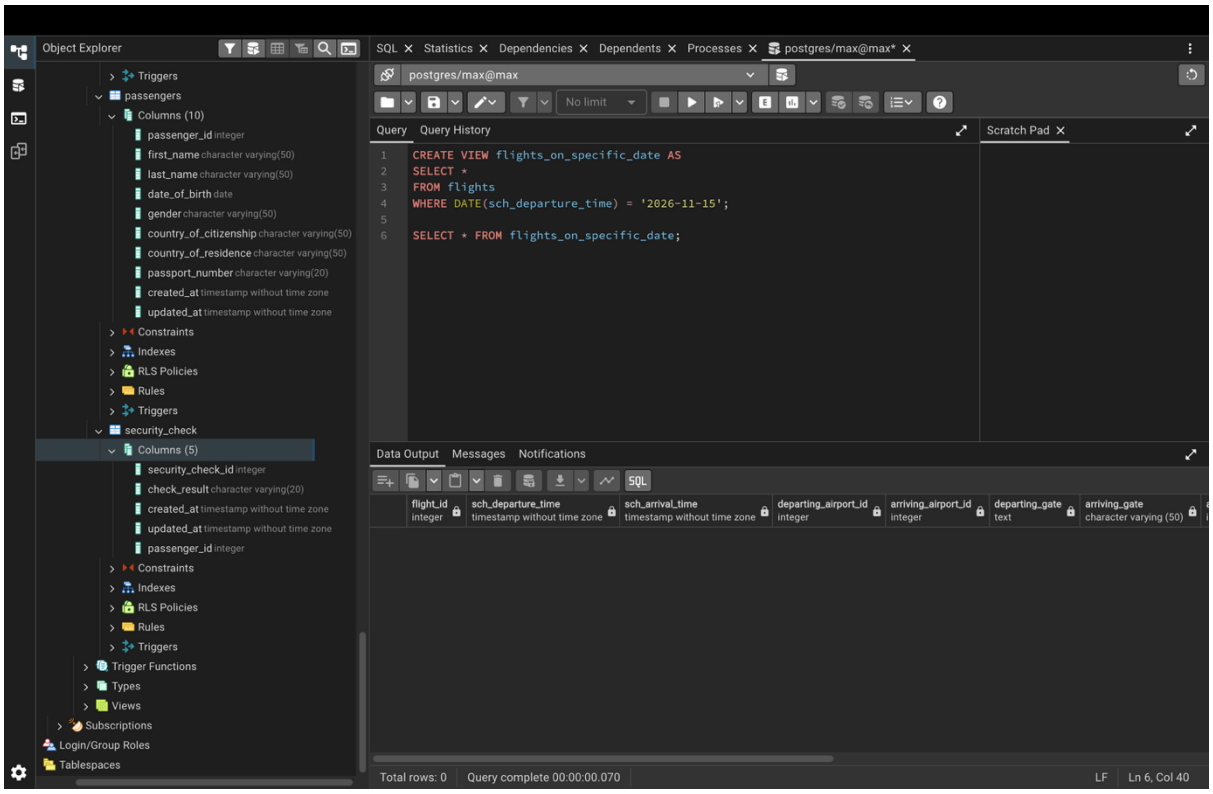
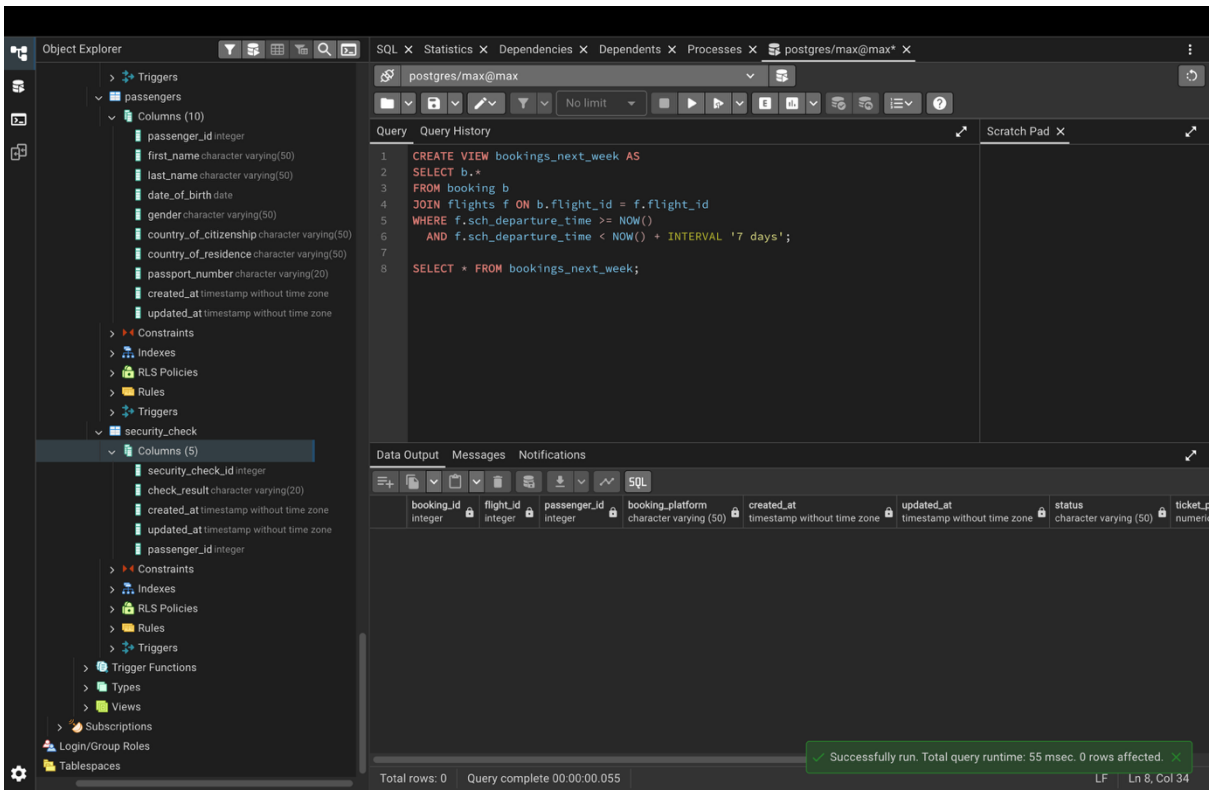
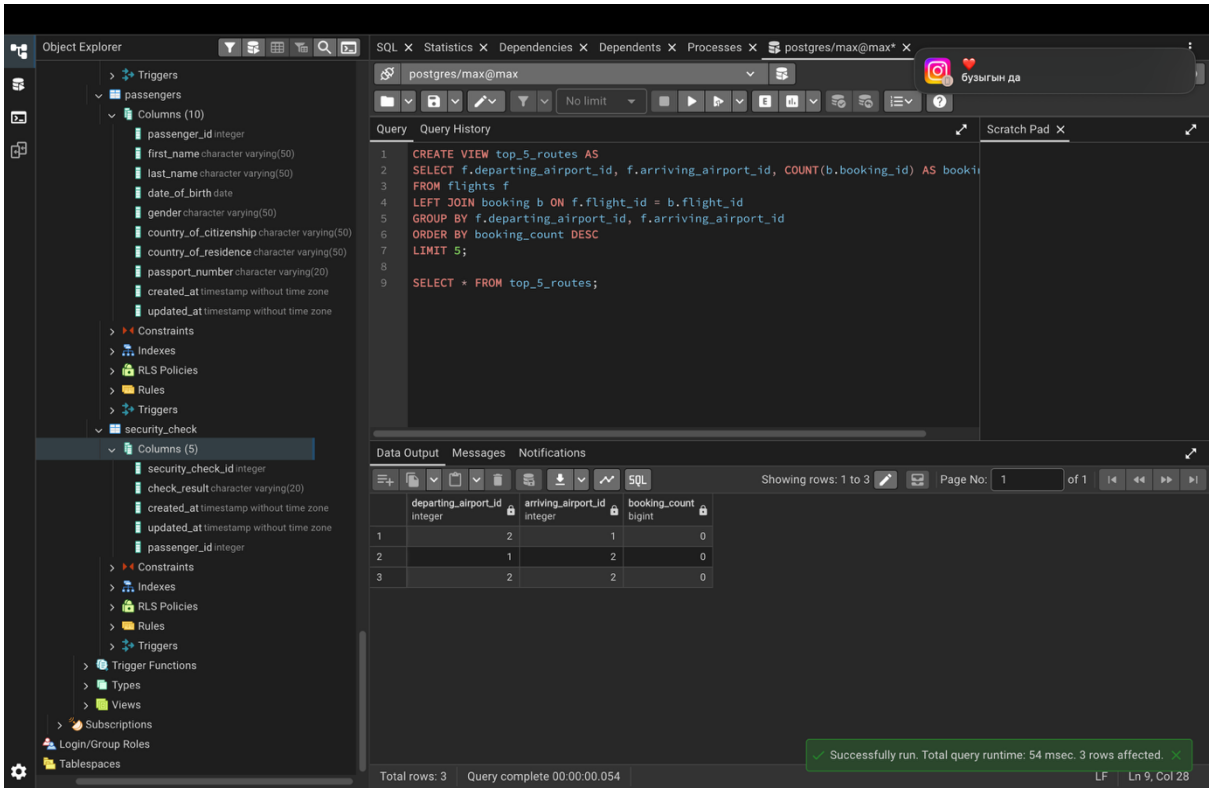
1)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE VIEW flights_on_specific_date AS
SELECT *
FROM flights
WHERE DATE(sch_departure_time) = '2026-11-15';
SELECT * FROM flights_on_specific_date;
Data Output
Messages
Notifications
flight_id integer
sch_departure_time timestamp without time zone
sch_arrival_time timestamp without time zone
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate character varying (50)
Total rows: 0
Query complete 00:00:00.070
LF
Ln 6, Col 40

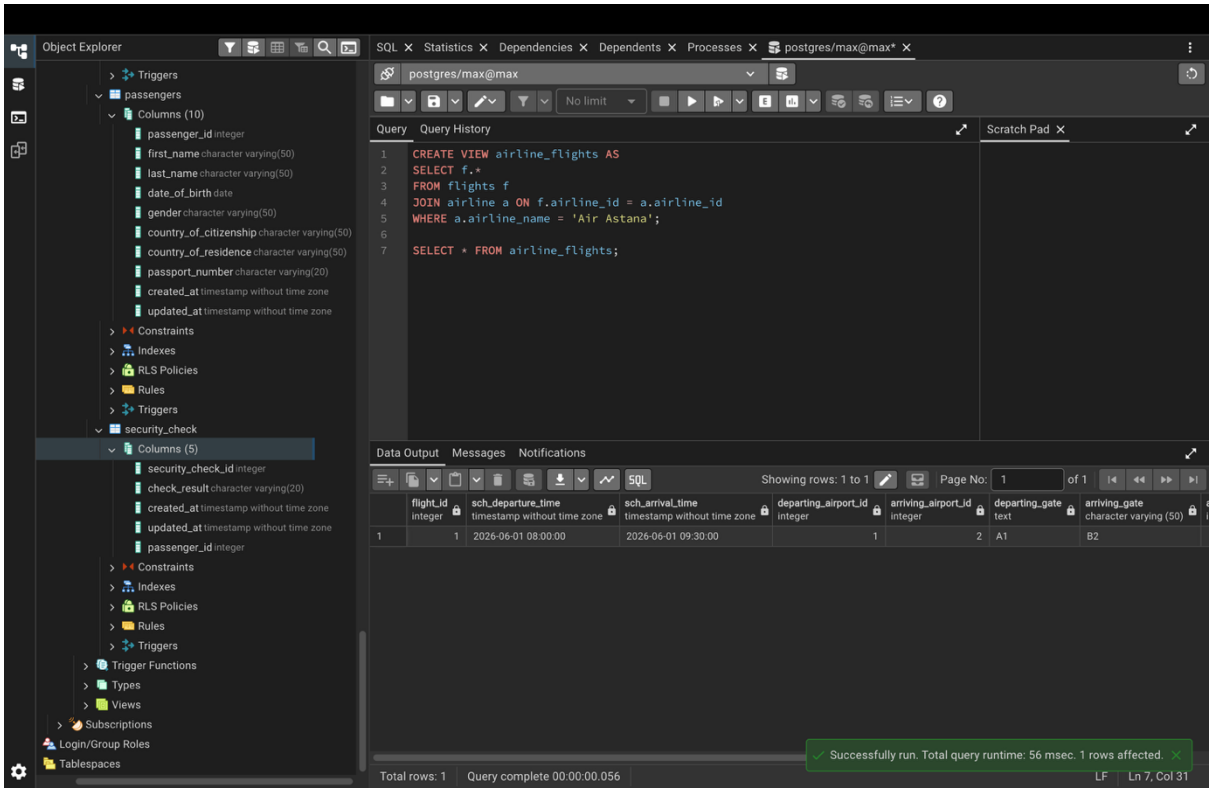
2)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE VIEW bookings_next_week AS
SELECT b.*
FROM booking b
JOIN flights f ON b.flight_id = f.flight_id
WHERE f.sch_departure_time >= NOW()
AND f.sch_departure_time < NOW() + INTERVAL '7 days';
SELECT * FROM bookings_next_week;
Data Output
Messages
Notifications
booking_id integer
flight_id integer
passenger_id integer
booking_platform character varying (50)
created_at timestamp without time zone
updated_at timestamp without time zone
status character varying (50)
Successfully run. Total query runtime: 55 msec. 0 rows affected.
Total rows: 0
Query complete 00:00:00.055
LF
Ln 8, Col 34

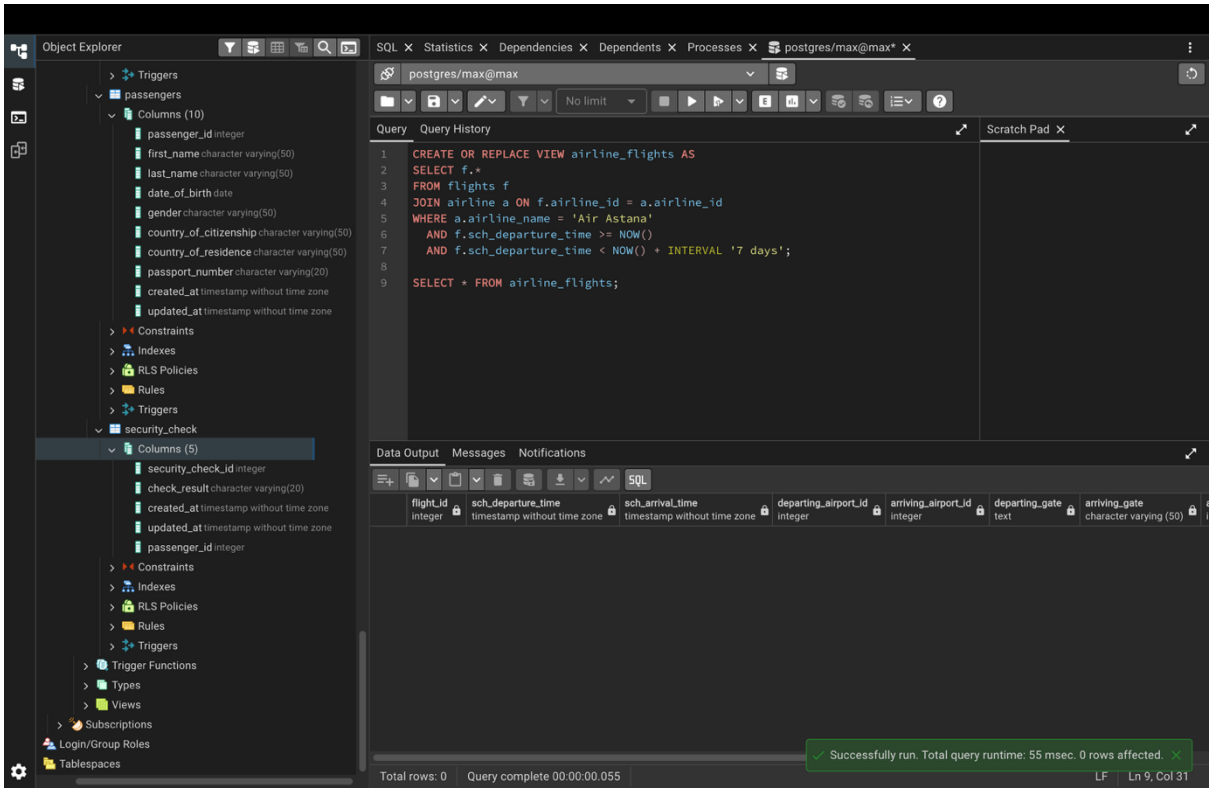
3)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE VIEW top_5_routes AS
SELECT f.departing_airport_id, f.arriving_airport_id, COUNT(b.booking_id) AS booki
FROM flights f
LEFT JOIN booking b ON f.flight_id = b.flight_id
GROUP BY f.departing_airport_id, f.arriving_airport_id
ORDER BY booking_count DESC
LIMIT 5;
SELECT * FROM top_5_routes;
Data Output
Messages
Notifications
Showing rows: 1 to 3
Page No: 1
of 1
departing_airport_id integer
arriving_airport_id integer
booking_count bigint
1 2 1 0
2 1 2 0
3 2 2 0
Successfully run. Total query runtime: 54 msec. 3 rows affected.
Total rows: 3
Query complete 00:00:00.054
LF
Ln 9, Col 28

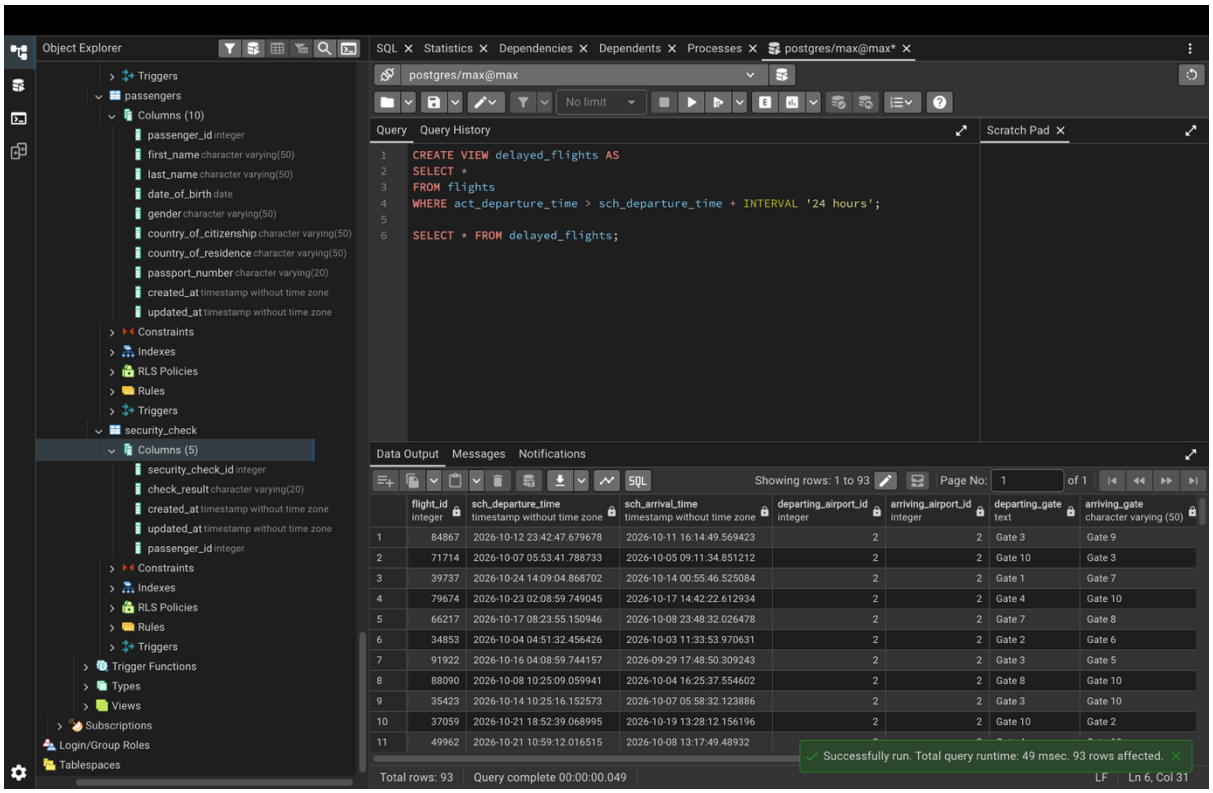
4)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE VIEW airline_flights AS
SELECT f.*
FROM flights f
JOIN airline a ON f.airline_id = a.airline_id
WHERE a.airline_name = 'Air Astana';
SELECT * FROM airline_flights;
Data Output
Messages
Notifications
Showing rows: 1 to 1
Page No: 1
of 1
flight_id integer
sch_departure_time timestamp without time zone
sch_arrival_time timestamp without time zone
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate character varying (50)
1 1 2026-06-01 08:00:00 2026-06-01 09:30:00 1 2 A1 B2
Successfully run. Total query runtime: 56 msec. 1 rows affected.
Total rows: 1
Query complete 00:00:00.056
LF
Ln 7, Col 31

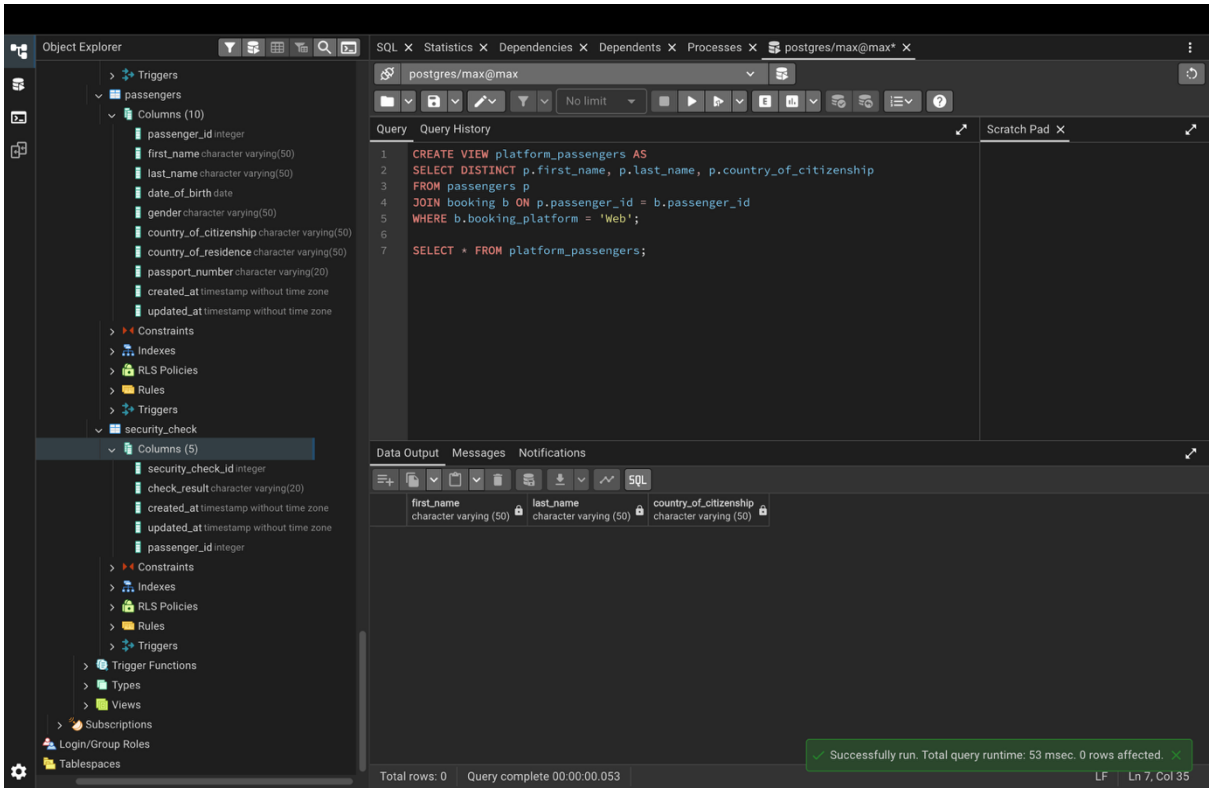
5)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE OR REPLACE VIEW airline_flights AS
SELECT f.*
FROM flights f
JOIN airline a ON f.airline_id = a.airline_id
WHERE a.airline_name = 'Air Astana'
AND f.sch_departure_time >= NOW()
AND f.sch_departure_time < NOW() + INTERVAL '7 days';
SELECT * FROM airline_flights;
Data Output
Messages
Notifications
flight_id integer
sch_departure_time timestamp without time zone
sch_arrival_time timestamp without time zone
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate character varying (50)
Successfully run. Total query runtime: 55 msec. 0 rows affected.
Total rows: 0
Query complete 00:00:00.055
LF
Ln 9, Col 31

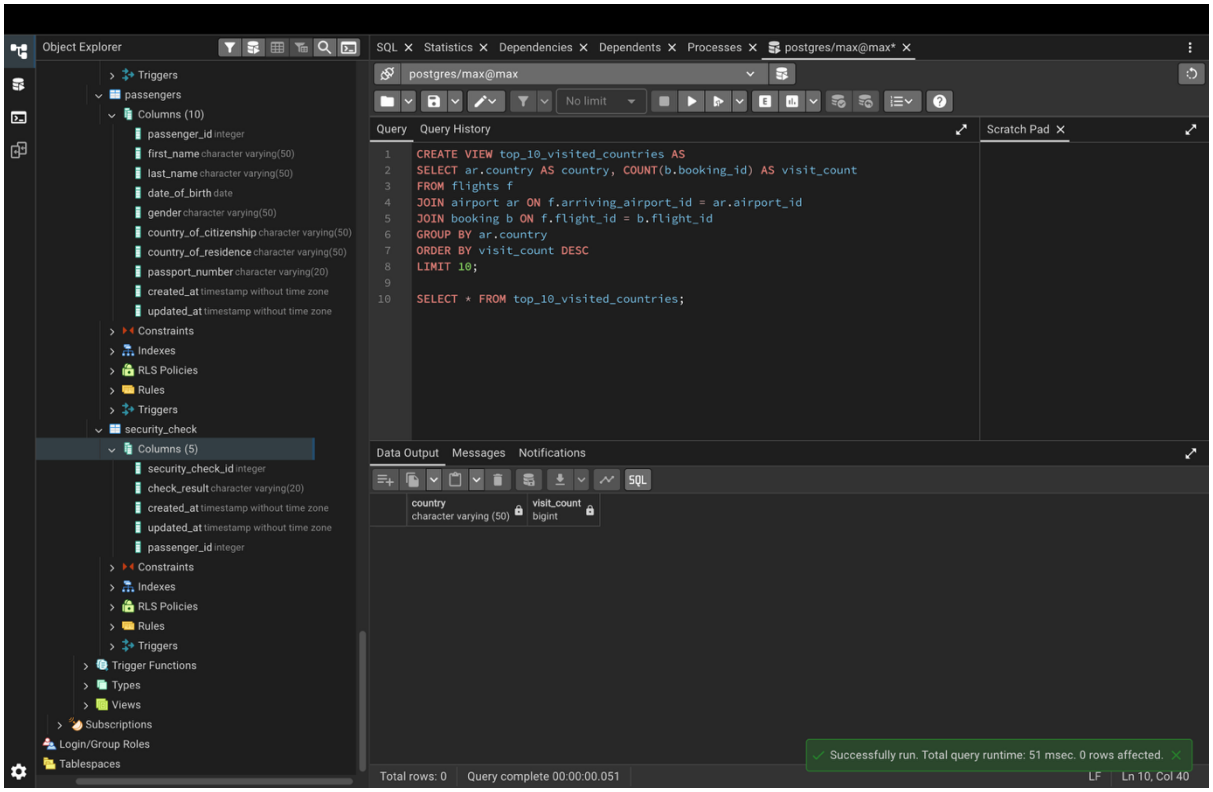
6)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE VIEW delayed_flights AS
SELECT *
FROM flights
WHERE act_departure_time > sch_departure_time + INTERVAL '24 hours';
SELECT * FROM delayed_flights;
Data Output
Messages
Notifications
Showing rows: 1 to 93
Page No: 1 of 1
flight_id integer
sch_departure_time timestamp without time zone
sch_arrival_time timestamp without time zone
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate character varying (50)
1 84867 2026-10-12 23:42:47.679678 2026-10-11 16:14:49.569423 2 2 Gate 3 Gate 9
2 71714 2026-10-07 05:53:41.788733 2026-10-05 09:11:34.851212 2 2 Gate 10 Gate 3
3 39737 2026-10-24 14:09:04.868702 2026-10-14 00:55:46.525084 2 2 Gate 1 Gate 7
4 79674 2026-10-23 02:08:59.749045 2026-10-17 14:42:22.612934 2 2 Gate 4 Gate 10
5 66217 2026-10-17 08:23:55.150946 2026-10-08 23:48:32.026478 2 2 Gate 7 Gate 8
6 34853 2026-10-04 04:51:32.456426 2026-10-03 11:33:53.970631 2 2 Gate 2 Gate 6
7 91922 2026-10-16 04:08:59.744157 2026-09-29 17:48:50.309243 2 2 Gate 3 Gate 5
8 88090 2026-10-08 10:25:09.059941 2026-10-04 16:25:37.554602 2 2 Gate 8 Gate 10
9 35423 2026-10-14 10:25:16.152573 2026-10-07 05:58:32.123886 2 2 Gate 3 Gate 10
10 37059 2026-10-21 18:52:39.068995 2026-10-19 13:28:12.156196 2 2 Gate 10 Gate 2
11 49962 2026-10-21 10:59:12.016515 2026-10-08 13:17:49.48932
Successfully run. Total query runtime: 49 msec. 93 rows affected.
Total rows: 93
Query complete 00:00:00.049
LF
Ln 6, Col 31

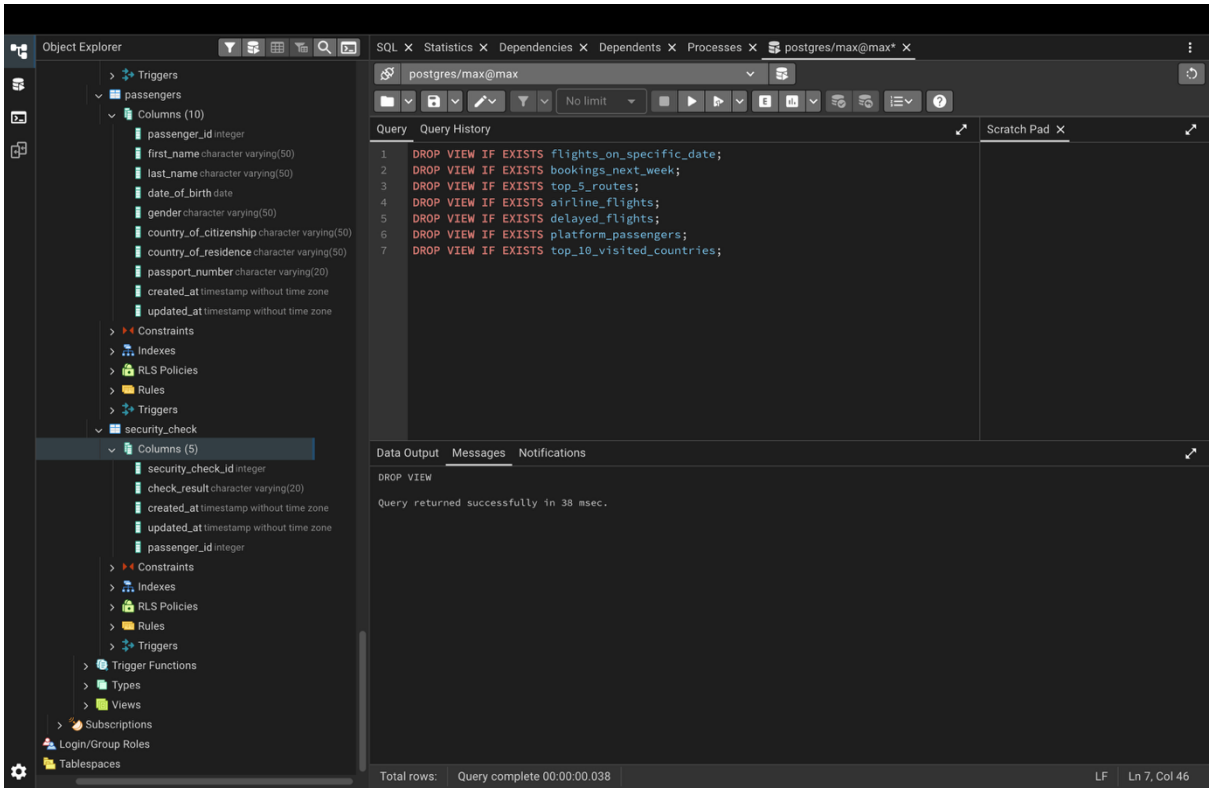
7)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE VIEW platform_passengers AS
SELECT DISTINCT p.first_name, p.last_name, p.country_of_citizenship
FROM passengers p
JOIN booking b ON p.passenger_id = b.passenger_id
WHERE b.booking_platform = 'Web';
SELECT * FROM platform_passengers;
Data Output
Messages
Notifications
first_name
character varying (50)
last_name
character varying (50)
country_of_citizenship
character varying (50)
Successfully run. Total query runtime: 53 msec. 0 rows affected.
Total rows: 0
Query complete 00:00:00.053
LF
Ln 7, Col 35

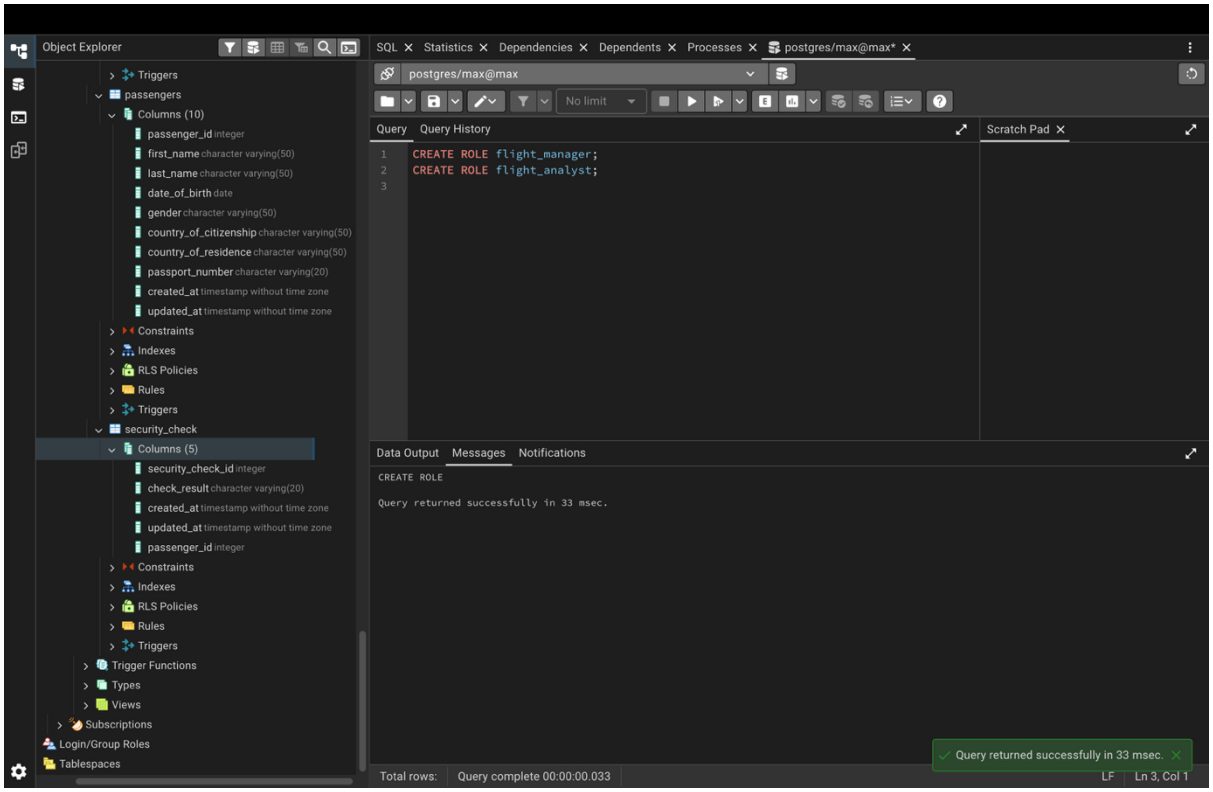
8)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE VIEW top_10_visited_countries AS
SELECT ar.country AS country, COUNT(b.booking_id) AS visit_count
FROM flights f
JOIN airport ar ON f.arriving_airport_id = ar.airport_id
JOIN booking b ON f.flight_id = b.flight_id
GROUP BY ar.country
ORDER BY visit_count DESC
LIMIT 10;
SELECT * FROM top_10_visited_countries;
Data Output
Messages
Notifications
country
character varying (50)
visit_count
bigint
Successfully run. Total query runtime: 51 msec. 0 rows affected.
Total rows: 0
Query complete 00:00:00.051
LF
Ln 10, Col 40

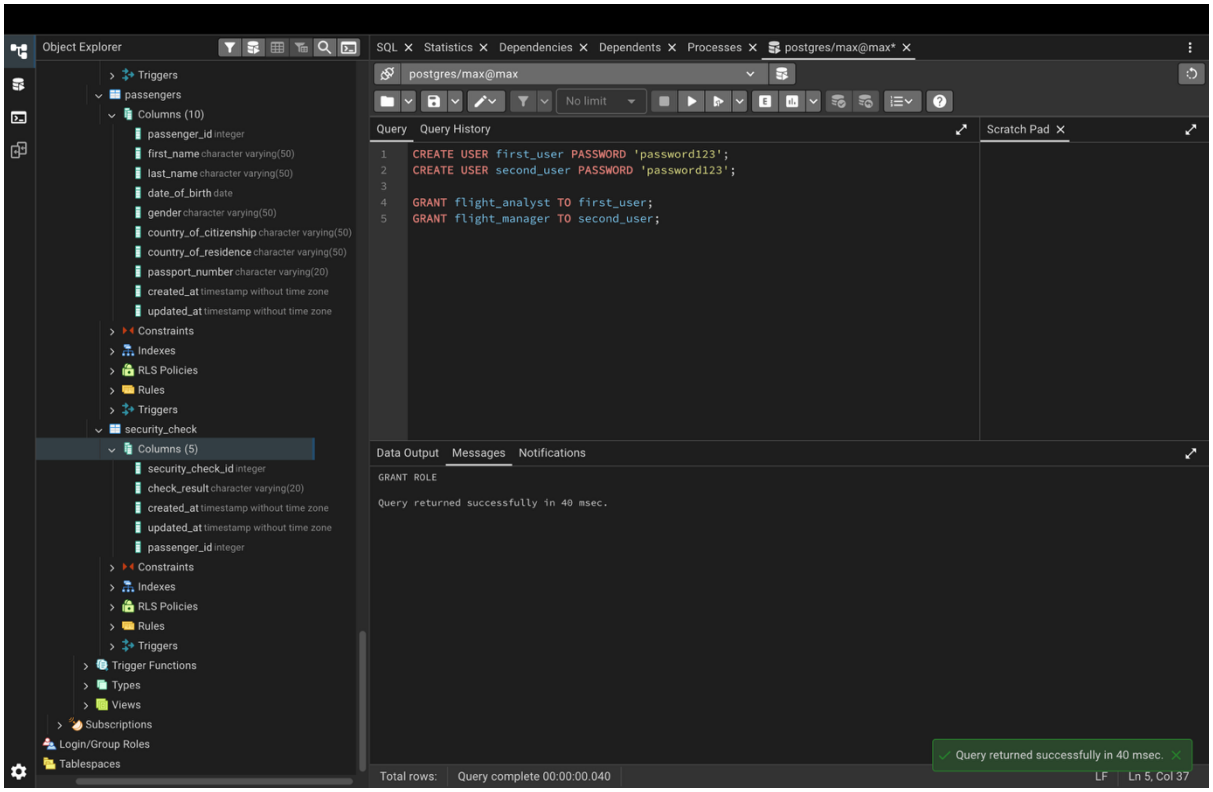
10)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
DROP VIEW IF EXISTS flights_on_specific_date;
DROP VIEW IF EXISTS bookings_next_week;
DROP VIEW IF EXISTS top_5_routes;
DROP VIEW IF EXISTS airline_flights;
DROP VIEW IF EXISTS delayed_flights;
DROP VIEW IF EXISTS platform_passengers;
DROP VIEW IF EXISTS top_10_visited_countries;
Data Output
Messages
Notifications
DROP VIEW
Query returned successfully in 38 msec.
Total rows:
Query complete 00:00:00.038
LF
Ln 7, Col 46

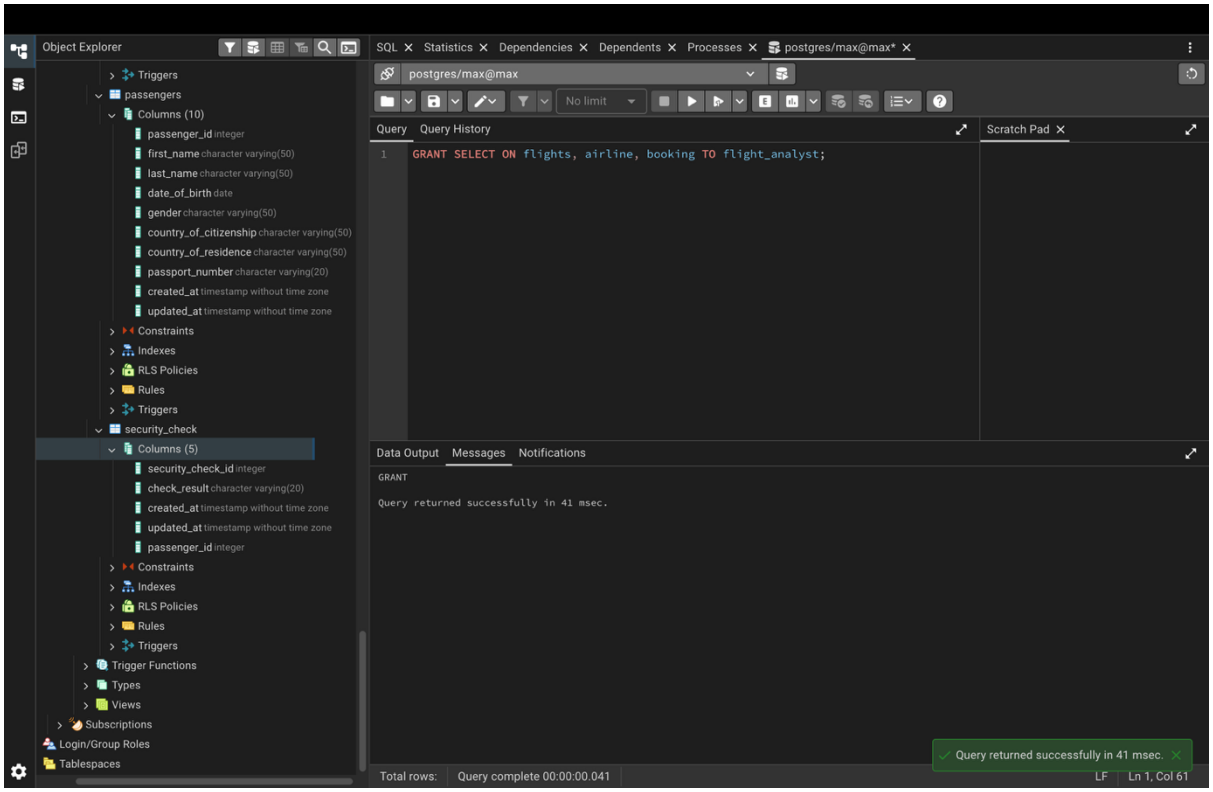
11)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE ROLE flight_manager;
CREATE ROLE flight_analyst;
Data Output
Messages
Notifications
CREATE ROLE
Query returned successfully in 33 msec.
Query returned successfully in 33 msec.
Total rows:
Query complete 00:00:00.033
LF
Ln 3, Col 1

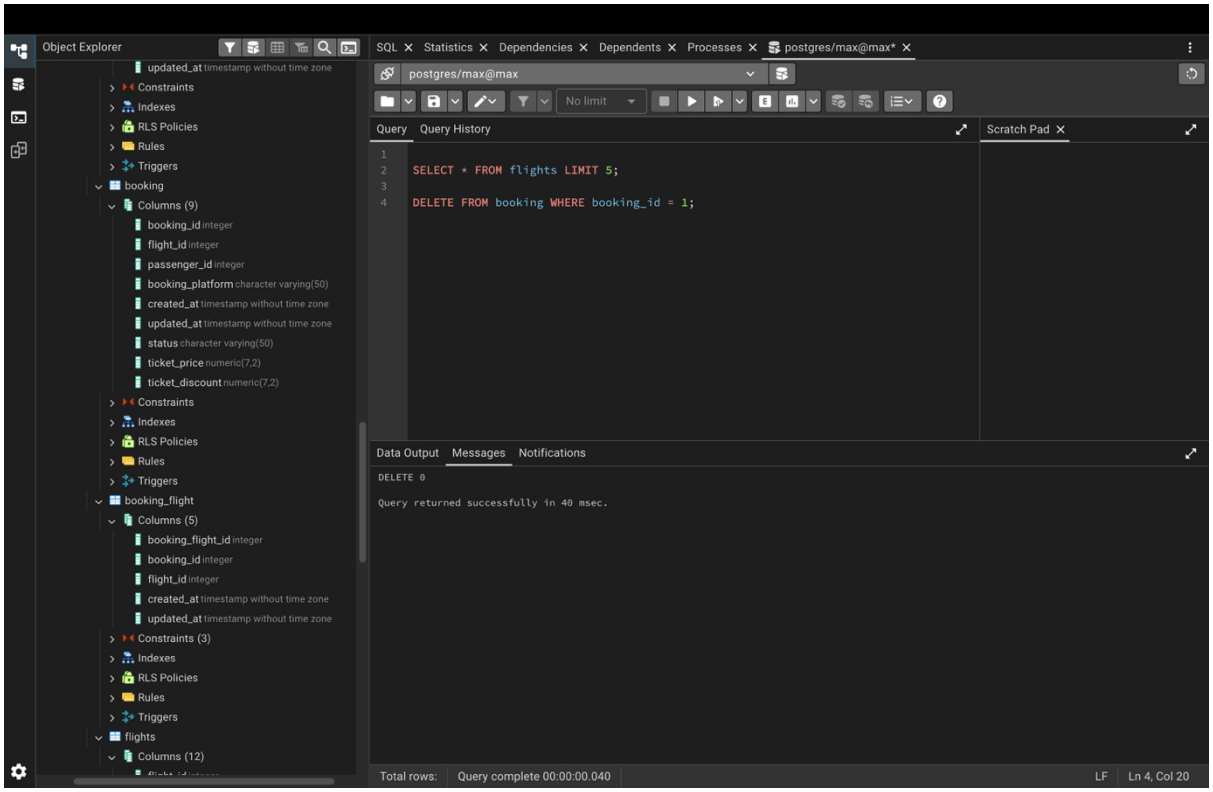
12)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
CREATE USER first_user PASSWORD 'password123';
CREATE USER second_user PASSWORD 'password123';
GRANT flight_analyst TO first_user;
GRANT flight_manager TO second_user;
Data Output
Messages
Notifications
GRANT ROLE
Query returned successfully in 40 msec.
Total rows:
Query complete 00:00:00.040
LF
Ln 5, Col 37

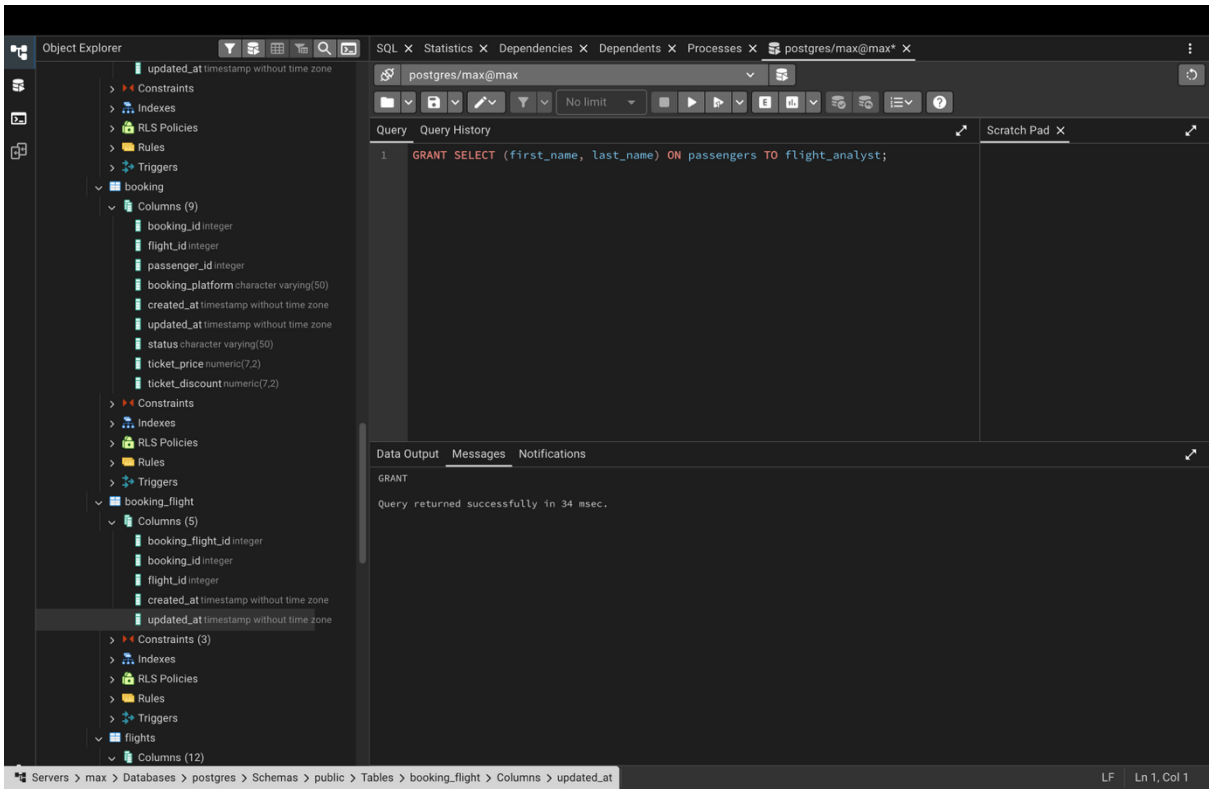
13)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
GRANT SELECT ON flights, airline, booking TO flight_analyst;
Data Output
Messages
Notifications
GRANT
Query returned successfully in 41 msec.
Total rows:
Query complete 00:00:00.041
LF
Ln 1, Col 61

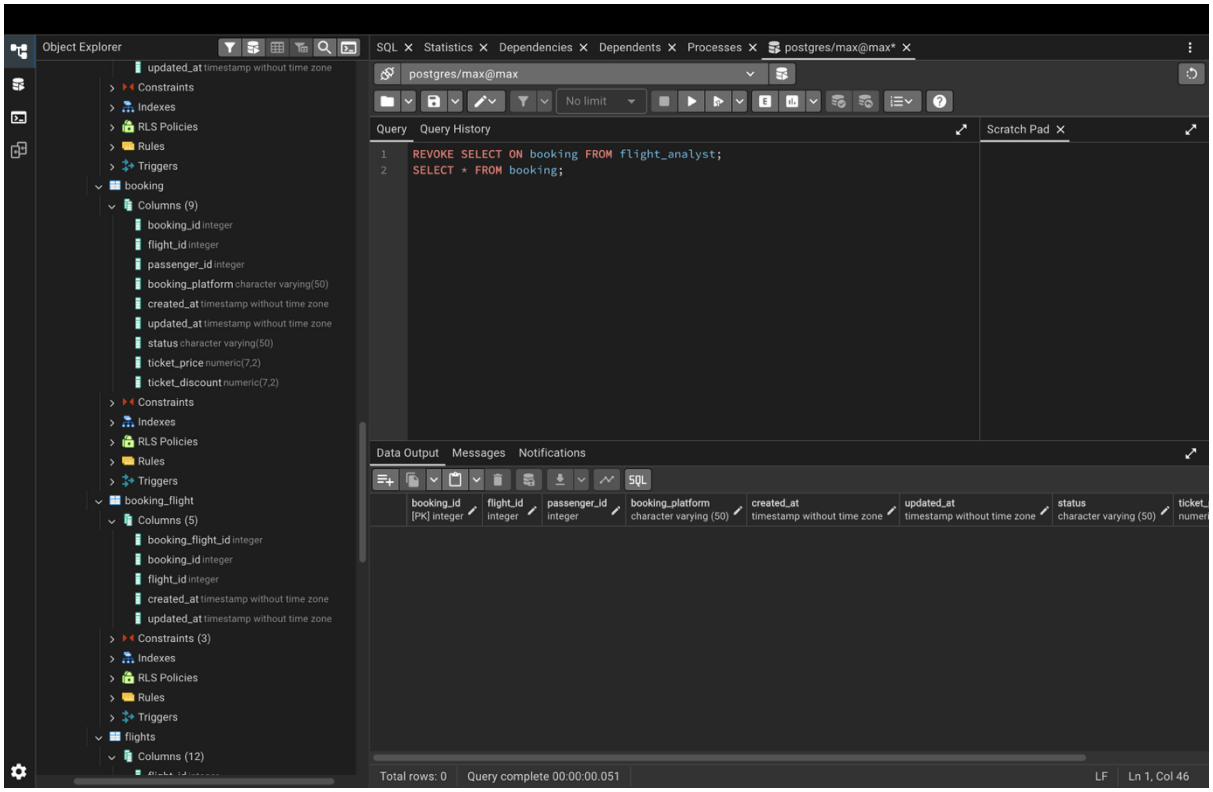
15)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
SELECT * FROM flights LIMIT 5;
DELETE FROM booking WHERE booking_id = 1;
Data Output
Messages
Notifications
DELETE 0
Query returned successfully in 40 msec.
Total rows:
Query complete 00:00:00.040
LF
Ln 4, Col 20

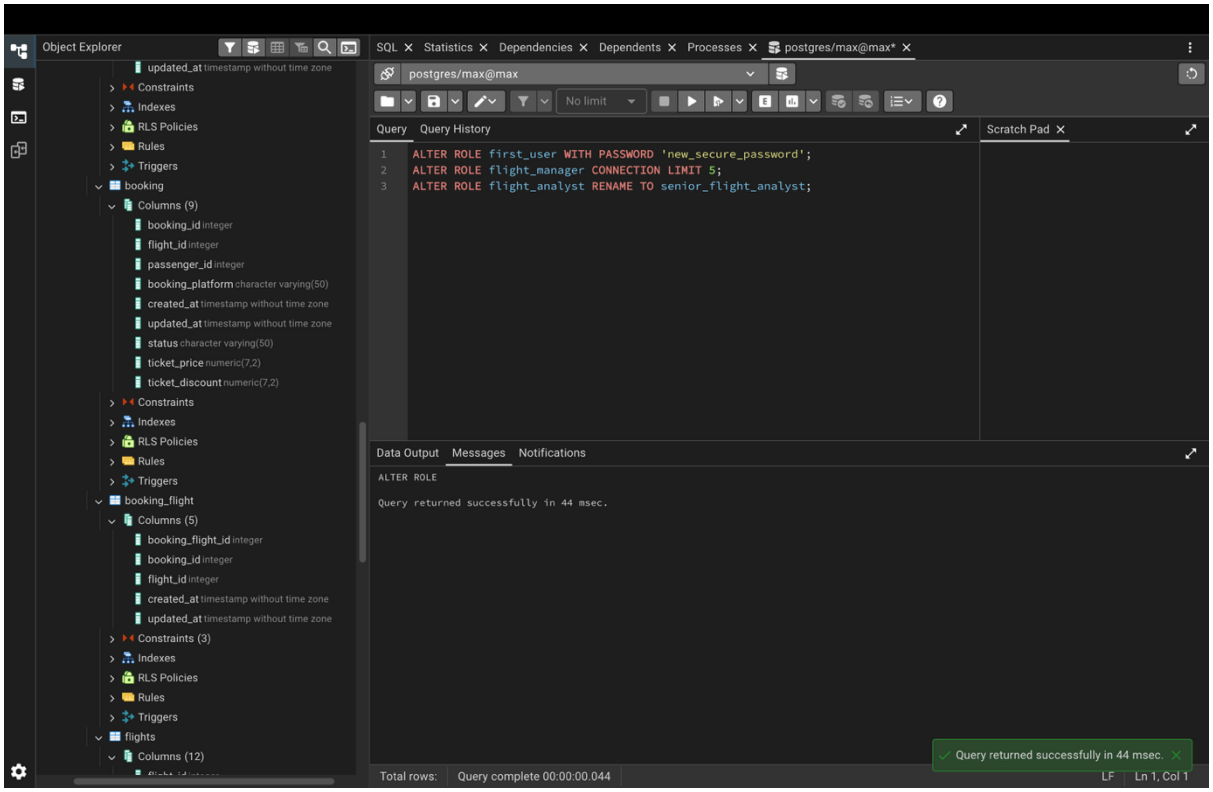
17)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
GRANT SELECT (first_name, last_name) ON passengers TO flight_analyst;
Data Output
Messages
Notifications
GRANT
Query returned successfully in 34 msec.
Servers > max > Databases > postgres > Schemas > public > Tables > booking_flight > Columns > updated_at
LF
Ln 1, Col 1

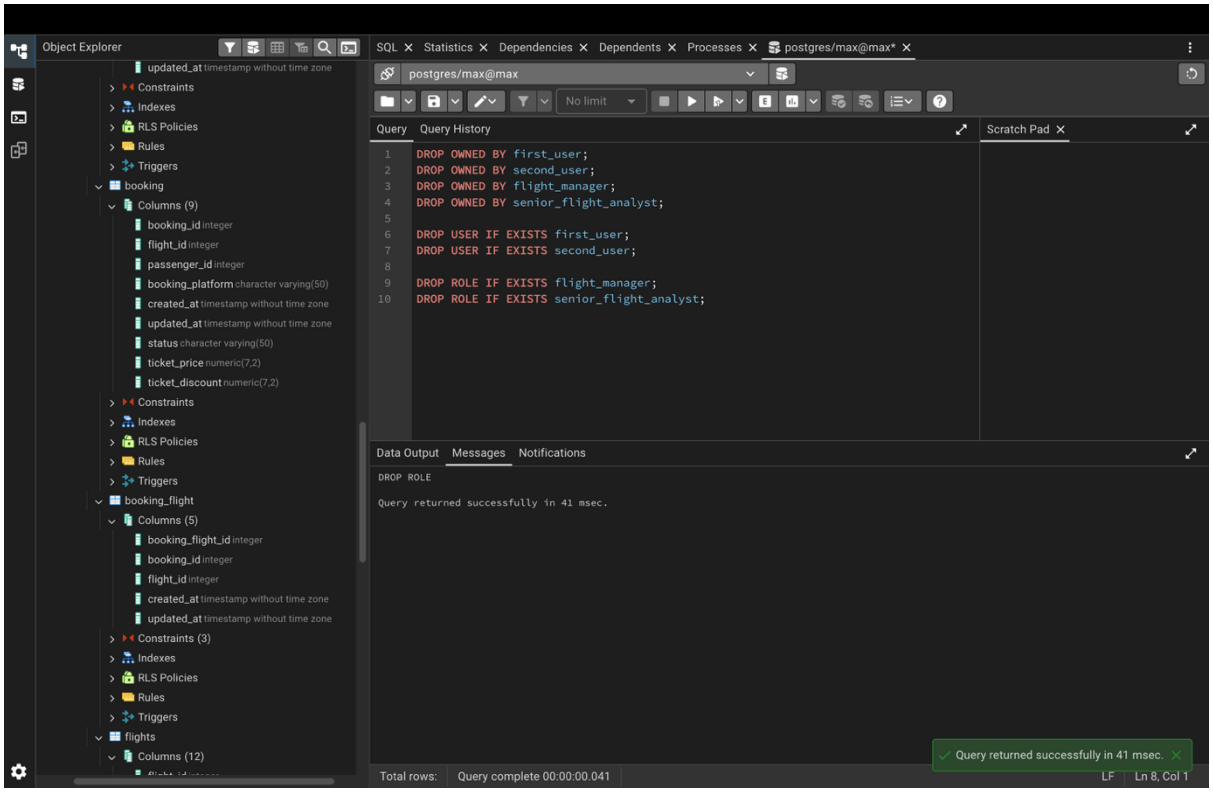
18)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
REVOKE SELECT ON booking FROM flight_analyst;
SELECT * FROM booking;
Data Output
Messages
Notifications
booking_id
flight_id
passenger_id
booking_platform
created_at
updated_at
status
Total rows: 0
Query complete 00:00:00.051
LF
Ln 1, Col 46

19)


Object Explorer
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
ALTER ROLE first_user WITH PASSWORD 'new_secure_password';
ALTER ROLE flight_manager CONNECTION LIMIT 5;
ALTER ROLE flight_analyst RENAME TO senior_flight_analyst;
Data Output
Messages
Notifications
ALTER ROLE
Query returned successfully in 44 msec.
Query returned successfully in 44 msec.
Total rows:
Query complete 00:00:00.044
LF
Ln 1, Col 1

20)


Object Explorer
updated_at timestamp without time zone
Constraints
Indexes
RLS Policies
Rules
Triggers
booking
Columns (9)
booking_id integer
flight_id integer
passenger_id integer
booking_platform character varying(50)
created_at timestamp without time zone
updated_at timestamp without time zone
status character varying(50)
ticket_price numeric(7,2)
ticket_discount numeric(7,2)
Constraints
Indexes
RLS Policies
Rules
Triggers
booking_flight
Columns (5)
booking_flight_id integer
booking_id integer
flight_id integer
created_at timestamp without time zone
updated_at timestamp without time zone
Constraints (3)
Indexes
RLS Policies
Rules
Triggers
flights
Columns (12)
SQL
Statistics
Dependencies
Dependents
Processes
postgres/max@max*
postgres/max@max
No limit
Query
Query History
Scratch Pad
1 DROP OWNED BY first_user;
2 DROP OWNED BY second_user;
3 DROP OWNED BY flight_manager;
4 DROP OWNED BY senior_flight_analyst;
5
6 DROP USER IF EXISTS first_user;
7 DROP USER IF EXISTS second_user;
8
9 DROP ROLE IF EXISTS flight_manager;
10 DROP ROLE IF EXISTS senior_flight_analyst;
Data Output
Messages
Notifications
DROP ROLE
Query returned successfully in 41 msec.
Query returned successfully in 41 msec.
Total rows:
Query complete 00:00:00.041
LF
Ln 8, Col 1