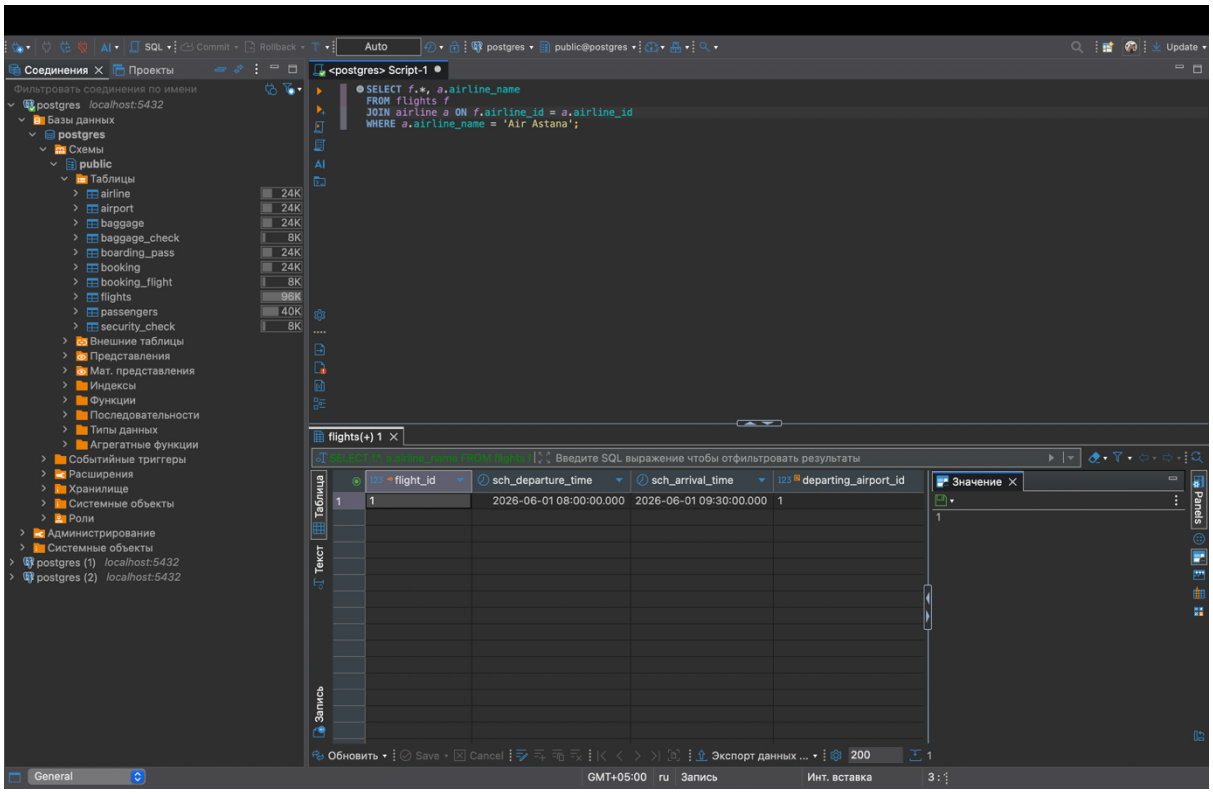
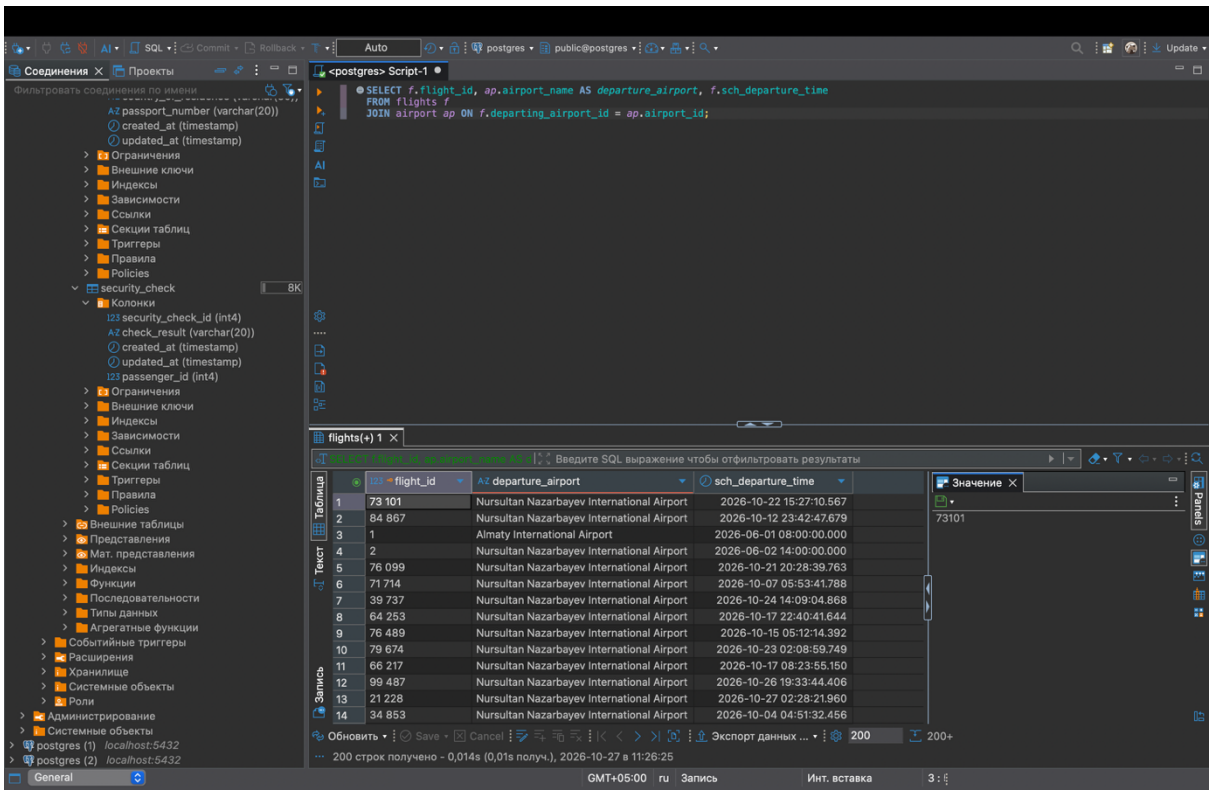
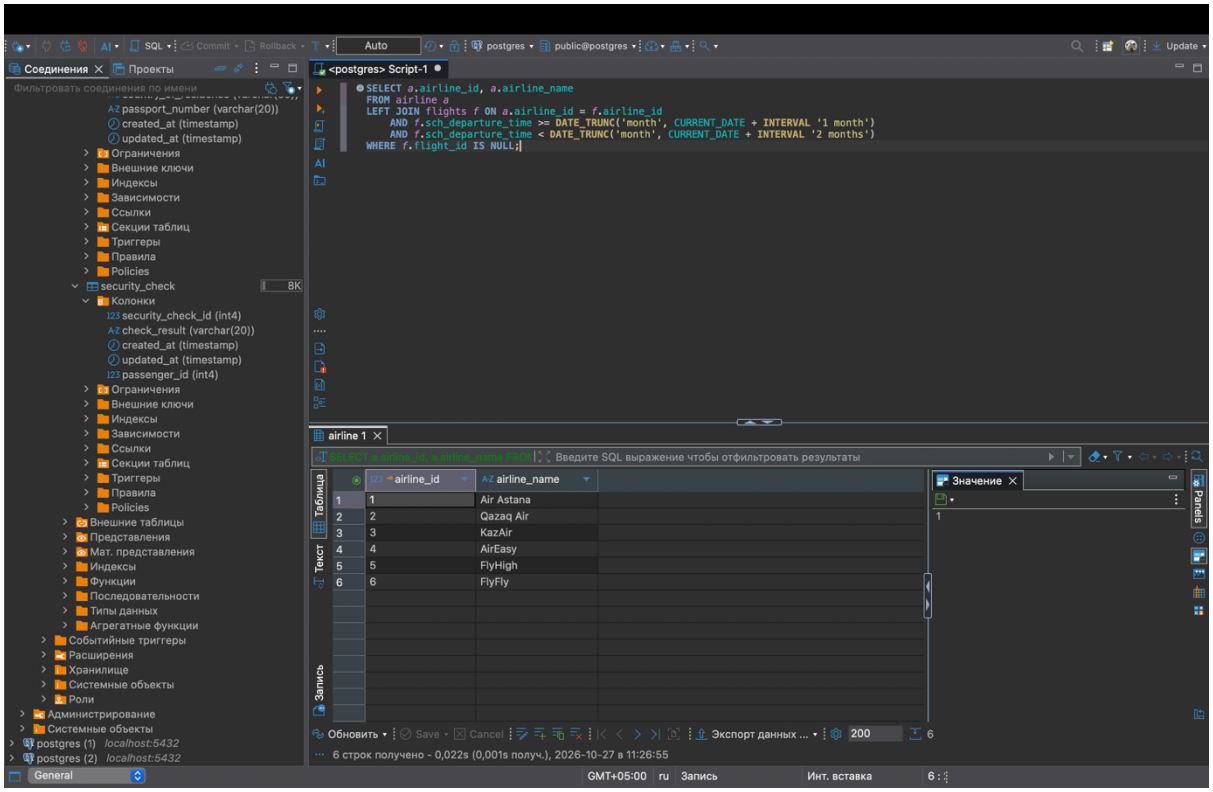
1)


SELECT f.*, a.airline_name
FROM flights f
JOIN airline a ON f.airline_id = a.airline_id
WHERE a.airline_name = 'Air Astana';
flight_id
sch_departure_time
sch_arrival_time
departing_airport_id
1
2026-06-01 08:00:00.000
2026-06-01 09:30:00.000
1

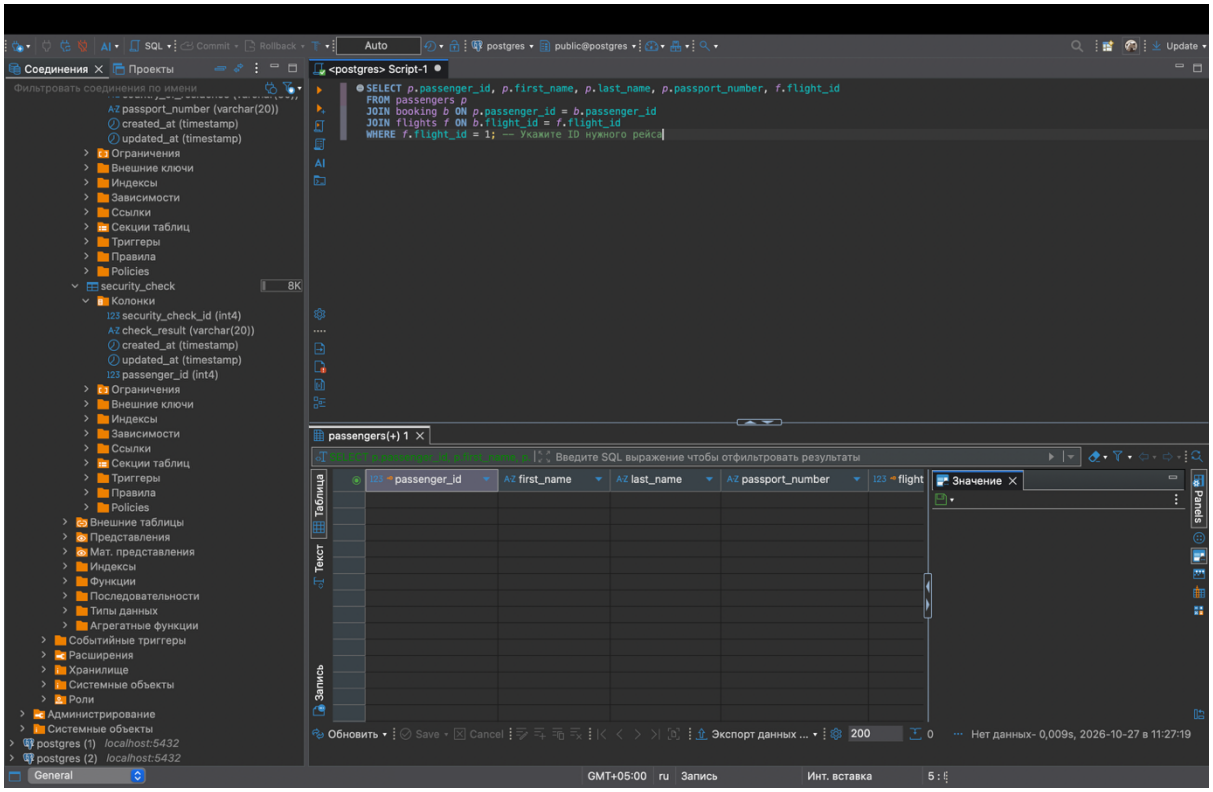
2)


SELECT f.flight_id, ap.airport_name AS departure_airport, f.sch_departure_time
FROM flights f
JOIN airport ap ON f.departing_airport_id = ap.airport_id;
flight_id
departure_airport
sch_departure_time
73 101
Nursultan Nazarbayev International Airport
2026-10-22 15:27:10.567
84 867
Nursultan Nazarbayev International Airport
2026-10-12 23:42:47.679
1
Almaty International Airport
2026-06-01 08:00:00.000
2
Nursultan Nazarbayev International Airport
2026-06-02 14:00:00.000
76 099
Nursultan Nazarbayev International Airport
2026-10-21 20:28:39.763
71 714
Nursultan Nazarbayev International Airport
2026-10-07 05:53:41.788
39 737
Nursultan Nazarbayev International Airport
2026-10-24 14:09:04.868
64 253
Nursultan Nazarbayev International Airport
2026-10-17 22:40:41.644
76 489
Nursultan Nazarbayev International Airport
2026-10-15 05:12:14.392
79 674
Nursultan Nazarbayev International Airport
2026-10-23 02:08:59.749
66 217
Nursultan Nazarbayev International Airport
2026-10-17 08:23:55.150
99 487
Nursultan Nazarbayev International Airport
2026-10-26 19:33:44.406
21 228
Nursultan Nazarbayev International Airport
2026-10-27 02:28:21.960
34 853
Nursultan Nazarbayev International Airport
2026-10-04 04:51:32.456
200 строк получено - 0,014s (0,01s получ.), 2026-10-27 в 11:26:25

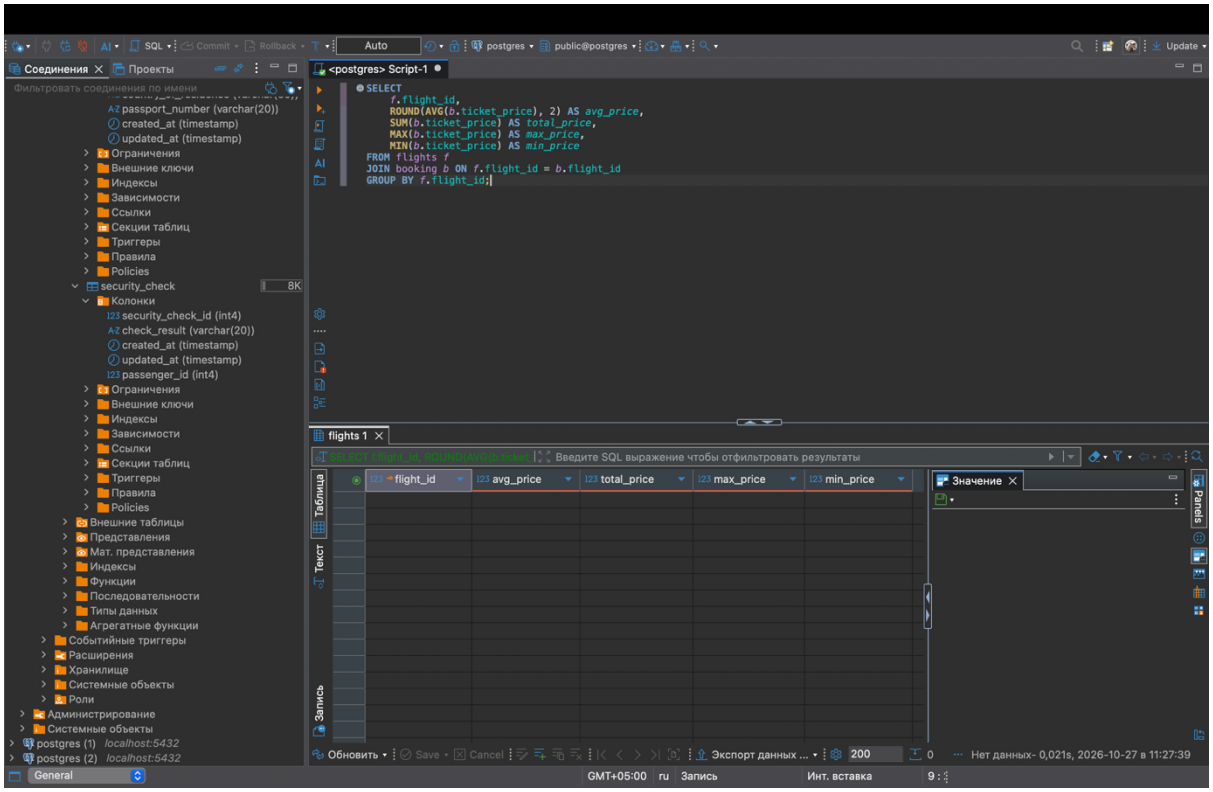
3)


SELECT a.airline_id, a.airline_name
FROM airline a
LEFT JOIN flights f ON a.airline_id = f.airline_id
AND f.sch_departure_time >= DATE_TRUNC('month', CURRENT_DATE + INTERVAL '1 month')
AND f.sch_departure_time < DATE_TRUNC('month', CURRENT_DATE + INTERVAL '2 months')
WHERE f.flight_id IS NULL;
airline_id
airline_name
1 Air Astana
2 Qazaq Air
3 KazAir
4 AirEasy
5 FlyHigh
6 FlyFly
6 строк получено - 0,022s (0,001s получ.), 2026-10-27 в 11:26:55

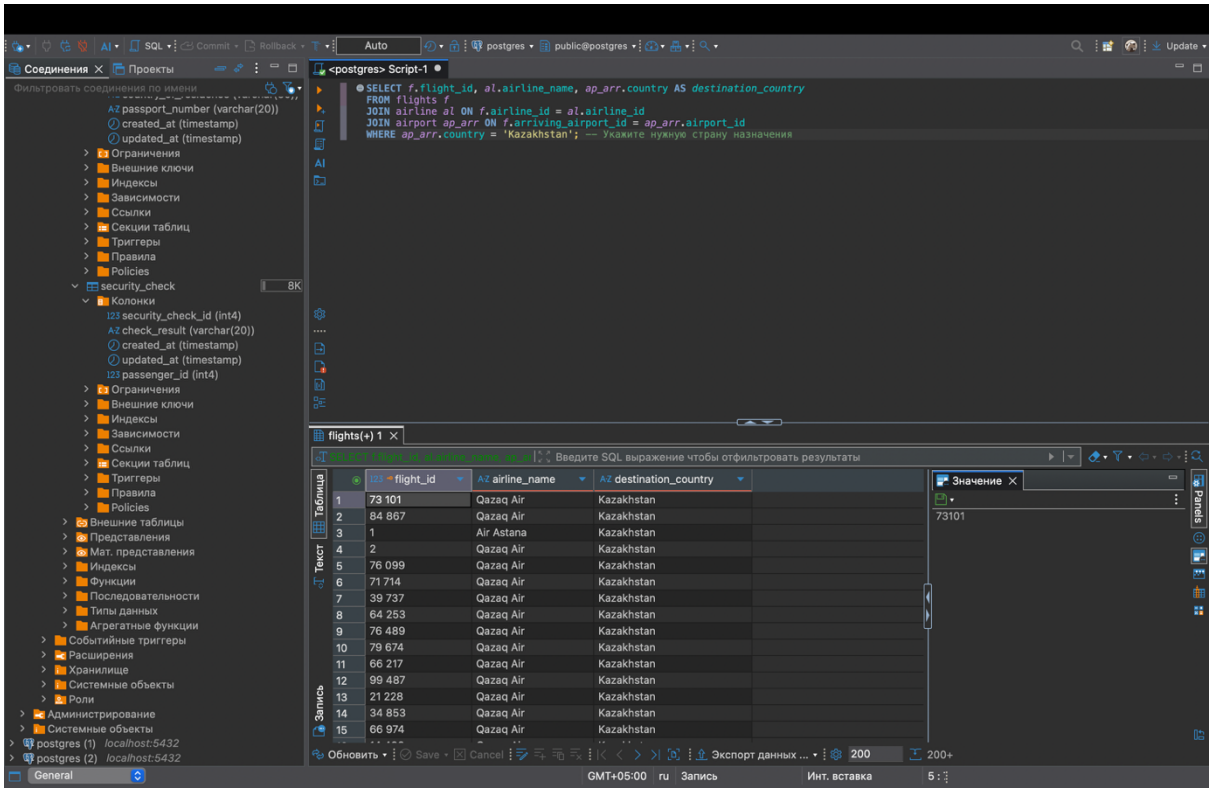
4)


SELECT p.passenger_id, p.first_name, p.last_name, p.passport_number, f.flight_id
FROM passengers p
JOIN booking b ON p.passenger_id = b.passenger_id
JOIN flights f ON b.flight_id = f.flight_id
WHERE f.flight_id = 1; -- Укажите ID нужного рейса
passenger_id
first_name
last_name
passport_number
flight
Нет данных- 0,009s, 2026-10-27 в 11:27:19

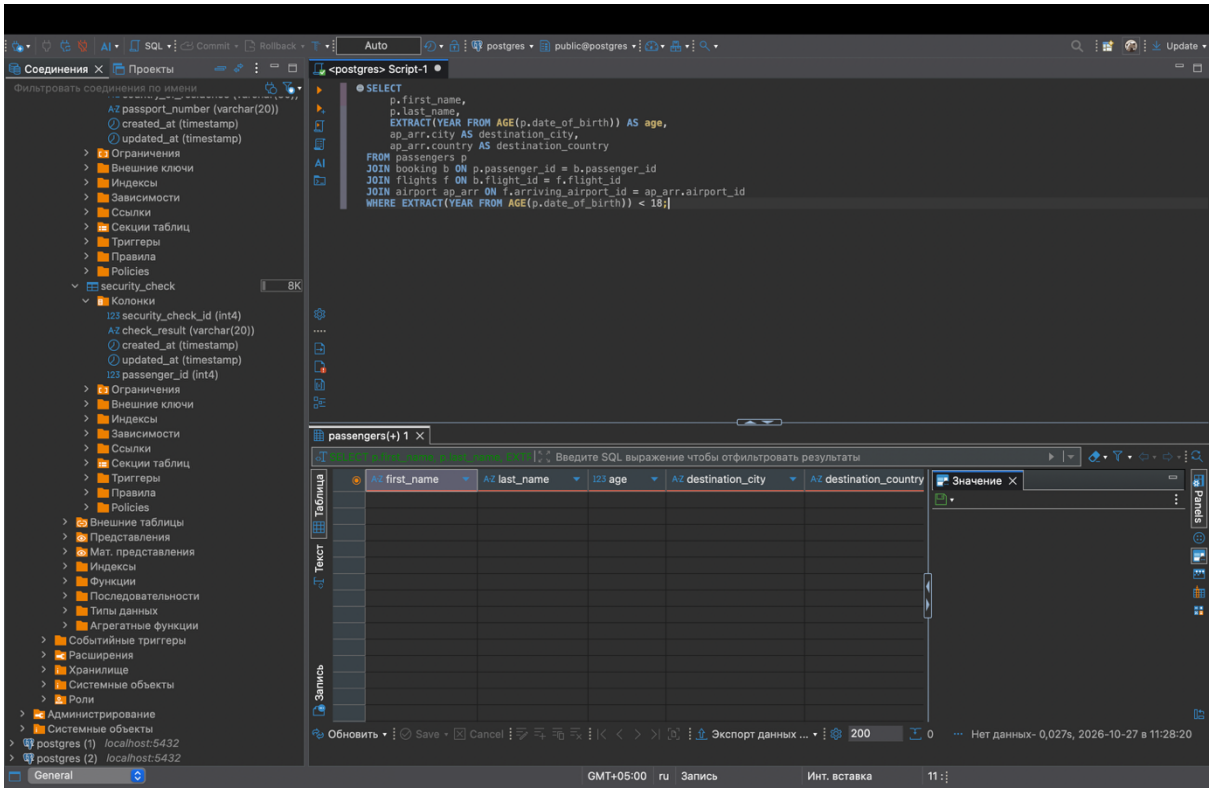
5)


SELECT
f.flight_id,
ROUND(AVG(b.ticket_price), 2) AS avg_price,
SUM(b.ticket_price) AS total_price,
MAX(b.ticket_price) AS max_price,
MIN(b.ticket_price) AS min_price
FROM flights f
JOIN booking b ON f.flight_id = b.flight_id
GROUP BY f.flight_id;
flights 1
flight_id
avg_price
total_price
max_price
min_price

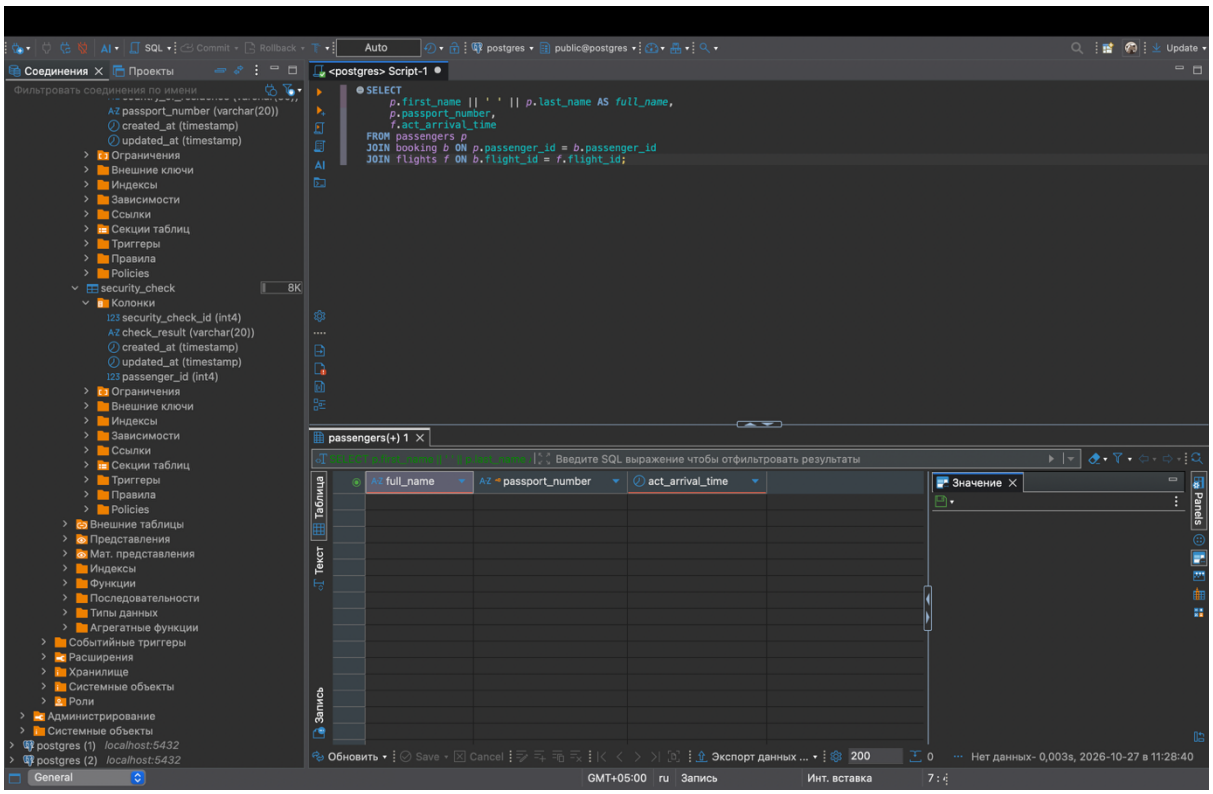
6)


SELECT f.flight_id, al.airline_name, ap_arr.country AS destination_country
FROM flights f
JOIN airline al ON f.airline_id = al.airline_id
JOIN airport ap_arr ON f.arriving_airport_id = ap_arr.airport_id
WHERE ap_arr.country = 'Kazakhstan'; -- Укажите нужную страну назначения
flights(+) 1
flight_id
airline_name
destination_country

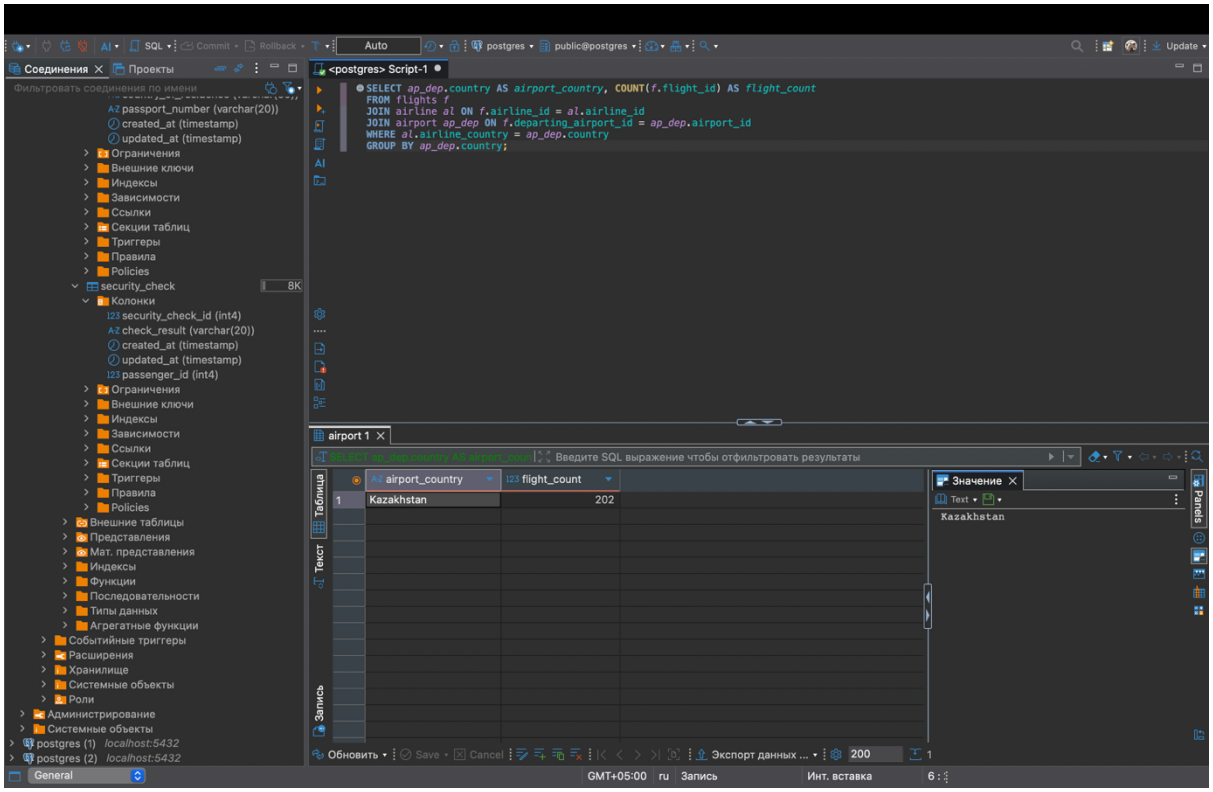
7)


SELECT
p.first_name,
p.last_name,
EXTRACT(YEAR FROM AGE(p.date_of_birth)) AS age,
ap_arr.city AS destination_city,
ap_arr.country AS destination_country
FROM passengers p
JOIN booking b ON p.passenger_id = b.passenger_id
JOIN flights f ON b.flight_id = f.flight_id
JOIN airport ap_arr ON f.arriving_airport_id = ap_arr.airport_id
WHERE EXTRACT(YEAR FROM AGE(p.date_of_birth)) < 18;
first_name
last_name
age
destination_city
destination_country

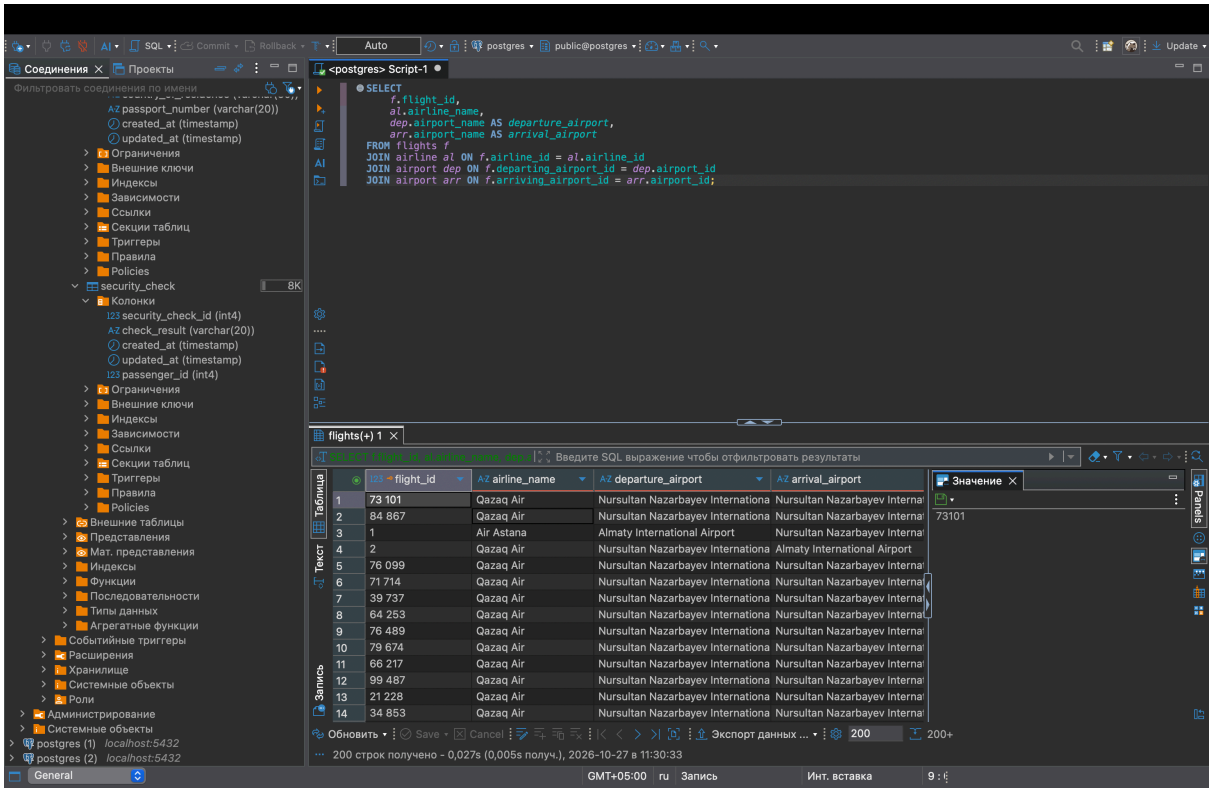
8)


SELECT
p.first_name || ' ' || p.last_name AS full_name,
p.passport_number,
f.act_arrival_time
FROM passengers p
JOIN booking b ON p.passenger_id = b.passenger_id
JOIN flights f ON b.flight_id = f.flight_id;
full_name
passport_number
act_arrival_time

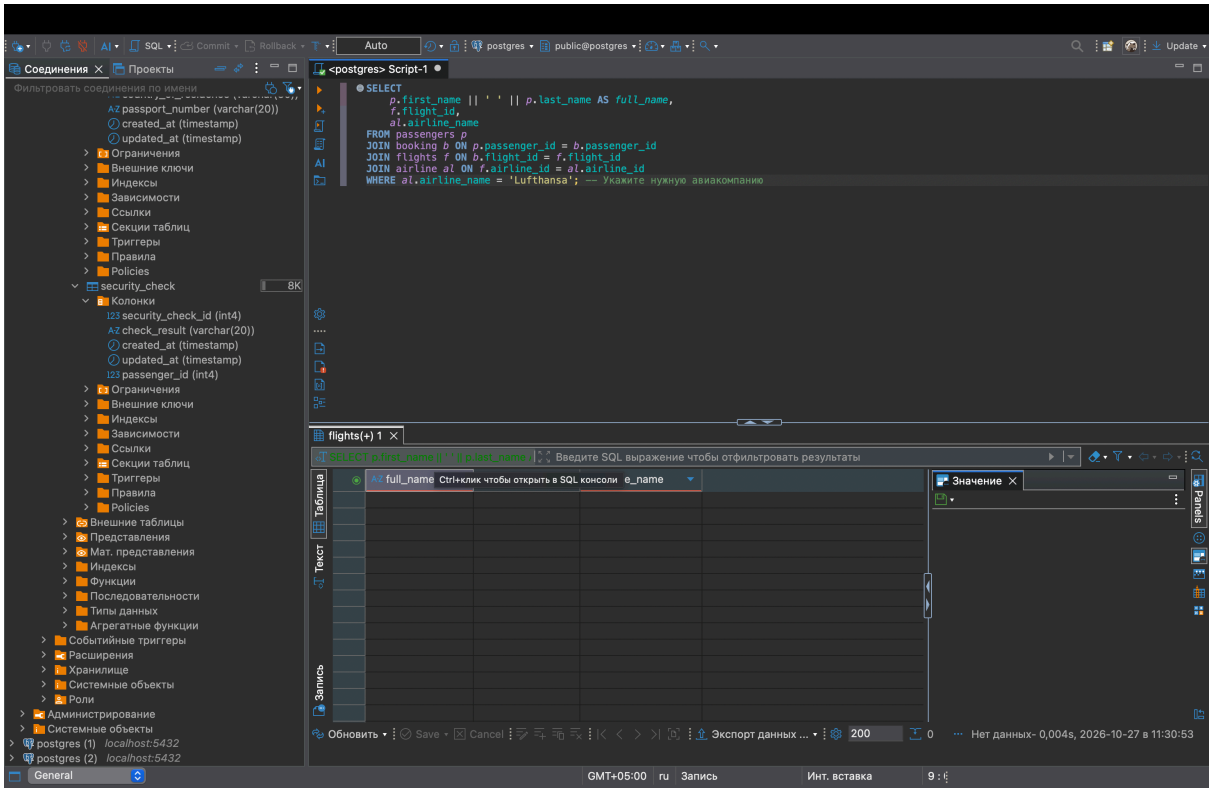
9)


SELECT ap_dep.country AS airport_country, COUNT(f.flight_id) AS flight_count
FROM flights f
JOIN airline al ON f.airline_id = al.airline_id
JOIN airport ap_dep ON f.departing_airport_id = ap_dep.airport_id
WHERE al.airline_country = ap_dep.country
GROUP BY ap_dep.country;
airport_country
flight_count
Kazakhstan
202
Значение
Kazakhstan

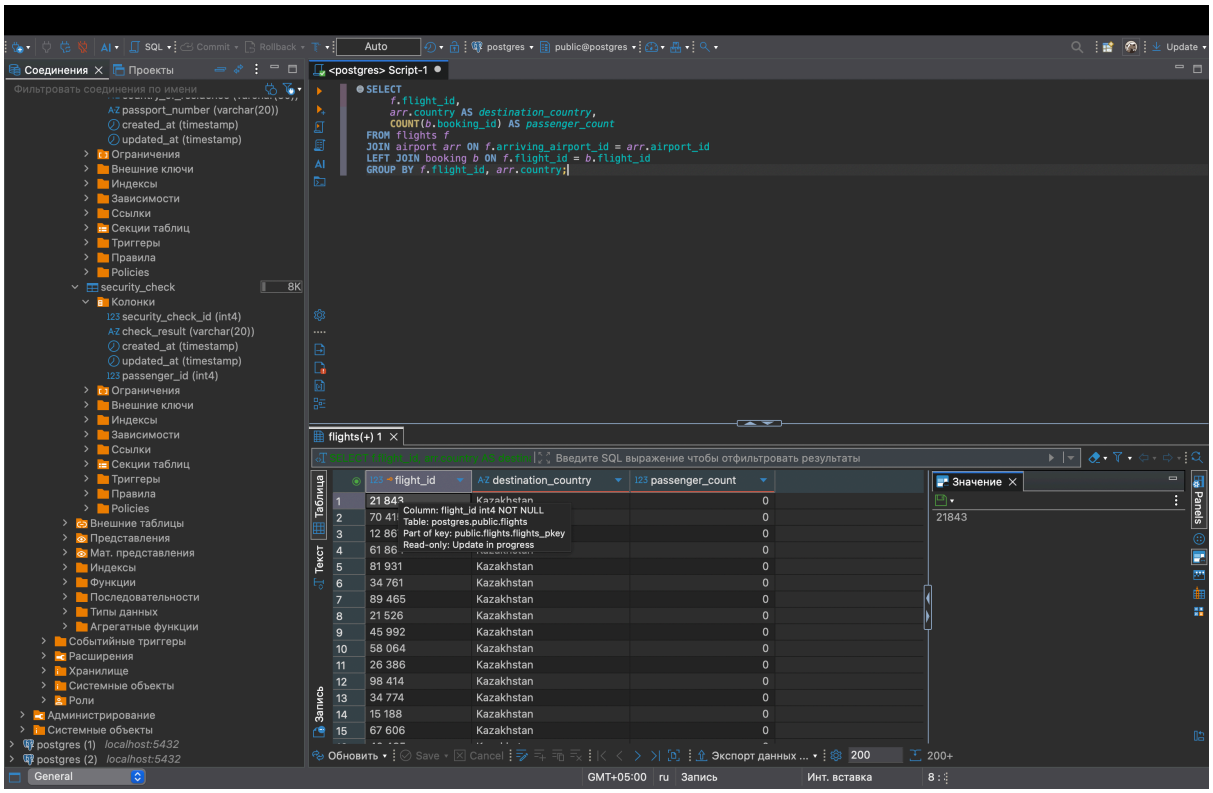
10)


SELECT
f.flight_id,
al.airline_name,
dep.airport_name AS departure_airport,
arr.airport_name AS arrival_airport
FROM flights f
JOIN airline al ON f.airline_id = al.airline_id
JOIN airport dep ON f.departing_airport_id = dep.airport_id
JOIN airport arr ON f.arriving_airport_id = arr.airport_id;
flight_id
airline_name
departure_airport
arrival_airport
Значение
73101
200 строк получено - 0,027s (0,005s получ.), 2026-10-27 в 11:30:33

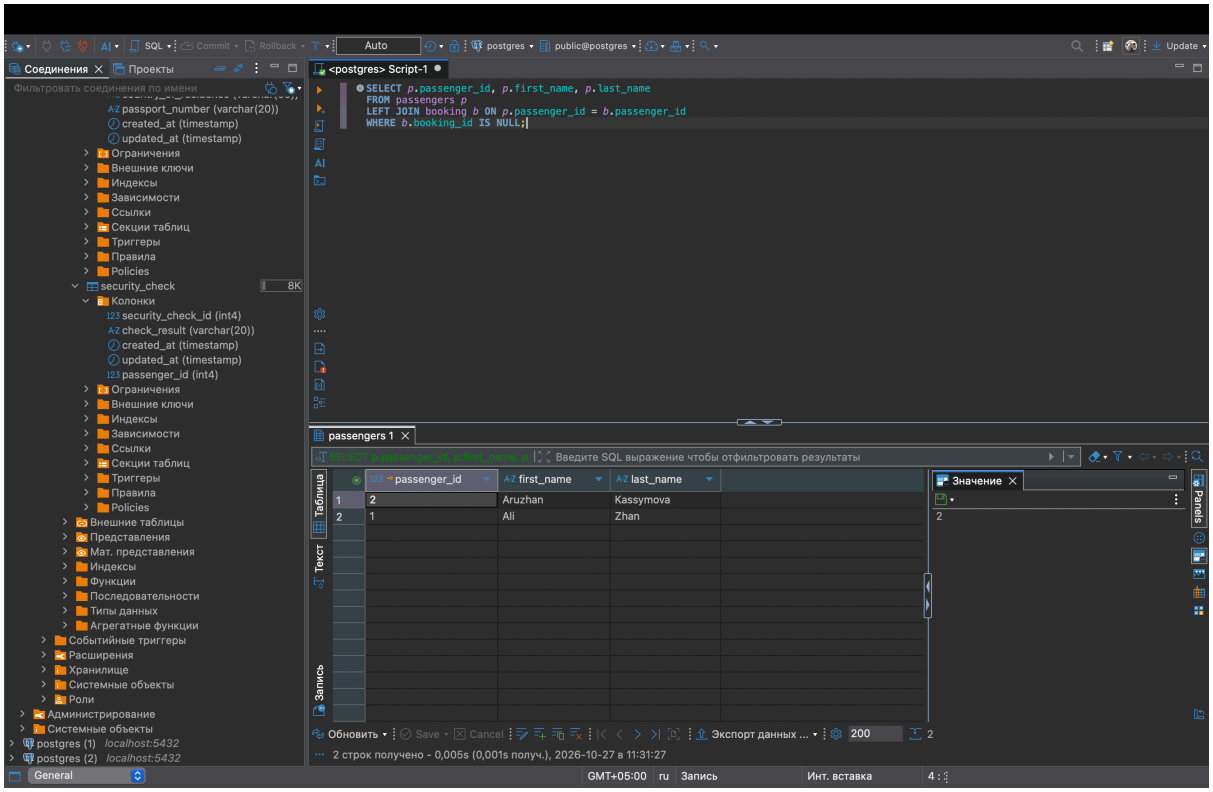
11)


SELECT
p.first_name || ' ' || p.last_name AS full_name,
f.flight_id,
al.airline_name
FROM passengers p
JOIN booking b ON p.passenger_id = b.passenger_id
JOIN flights f ON b.flight_id = f.flight_id
JOIN airline al ON f.airline_id = al.airline_id
WHERE al.airline_name = 'Lufthansa'; -- Укажите нужную авиакомпанию

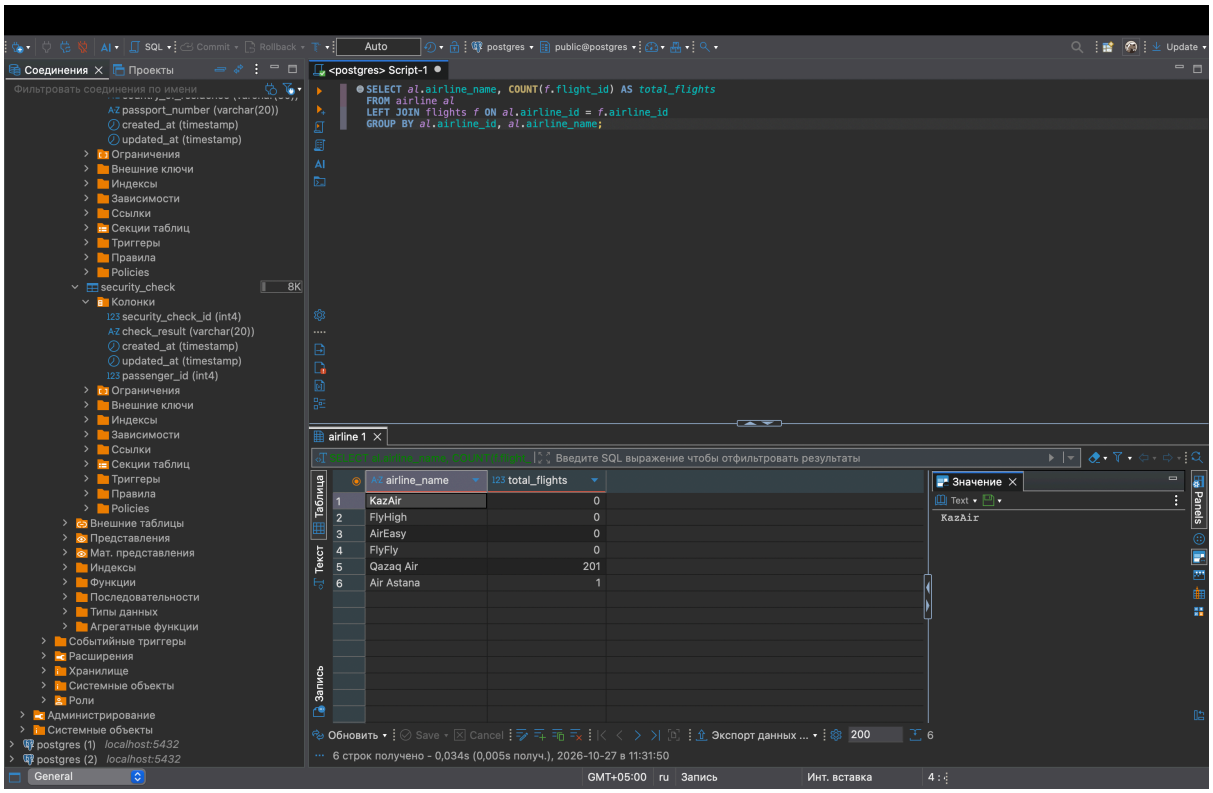
12)


SELECT
f.flight_id,
arr.country AS destination_country,
COUNT(b.booking_id) AS passenger_count
FROM flights f
JOIN airport arr ON f.arriving_airport_id = arr.airport_id
LEFT JOIN booking b ON f.flight_id = b.flight_id
GROUP BY f.flight_id, arr.country;

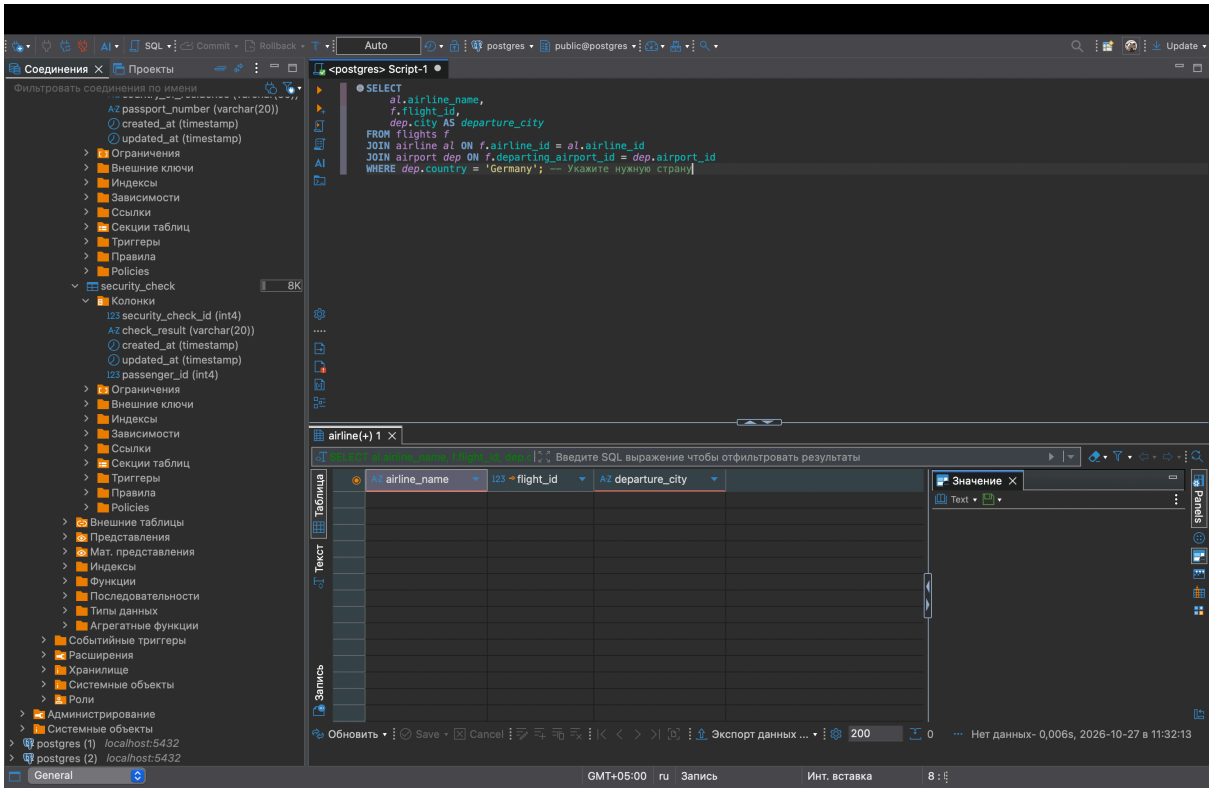
13)


SELECT p.passenger_id, p.first_name, p.last_name
FROM passengers p
LEFT JOIN booking b ON p.passenger_id = b.passenger_id
WHERE b.booking_id IS NULL;
passengers 1
passenger_id
first_name
last_name
2
Aruzhan
Kassymova
1
Ali
Zhan
2 строк получено - 0,005s (0,001s получ.), 2026-10-27 в 11:31:27

14)


SELECT al.airline_name, COUNT(f.flight_id) AS total_flights
FROM airline al
LEFT JOIN flights f ON al.airline_id = f.airline_id
GROUP BY al.airline_id, al.airline_name;
airline 1
airline_name
total_flights
KazAir 0
FlyHigh 0
AirEasy 0
FlyFly 0
Qazaq Air 201
Air Astana 1
6 строк получено - 0,034s (0,005s получ.), 2026-10-27 в 11:31:50

15)


Соединения
Проекты
Фильтровать соединения по имени
passport_number (varchar(20))
created_at (timestamp)
updated_at (timestamp)
Ограничения
Внешние ключи
Индексы
Зависимости
Ссылки
Секции таблиц
Триггеры
Правила
Policies
security_check
8K
Колонки
security_check_id (int4)
check_result (varchar(20))
created_at (timestamp)
updated_at (timestamp)
passenger_id (int4)
Ограничения
Внешние ключи
Индексы
Зависимости
Ссылки
Секции таблиц
Триггеры
Правила
Policies
Внешние таблицы
Представления
Мат. представления
Индексы
Функции
Последовательности
Типы данных
Агрегатные функции
Событийные триггеры
Расширения
Хранилище
Системные объекты
Роли
Администрирование
Системные объекты
postgres (1) localhost:5432
postgres (2) localhost:5432
<postgres> Script-1
SELECT
al.airline_name,
f.flight_id,
dep.city AS departure_city
FROM flights f
JOIN airline al ON f.airline_id = al.airline_id
JOIN airport dep ON f.departing_airport_id = dep.airport_id
WHERE dep.country = 'Germany'; -- Укажите нужную страну
airline(+) 1
Введите SQL выражение чтобы отфильтровать результаты
airline_name
flight_id
departure_city
Значение
Text
Таблица
Текст
Запись
Panels
Обновить
Save
Cancel
Экспорт данных ...
200
0
Нет данных- 0,006s, 2026-10-27 в 11:32:13
General
GMT+05:00
ru
Запись
Инт. вставка