## **SYNOPSIS**

A public news application is a website that provides news and information about current events, issues, and other topics of interest. Online news portals typically offer a range of content, including articles, videos, podcasts, and other multimedia formats, and may cover a wide range of topics such as politics, business, sports, entertainment, and more. They are a popular source of information for people who want to stay informed about current events and news from around the world.

Reading news through Newspaper is not a good solution in this era for news readers. The web World is so fast, there are many websites which provides instant news. The main objective building and developing of Online News Portals provide instant news to news readers. This website provides information about latest news, articles, education, health tips, breaking news, political, sports, etc. The One more advantage of this project is here advertisers can upload advertising contents through online for website ads. Advertisers have option to make payment through online for published advertisements.

# 1. INTRODUCTION

#### 1.1 ORGANIZATION PROFILE

#### **Retech solution**

Currently, we are dealing with three major start-ups built by us. All started with our first start up Retech Projects which provides service and supports for engineering students in their engineering projects and course internships. It is responsible for all the research activities carried by our all other companies. Retech Lasers is created to manufacturing machinery which uses laser technology in their core. We have just started working simultaneously on BLDC motor design and development which is delta by one of our start up called Retech Motors. We are interested to create opportunities for young graduates. Feel free to reach to take part in our mission.

## Website

http://www.retechsolutions.in

## Industries

**Design Services** 

## Company size

11-50 employees

## Headquarters

Chennai, Tamil Nadu

## **Type**

Privately Held

# 1.2 SYSTEM SPECIFICATION

System Requirements Specification also known as Software Requirements Specification, is a document or set of documentation that describes the features and behavior of a software application

#### WINDOWS OS

Windows is a graphical operating system developed by Microsoft. It allows users to view and store files, run the software, play games, watch videos, and provides a way to connect to the internet. It was released for both home computing and professional works.

Microsoft introduced the first version as 1.0

It was released for both home computing and professional functions of Windows on 10 November 1983. Later, it was released on many versions of Windows as well as the current version, Windows 10.

In 1993, the first business-oriented version of Windows was released, which is known as Windows NT 3.1. Then it introduced the next versions, Windows 3.5, 4/0, and Windows 2000. When the XP Windows was released by Microsoft in 2001, the company designed its various versions for a personal and business environment. It was designed based on standard x86 hardware, like Intel and AMD processor. Accordingly, it can run on different brands of hardware, such as HP, Dell, and Sony computers, including home-built PCs. Play Video

#### **Editions of Windows**

Microsoft has produced several editions of Windows, starting with Windows XP. These versions have the same core operating system, but some versions included advance features with an additional cost. There are two most common editions of Windows:

- ➤ Windows Home
- Windows Professional

Windows Home is basic edition of Windows. It offers all the fundamental functions of Windows, such as browsing the web, connecting to the Internet, playing video games, using office software, watching videos. Furthermore, it is less expensive and comes pre-installed with many new computers.

#### **JAVA**

Java is a high-level programming language developed by Sun Microsystems. It was originally designed for developing programs for set-top boxes and handheld devices, but later became a popular choice for creating web applications.

The Java syntax is similar to C++, but is strictly an object-oriented programming language. For example, most Java programs contain classes, which are used to define objects, and methods, which are assigned to individual classes. Java is also known for being stricter than C++, meaning variables and functions must be explicitly defined.

Unlike Windows executable (.EXE files) or Macintosh applications (.APP files), Java

programs are not run directly by the operating system. Instead, Java programs are interpreted

by the Java Virtual Machine, or JVM, which runs on multiple platforms. This means all Java

programs are multiplatform and can run on different platforms, including Macintosh,

Windows, and Unix computers. However, the JVM must be installed for Java applications or

applets to run at all. Fortunately, the JVM is included as part of the Java Runtime

Environment (JRE),

**SQL** 

Structured query language (SQL) is a programming language for storing and

processing information in a relational database. A relational database stores information in

tabular form, with rows and columns representing different data attributes and the various

relationships between the data values. You can use SQL statements to store, update, remove,

search, and retrieve information from the database. You can also use SQL to maintain and

optimize database performance.

Relational database management systems use structured query language (SQL) to store and

manage data. The system stores multiple database tables that relate to each other. MS SQL

Server, MySQL, or MS Access are examples of relational database management systems.

The following are the components of such a system.

A SQL table is the basic element of a relational database. The SQL database table

consists of rows and columns. Database engineers create relationships between multiple

database tables to optimize data storage space.

SQL statements, or SQL queries, are valid instructions that relational database

management systems understand. Software developers build SQL statements by using

different SQL language elements. SQL language elements are components such as identifiers,

variables, and search conditions that form a correct SQL statement.

1.2.1 HARDWARE SPECIFICATION

> Processor

: P 4 700 GHz.

> RAM

: 4 GB RAM

➤ Hard Disk Drive

: 180 GB

4

# 1.2.2 SOFTWARE SPECIFICATION

➤ Operating System : Windows 7/8/10

➢ Front End : JAVA➢ Back End : SQL

# **SYSTEM STUDY**

# 2.1 EXISTING SYSTEM

The existing system of news portal we need to spend money and buying the newspaper. The newspaper has only specific number of pages and cannot cover all the news in single paper. Also we need to wait for next day to read the yesterday news.

## 2.1.1 DRAWBACKS

- ➤ Waste of paper
- ➤ Waste of money
- Cannot read live news

## 2.2 PROPOSED SYSTEM

This is generally thought of as a Internet connection to a news source but the definition of a "News Portal" would include a newspaper, magazine or any other access to news. A web portal is any access point to the Internet.

## **2.2.1 FEATURES**

- > Report news if it is fake
- > Find the latest news
- > District wise split news

## SYSTEM DESIGN AND DEVELOPMENT

## 3.1 FILE DESIGN

The selection of the file system design approach is done according to the needs of the developers what are the needed requirements and specifications for the new design. It allowed us to identify where our proposal fitted in with relation to current and past file system development. Our experience with file system development is limited so the research served to identify the different techniques that can be used. The variety of file systems encountered show what an active area of research file system development is. The file systems may be from one of the two fundamental categories. In one category, the file system is developed in user space and runs as a user process. Another file system may be developed in the kernel space and runs as a privileged process. Another one is the mixed approach in which we can take the advantages of both aforesaid approaches. Each development option has its own pros and cons. In this article, these design approaches are discussed.

A file system is the data structure designed to support the abstraction of the data blocks as an archive and collection of files. This data structure is unique because it is stored on secondary storage (usually the disk), which is a very slow device.

The file system structure is the most basic level of organization in an operating system. Almost all of the ways an operating system interacts with its users, applications, and security model are dependent upon the way it organizes files on storage devices.

File Design Information systems in business are file and database oriented. Data are accumulated into files that are processed or maintained by the system. The systems analyst is responsible for designing files, determining their contents and selecting a method for organizing the data.

The most important purpose of a file system is to manage user data. This includes storing, retrieving and updating data. Some file systems accept data for storage as a stream of bytes which are collected and stored in a manner efficient for the media.

# 3.2 INPUT DESIGN

The input design is the link between the information system and the user. It comprises the developing specification and procedures for data preparation and those steps are necessary to put transaction data in to a usable form for processing can be achieved by inspecting the computer to read data from a written or printed document or it can occur by having people keying the data directly into the system. The design of input focuses on controlling the amount of input required, controlling the errors, avoiding delay, avoiding extra steps and keeping the process simple. The input is designed in such a way so that it provides security and ease of use with retaining the privacy. Input Design considered the following things:'

- ➤ What data should be given as input?
- ➤ How the data should be arranged or coded?
- The dialog to guide the operating personnel in providing input.
- Methods for preparing input validations and steps to follow when error occur.

#### **OBJECTIVES**

- Input Design is the process of converting a user-oriented description of the input into
  a computer-based system. This design is important to avoid errors in the data input
  process and show the correct direction to the management for getting correct
  information from the computerized system.
- It is achieved by creating user-friendly screens for the data entry to handle large volume of data. The goal of designing input is to make data entry easier and to be free from errors. The data entry screen is designed in such a way that all the data manipulates can be performed. It also provides record viewing facilities.
- When the data is entered it will check for its validity. Data can be entered with the help of screens. Appropriate messages are provided as when needed so that the user
- will not be in maize of instant. Thus the objective of input design is to create an input layout that is easy to follow

## 3.3 OUTPUT DESIGN

The design of output is the most important task of any system. During output design, developers identify the type of outputs needed, and consider the necessary output controls and prototype report layouts.

## **External Outputs**

Manufacturers create and design external outputs for printers. External outputs enable the system to leave the trigger actions on the part of their recipients or confirm actions to their recipients.

Some of the external outputs are designed as turnaround outputs, which are implemented as a form and re-enter the system as an input.

## **Internal outputs**

Internal outputs are present inside the system, and used by end-users and managers. They support the management in decision making and reporting.

## **Output Integrity Controls**

Output integrity controls include routing codes to identify the receiving system, and verification messages to confirm successful receipt of messages that are handled by network protocol.

Printed or screen-format reports should include a date/time for report printing and the data. Multipage reports contain report title or description, and pagination. Pre-printed forms usually include a version number and effective date.

#### 3.4 DATABASE DESIGN

Today's businesses depend on their databases to provide information essential for day-to-day operations, especially in case of electronic commerce businesses who has a definite advantage with up-to-date database access. Good design forms the foundation of any database, and experienced hands are required in the automation process to design for optimum and stable performance.

Software Solutions have been constantly working on these platforms and have attained a level of expertise. We apply proven methodologies to design, develop, integrate and implement database systems to attain its optimum level of performance and maximize security to meet the client's business model.

## **Business needs addressed:**

- Determine the basic objects about which the information is stored
- Determine the relationships between these groups of information and the objects
- Effectively manage data and create intelligent information
- Remote database administration or on site administrative support

- Database creation, management, and maintenance
- Information retrieval efficiency, remove data redundancy and ensure data security

The most important consideration in designing the database is how the information will be used. The main objective of designing a database is Data Integration, Data Integrity and Data Independence.

Data IntegrationIn a database, information from several files is coordinated, accessed and operated upon as through it is in a single file. Logically, the information is centralized, physically; the data may be located on different devices, connected through data communication facilities.

## **Data Integrity**

Data integrity means storing all data in one place only and how each application accesses it. This approach results in more consistent information, one update being sufficient to achieve a new record status for all applications. This leads to less data redundancy that is data items need not be duplicated.

## **Data Independence**

Data in dependence is the insulation of application programs from changing aspects of physical data organization. This objective seeks to allow changes in the content and organization of physical data without reprogramming of application and allow modifications to application programs without reorganizing the physical data.

## 3.5 SYSTEM DEVELOPMENT

Systems development is the process of defining, designing, testing, and implementing a new software application or program. It could include the internal development of customized systems, the creation of database systems, or the acquisition of third party developed software.

Systems development life cycle phases include planning, system analysis, system design, development, implementation, integration and testing, and operations and maintenance.

## 3.5.1 DESCRIPTION OF MODULES

# **Upload News**

This module used to publish news. Admin or news reader can publish breaking news, latest news, Political, Financial, Sports, etc. Visitors or news readers can read published news content. Advertisements will appear in the right side of the news and articles section.

# **News Reader Registration**

This module is used to collect the information about the news reader and save these details to the news reader table. This module also collects the information about the login credentials. Using this credential to login into the application.

## **News Details**

When the admin or news readers are upload their local news video it will be shown to the all the registered users and admin as well. The admin can have provision to delete the videos.

# **Report News**

If any one of the user view the video and if the video is an vulnerable then the news reader can able to report the news and it will be notify to the admin. Then the admin can able to check the news and block the content.

# Admin/News Reader

This module used to publish articles or knowledge base. Admin or news reader can publish articles of education, health tips, movies, story, etc. Visitors or news readers can read published article content. Advertisements will appear in the right side of the news and articles section

## TESTING AND IMPLEMENTATION

#### TESTING METHODOLOGIES

System testing is state of implementation, which is aimed at ensuring that the system works accurately and efficiently as expect before live operation commences. It certifies that the whole set of programs hang together.

System testing requires a test plan that consists of several key activities and step for run program, string, system and user acceptance testing. The implementation of newly designed package is important in adopting a successful new system

Testing is the important stage in software development. the system test in implementation stage in software development process. The system testing implementation should be confirmation that all is correct and an opportunity to show the users that the system works as expected. It accounts the largest percentage of technical effort in the software development process.

Testing phase in the development cycle validates the code against the functional specification testing is vital to achievement of the system goals. The objective of the testing is to discover errors to fulfill this objective a series of test step unit, integration. Validation and system tests were planned and executed the test steps are:

## **SYSTEM TESTING**

Testing is an integral part of any system development life cycle. Insufficient and untested applications may tend to crash and the result is loss of economic and manpower investment besides user's dissatisfaction and downfall of reputation. Software testing can be looked upon as one among many processes, an organization performs, and that provides the lost opportunity to correct any flaws in the developed system. Software testing includes selecting test data that have more probability of giving errors.

The first step in system testing is to develop a plan that tests all aspects of the system. Completeness, correctness, reliability and maintainability of the software are to be tested for the best quality assurance that the system meets the specification and requirements for its intended use and performance. System testing is the most useful practical process of executing a program with the implicit intention of finding errors that make the program fails. System testing is done in three phases.

- Unit Testing
- ➤ Integration Testing
- ➤ Validation Testing

## **UNIT TESTING**

Unit testing focuses verification effort on the smallest unit of software the module. Using the detailed design and the process specification testing is done to registration by the user with in the boundary of the Login module. The login form receives the username and password details and validates the value with the database. If valid, the home page is displayed.

## **INTEGRATION TESTIN**

Integration Testing is the process of this activity can be considered as testing the design and hence module interaction. The primary objective of integration testing is to discover errors in the interfaces between the components. Login form and registration form are integrated and tested together. If the user is newly registered, the received details will be stored in the registration table. While logging in, the application will check for valid user name and password in the registration table and if valid the user is prompted for submitting complaints.

Data can be lost across an interface, one module can have adverse effect on another sub function when combined it may not produce the desired major functions. Integration testing is a systematic testing for constructing test to uncover errors associated within an interface.

The objectives taken from unit tested modules and a program structure is built for integrated testing. All the modules are combined and the test is made.

A correction made in this testing is difficult because the vast expenses of the entire program complicated the isolation of causes. In this integration testing step, all the errors are corrected for next testing process.

## **VALIDATION TESTIN**

Validation are independent procedures that are used together for checking that a product, service, or system meets requirements and specifications and that it fulfills its in purpose the actual result from the expected result for the complaint process. Select the complaint category of the complaint by user. The input given to various forms fields are validated effectively. Each module is tested independently. It is tested that the complaint module fields receive the correct input for the necessary details such as complaint category, complaint id, reference name, complaint description, and email for further process.s

After the completion of the integrated testing, software is completely assembled as a package; interfacing error has been uncovered and corrected and a final series of software test validation begins.

Validation testing can be defined in many ways but a simple definition is that validation succeeds when the software function in a manner that can be reasonably expected by the customer. After validation test has been conducted, one of two possible conditions exists.

#### **OUTPUT TESTIN**

The next process of validation testing, is output testing of the proposed system, since no system could be successful if it does not produce the required output in the specified format. Asking the user about the format required, list the output to be generated or displayed by the system under considerations.

Output testing is a different test whose primary purpose is to fully exercise the computer based system although each test has a different purpose all the work should verify that all system elements have been properly integrated and perform allocated functions.

The output format on the screen is found to be corrected as the format was designed in the system design phase according to the user needs for the hard copy also; the output testing has not resulted in any correction in the system.

## SYSTEM IMPLEMENTATION

When the initial design was done for the system, the client was consulted for the acceptance of the design so that further proceedings of the system development can be carried on. After the development of the system a demonstration was given to them about the working of the system. The aim of the system illustration was to identify any malfunction of the system.

After the management of the system was approved the system implemented in the concern, initially the system was run parallel with existing manual system. The system has been tested with live data and has proved to be error free and user friendly.

Implementation is the process of converting a new or revised system design into an operational one when the initial design was done by the system; a demonstration was given to the end user about the working system.

This process is uses to verify and identify any logical mess working of the system by feeding various combinations of test data. After the approval of the system by both end user and management the system was implemented.

System implementation is made up of many activities. The six major activities are as follows.

#### **CODING**

Coding is the process of whereby the physical design specifications created by the analysis team turned into working computer code by the programming team. A design code may be a tool which helps ensure that the aspiration for quality and quantity for customers and their requirements, particularly for large scale projects, sought by the water agency Design pattern are documented tried and tested solutions for recurring problems in a given context. So basically you have a problem context and the proposed solution for the same.

# **INSTALLATION**

Installation is the process during which the current system is replaced by the new system. This includes conversion of existing data, software, and documentation and work procedures to those consistent with the new system.

#### DOCUMENTATION

Documentation is descriptive information that describes the use and operation of the system. The user guide is provided to the end user as the student and administrator. The documentation part contains the details as follows,

User requirement and water agency details administration has been made online. Any customer can request their water requirement details through online and also use of documentation, they can view the purpose of each purpose, The admin could verify the authentication of the users, users requirements and need to take delivery process, thus the documentation is made of full view of project thus it gives the guideline to study the project and how to execute also.

#### USER TRAINING AND SUPPORT

The software is installed at the deployment environment, the developer will give training to the end user of the regional transport officer and police admin officer in that software. The goal of an end user training program is to produce a motivated user who has the skills needed to apply what has been to apply what has been learned to perform the job related task. The following are the instruction which is specified the handling and un-handling events in the application,

- The authenticated user of admin and office workers only login in the application with authorized username and password.
- Don't make user waste their time to come straight to the water agency or make a phone call.
- It can easily track through online by the user.
- Very user friendliness software

#### IMPLEMENTATION PROCEDURES

Implementation includes all the activities that take place to convert the old system to the new one. Proper implementation system the organization requirements. Implementation is the stage in the project where the theoretical design is turned into a working system. The most crucial stage is achieving a successful new system & giving the user confidence in that the new system will work efficiently & effectively in the implementation state.

#### IMPLEMENTATION PROCEDURES

#### PILOT RUNNING

Processing the current data by only one user at a time called the pilot running process. When one user is accessing the data at one system, the system is sets to be engaged and connected in network. This process is useful only in system where more than one user is restricted.

#### **PARALLEL RUNNING:**

Processing the current data by more than one user at a time simultaneously is said to be parallel running process. This same system can be viewed and accessed by more than one user at the time. Hence the implementation method used in the system is a pilot type of implementation.

Implementation is the stage in the project where the theoretical design is turned into a working system. The most crucial stage is achieving a successful new system & giving the user confidence in that the new system will work efficiently & effectively in the implementation state.

The stage consists of,

- > Testing the developed program with sample data.
- > Detection's and correction of error.
- > Creating whether the system meets user requirements.
- Making necessary changes as desired by the user.
- > Training user personnel.

#### USER TRAINING

User Training is designed to prepare the user for testing &consenting the system. .

- User Manual.
- ➤ Help Screens.
- > Training Demonstration.

#### **USER MANUAL**

The summary of important functions about the system and software can be provided

as a document to the user.

#### **HELP SCREENS**

This features now available in every software package, especially when it is used with a menu. The user selects the "Help" option from the menu. The system accesses the necessary description or information for user reference.

#### TRAINING DEMONSTRATION:

Another User Training element is a Training Demonstration. Live demonstrations with personal contact are extremely effective for Training Users.

#### SYSTEM MAINTENANCE

Maintenance is actually the implementation of the review plan. As important as it is, many programmers and analysts are to perform or identify themselves with the maintenance effort. There are psychological, personality and professional reasons for this. Analysts and programmers spend far more time maintaining programs than they do writing them. Maintenance accounts for 50-80 percent of total system development

Maintenance is expensive. One way to reduce the maintenance costs are through maintenance management and software modification audits.

- Maintenance is not as rewarding as exciting as developing systems. It is perceived as requiring neither skill not experience.
- Users are not fully cognizant of the maintenance problem or its high cost.
- Few tools and techniques are available for maintenance.
- A good test plan is lacking.
- Standards, procedures, and guidelines are poorly defined and enforced.
- Programs are often maintained without care for structure and documentation.
- There are minimal standards for maintenance.
- Programmers expect that they will not be in their current commitment by time their programs go into the maintenance cycle.

## **Corrective Maintenance**

It means repairing, processing or performance failure or making changes because of previously uncovered problems or false assumptions. Task performed to identify,

isolate, and rectify a fault so that the failed equipment, machine, or system can be restored to an operational condition within the tolerances or limits established for in-service operations.

Corrective maintenance can be subdivided into "immediate corrective maintenance" (in which work starts immediately after a failure) and "deferred corrective maintenance" (in which work is delayed in conformance to a given set of maintenance rules).

## **Perfective Maintenance**

It means changes made to a system to add new features or to improve performance. Preventive maintenance is predetermined work performed to a schedule with the aim of preventing the wear and tear or sudden failure of equipment components. process or control equipment failure can have adverse results in both human and economic terms. In addition to down time and the costs involved to repair and/or replace equipment parts or components, there is the risk of injury to operators, and of acute exposures to chemical and/or physical agents.

Time-based or run-based Periodically inspecting, servicing, cleaning, or replacing parts to prevent sudden failure .On-line monitoring of equipment in order to use important/expensive parts to the limit of their serviceable life. Preventive maintenance involves changes made to a system to reduce the chance of future system failure.

An example of preventive maintenance might be to increase the number of records that a system can process far beyond what is currently needed or to generalize how a system sends report information to a printer so that so that the system can adapt to changes in printer technology.

#### **Preventive Maintenance**

Changes made to a system to avoid possible future problems Perfective maintenance involves making enhancements to improve processing performance, interface usability, or to add desired, but not necessarily required, system features. The objective of perfective maintenance is to improve response time, system efficiency, reliability, or maintainability.

During system operation, changes in user activity or data pattern can cause a decline in efficiency, and perfective maintenance might be needed to restore performance. Usually, the perfective maintenance work is initiated by the IT department, while the corrective and adaptive maintenance work is normally requested by user.

# **CONCLUSION**

## public news application

Public news applications have become an increasingly popular way for people to stay informed about the latest news and events happening around the world. These applications offer a number of benefits, including instant access to breaking news, customizable news feeds, and the ability to share and discuss news stories with others.

One of the biggest advantages of public news applications is the convenience they offer. Users can access news stories and updates at any time from their mobile devices, making it easy to stay informed even when they are on the go. Additionally, many news applications allow users to customize their news feeds based on their interests and preferences, ensuring that they receive news stories that are relevant to them.

Another advantage of public news applications is the ability to share and discuss news stories with others. Many news applications include features that allow users to share stories on social media, email, or messaging platforms, making it easy to spread the word about important news and events. Some applications also include commenting or discussion features, which allow users to engage in conversations with others about the stories they are reading.

Overall, public news applications provide a convenient and efficient way for people to stay informed about the latest news and events happening around the world. As technology continues to evolve, these applications will likely become even more advanced and provide even more benefits for users seeking to stay up-to-date on the news.

# BIBLIOGRAPHY

## **Reference:**

- ➤ Horstmann, Cay S. Core Java Volume I--Fundamentals. Prentice Hall, 2018.
- ➤ Shildt, Herbert. Java: A Beginner's Guide. McGraw-Hill Education, 2018.
- ➤ Sierra, Kathy, and Bert Bates. Head First Java, 2nd Edition. O'Reilly Media, 2005.
- ➤ Subramaniam, Venkat. Functional Programming in Java: Harnessing the Power of Java 8 Lambda Expressions. Pragmatic Bookshelf, 2014.
- ➤ Walrath, Kathy, et al. The Java Tutorial: A Short Course on the Basics. Addison-Wesley Professional, 2018.

## Website:


- > Stack Overflow. "Questions tagged [java]." Stack Overflow, https://stackoverflow.com/questions/tagged/java.
- ➤ Tutorials Point. "Java Tutorial." Tutorials Point, 2023, https://www.tutorialspoint.com/java/index.htm.
- ➤ Vogella. "Java Tutorials." Vogella, 2023, https://www.vogella.com/tutorials/java.html.
- FitHub. "Java Repositories." GitHub, <a href="https://github.com/topics/java">https://github.com/topics/java</a>.
- ➤ JetBrains. "IntelliJ IDEA Documentation." JetBrains, https://www.jetbrains.com/help/idea/.

## **APPENDICES**


## A. DATA FLOW DIAGRAM

A data-flow diagram (DFD) is a way of representing a flow of a data of a process or system. The DFD also provides information about the outputs and inputs of each entity and process itself. A data-flow diagram is a part of structured-analysis modeling tools.

## LEVEL 0:



# LEVEL 1:

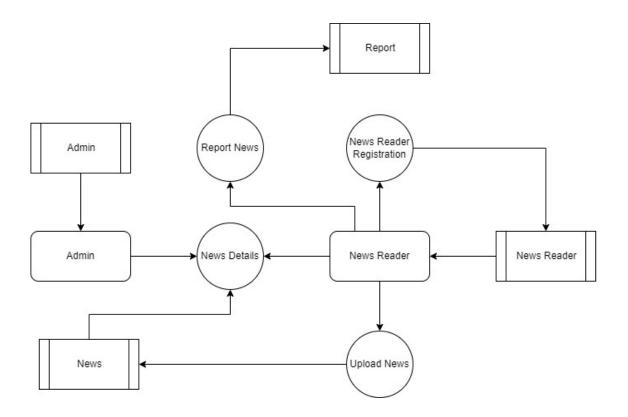

# **B. TABLE STRUCTURE**

The table needed for each module was designed and the specification of each and every column was given based on the records and details collected during record specification of the system study.

**TABLE NAME: ADMIN** 

FIELD	DATA TYPE	SIZE	CONSTRAINT
Id	Int	10	Primary key
Username	Varchar	20	Not null
password	Varchar	20	Not null

**TABLE NAME: CATEGORY** 

FIELD	DATA TYPE	SIZE	CONSTRAINT
Category id	Int	10	Primary key
Name	Varchar	20	Not null
Description	Varchar	30	Not null

# **TABLE NAME: POST**

FIELD	DATA TYPE	SIZE	CONSTRAINT
Post id	Int	10	Primary key
Post Title	Varchar	20	Not null
Category Id	Int	10	Foreign Key
Post Details	Varchar	100	Not null
Date	Date	10	Not null
Post Url	Varchar	20	Not null
Posted By	Varchar	30	Not null

# TABLE NAME: USER

FIELD	DATA TYPE	SIZE	CONSTRAINT
User id	Int	10	Primary key
Name	Varchar	20	Not null
Email Id	Varchar	30	Not null
Username	Varchar	30	Not null
Password	Varchar	30	Not null

# C. SAMPLE CODEING

```
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpSession;
import org.springframework.stereotype.Controller;
import org.springframework.ui.Model;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.PostMapping;
import org.springframework.web.bind.annotation.RequestParam;
@Controller
public class MyController {
  @GetMapping("/aboutus")
  public String aboutus(HttpServletRequest request, Model model) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0)  {
       return "redirect:/index.php";
    return "aboutus";
  @PostMapping("/aboutus/update")
  public String updateAboutUs(HttpServletRequest request, Model model, @RequestParam String
pagetitle, @RequestParam String pagedescription) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    }
    String pagetype = "aboutus";
    try {
       // code to update about us page
       model.addAttribute("msg", "About us page successfully updated");
     } catch(Exception e) {
       model.addAttribute("error", "Something went wrong. Please try again.");
```

```
return "aboutus";
  @GetMapping("/createCategory")
  public String createCategory(HttpServletRequest request, Model model) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    }
    return "createCategory";
  }
  @PostMapping("/createCategory")
  public String createCategory(HttpServletRequest request, Model model, @RequestParam String
category, @RequestParam String description) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    int status = 1;
    try {
       // code to create category
       // ...
       model.addAttribute("msg", "Category created");
     } catch(Exception e) {
       model.addAttribute("error", "Something went wrong. Please try again.");
    }
    return "createCategory";
  @GetMapping("/addPost")
  public String addPost(HttpServletRequest request, Model model) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    }
    return "addPost";
```

```
@PostMapping("/addPost")
  public String addPost(HttpServletRequest request, Model model, @RequestParam String posttitle,
@RequestParam int category, @RequestParam int subcategory, @RequestParam String
postdescription, @RequestParam("postimage") MultipartFile postimage) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    }
    String postedby = session.getAttribute("login").toString();
    String url = posttitle.replaceAll("\\s", "-");
    try {
       // code to add post
       // ...
       model.addAttribute("msg", "Post successfully added");
     } catch(Exception e) {
       model.addAttribute("error", "Something went wrong. Please try again.");
    return "addPost";
import org.springframework.stereotype.Controller;
import org.springframework.ui.Model;
import org.springframework.web.bind.annotation.*;
@Controller
@SessionAttributes("login")
public class AdminController {
  @GetMapping("/add-subadmin")
  public String showAddSubAdminForm(Model model, @SessionAttribute("login") String login) {
    if (\log in == null || \log in.length() == 0) {
       return "redirect:/index";
    }
    return "add-subadmin-form";
  @PostMapping("/add-subadmin")
  public String addSubAdmin(@RequestParam("sadminusername") String username,
                  @RequestParam("emailid") String email,
                  @RequestParam("pwd") String password,
```

```
@SessionAttribute("login") String login) {
    if (\log in == null || \log in.length() == 0) {
       return "redirect:/index";
    String usertype = "0";
    // code to insert sub-admin details into the database
    // ...
    return "redirect:/manage-subadmins";
}
import org.springframework.stereotype.Controller;
import org.springframework.ui.Model;
import org.springframework.web.bind.annotation.*;
import java.security.SecureRandom;
import java.util.Random;
@Controller
public class NewsController {
  private static final Random RANDOM = new SecureRandom();
  // Code for username availability
  @PostMapping("/checkUsername")
  @ResponseBody
  public String checkUsername(@RequestParam("username") String username) {
    // TODO: Replace the database query with your own implementation
    boolean exists = someDatabaseService.checkUsernameExists(username);
    if (exists) {
       return
               "<span
                        style='color:red'>
                                             Username
                                                          already
                                                                    exists.
                                                                              Try
                                                                                    with
                                                                                           another
username</span><script>$('#submit').prop('disabled',true);</script>";
    } else {
                            style='color:green'>
                                                    Username
                                                                  available
                                                                                for
                                                                                       Registration
       return
                 "<span
.</span><script>$('#submit').prop('disabled',false);</script>";
  }
  @GetMapping("/news-details/{id}")
  public String showNewsDetails(@PathVariable("id") int id, Model model) {
```

```
// Code for updating viewCounter
    someDatabaseService.updateViewCounter(id);
    // TODO: Replace the database query with your own implementation
    News news = someDatabaseService.getNewsById(id);
    if (news != null) {
       model.addAttribute("news", news);
    }
    return "news-details";
  @GetMapping("/news")
  public String showNews(@RequestParam(value = "catid", required = false) Integer categoryId,
                @RequestParam(value = "pageno", required = false, defaultValue = "1") int
pageNumber,
                Model model) {
    if (categoryId != null) {
       model.addAttribute("category", someDatabaseService.getCategoryById(categoryId));
    }
    int pageSize = 8;
    int offset = (pageNumber - 1) * pageSize;
    int totalRows = someDatabaseService.getTotalNewsCount();
    int totalPages = (int) Math.ceil((double) totalRows / pageSize);
    model.addAttribute("totalPages", totalPages);
    model.addAttribute("currentPage", pageNumber);
    // TODO: Replace the database query with your own implementation
    List<News>
                   newsList = someDatabaseService.getNewsByCategory(categoryId,
                                                                                          offset,
pageSize);
    model.addAttribute("newsList", newsList);
    return "news";
  @ModelAttribute("csrfToken")
  public String generateCsrfToken() {
    byte[] bytes = new byte[32];
```

```
RANDOM.nextBytes(bytes);
    return bytesToHex(bytes);
  @PostMapping("/addComment")
  public String addComment(@RequestParam("csrftoken") String csrfToken,
                @RequestParam("name") String name,
                @RequestParam("email") String email,
                @RequestParam("comment") String comment,
                @RequestParam("nid") int newsId,
                Model model) {
    if (!generateCsrfToken().equals(csrfToken)) {
      // Invalid CSRF token
      model.addAttribute("commentError", "Invalid CSRF token");
      return "news-details";
    }
    // TODO: Replace the database query with your own implementation
    Comment comment = new Comment(newsId, name, email, comment);
    boolean success = someDatabaseService.addComment(comment);
    if (success) {
      model.addAttribute("commentSuccess", "Comment successfully submitted. Comment will be
displayed after admin review.");
    } else {
      model.addAttribute("commentError", "Something went wrong. Please try again.");
    }
    return "news-details";
  private static final char[] HEX ARRAY = "0123456789ABCDEF".toCharArray();
  private static String bytesToHex(byte[] bytes
import org.springframework.stereotype.Controller;
import org.springframework.ui.Model;
import org.springframework.web.bind.annotation.*;
import java.security.SecureRandom;
import java.util.Random;
```

```
@Controller
public class NewsController {
  private static final Random RANDOM = new SecureRandom();
  // Code for username availability
  @PostMapping("/checkUsername")
  @ResponseBody
  public String checkUsername(@RequestParam("username") String username) {
    // TODO: Replace the database query with your own implementation
    boolean exists = someDatabaseService.checkUsernameExists(username);
    if (exists) {
       return
               "<span style='color:red'> Username
                                                        already
                                                                  exists.
                                                                           Try
                                                                                  with
                                                                                         another
username</span><script>$('#submit').prop('disabled',true);</script>";
    } else {
                           style='color:green'>
                                                   Username
                                                                available
                                                                                    Registration
       return
                 "<span
                                                                             for
.</span><script>$('#submit').prop('disabled',false);</script>";
  }
  @GetMapping("/news-details/{id}")
  public String showNewsDetails(@PathVariable("id") int id, Model model) {
    // Code for updating viewCounter
    someDatabaseService.updateViewCounter(id);
    // TODO: Replace the database query with your own implementation
    News news = someDatabaseService.getNewsById(id);
    if (news != null) {
       model.addAttribute("news", news);
    }
    return "news-details";
  }
  @GetMapping("/news")
  public String showNews(@RequestParam(value = "catid", required = false) Integer categoryId,
                @RequestParam(value = "pageno", required = false, defaultValue = "1") int
pageNumber,
                Model model) {
    if (categoryId != null) {
       model.addAttribute("category", someDatabaseService.getCategoryById(categoryId));
    }
```

```
int pageSize = 8;
    int offset = (pageNumber - 1) * pageSize;
    int totalRows = someDatabaseService.getTotalNewsCount();
    int totalPages = (int) Math.ceil((double) totalRows / pageSize);
    model.addAttribute("totalPages", totalPages);
    model.addAttribute("currentPage", pageNumber);
    // TODO: Replace the database query with your own implementation
    List<News>
                  newsList = someDatabaseService.getNewsByCategory(categoryId,
                                                                                         offset,
pageSize);
    model.addAttribute("newsList", newsList);
    return "news";
  @ModelAttribute("csrfToken")
  public String generateCsrfToken() {
    byte[] bytes = new byte[32];
    RANDOM.nextBytes(bytes);
    return bytesToHex(bytes);
  @PostMapping("/addComment")
  public String addComment(@RequestParam("csrftoken") String csrfToken,
                 @RequestParam("name") String name,
                 @RequestParam("email") String email,
                 @RequestParam("comment") String comment,
                 @RequestParam("nid") int newsId,
                Model model) {
    if (!generateCsrfToken().equals(csrfToken)) {
       // Invalid CSRF token
       model.addAttribute("commentError", "Invalid CSRF token");
       return "news-details";
    }
    // TODO: Replace the database query with your own implementation
    Comment comment = new Comment(newsId, name, email, comment);
```

```
boolean success = someDatabaseService.addComment(comment);
    if (success) {
       model.addAttribute("commentSuccess", "Comment successfully submitted. Comment will be
displayed after admin review.");
    } else {
       model.addAttribute("commentError", "Something went wrong. Please try again.");
    }
    return "news-details";
  private static final char[] HEX ARRAY = "0123456789ABCDEF".toCharArray();
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpSession;
import org.springframework.stereotype.Controller;
import org.springframework.ui.Model;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.PostMapping;
import org.springframework.web.bind.annotation.RequestParam;
@Controller
public class MyController {
  @GetMapping("/aboutus")
  public String aboutus(HttpServletRequest request, Model model) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    return "aboutus";
  @PostMapping("/aboutus/update")
  public String updateAboutUs(HttpServletRequest request, Model model, @RequestParam String
pagetitle, @RequestParam String pagedescription) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
     }
```

```
String pagetype = "aboutus";
    try {
       // code to update about us page
       model.addAttribute("msg", "About us page successfully updated");
     } catch(Exception e) {
       model.addAttribute("error", "Something went wrong. Please try again.");
    }
    return "aboutus";
  @GetMapping("/createCategory")
  public String createCategory(HttpServletRequest request, Model model) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    return "createCategory";
  }
  @PostMapping("/createCategory")
  public String createCategory(HttpServletRequest request, Model model, @RequestParam String
category, @RequestParam String description) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    }
    int status = 1;
    try {
       // code to create category
       // ...
       model.addAttribute("msg", "Category created");
     } catch(Exception e) {
       model.addAttribute("error", "Something went wrong. Please try again.");
    }
    return "createCategory";
  @GetMapping("/addPost")
  public String addPost(HttpServletRequest request, Model model) {
```

```
HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    }
    return "addPost";
  }
  @PostMapping("/addPost")
  public String addPost(HttpServletRequest request, Model model, @RequestParam String posttitle,
@RequestParam int category, @RequestParam int subcategory, @RequestParam String
postdescription, @RequestParam("postimage") MultipartFile postimage) {
    HttpSession session = request.getSession();
    if(session.getAttribute("login") == null || session.getAttribute("login").toString().length() == 0) {
       return "redirect:/index.php";
    }
    String postedby = session.getAttribute("login").toString();
    String url = posttitle.replaceAll("\\s", "-");
    try {
       // code to add post
       // ...
       model.addAttribute("msg", "Post successfully added");
    } catch(Exception e) {
       model.addAttribute("error", "Something went wrong. Please try again.");
    }
    return "addPost";
}
```

# D. SAMPLE INPUT & OUTPUT DESIGN





