

Comp 3123 exec-05

Gokul Jinu

student ID : 101373306

localhost:8081/home (GET)

The screenshot shows the Postman interface with a workspace named 'My Workspace'. The left sidebar displays a collection named 'lab5' containing several HTTP requests. The main panel shows a GET request to 'http://localhost:8081/home'. The response is a 200 OK status with a response time of 12 ms and a body size of 670 B. The response body is displayed in HTML format, showing a basic HTML document structure with a title 'Home'.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <meta name="author" content="Gokul Jinu">
  <meta name="description" content="COMP3123 lab-s5">
  <title>Home</title>
</head>
<body>
```

localhost:8081/profile (GET)

The screenshot shows the Postman interface with a workspace named 'My Workspace'. The left sidebar displays a collection named 'lab5' containing several HTTP requests. The main panel shows a GET request to 'http://localhost:8081/profile'. The response is a 200 OK status with a response time of 5 ms and a body size of 660 B. The response body is displayed in JSON format, showing a user profile object.

```
{
  "id": 1,
  "name": "Leanne Graham",
  "username": "bret",
  "password": "bret@123",
  "email": "Sincere@april.biz",
  "address": {
    "street": "Kulas Light",
    "suite": "Apt. 556",
    "city": "Gwenborough"
  }
}
```

localhost:8081/login (POST)

The screenshot shows the Postman interface with a workspace named 'My Workspace'. A collection named 'lab5' is expanded, showing a list of requests. The selected request is a POST to 'http://localhost:8081/login'. The request body is a JSON object:

```
{  "username": "bret",  "password": "bret@123"}
```

. The response is a 200 OK status with a response time of 5 ms and a body size of 276 B. The response body is a JSON object:

```
{  "status": true,  "message": "User is valid"}
```

.

lab5 / http://localhost:8081/login

POST http://localhost:8081/login

Params Auth Headers (8) Body Scripts Settings

raw JSON

```
1 {
2   "username": "bret",
3   "password": "bret@123"
4 }
```

Body

200 OK • 5 ms • 276 B

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": true,
3   "message": "User is valid"
4 }
```

localhost:8081/logout (GET)

The screenshot shows the Postman interface with a workspace named 'My Workspace'. A collection named 'lab5' is expanded, showing a list of requests. The selected request is a GET to 'http://localhost:8081/logout'. The response is a 400 Bad Request status with a response time of 4 ms and a body size of 276 B. The response body is an HTML message:

```
<b>Username is required to log out.</b>
```

.

lab5 / http://localhost:8081/logout

GET http://localhost:8081/logout

Params Auth Headers (6) Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	


Body

400 Bad Request • 4 ms • 276 B

Pretty Raw Preview Visualize HTML

```
1 <b>Username is required to log out.</b>
```

localhost:8081/logout?username=bret (GET)

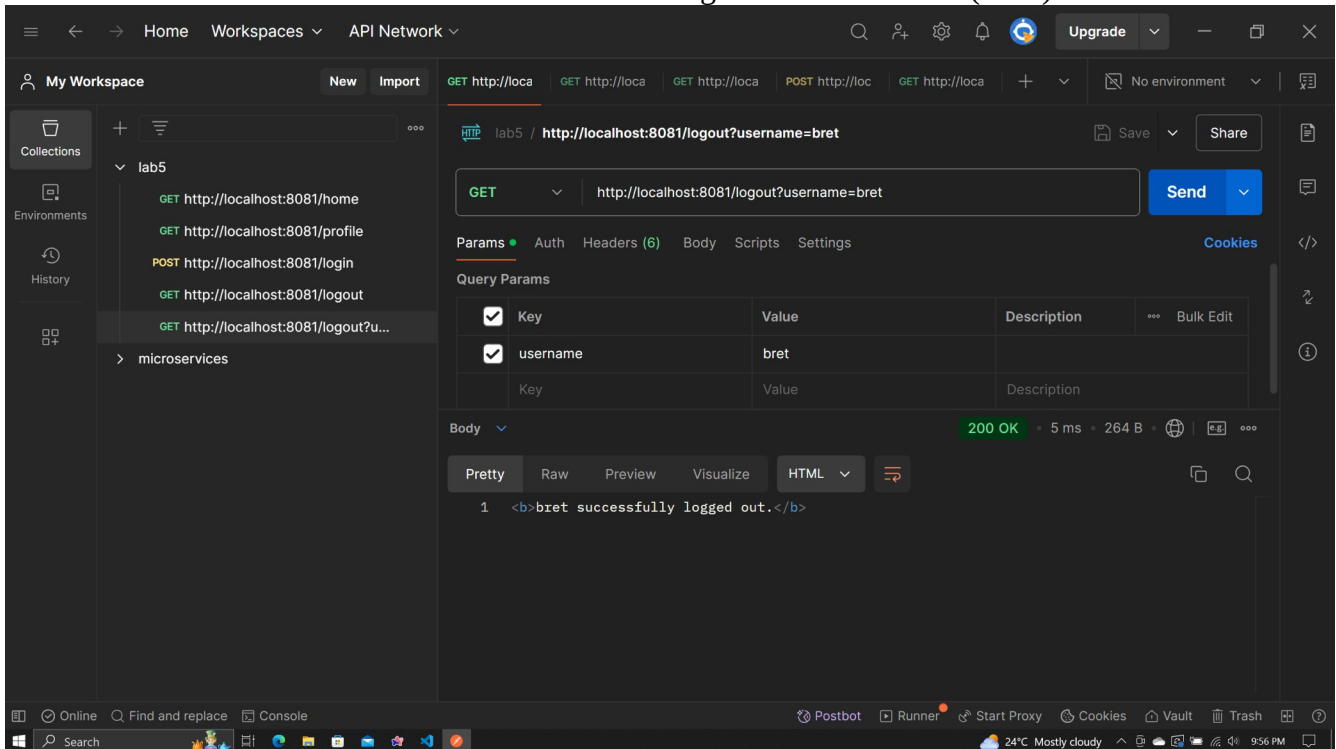

WEB VIEW



Welcome to express js tutorial

