AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

1.Create an EC2 Windows Instance in AWS

Gokulavasan B
CSE-Artificial Intelligence & Machine Learning,
Sri Eshwar College of Engineering
Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Windows instance is a virtual machine running the Microsoft Windows operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, IIS, etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Windows Instances:

- Web and Application Hosting: Run IIS web servers or other Windows-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Windows instances, using RDS or EC2 for more control.
- Remote Desktop Applications: Set up RDS (Remote Desktop Services) for remote access to Windows desktops in the cloud.
- Development and Testing: Create development environments with Windows OS to test .NET or other Windows-based applications.

Used Services in AWS:



Amazon EC2

Topology

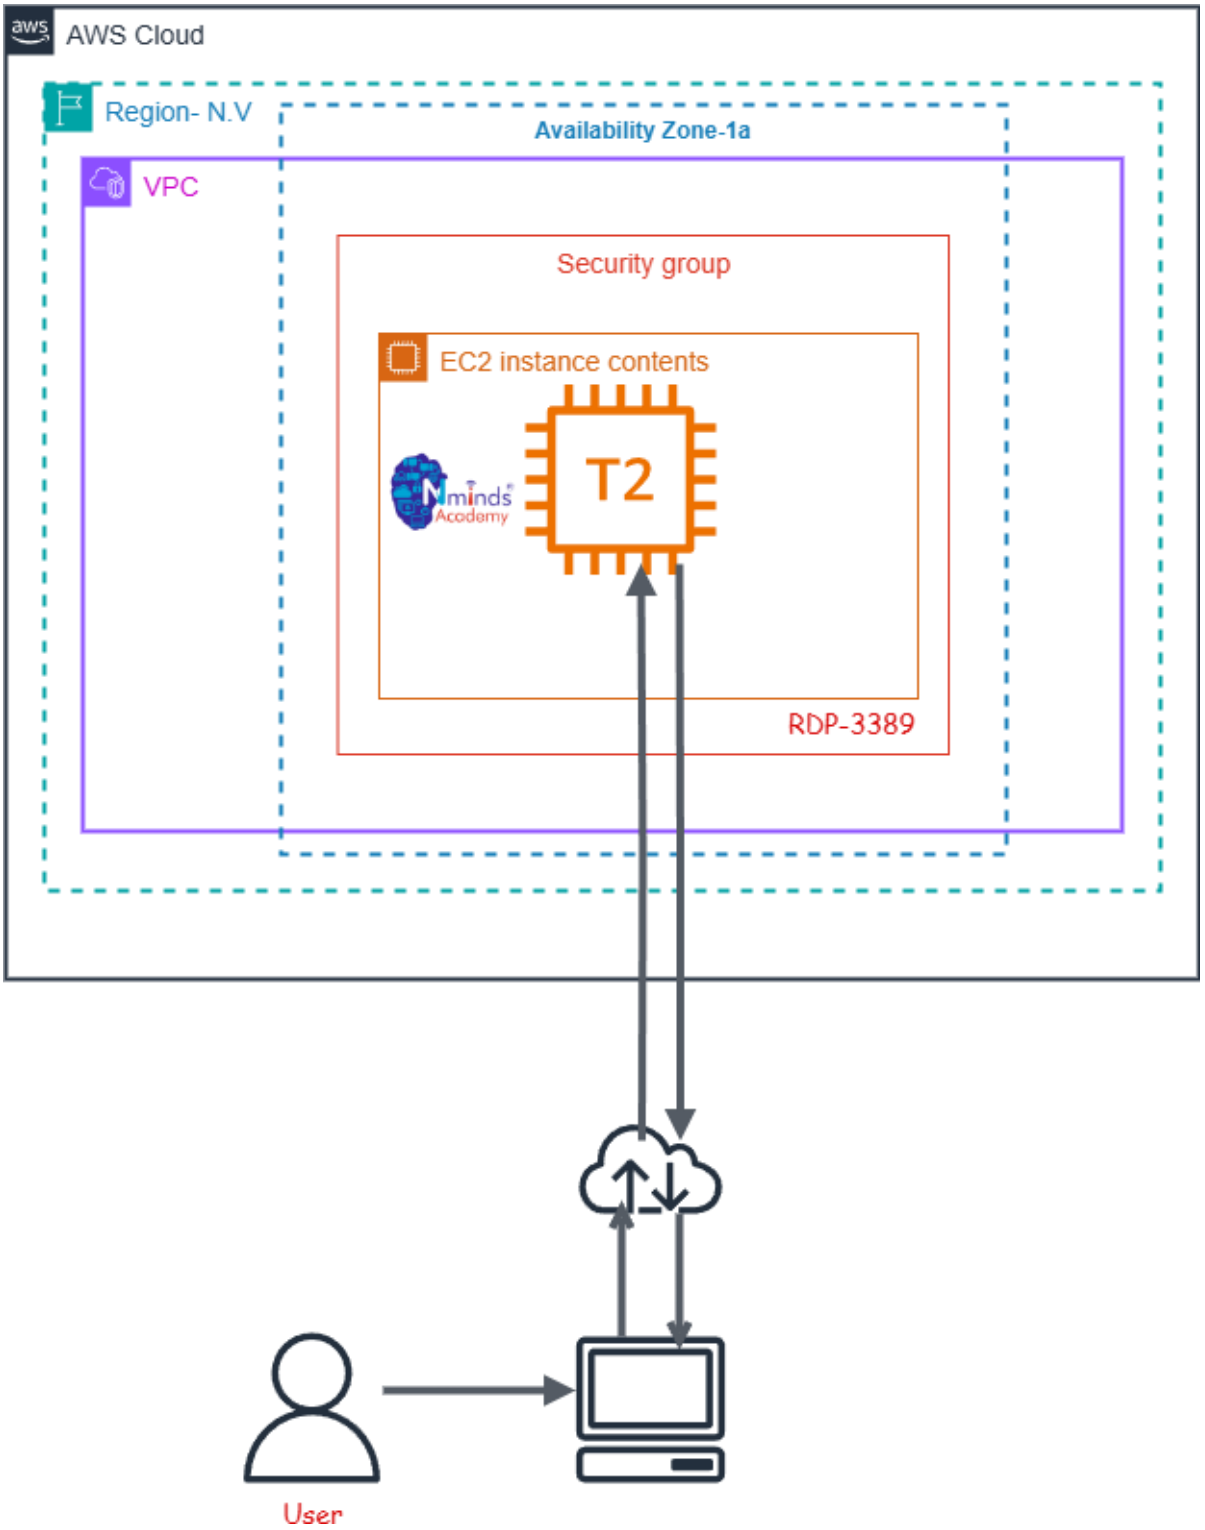
AWS Cloud
Region- N.V
Availability Zone-1a
VPC
Security group
EC2 instance contents
T2
RDP-3389
User

Execution Tasks:

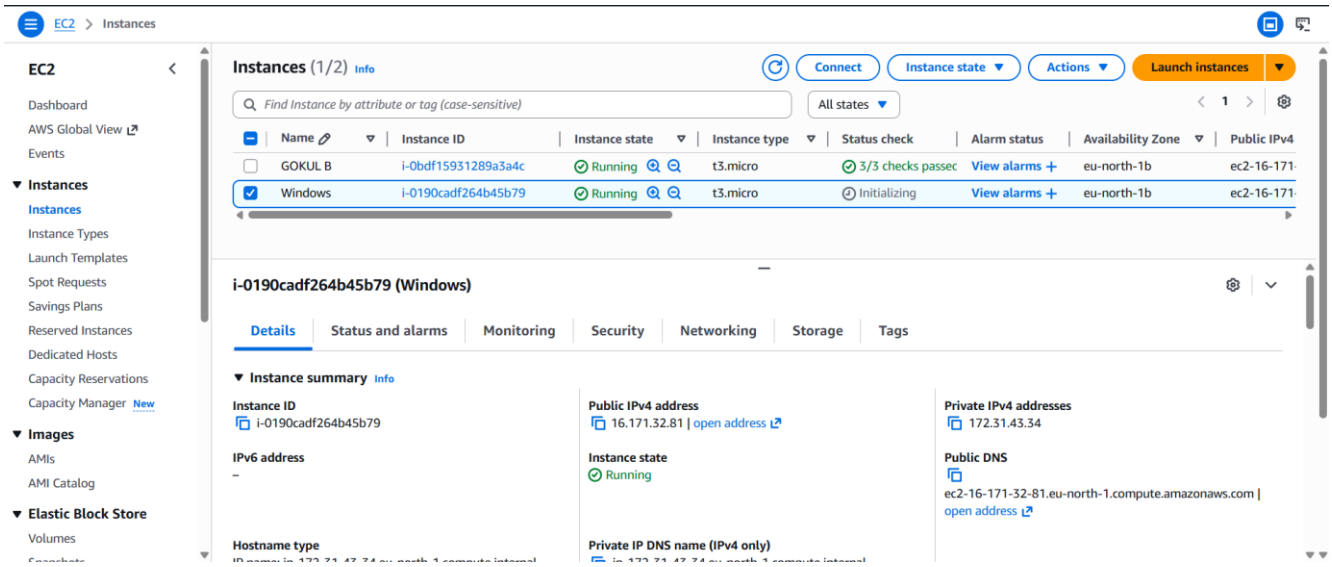

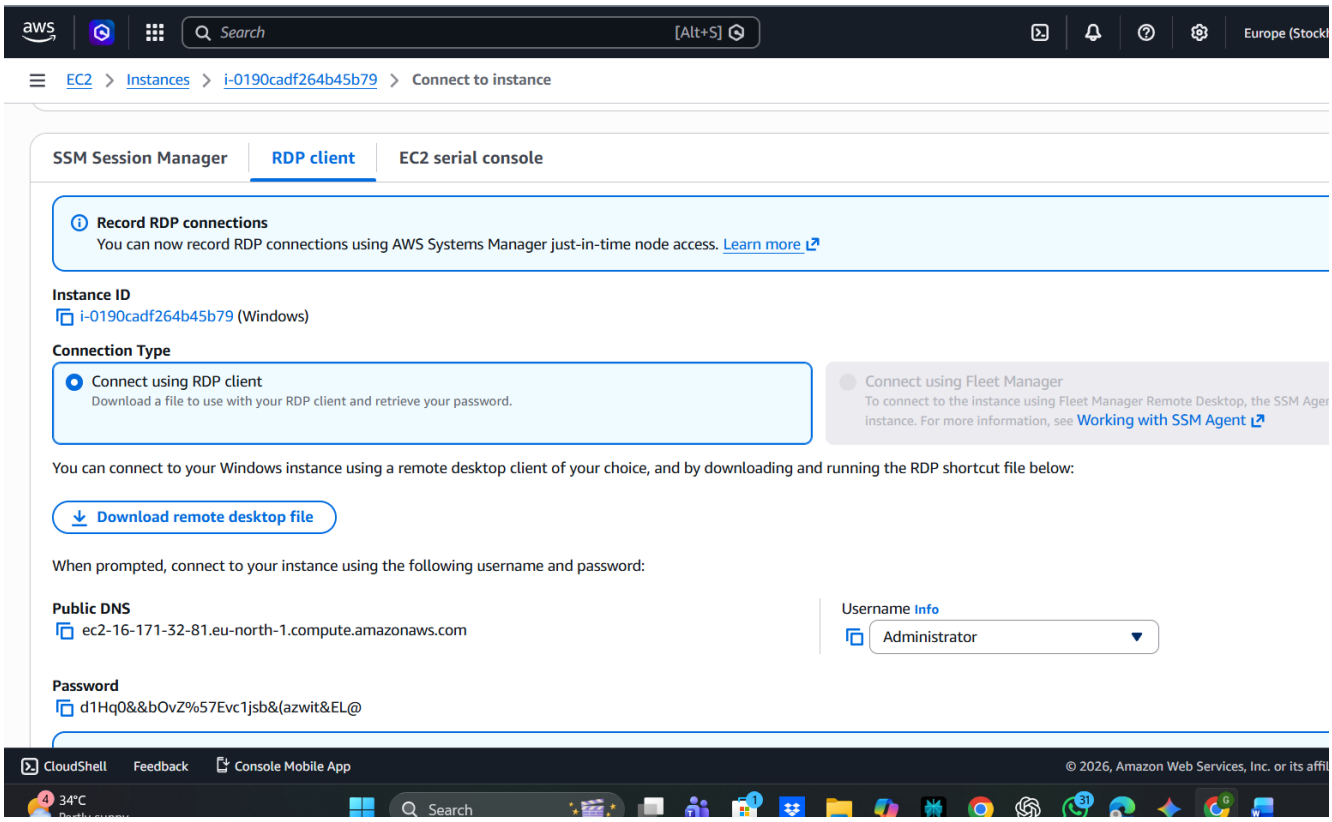

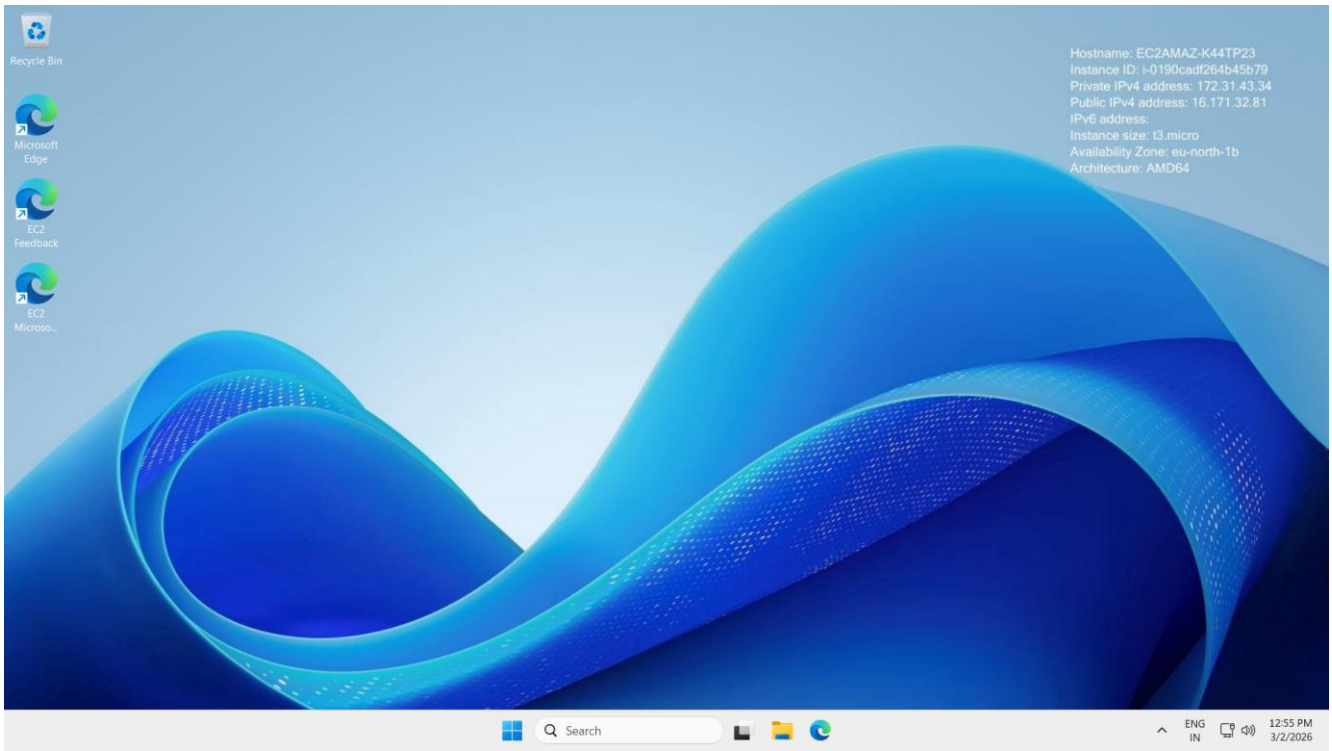
Recycle Bin
Microsoft Edge
EC2 Feedback
EC2 Microso...
Hostname: EC2AMAZ-K44TP23
Instance ID: i-0190cadf264b45b79
Private IPv4 address: 172.31.43.34
Public IPv4 address: 16.171.32.81
IPv6 address:
Instance size: t3.micro
Availability Zone: eu-north-1b
Architecture: AMD64
Search
ENG
IN
12:55 PM
3/2/2026

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification Training

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

2. Configure IIS Webserver on Windows Server in AWS

Aravindraj.G

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

An EC2 Windows instance is a virtual machine running the Microsoft Windows operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, IIS, etc.) in the cloud without having to manage physical hardware.

IIS (Internet Information Services) is a web server software created by Microsoft for hosting websites and web applications on Windows Server operating systems. It provides a platform for building, deploying, and managing web-based applications. IIS supports multiple protocols, including HTTP, HTTPS, FTP, and more, and is tightly integrated with the Windows OS.

Common Use Cases of IIS:

1. Hosting Websites: IIS is often used by businesses and developers to host websites and web applications, particularly those built with ASP.NET.
2. Web Applications: For applications that require robust back-end support, IIS provides features like application pooling and security for web services (e.g., SOAP or RESTful APIs).
3. Secure File Sharing: IIS can be configured as an FTP server to securely share files between different locations.
4. Application Hosting in Enterprises: Many enterprise applications built on Microsoft technologies rely on IIS for deployment, such as SharePoint, Exchange Server, or Dynamics CRM.
5. API Hosting: IIS is commonly used to host APIs (e.g., RESTful services) built with .NET or other technologies.

Used Services in AWS

Used Services in Windows Server

Amazon EC2

IIS- Internet Information Services

Topology

How to Configure the IIS web server in Windows Server with AWS EC2

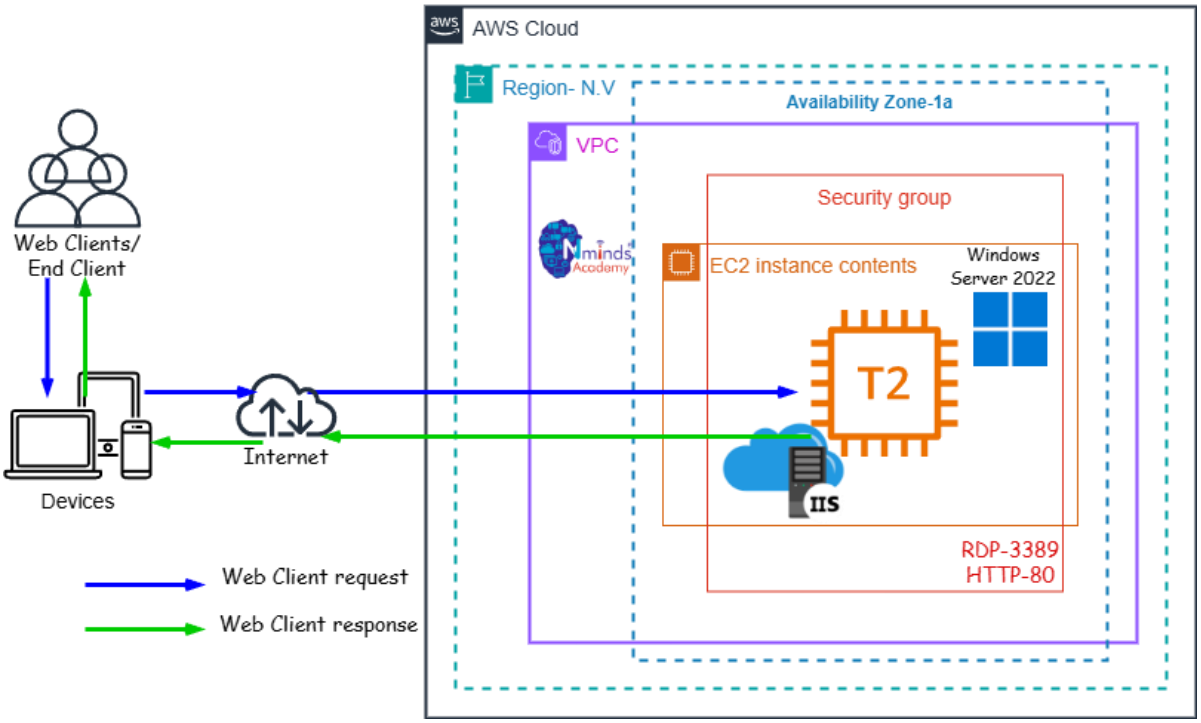

Execution Tasks:

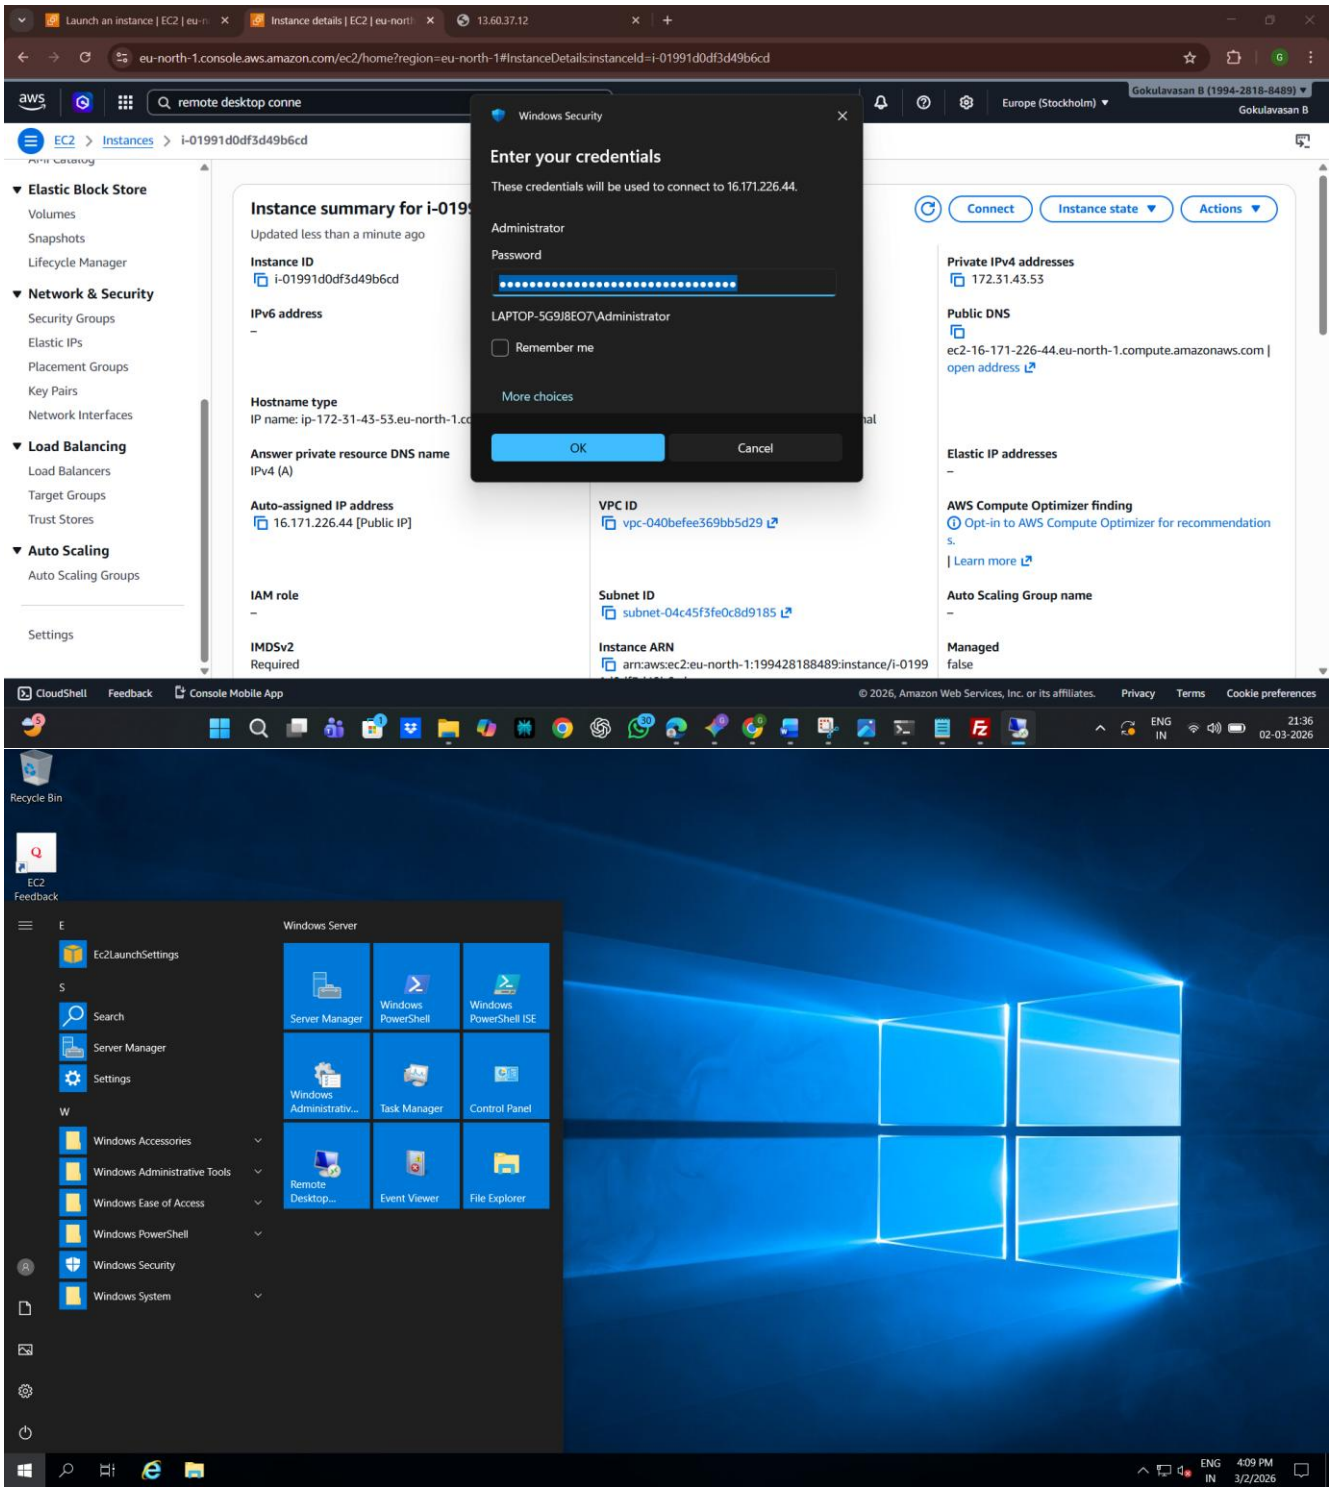

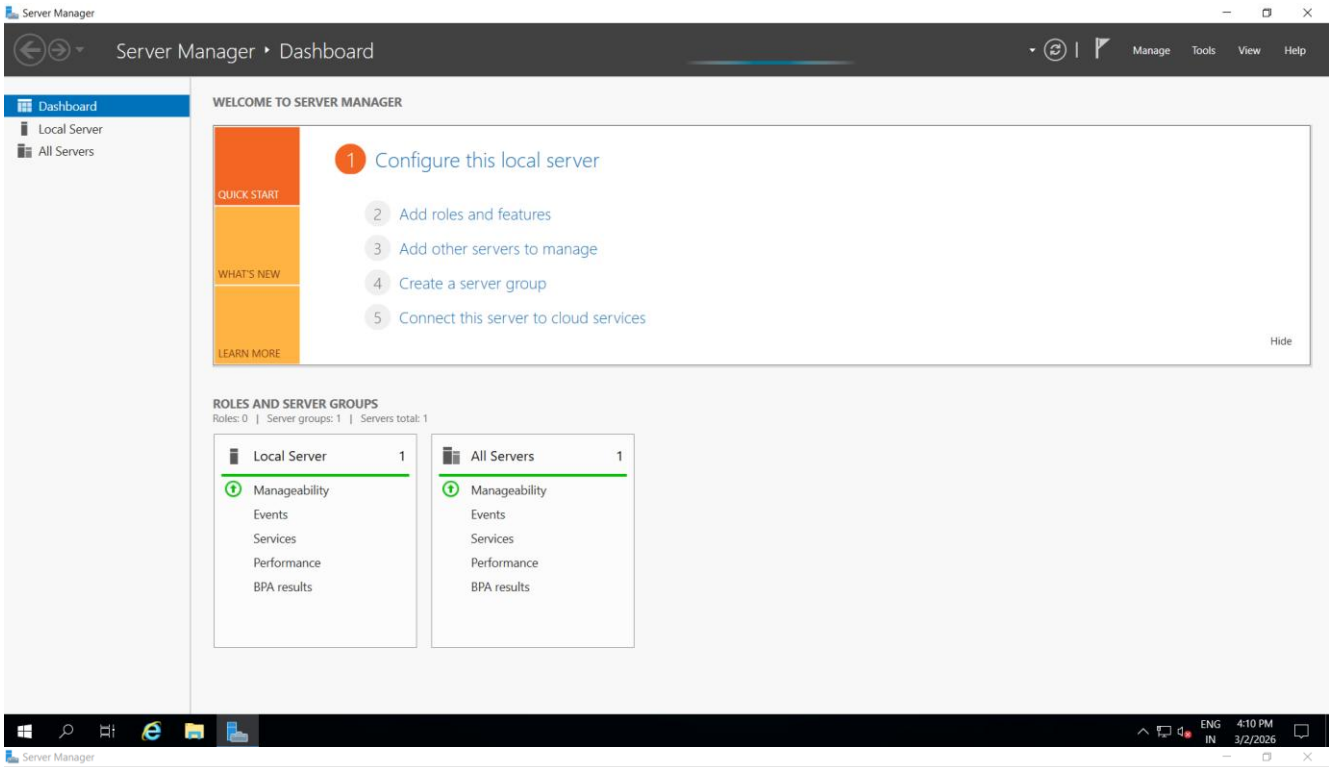
Server Manager
Server Manager • Dashboard
Manage
Tools
View
Help
Dashboard
Local Server
All Servers
WELCOME TO SERVER MANAGER
QUICK START
WHAT'S NEW
LEARN MORE
1 Configure this local server
2 Add roles and features
3 Add other servers to manage
4 Create a server group
5 Connect this server to cloud services
Hide
ROLES AND SERVER GROUPS
Roles: 0 | Server groups: 1 | Servers total: 1
Local Server 1
Manageability
Events
Services
Performance
BPA results
All Servers 1
Manageability
Events
Services
Performance
BPA results
ENG IN
4:10 PM
3/2/2026

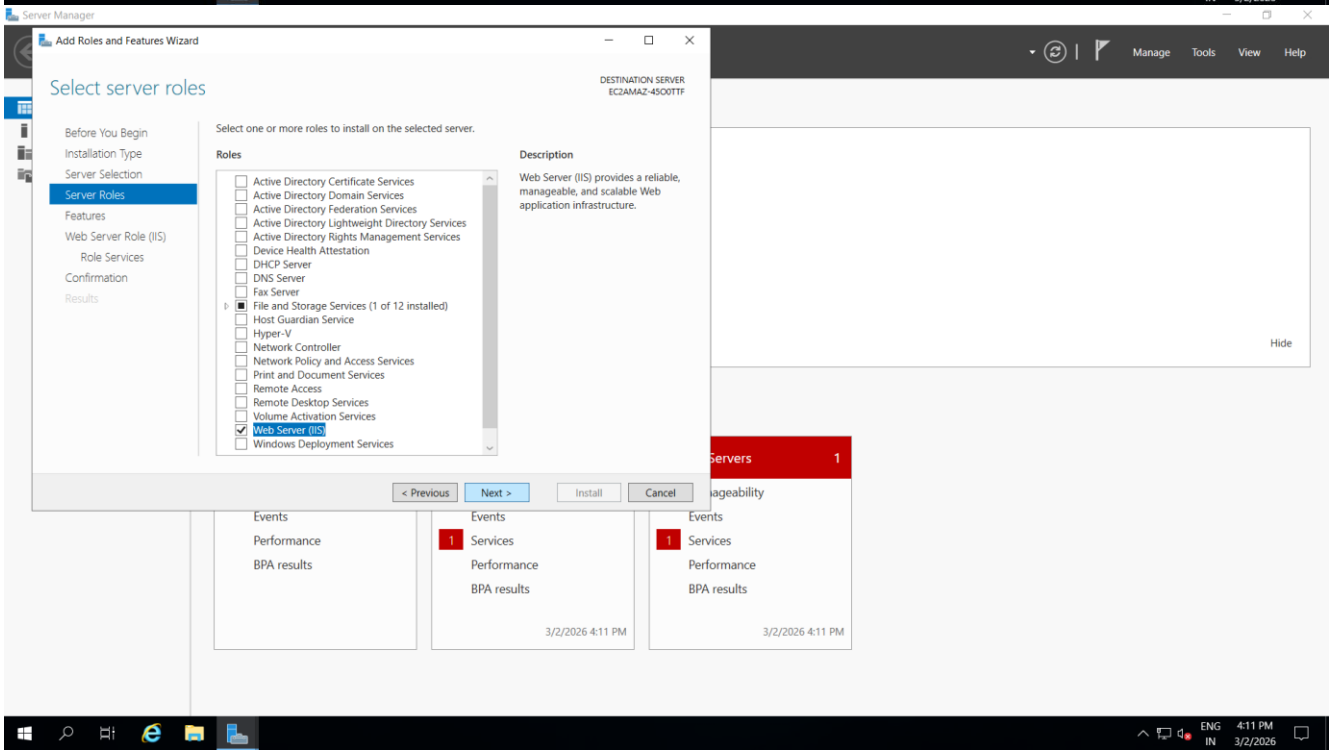
Add Roles and Features Wizard
Select server roles
DESTINATION SERVER
EC2AMAZ-45OOTTF
Before You Begin
Installation Type
Server Selection
Server Roles
Features
Web Server Role (IIS)
Role Services
Confirmation
Results
Select one or more roles to install on the selected server.
Roles
Active Directory Certificate Services
Active Directory Domain Services
Active Directory Federation Services
Active Directory Lightweight Directory Services
Active Directory Rights Management Services
Device Health Attestation
DHCP Server
DNS Server
Fax Server
File and Storage Services (1 of 12 installed)
Host Guardian Service
Hyper-V
Network Controller
Network Policy and Access Services
Print and Document Services
Remote Access
Remote Desktop Services
Volume Activation Services
Web Server (IIS)
Windows Deployment Services
Description
Web Server (IIS) provides a reliable, manageable, and scalable Web application infrastructure.
< Previous
Next >
Install
Cancel
Manage
Tools
View
Help
Hide
Events
Performance
BPA results
Services
3/2/2026 4:11 PM
ENG IN
4:11 PM
3/2/2026

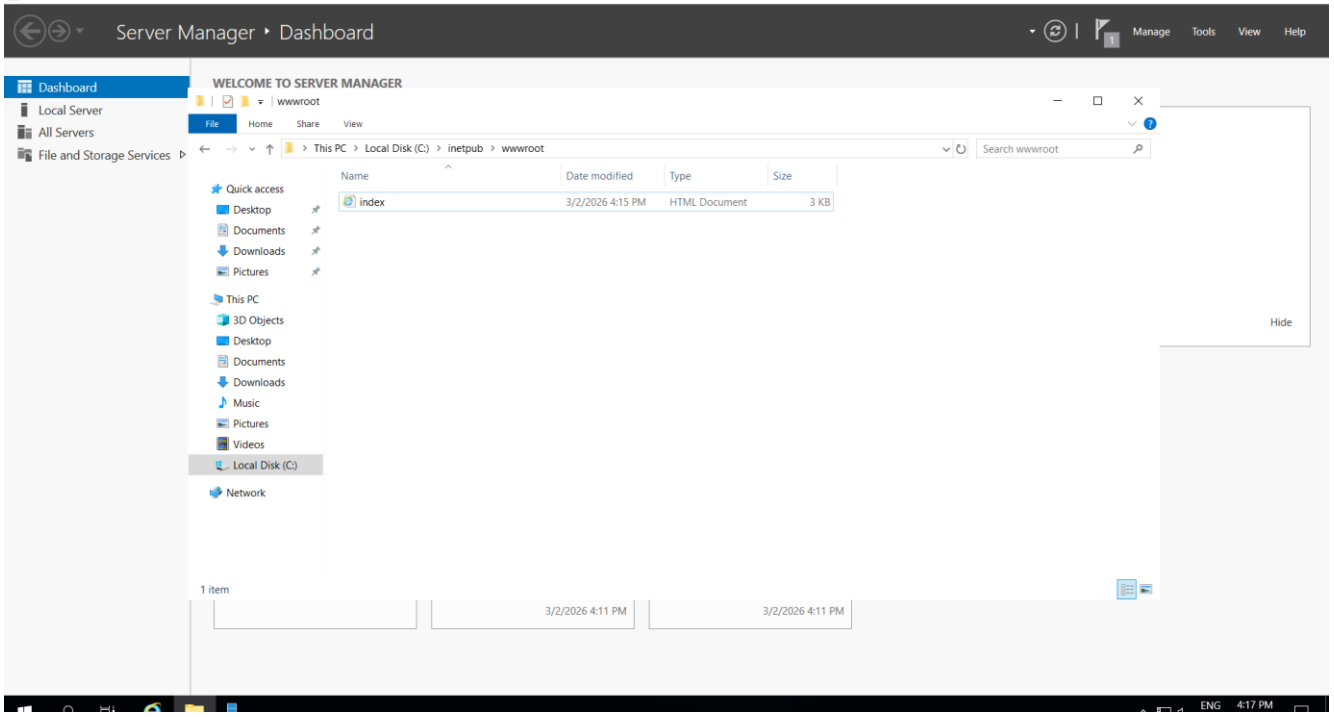
Server Manager • Dashboard
Manage
Tools
View
Help
Dashboard
Local Server
All Servers
File and Storage Services
WELCOME TO SERVER MANAGER
wwwroot
File
Home
Share
View
This PC > Local Disk (C:) > inetpub > wwwroot
Search wwwroot
Quick access
Desktop
Documents
Downloads
Pictures
This PC
3D Objects
Desktop
Documents
Downloads
Music
Pictures
Videos
Local Disk (C:)
Network
Name
Date modified
Type
Size
index
3/2/2026 4:15 PM
HTML Document
3 KB
1 item
Hide
3/2/2026 4:11 PM
3/2/2026 4:11 PM
ENG
4:17 PM

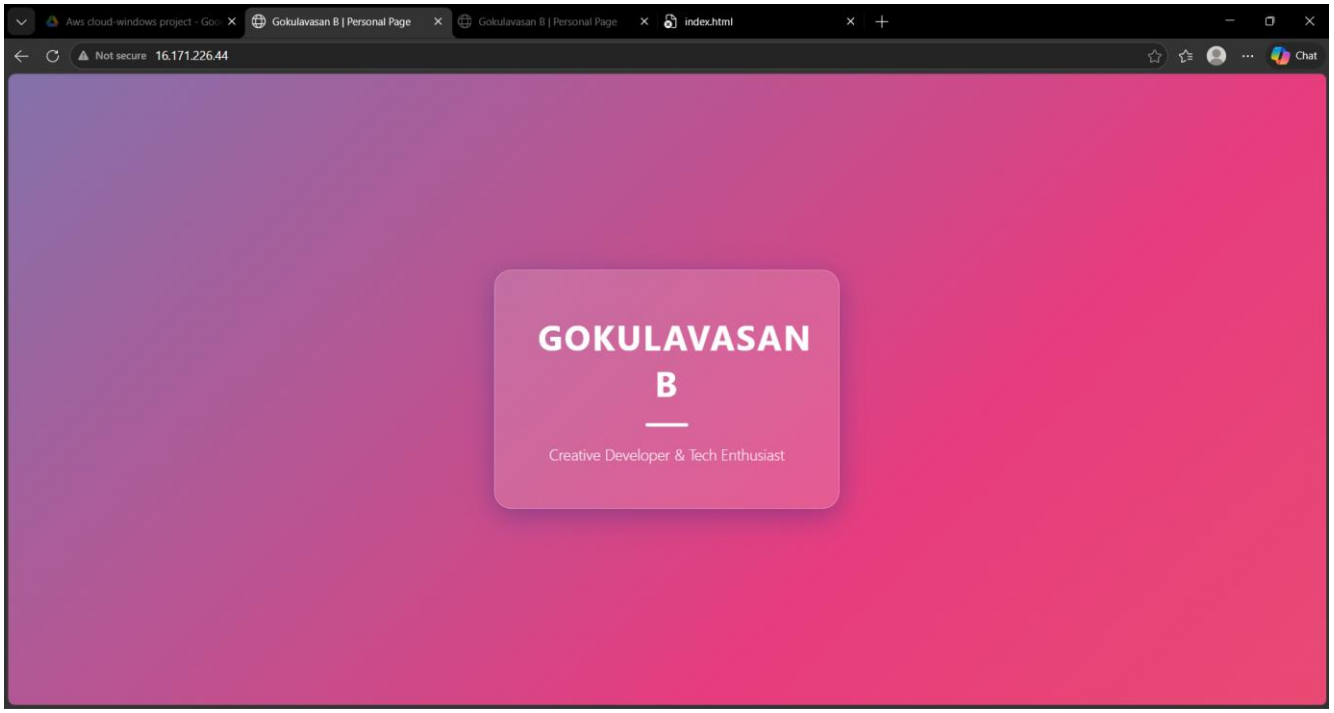
Gokulavasan B | Personal Page
index.html
Not secure
16.171.226.44
Chat
GOKULAVASAN
B
Creative Developer & Tech Enthusiast

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

3. Configure Elastic IP Address to Windows Web Server in AWS

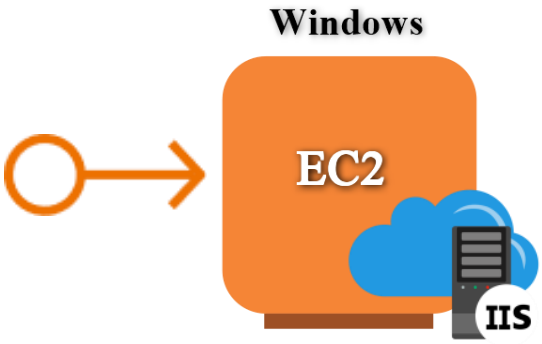

Aravindraj.G

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

An Elastic IP (EIP) in AWS is a static, public IP address designed for dynamic cloud computing. It is associated with your AWS account and can be quickly associated or disassociated with any EC2 instance in your account. This feature is particularly useful when you need to maintain a consistent IP address for your resources, even when you stop and start EC2 instances.

Common Use Cases for Elastic IP:

1. Highly Available Applications:
    - If you're running a service that requires high availability, you can use Elastic IPs to quickly reassign a static IP to a new instance if your primary instance fails, ensuring minimal downtime.
2. Web Servers:
    - If you host a website and need to ensure the IP address remains the same even if the underlying EC2 instance is restarted, an Elastic IP helps maintain this consistency.
3. Disaster Recovery:
    - Elastic IPs are useful for disaster recovery scenarios. If one instance goes down, you can quickly associate the EIP with a backup instance to ensure services are still accessible.

Best Practices:

- Use Elastic IPs only when necessary: Since they come with associated costs when unused, it's a good practice to release EIPs that are no longer required.
- Move IPs during instance failure: Instead of keeping an EIP permanently attached, use it as a failover method, reassociating it to a new instance when needed.
- Monitor EIP Usage: Periodically review your usage to ensure you're not paying for unnecessary Elastic IP addresses.

Topology

How to Configure the Elastic IP Address to Windows Web Server with AWS EC2

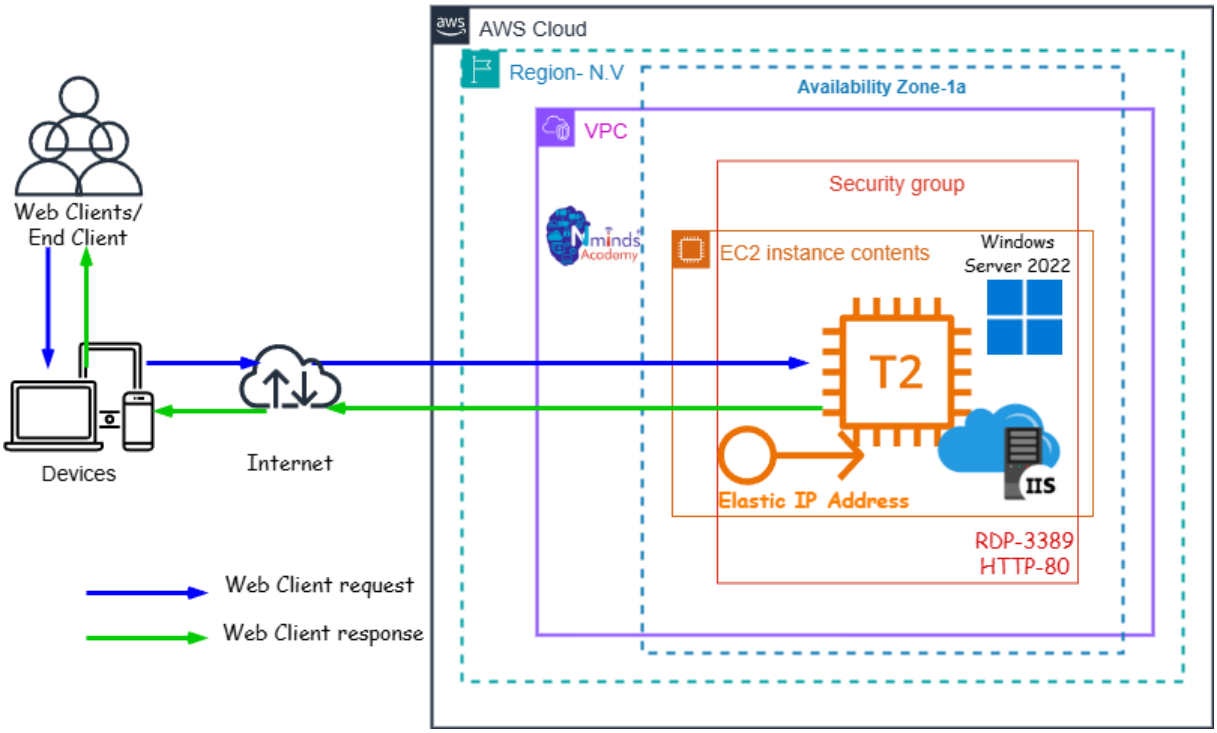

Used Services in AWS

Used Services in Windows Server



Amazon EC2

IIS- Internet Information Services

Amazon Elastic IP Address

Execution Tasks:

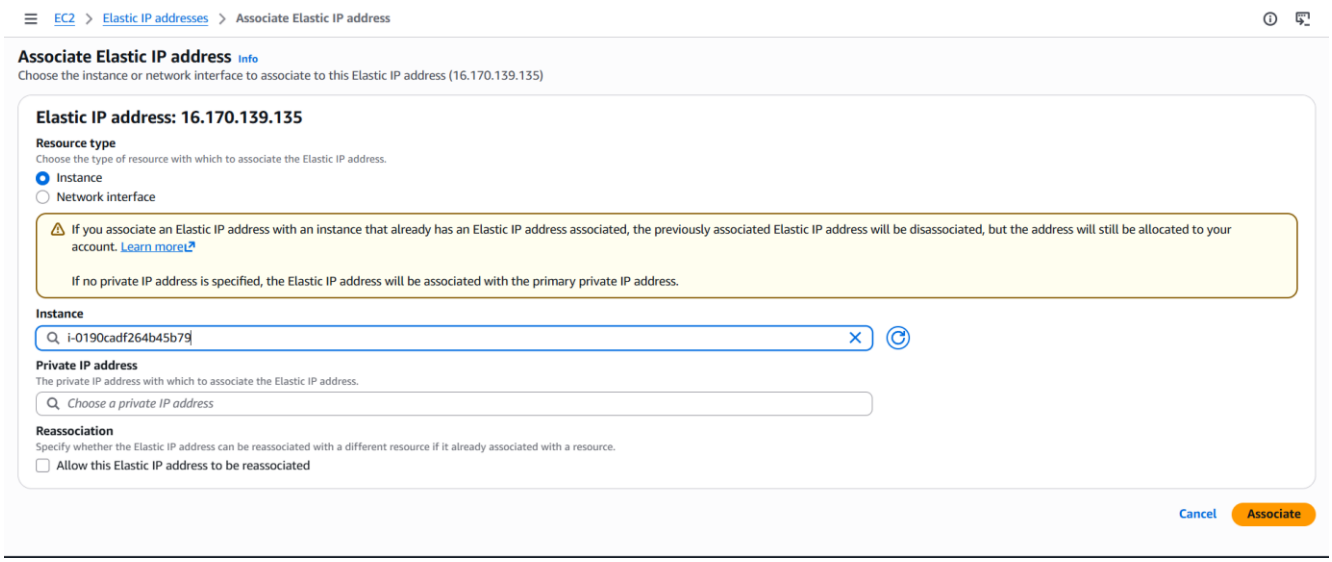

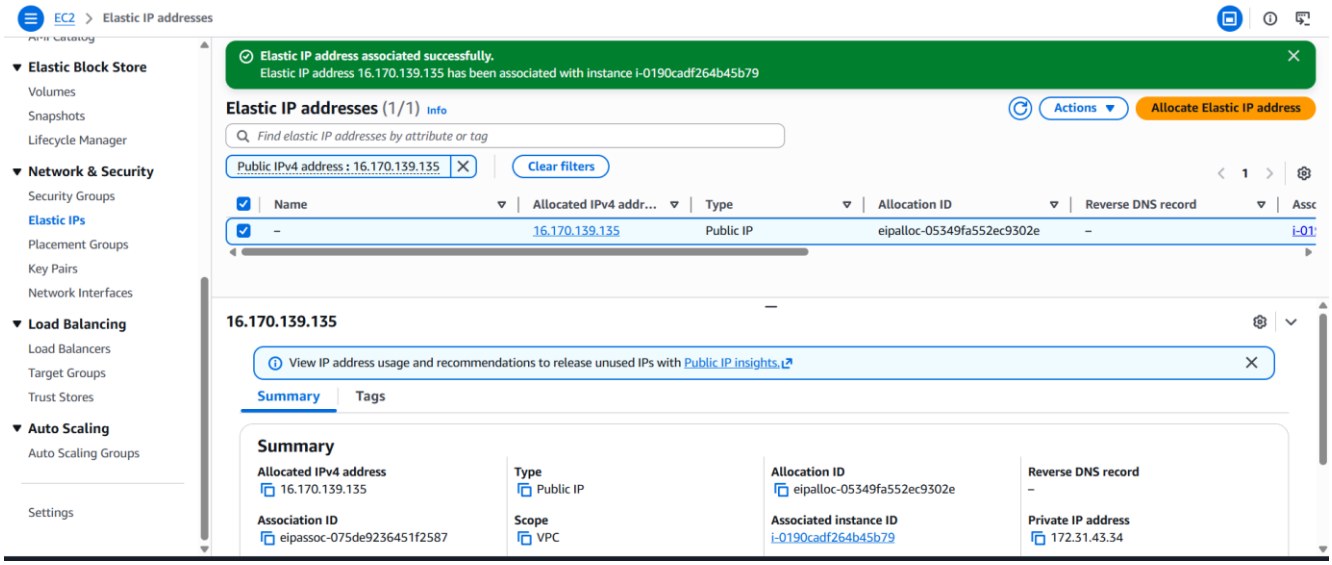

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

4. Create an EC2 Linux Instance in AWS

Aravindraj.G

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Linux instance is a virtual machine running the Linux operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, Apache,FileServer etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

Used Services in AWS



Amazon EC2

Topology

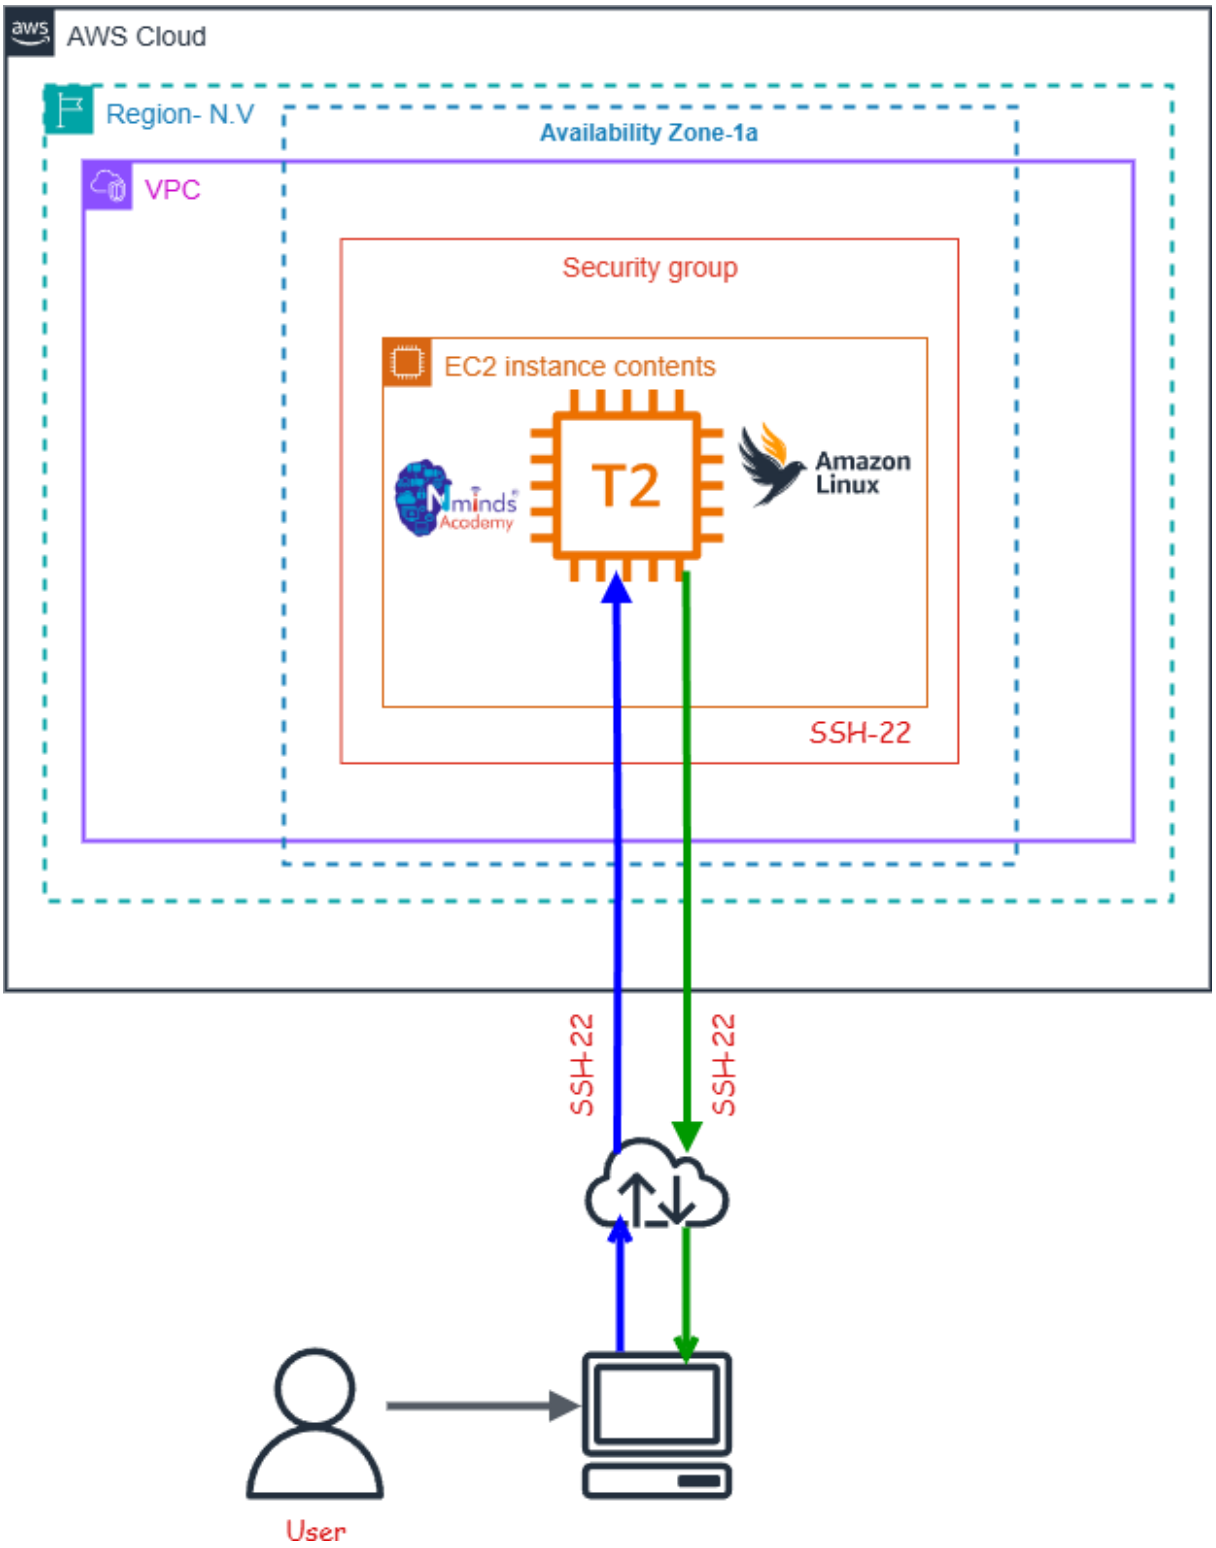

Execution Tasks:

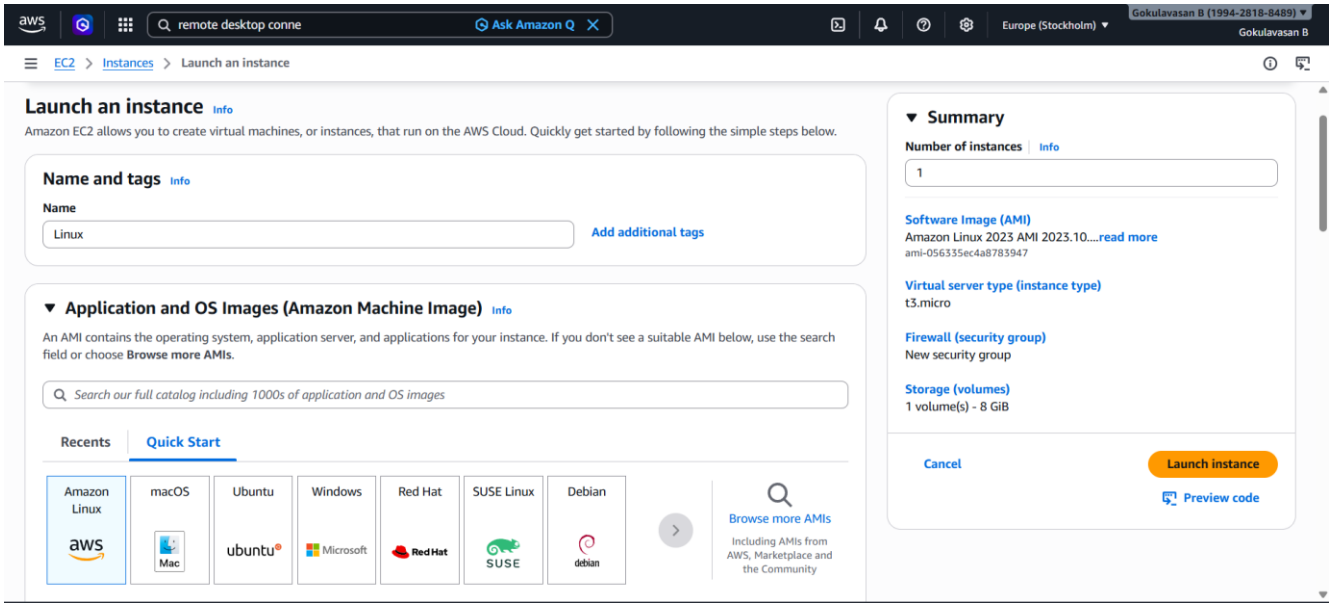
remote desktop conne
Ask Amazon Q
Europe (Stockholm)
Gokulavasan B (1994-2818-8489)
Gokulavasan B
EC2 > Instances > Launch an instance
Launch an instance Info
Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.
Name and tags Info
Name
Linux
Add additional tags
Application and OS Images (Amazon Machine Image) Info
An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose Browse more AMIs.
Search our full catalog including 1000s of application and OS images
Recents
Quick Start
Amazon Linux
macOS
Ubuntu
Windows
Red Hat
SUSE Linux
Debian
Browse more AMIs
Including AMIs from AWS, Marketplace and the Community
Summary
Number of instances Info
1
Software Image (AMI)
Amazon Linux 2023 AMI 2023.10....read more
ami-056335ec4a8783947
Virtual server type (instance type)
t3.micro
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Launch instance
Preview code

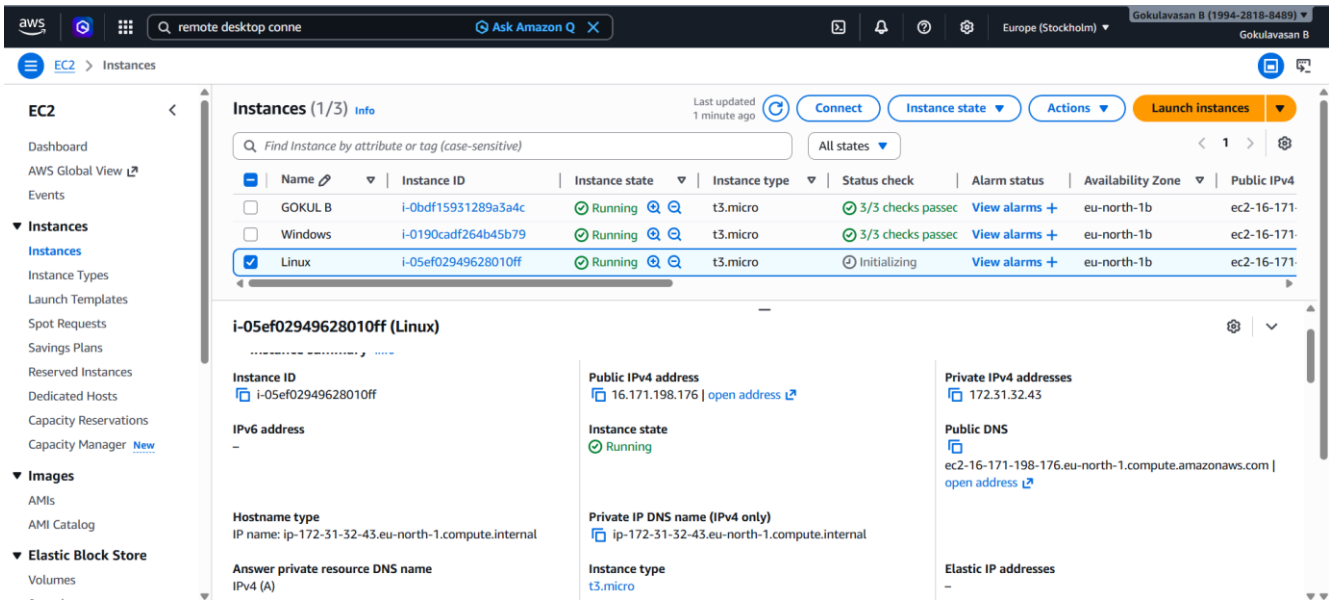
remote desktop conne
Ask Amazon Q
Europe (Stockholm)
Gokulavasan B (1994-2818-8489)
Gokulavasan B
EC2 > Instances
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Instances (1/3) Info
Last updated 1 minute ago
Connect
Instance state
Actions
Launch instances
Find Instance by attribute or tag (case-sensitive)
All states
Name
Instance ID
Instance state
Instance type
Status check
Alarm status
Availability Zone
Public IPv4
GOKUL B
i-0bdf15931289a3a4c
Running
t3.micro
3/3 checks passed
View alarms
eu-north-1b
ec2-16-171-
Windows
i-0190cadf264b45b79
Running
t3.micro
3/3 checks passed
View alarms
eu-north-1b
ec2-16-171-
Linux
i-05ef02949628010ff
Running
t3.micro
Initializing
View alarms
eu-north-1b
ec2-16-171-
i-05ef02949628010ff (Linux)
Instance ID
i-05ef02949628010ff
Public IPv4 address
16.171.198.176 | open address
Private IPv4 addresses
172.31.32.43
IPv6 address
–
Instance state
Running
Public DNS
ec2-16-171-198-176.eu-north-1.compute.amazonaws.com | open address
Hostname type
IP name: ip-172-31-32-43.eu-north-1.compute.internal
Private IP DNS name (IPv4 only)
ip-172-31-32-43.eu-north-1.compute.internal
Answer private resource DNS name
IPv4 (A)
Instance type
t3.micro
Elastic IP addresses
–

```
Microsoft Windows [Version 10.0.26100.7840]
(c) Microsoft Corporation. All rights reserved.

C:\Users\GOKULAVASAN>cd Downloads

C:\Users\GOKULAVASAN\Downloads>ssh -i newkey.pem ec2-user@16.171.198.176
       #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
[ec2-user@ip-172-31-32-43 ~]$ sudo -i
[root@ip-172-31-32-43 ~]# yum  update -y
Amazon Linux 2023 Kernel Livepatch repository                                    260 kB/s |  31 kB     00:00
Dependencies resolved.
Nothing to do.
Complete!
[root@ip-172-31-32-43 ~]# yum install httpd -y
Last metadata expiration check: 0:00:51 ago on Mon Mar  2 13:26:27 2026.
Dependencies resolved.
```

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

5. Configure Apache Web Server on Linux Instance in AWS

Aravindraj.G

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Linux instance is a virtual machine running the Linux operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, Apache,FileServer etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

Used Services in AWS

Amazon EC2

Used Services in Linux Server

Apache Webserver

Topology

How to Configure the Apache web server in Linux Server with AWS EC2

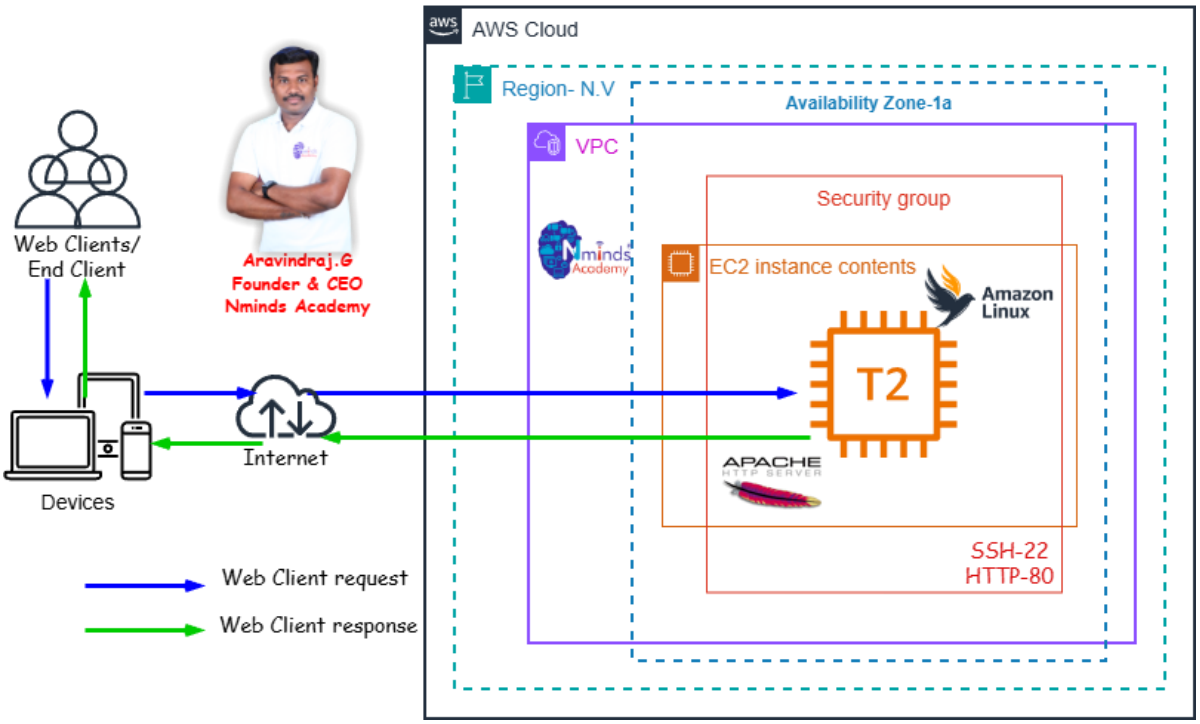

Execution Tasks:

```
Microsoft Windows [Version 10.0.26100.7840]
(c) Microsoft Corporation. All rights reserved.

C:\Users\GOKULAVASAN>cd Downloads

C:\Users\GOKULAVASAN\Downloads>ssh -i newkey.pem ec2-user@16.171.198.176
       #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
[ec2-user@ip-172-31-32-43 ~]$ sudo -i
[root@ip-172-31-32-43 ~]# yum  update -y
Amazon Linux 2023 Kernel Livepatch repository                                    260 kB/s |  31 kB     00:00
Dependencies resolved.
Nothing to do.
Complete!
[root@ip-172-31-32-43 ~]# yum install httpd -y
Last metadata expiration check: 0:00:51 ago on Mon Mar  2 13:26:27 2026.
Dependencies resolved.
```

```
 Package                        Architecture       Version                              Repository              Size
================================================================================================================
nstalling:
 httpd                          x86_64             2.4.66-1.amzn2023.0.1                amazonlinux              47 k
nstalling dependencies:
 apr                            x86_64             1.7.5-1.amzn2023.0.4                 amazonlinux             129 k
 apr-util                       x86_64             1.6.3-1.amzn2023.0.2                 amazonlinux              97 k
 apr-util-lmdb                  x86_64             1.6.3-1.amzn2023.0.2                 amazonlinux              13 k
 generic-logos-httpd            noarch             18.0.0-12.amzn2023.0.3               amazonlinux              19 k
 httpd-core                     x86_64             2.4.66-1.amzn2023.0.1                amazonlinux             1.4 M
 httpd-filesystem               noarch             2.4.66-1.amzn2023.0.1                amazonlinux              13 k
 httpd-tools                    x86_64             2.4.66-1.amzn2023.0.1                amazonlinux              81 k
 libbrotli                      x86_64             1.0.9-4.amzn2023.0.2                 amazonlinux             315 k
 mailcap                        noarch             2.1.49-3.amzn2023.0.3                amazonlinux              33 k
nstalling weak dependencies:
 apr-util-openssl               x86_64             1.6.3-1.amzn2023.0.2                 amazonlinux              15 k
 mod_http2                      x86_64             2.0.27-1.amzn2023.0.3                amazonlinux             166 k
 mod_lua                        x86_64             2.4.66-1.amzn2023.0.1                amazonlinux              60 k

ransaction Summary
================================================================================================================
nstall  13 Packages

otal download size: 2.4 M
nstalled size: 6.9 M
ownloading Packages:
(1/13): apr-util-1.6.3-1.amzn2023.0.2.x86_64.rpm                                 2.7 MB/s |  97 kB     00:00
(2/13): apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64.rpm                            340 kB/s |  13 kB     00:00
```

```
[root@ip-172-31-32-43 ~]# systemctl start httpd
[root@ip-172-31-32-43 ~]# systemctl status httpd
● httpd.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
     Active: active (running) since Mon 2026-03-02 13:28:51 UTC; 36s ago
       Docs: man:httpd.service(8)
   Main PID: 25822 (httpd)
     Status: "Total requests: 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes served/sec:   0 B/sec"
      Tasks: 177 (limit: 1067)
     Memory: 13.3M
        CPU: 117ms
     CGroup: /system.slice/httpd.service
             ├─25822 /usr/sbin/httpd -DFOREGROUND
             ├─25846 /usr/sbin/httpd -DFOREGROUND
             ├─25848 /usr/sbin/httpd -DFOREGROUND
             ├─25849 /usr/sbin/httpd -DFOREGROUND
             └─25860 /usr/sbin/httpd -DFOREGROUND

Mar 02 13:28:51 ip-172-31-32-43.eu-north-1.compute.internal systemd[1]: Starting httpd.service - The Apache HTTP Server>
Mar 02 13:28:51 ip-172-31-32-43.eu-north-1.compute.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Mar 02 13:28:51 ip-172-31-32-43.eu-north-1.compute.internal httpd[25822]: Server configured, listening on: port 80

[root@ip-172-31-32-43 ~]# systemctl enable httpd
Created symlink /etc/systemd/system/multi-user.target.wants/httpd.service → /usr/lib/systemd/system/httpd.service.
[root@ip-172-31-32-43 ~]# cd /var/www/html
[root@ip-172-31-32-43 html]# ls
[root@ip-172-31-32-43 html]# vi index.html
[root@ip-172-31-32-43 html]#
[root@ip-172-31-32-43 html]# vi index.html
[root@ip-172-31-32-43 html]#
```

Gokulavasan B

Welcome to my colorful corner of the internet!

I'm exploring the world of web development.

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

6. Configure Elastic IP Address to Windows Web Server in AWS

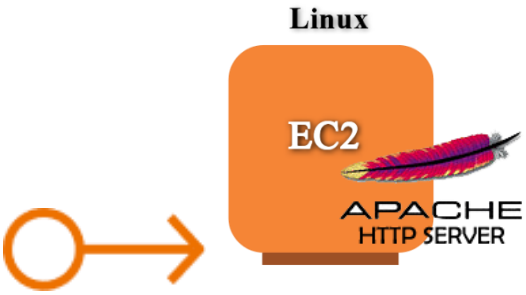

Aravindraj.G

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

An Elastic IP (EIP) in AWS is a static, public IP address designed for dynamic cloud computing. It is associated with your AWS account and can be quickly associated or disassociated with any EC2 instance in your account. This feature is particularly useful when you need to maintain a consistent IP address for your resources, even when you stop and start EC2 instances.

Common Use Cases for Elastic IP:

1. Highly Available Applications:
   - If you're running a service that requires high availability, you can use Elastic IPs to quickly reassign a static IP to a new instance if your primary instance fails, ensuring minimal downtime.
2. Web Servers:
   - If you host a website and need to ensure the IP address remains the same even if the underlying EC2 instance is restarted, an Elastic IP helps maintain this consistency.
3. Disaster Recovery:
   - Elastic IPs are useful for disaster recovery scenarios. If one instance goes down, you can quickly associate the EIP with a backup instance to ensure services are still accessible.

Best Practices:

- Use Elastic IPs only when necessary: Since they come with associated costs when unused, it's a good practice to release EIPs that are no longer required.
- Move IPs during instance failure: Instead of keeping an EIP permanently attached, use it as a failover method, reassociating it to a new instance when needed.
- Monitor EIP Usage: Periodically review your usage to ensure you're not paying for unnecessary Elastic IP addresses.

Topology

How to Configure the Elastic IP Address to Linux Web Server with AWS EC2

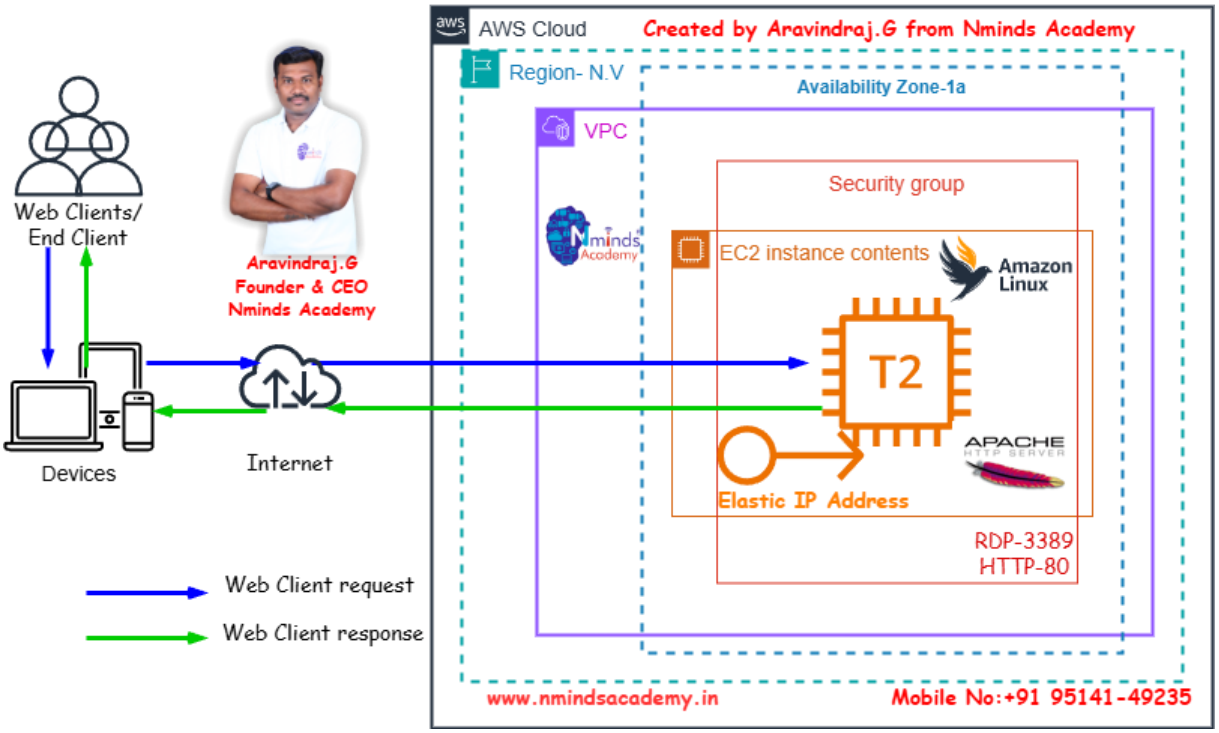

Used Services in AWS

Used Services in Windows Server

Amazon EC2

Apache Webserver

Amazon Elastic IP Address

Execution Tasks:

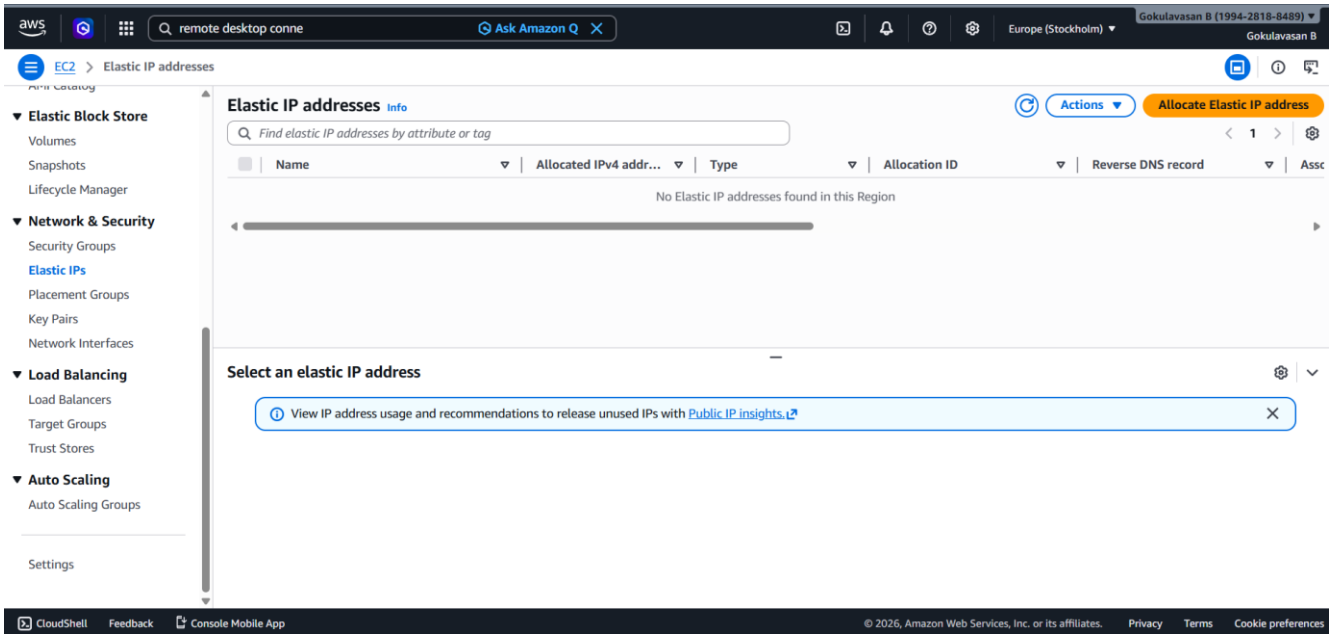

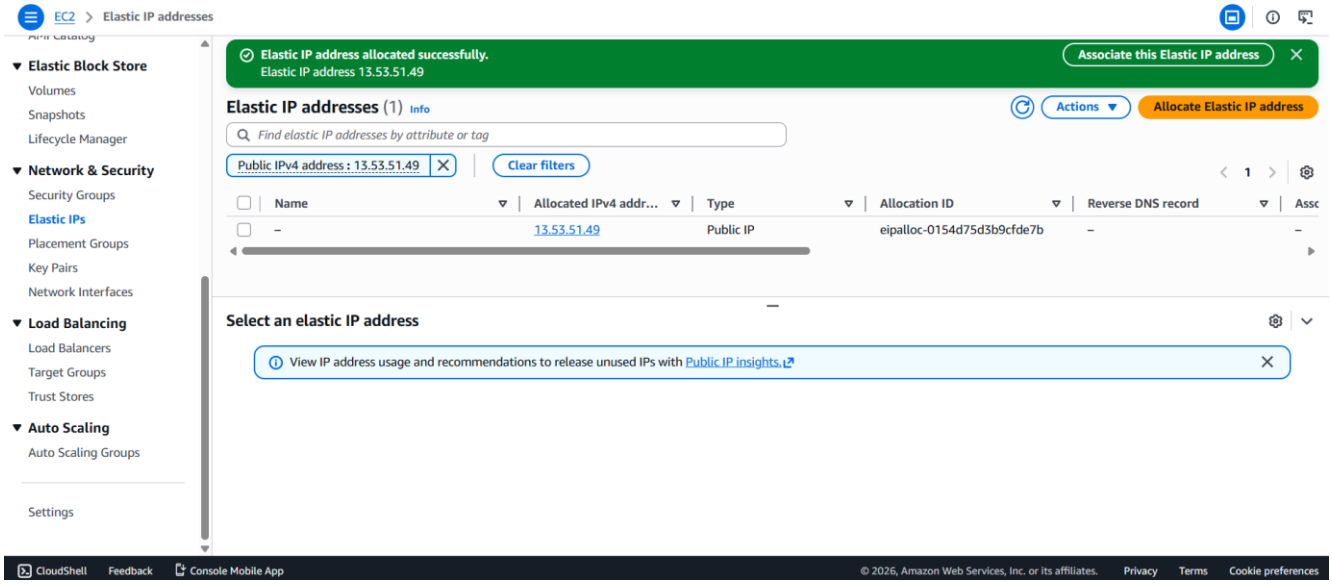

EC2 > Elastic IP addresses > Associate Elastic IP address

Associate Elastic IP address Info

Choose the instance or network interface to associate to this Elastic IP address (13.53.51.49)

Elastic IP address: 13.53.51.49

Resource type

Choose the type of resource with which to associate the Elastic IP address.

- (●) Instance
- ( ) Network interface

⚠ If you associate an Elastic IP address with an instance that already has an Elastic IP address associated, the previously associated Elastic IP address will be disassociated, but the address will still be allocated to your account. Learn more

If no private IP address is specified, the Elastic IP address will be associated with the primary private IP address.

Instance

i-05ef02949628010ff

Private IP address

The private IP address with which to associate the Elastic IP address.

Choose a private IP address

Reassociation

Specify whether the Elastic IP address can be reassociated with a different resource if it already associated with a resource.

☐ Allow this Elastic IP address to be reassociated

Cancel | Associate

CloudShell | Feedback | Console Mobile App | © 2026, Amazon Web Services, Inc. or its affiliates. | Privacy | Terms | Cookie preferences

---

aws | remote desktop conne | Ask Amazon Q | Europe (Stockholm) | Gokulavasan B (1994-2818-8489) | Gokulavasan B

EC2 > Elastic IP addresses

- Elastic Block Store
  - Volumes
  - Snapshots
  - Lifecycle Manager
- Network & Security
  - Security Groups
  - Elastic IPs
  - Placement Groups
  - Key Pairs
  - Network Interfaces
- Load Balancing
  - Load Balancers
  - Target Groups
  - Trust Stores
- Auto Scaling
  - Auto Scaling Groups
- Settings

✓ **Elastic IP address associated successfully.**
Elastic IP address 13.53.51.49 has been associated with instance i-05ef02949628010ff

Elastic IP addresses (1) Info

Actions | Allocate Elastic IP address

Find elastic IP addresses by attribute or tag

Public IPv4 address : 13.53.51.49 | Clear filters

Name	Allocated IPv4 addr...	Type	Allocation ID	Reverse DNS record	Assc
–	13.53.51.49	Public IP	eipalloc-0154d75d3b9cfde7b	–	i-05

Select an elastic IP address

ⓘ View IP address usage and recommendations to release unused IPs with Public IP insights.

CloudShell | Feedback | Console Mobile App | © 2026, Amazon Web Services, Inc. or its affiliates. | Privacy | Terms | Cookie preferences

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

7.Configure SFTP to Linux Web Server in AWS

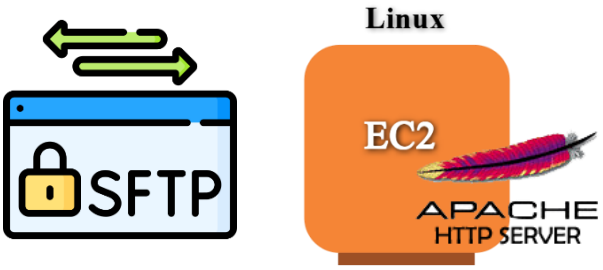

Aravindraj.G

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

SFTP- Secure File Transfer Protocol

SFTP (Secure File Transfer Protocol) is a secure network protocol that allows users to transfer files over a secure, encrypted connection. It is a more secure alternative to FTP (File Transfer Protocol) and is commonly used to upload, download, and manage files on remote servers.

Here are the key uses and advantages of SFTP:

1. File Transfer: SFTP allows secure transfer of files between a local and a remote computer over a network. It ensures that the data is encrypted during transmission, protecting it from eavesdropping or tampering.
2. File Management: Besides transferring files, SFTP also allows users to perform file management tasks such as renaming, deleting, and moving files on the remote server.
3. Secure Authentication: SFTP uses SSH (Secure Shell) for authentication, which provides a stronger level of security compared to FTP's traditional username/password system. It often supports public key authentication, adding an extra layer of security.
4. Encryption: The main advantage of SFTP over FTP is encryption. All data sent over SFTP is encrypted, ensuring that sensitive information (like passwords and files) is protected during transmission.

5. Firewall-Friendly: SFTP operates over a single port (usually port 22), making it easier to use behind firewalls and NAT (Network Address Translation) devices compared to FTP, which uses multiple ports.

Topology

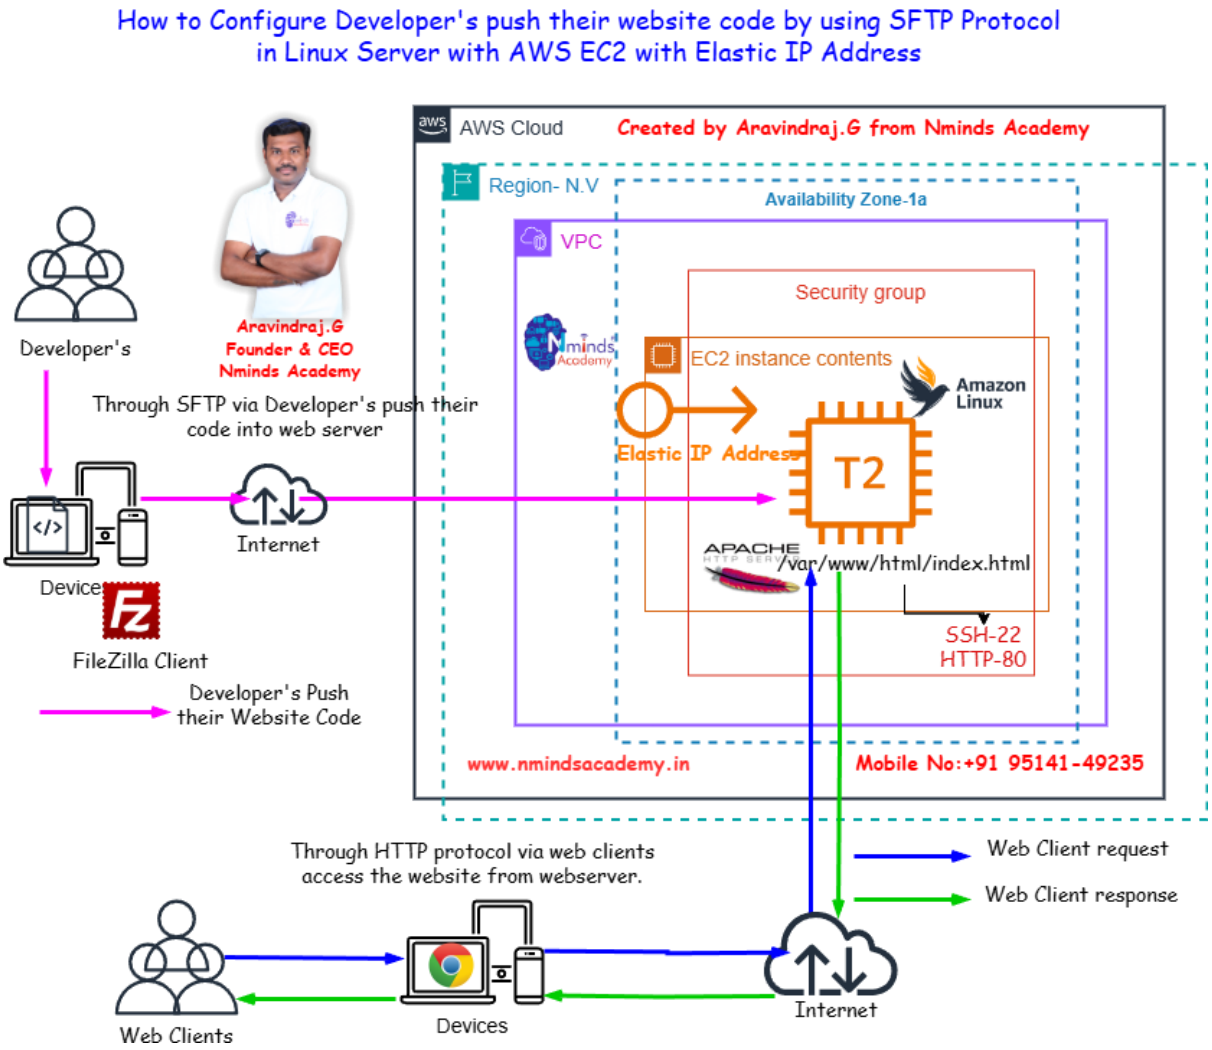

Used Services in AWS

Used Services in Windows Server

Amazon EC2

APACHE HTTP SERVER

Apache Webserver

Amazon Elastic IP Address



Execution Tasks:

```
root@ip-172-31-32-43:~
#MaxSessions 10

PubkeyAuthentication no

# The default is to check both .ssh/authorized_keys and .ssh/authorized_keys2
# but this is overridden so installations will only check .ssh/authorized_keys
AuthorizedKeysFile      .ssh/authorized_keys

#AuthorizedPrincipalsFile none


# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no
# Change to yes if you don't trust ~/.ssh/known_hosts for
# HostbasedAuthentication
#IgnoreUserKnownHosts no
# Don't read the user's ~/.rhosts and ~/.shosts files
#IgnoreRhosts yes

# Explicitly disable PasswordAuthentication. By presetting it, we
# avoid the cloud-init set_passwords module modifying sshd_config and
# restarting sshd in the default instance launch configuration.
PasswordAuthentication yes
PermitEmptyPasswords no

# Change to no to disable s/key passwords
#KbdInteractiveAuthentication yes

# Kerberos options
#KerberosAuthentication no
#KerberosOrLocalPasswd yes
#KerberosTicketCleanup yes
#KerberosGetAFSToken no
#KerberosUseKuserok yes

# GSSAPI options
#GSSAPIAuthentication no
#GSSAPICleanupCredentials yes
#GSSAPIStrictAcceptorCheck yes
#GSSAPIKeyExchange no
-- INSERT --                                                    65,27         45%
```

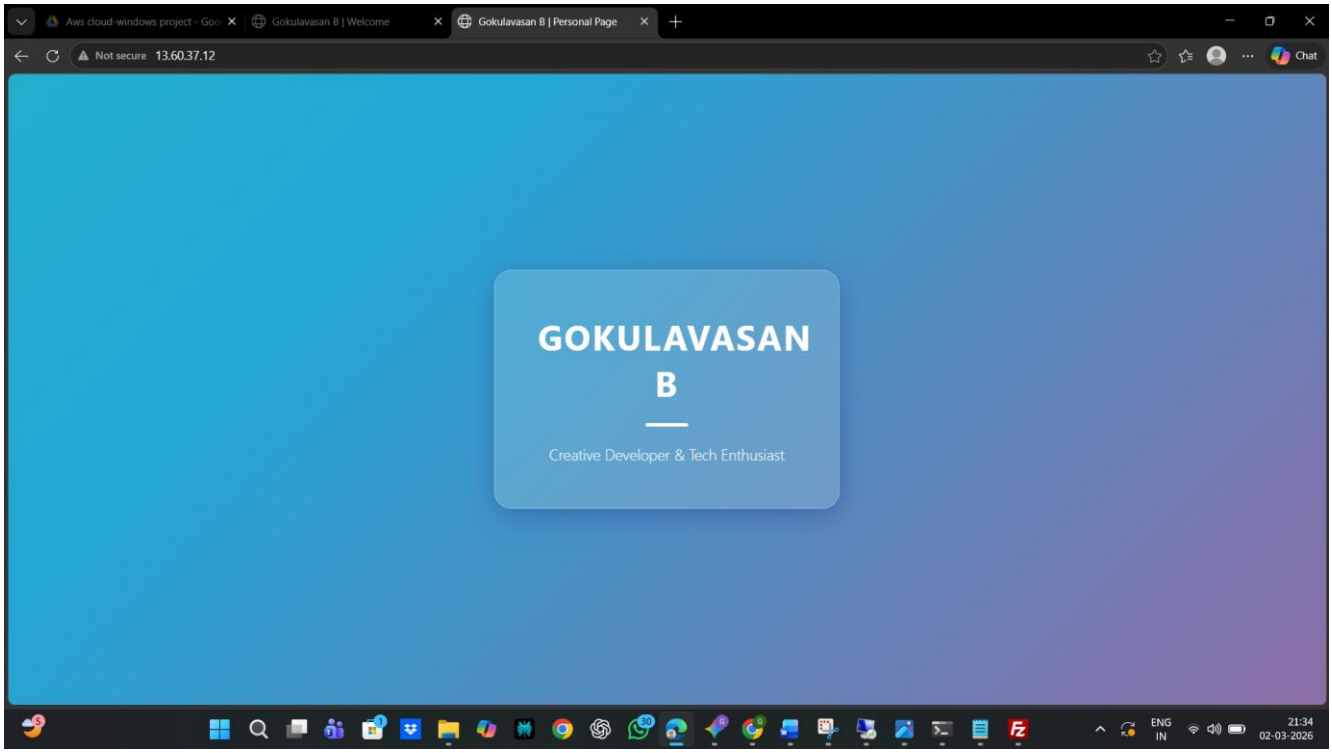
Aws cloud-windows project - Goo
Gokulavasan B | Welcome
Gokulavasan B | Personal Page
Not secure 13.60.37.12
Chat
GOKULAVASAN
B
Creative Developer & Tech Enthusiast
ENG
IN
21:34
02-03-2026
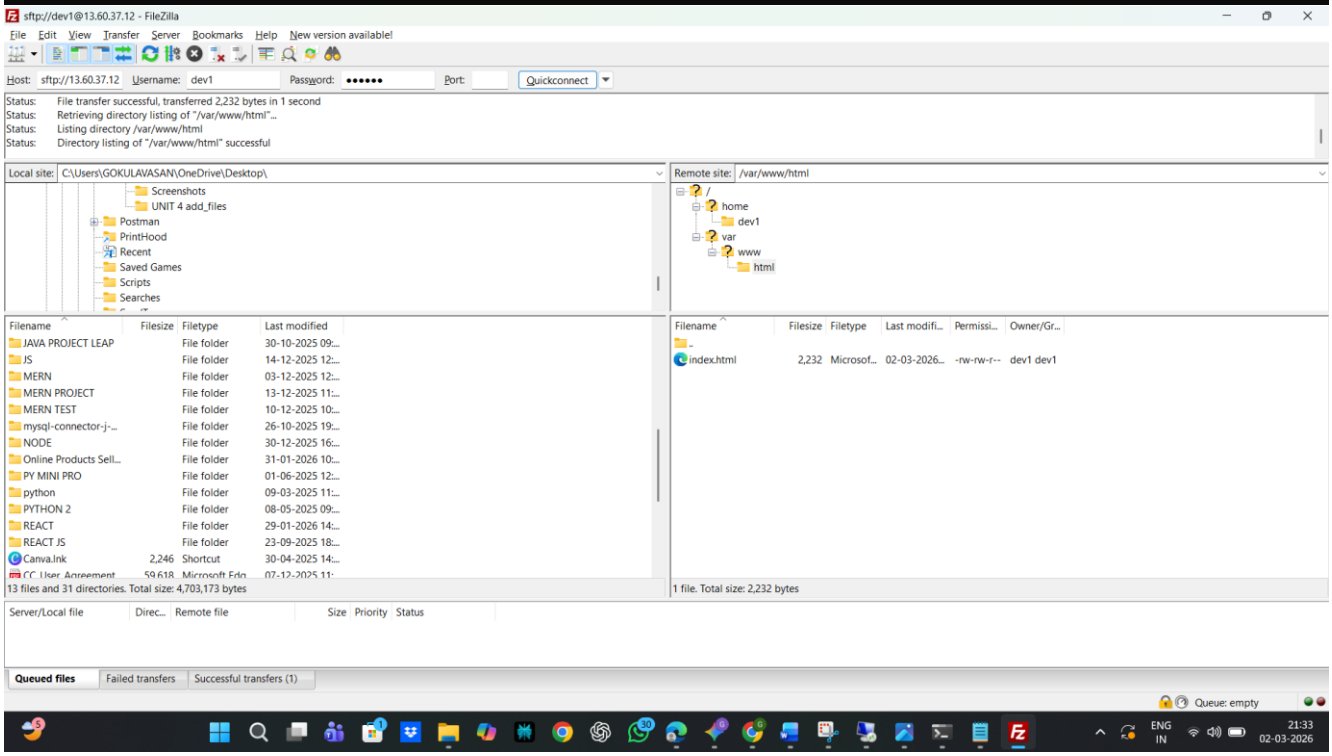
```
[root@ip-172-31-32-43 ~]# groupadd group1
[root@ip-172-31-32-43 ~]# usermod -G group1 dev1
[root@ip-172-31-32-43 ~]# usermod -G group1 dev2
[root@ip-172-31-32-43 ~]# ls -ld /var/www/html
drwxr-xr-x. 2 root root 24 Mar  2 13:39 /var/www/html
[root@ip-172-31-32-43 ~]# chgrp group1 /var/www/html
[root@ip-172-31-32-43 ~]# chmod 775 /var/www/html
[root@ip-172-31-32-43 ~]# passwd dev1
Changing password for user dev1.
New password:
BAD PASSWORD: The password is shorter than 8 characters
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-32-43 ~]# passwd dev2
Changing password for user dev2.
New password:
BAD PASSWORD: The password is shorter than 8 characters
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-32-43 ~]# passwd root
Changing password for user root.
New password:
BAD PASSWORD: The password is shorter than 8 characters
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-32-43 ~]# passwd ec2-user
Changing password for user ec2-user.
New password:
BAD PASSWORD: The password is shorter than 8 characters
Retype new password:
Sorry, passwords do not match.
New password:
BAD PASSWORD: The password is shorter than 8 characters
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-32-43 ~]# vi/etc/ssh/sshd-config
-bash: vi/etc/ssh/sshd-config: No such file or directory
[root@ip-172-31-32-43 ~]# vi /etc/ssh/sshd-config
[root@ip-172-31-32-43 ~]# vi /etc/ssh/sshd_config
[root@ip-172-31-32-43 ~]# systemctl reload sshd
[root@ip-172-31-32-43 ~]#
```