

Building an Interactive 3D Art Gallery

A step-by-step guide - Next.js, TypeScript, React Three Fiber, Drei, Three.js, and GSAP

VERSION 1.2 / English

Documentation version: 1.2 Project snapshot: multi-room skylight gallery, September 9, 2026 Changes in 1.2: two-room navigation was added through the right-hand passage. `GalleryCanvas` now owns `roomId`, a transition state machine, a fade overlay, and an input lock. `galleryRooms.ts` is the room configuration registry, `RoomPortal.tsx` supplies a 3D hitbox and accessible button, and `CameraController` reports arrival before the scene is swapped. The application interface is now fully in English.

Table of Contents

1. Learning goals	3
2. Stack and responsibilities	3
3. Running the project	4
4. Project structure	4
5. Mental model: DOM and the 3D world	4
6. 3D coordinate fundamentals	6
7. Application architecture	8
8. Step 1 - App Router shell	9
9. Step 2 - Client boundary and Canvas	10
10. Step 3 - Selection state	10
11. Step 4 - Constructing the room	11
12. Step 5 - Lighting	12
13. Step 6 - Data-driven paintings	13
14. Step 7 - The Painting component	14
15. Step 8 - CameraController and GSAP	15
16. Step 9 - Loading the vending machine GLB	16
17. Step 10 - Invisible keypad hitbox	16
18. Step 11 - HTML form inside the scene	17
19. Step 12 - Overlay CSS	18
20. Complete interaction flow	19
21. Step 13 - Multi-room navigation and portals	19
22. File-by-file reference	21
23. Common problems and diagnosis	23
24. Performance and production quality	24
25. Adding a painting	24
26. Building individual vending buttons	25
27. Learning exercises	25
28. Short glossary	26
29. Mental model summary	27

1. Learning goals

This document explains the actual `interactive-gallery` project rather than an isolated demo. After reading it, you should understand:

- the difference between the regular React DOM and a Three.js scene graph;
- the roles of a scene, camera, renderer, geometry, material, mesh, texture, and light;
- how React Three Fiber translates JSX into Three.js objects;
- how to construct a 3D room with a coordinate system;
- how to create a reusable, data-driven Painting component;
- how selection, hover, pointer events, and HTML overlays work;
- how to animate a camera with GSAP;
- how to load a GLB model and add an invisible hitbox;
- how to implement multi-room navigation without creating another Canvas;
- why z-fighting, misplaced hitboxes, and common 3D UI issues occur;
- how to extend the project safely.

Note: positions and sizes use Three.js world units. This project treats one unit approximately as one meter for easier reasoning, although Three.js does not enforce a physical unit.

2. Stack and responsibilities

Technology	Responsibility in this project
Next.js App Router	Application shell, metadata, routing, bundling, and public asset serving
React + TypeScript	Component composition, UI state, props, and type checking
Three.js	3D engine: vectors, cameras, meshes, materials, lights, textures, and scene graph
React Three Fiber (R3F)	React renderer for Three.js; allows scenes to be written in JSX
Drei	R3F helpers such as <code>Html</code> , <code>useTexture</code> , <code>useGLTF</code> , <code>Clone</code> , and <code>Edges</code>
GSAP	Cinematic tweening of the camera position and look-at target
CSS	DOM UI: Back button, popovers, vending form, and visual accessibility

Important versions at the time of writing:

TEXT	
<code>Next.js</code>	16.3.4
<code>React</code>	19.2.8
<code>Three.js</code>	0.185.1
<code>@react-three/fiber</code>	9.7.0
<code>@react-three/drei</code>	10.7.8
<code>GSAP</code>	3.15.0

3. Running the project

BASH

```
cd interactive-gallery
yarn install
yarn dev
```

Open <http://localhost:3000>. For static validation:

BASH

```
yarn lint
yarn tsc --noEmit
```

If `tsc` is not defined as a package script, invoke `yarn tsc --noEmit` directly as shown above.

4. Project structure

TEXT

```
interactive-gallery/
├── app/
│   ├── page.tsx           # route entry
│   ├── layout.tsx         # root HTML and metadata
│   └── globals.css        # full-screen layout and DOM UI
├── components/gallery/
│   ├── GalleryCanvas.tsx  # client boundary, Canvas, primary state
│   ├── GalleryScene.tsx   # lights, object data, scene composition
│   ├── GalleryRoom.tsx    # walls, skylight, beams, alcove, grille
│   ├── galleryLayout.ts   # shared room dimensions and camera home
│   ├── galleryRooms.ts    # room registry, themes, destinations
│   ├── RoomPortal.tsx     # passage hitbox and accessible button
│   ├── Painting.tsx       # reusable painting and popovers
│   ├── CameraController.tsx # GSAP camera animation
│   └── VendingMachine.tsx # GLB, hover, hitbox, and form
├── public/
│   ├── paintings/         # JPG painting textures
│   └── model/             # soda_vending_machine.glb
├── docs/                 # Markdown documentation sources
└── output/pdf/           # final PDF documentation
```

The modularity rule is simple: the page does not know Three.js details, the Canvas does not construct the room, the scene does not own tween logic, and every interactive object manages its local behavior.

5. Mental model: DOM and the 3D world

The application has two visual layers:

Relationship diagram: each row shows a directed connection; repeated names refer to the same node.


React component tree

DOM / HTML UI

React component tree

React Three Fiber


Relationship diagram: each row shows a directed connection; repeated names refer to the same node.

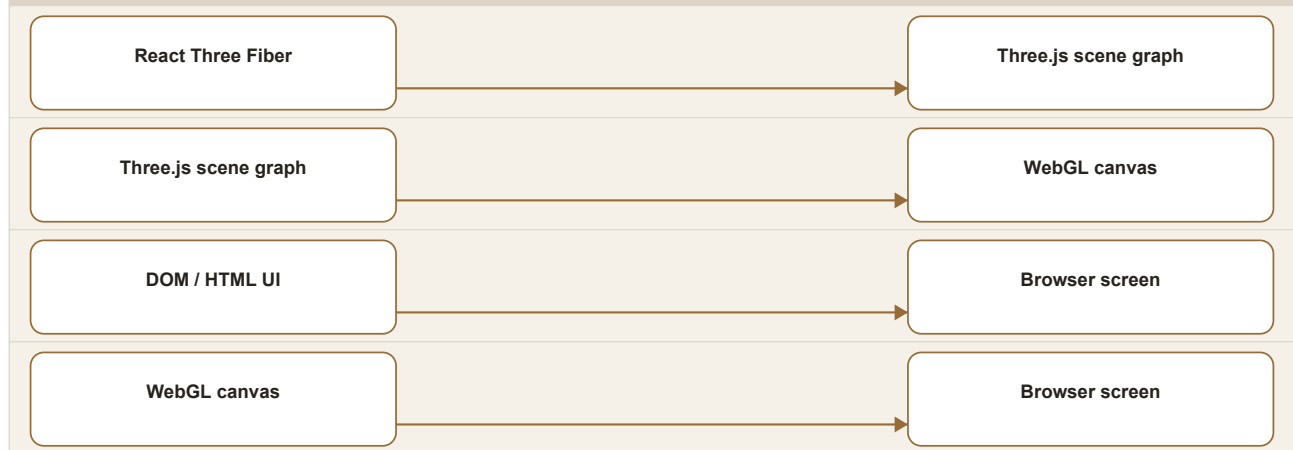


- The Back button and model credit are regular DOM elements above the canvas.
- Walls, lights, paintings, camera, and vending machine are objects in the 3D scene.
- Drei's `<Html>` bridges both worlds: its position follows a 3D point, but its children are DOM elements, so inputs and buttons remain practical.

The scene graph is hierarchical:

Relationship diagram: each row shows a directed connection; repeated names refer to the same node.

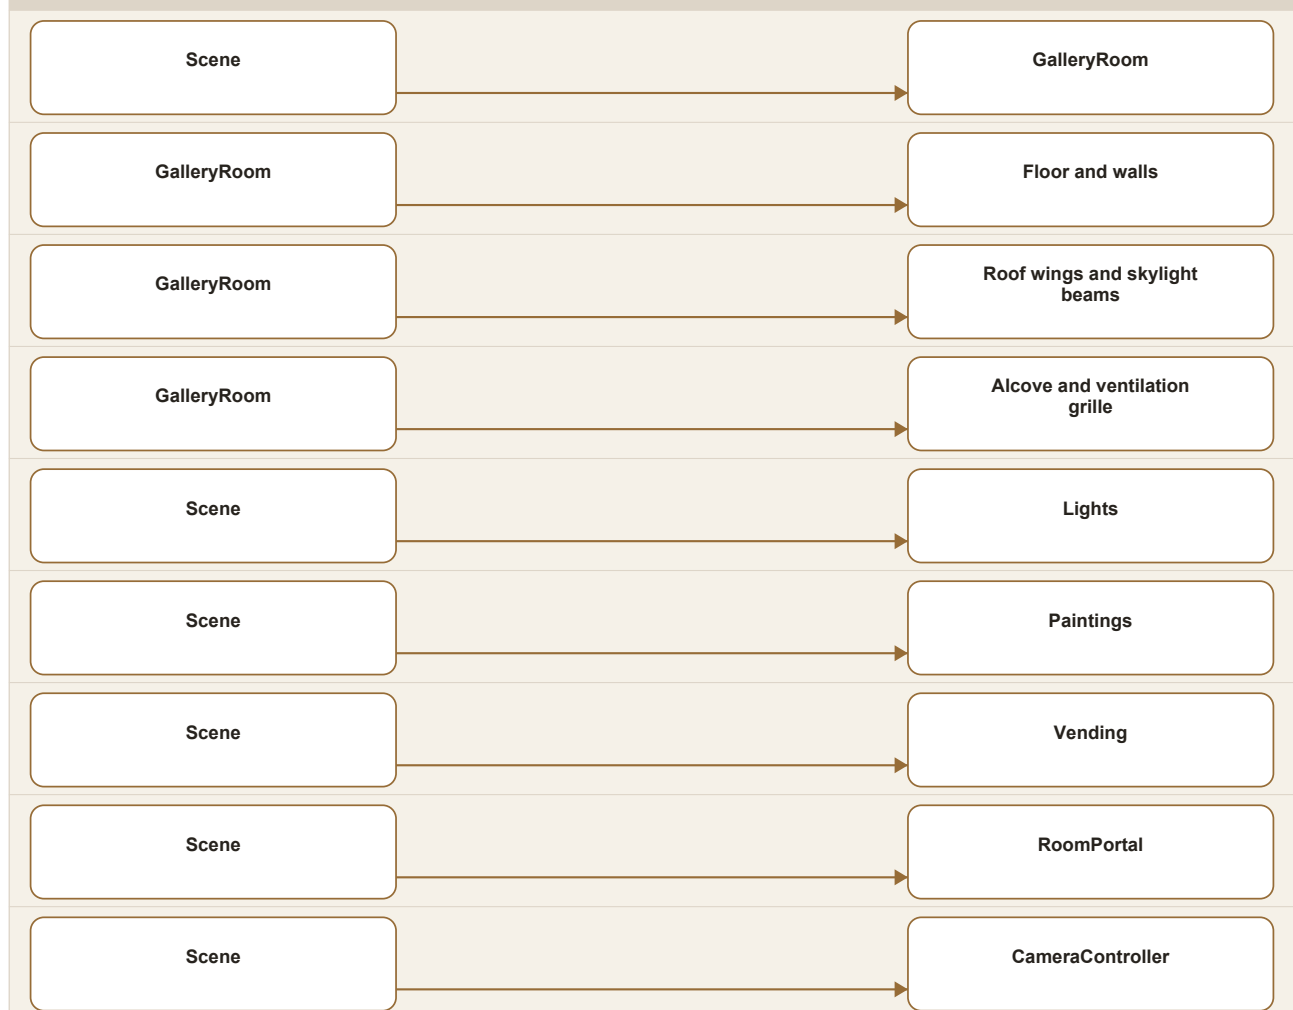

Relationship diagram: each row shows a directed connection; repeated names refer to the same node.

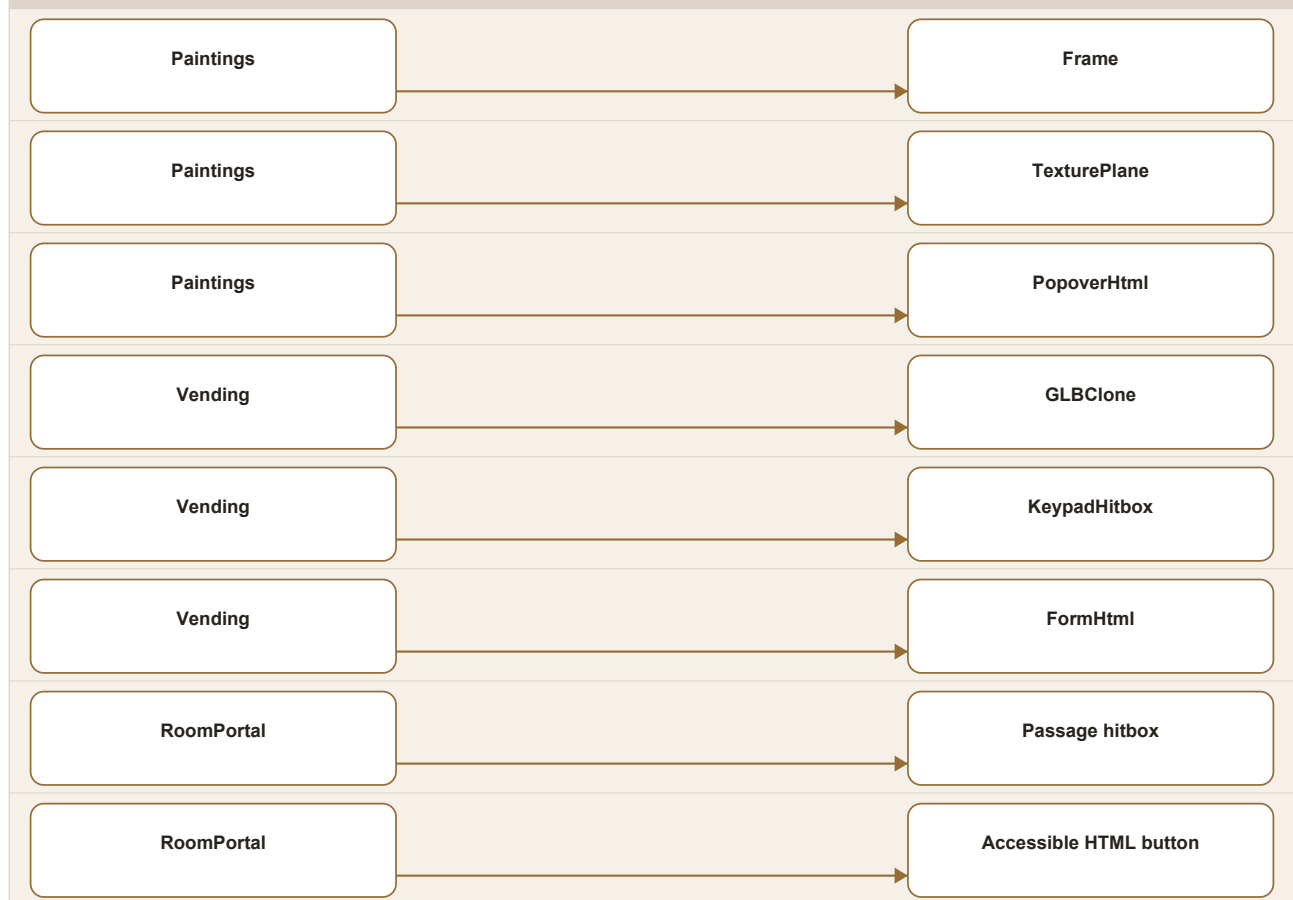

A parent transform affects all children. If a `<group>` rotates, the local positions of its meshes and hitboxes rotate with it. This is crucial when placing paintings on side walls and calibrating the keypad hitbox.

6. 3D coordinate fundamentals

Three.js uses a right-handed coordinate system:

TEXT

```

      +Y (up)
      |
      |
      o----- +X (right)
      /
     /
    +Z (toward the initial camera)
  
```

The back wall sits on negative Z.

The initial camera sits on positive Z and looks toward negative Z.

The `[x, y, z]` tuple is used for `position`, while `rotation` uses radians in `[x, y, z]` order.

TSX

```


position=[0, 2.45, -7.86]
rotation=[0, Math.PI / 2, 0]
  
```


- `Math.PI / 2` is 90 degrees.
- `-Math.PI / 2` is -90 degrees.

- A child position is local to its parent.
- After the parent rotates, a child's local axes do not necessarily match world axes.

7. Application architecture

Relationship diagram: each row shows a directed connection; repeated names refer to the same node.

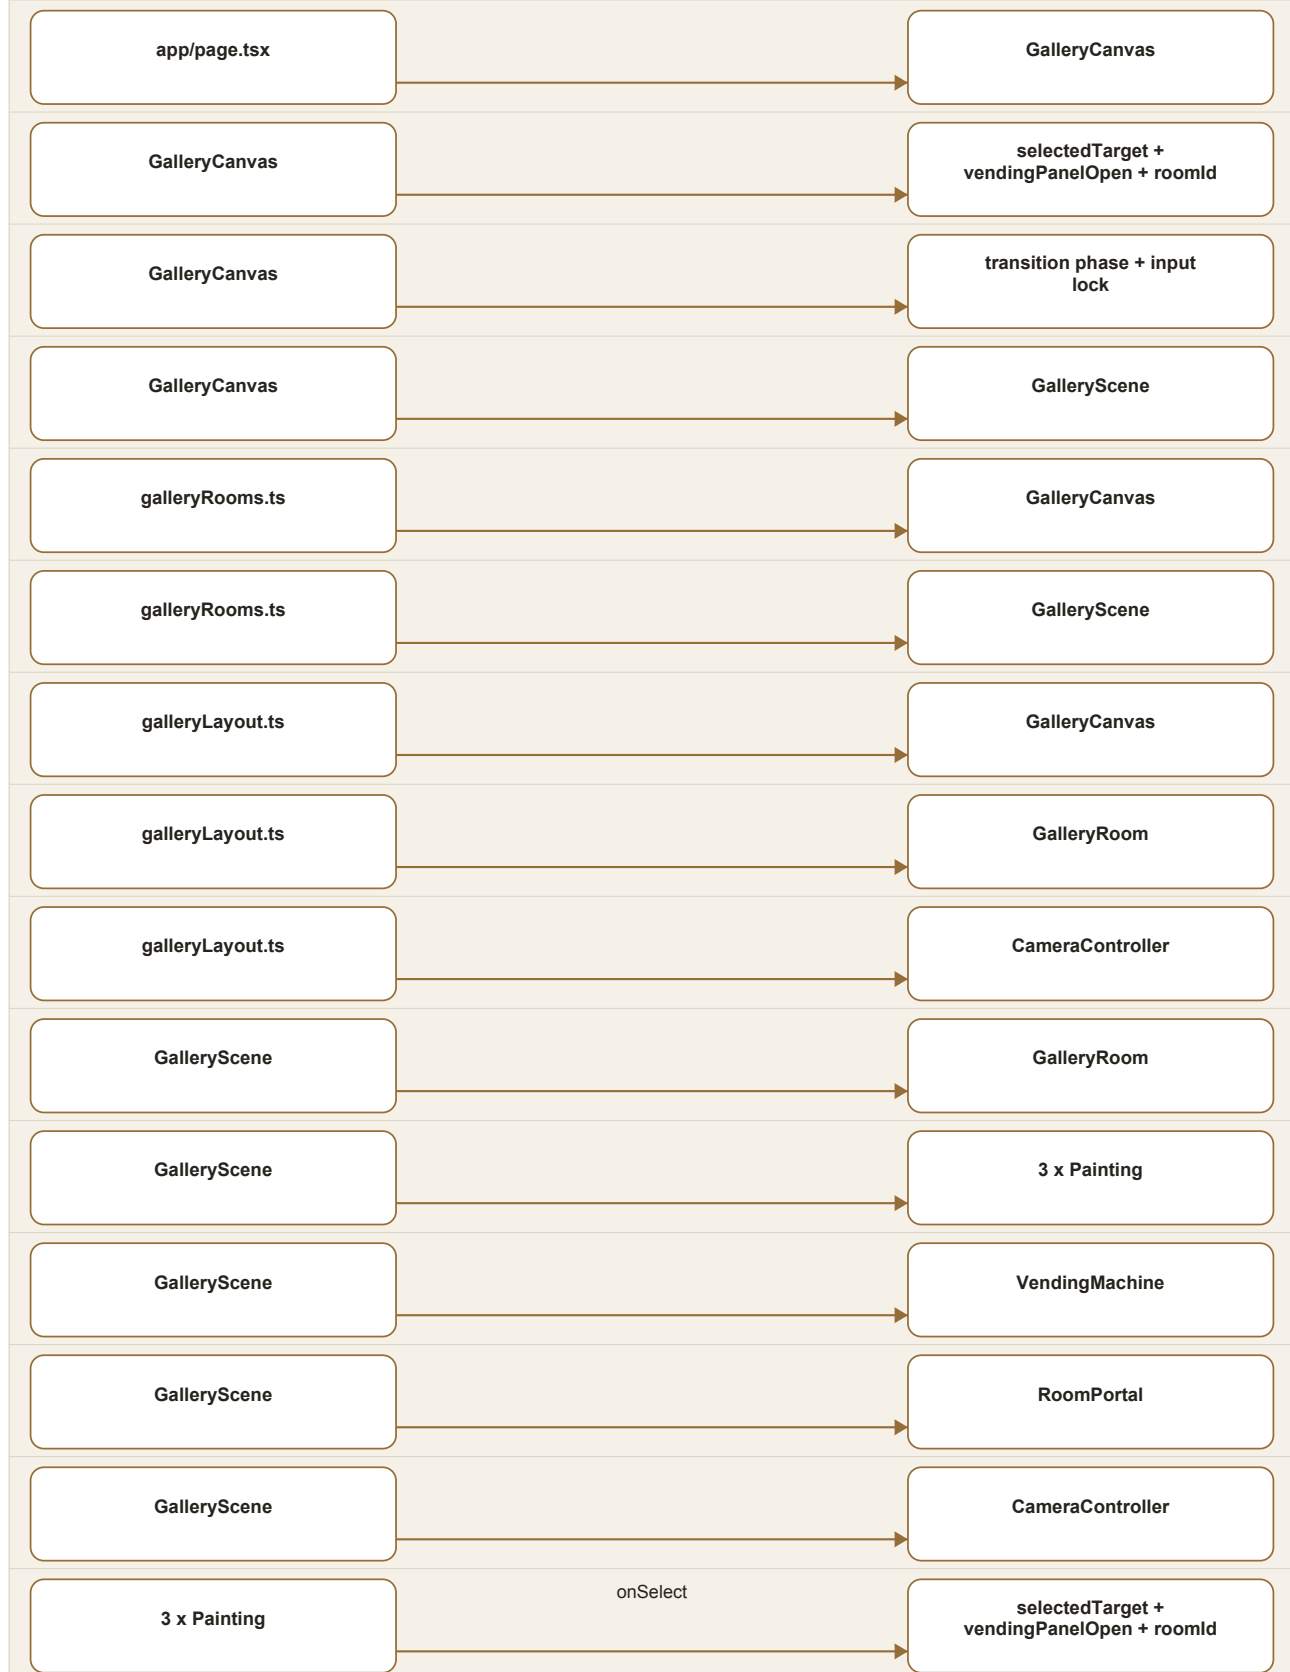

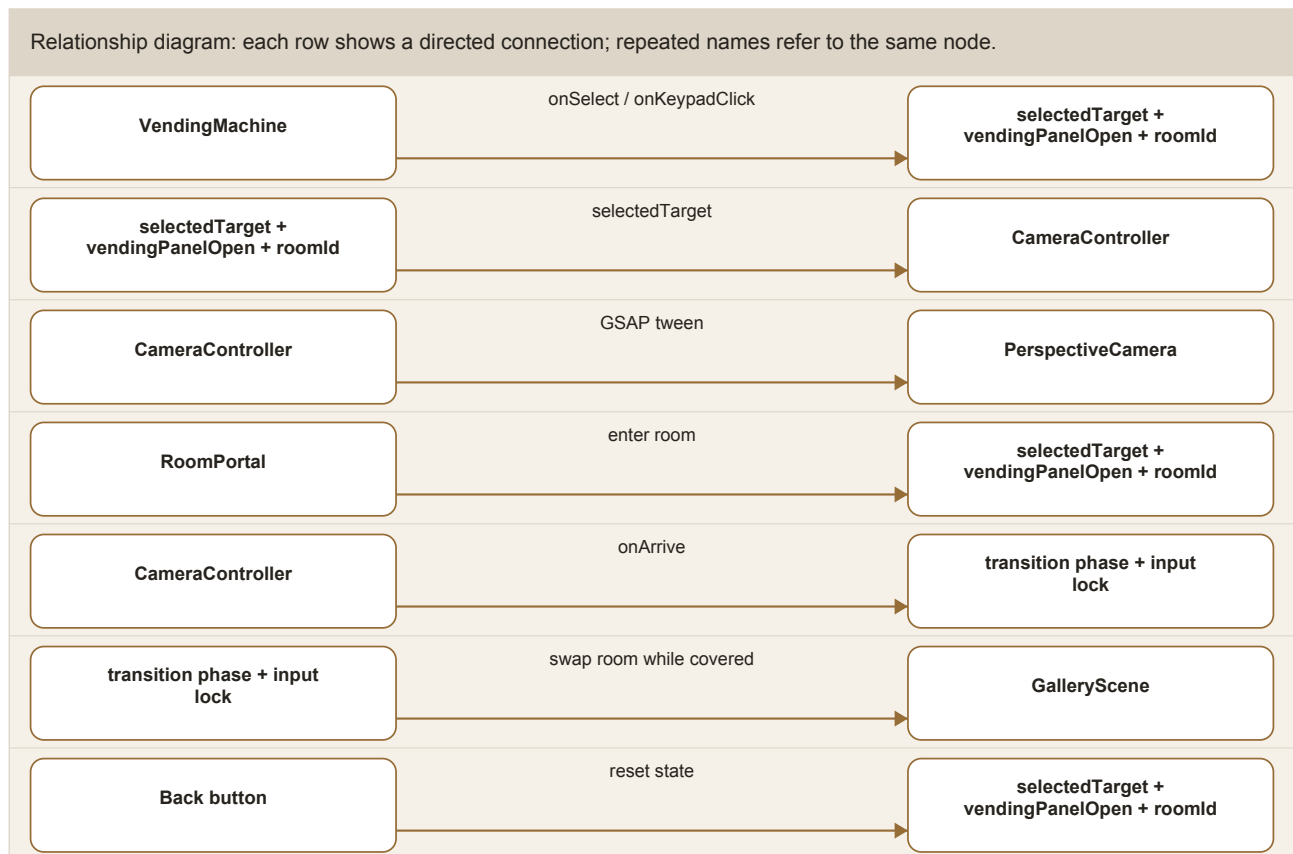

Selection and the active room have one source of truth in `GalleryCanvas`. Paintings, the vending machine, and the portal never move the camera directly; they only report intent or a target. `CameraController` reacts to the target, then its arrival callback advances the room-transition state machine.

8. Step 1 - App Router shell

`app/layout.tsx`

This file creates the root HTML document, imports global CSS, and defines metadata.

TSX

```

export const metadata: Metadata = {
  title: "Imagination Gallery | 3D Art Gallery",
  description: "Explore an interactive 3D art gallery.",
};

```

`<html lang="en">` tells browsers and screen readers the current interface language. `children` is the active route inserted by Next.js.

`app/page.tsx`

TSX

```

export default function Home() {
  return (
    <main className="gallery-page" aria-label="Virtual art gallery">
      <GalleryCanvas />
    </main>
  );
}

```

The page remains deliberately small. It provides a semantic `<main>` landmark and delegates the complete 3D implementation to the gallery component.

9. Step 2 - Client boundary and Canvas

`GalleryCanvas.tsx` starts with:

```
TSX

"use client";
```

This is required because the component uses React state, browser events, and WebGL. Server Components cannot use those APIs directly.

Canvas configuration:

```
TSX

<Canvas
  camera={{ position: [...HOME_POSITION], fov: 58, near: 0.1, far: 50 }}
  dpr={[1, 1.75]}
  frameloop="demand"
  gl={{ antialias: true, powerPreference: "high-performance" }}
  shadows="percentage"
>
```

Each option means:

- `position`: initial `PerspectiveCamera` location.
- `fov`: vertical field of view; lower values feel zoomed in, higher values feel wide-angle.
- `near` and `far`: camera clipping range. Objects outside it are not drawn.
- `dpr=[1, 1.75]`: caps pixel ratio so retina displays do not become excessively expensive.
- `frameloop="demand"`: renders only after a change, saving GPU work in a mostly static scene.
- `antialias`: smooths geometry edges.
- `powerPreference`: asks for a high-performance GPU when available.
- `shadows="percentage"`: a shadow mode compatible with the current Three.js version.

`<Suspense fallback={null}>` waits for textures and the GLB before rendering an incomplete scene.

10. Step 3 - Selection state

The central state is:

```
TSX

const [selectedTarget, setSelectedTarget] =
  useState<GalleryFocusTarget | null>(null);
const [vendingPanelOpen, setVendingPanelOpen] = useState(false);
const [roomId, setRoomId] = useState<GalleryRoomId>("main");
const [transition, setTransition] = useState<RoomTransition>("idle");
```

`null` means the camera is in gallery overview. A target follows this contract:

TSX

```
type GalleryFocusTarget = {
  id: string;
  title: string;
  position: readonly [number, number, number];
  cameraTarget: readonly [number, number, number];
};
```

`position` is the point the camera looks at. `cameraTarget` is the destination of the camera itself, not its look direction. A future refactor could rename it to `cameraPosition` for clarity.

The Back button is conditionally rendered whenever a selection exists. `handleBack()` resets both selection and the vending panel, so `CameraController` automatically returns home. `roomId` selects the active room configuration. `transition` is `idle`, `approaching`, `covering`, or `revealing`; the multi-room step explains those phases.

11. Step 4 - Constructing the room

Basic room dimensions now live in `galleryLayout.ts`. `GalleryRoom.tsx` imports `GALLERY_ROOM` using the alias `ROOM`:

TSX

```
export const GALLERY_ROOM = {
  width: 10,
  height: 5.8,
  depth: 16,
  wallThickness: 0.2,
  skylightWidth: 3.6,
} as const;
```

The `RoomBox` helper constructs building parts from a geometry/material pair. This is the core of that helper:

TSX

```
<mesh castShadow receiveShadow position={position}>
  <boxGeometry args={size} />
  <meshStandardMaterial color={color} roughness={roughness} />
</mesh>
```

In `Three.js`:

TEXT

```
Mesh = Geometry + Material + Transform
```

- Geometry defines shape.
- Material defines how the surface responds to light.
- Transform is position, rotation, and scale.
- `receiveShadow` lets the surface receive shadows.

The floor is slightly below `y=0`. The back wall is at `z=-depth/2`. Side walls are at `x=±width/2`.

Why geometry instead of a PNG or GLB?

A PNG can fill the screen, but a single perspective image contains no building depth. Moving the camera cannot reveal new sides of that room. `Three.js` geometry supplies perspective, shadows, and occlusion that follow the camera. GLB is an option for complex buildings authored in Blender; JSX components are sufficient for the box forms in this reference. The actual scene background is sky color `#d5e7f2`, visible through openings.

Reading `GalleryRoom.tsx` step by step

1. `RoomBoxProps` restricts positions and sizes to three-number tuples, with optional color and roughness. Defaults are `#e4dcccb` and `0.86`.
2. `halfWidth=5` and `halfDepth=8` determine wall centers. The floor uses `#cbb89b` and roughness `0.48`; it is a solid-color material without a stone texture yet.
3. The main right wall is 14 units long and centered at `z=1`, leaving an opening from `z=-8` to `-6`. A header above the opening and three alcove wall sections create actual recessed depth.
4. `roofWingWidth=(10-3.6)/2=3.2` determines each roof wing's width. The `[-1, 1]` loop mirrors roof wings, longitudinal beams, skylight trim, and skirting on both sides.
5. Longitudinal beams are centered at `x=±1.8, y=5.55`. Five crossbeams sit at `z=[-7.8, -4, 0, 4, 7.8]`. Gaps remain open as skylights; physical glass is not implemented yet.
6. The back-wall ventilation grille uses a casing, dark panel, and 32 thin slats generated by `Array.from`. It is decorative geometry without airflow simulation.
7. All parts belong to the `Skylight gallery architecture` group. The group organizes the scene; each `RoomBox` casts and receives shadows.

Basic dimensions use shared constants, but alcove, beam, and grille details still contain local numeric values. Changing `GALLERY_ROOM` alone does not automatically resize every detail or reposition paintings; also review `GalleryRoom.tsx` and the data in `GalleryScene.tsx`.

12. Step 5 - Lighting

The scene uses ambient, hemisphere, and directional lights, plus four spotlights:

TSX

```
<ambientLight color="#fff5e7" intensity={0.65} />
<hemisphereLight args={["#edf5ff", "#c8b797", 1.6]} />
```

Ambient light supplies a uniform baseline so shadows do not become completely black. Spotlights provide direction, focus, and the gallery mood.

Hemisphere light blends sky and ground colors according to surface orientation. It approximates environmental illumination rather than simulating full light bounces. The directional light at `[5, 12, 4]`, color `#fff0d4`, intensity `3.2`, points toward its default target `[0, 0, 0]` and suggests sunlight entering the skylight. Beams and roof wings with `castShadow` shape the resulting shadows.

Sun shadows use a `2048×2048` map, shadow-camera bounds of `-12..12` on both axes, near `0.5`, far `40`, bias `-0.0001`, and normalBias `0.025`. The four spotlights now use intensity `22` and `1024×1024` maps to supplement object lighting. Spotlight targets read `position` directly from object data so they follow repositioned objects.

A Three.js spotlight requires an `Object3D` target rather than a tuple:

TSX

```
const targetObject = useMemo(() => {
  const object = new Object3D();
  object.position.set(...target);
  return object;
}, [target]);
```

`useMemo` keeps the target identity stable across renders. `<primitive object={targetObject} />` inserts a raw Three.js object into the R3F scene graph.

Important spotlight properties:

- `intensity`: light strength;
- `distance`: maximum range;
- `angle`: cone width in radians;
- `penumbra`: cone edge softness;
- `decay`: energy falloff over distance;
- `shadow-mapSize`: shadow texture resolution;
- `shadow-bias` and `shadow-normalBias`: reduce shadow acne.

13. Step 6 - Data-driven paintings

Instead of writing three separate components, all artwork metadata lives in the `paintings` array.

TSX

```
type GalleryPainting = GalleryFocusTarget & {
  src: string;
  description: string;
  price: number;
  rotation: Vector3Tuple;
  size: readonly [number, number];
};
```

It is then rendered with `map`:

TSX

```
{paintings.map((painting) => (
  <Painting
    key={painting.id}
    {...painting}
    selected={selectedTarget?.id === painting.id}
    onSelect={() => onSelectTarget(painting)}
  />
))}
```

Benefits of this pattern:

- adding a painting only requires another data entry;
- appearance and interaction remain consistent;
- TypeScript ensures every item is complete;
- every object owns its camera destination.

Current placement:

Painting	Wall	Y rotation	Camera about 3 m in front
Danau Fajar	left	$\text{Math.PI} / 2$	$[-1.86, 2.45, -2.2]$
Champions 1999	back	0	$[0, 2.45, -4.86]$
Kota Bulan Sabit	right	$-\text{Math.PI} / 2$	$[1.86, 2.45, -2.2]$

Painting centers are $[-4.86, 2.45, -2.2]$ on the left, $[0, 2.45, -7.86]$ at the back, and $[4.86, 2.45, -2.2]$ on the right. The vending machine is at $[-3.3, 1.88, -6.25]$, with focus camera position $[-1.18, 1.9, -4.13]$. Painting focus distance is exactly 3 units; vending focus distance is about 2.998 units. Moving the vending machine farther back clears the viewing area for the left painting.

14. Step 7 - The Painting component

Loading a texture

TSX

```
const texture = useTexture(src);
```

`useTexture` loads the JPG into a `THREE.Texture` and integrates with `Suspense`. The preload calls at the bottom start loading known images early.

Frame and image plane

The backing uses a thin box while the image uses a plane in front:

TSX

```
<boxGeometry args={[width + 0.12, height + 0.12, 0.04]} />
<planeGeometry args={[width, height]} />
```

The plane sits at `z=0.035`, slightly ahead of the frame. This small separation matters. When two surfaces are almost coplanar, the depth buffer cannot consistently decide which one is in front, producing flicker called **z-fighting**.

`meshStandardMaterial` reacts to lighting. Higher `roughness` creates softer reflections. When selected, the frame receives subtle emissive color to make focus state visible.

Smooth hover

`useFrame` executes during active render frames:

TSX

```
const targetScale = hovered && !selected ? 1.035 : 1;
const nextScale = MathUtils.damp(
  artworkRef.current.scale.x,
  targetScale,
  12,
  delta,
);
```

`MathUtils.damp` makes the transition frame-rate independent. `delta` is elapsed time since the previous frame. Hover scaling is disabled after selection so the object does not zoom again when the camera is already close.

Because Canvas renders on demand, `invalidate()` is called until the scale reaches its target.

Pointer events

TSX

```
event.stopPropagation();
setHovered(active);
document.body.style.cursor = active ? "pointer" : "default";
```

R3F raycasts from the pointer into the 3D scene. `stopPropagation()` prevents the event from continuing to meshes behind the current hit.

Popovers


There are two modes:

- not selected: appears above the painting on hover;
- selected: remains visible to the left of the painting.

`<Html>` projects a 3D anchor into DOM coordinates. `distanceFactor` controls how 3D distance affects the HTML scale. The selected popover anchors to the local left edge so the panel does not cover the artwork.

15. Step 8 - CameraController and GSAP

When selection changes:

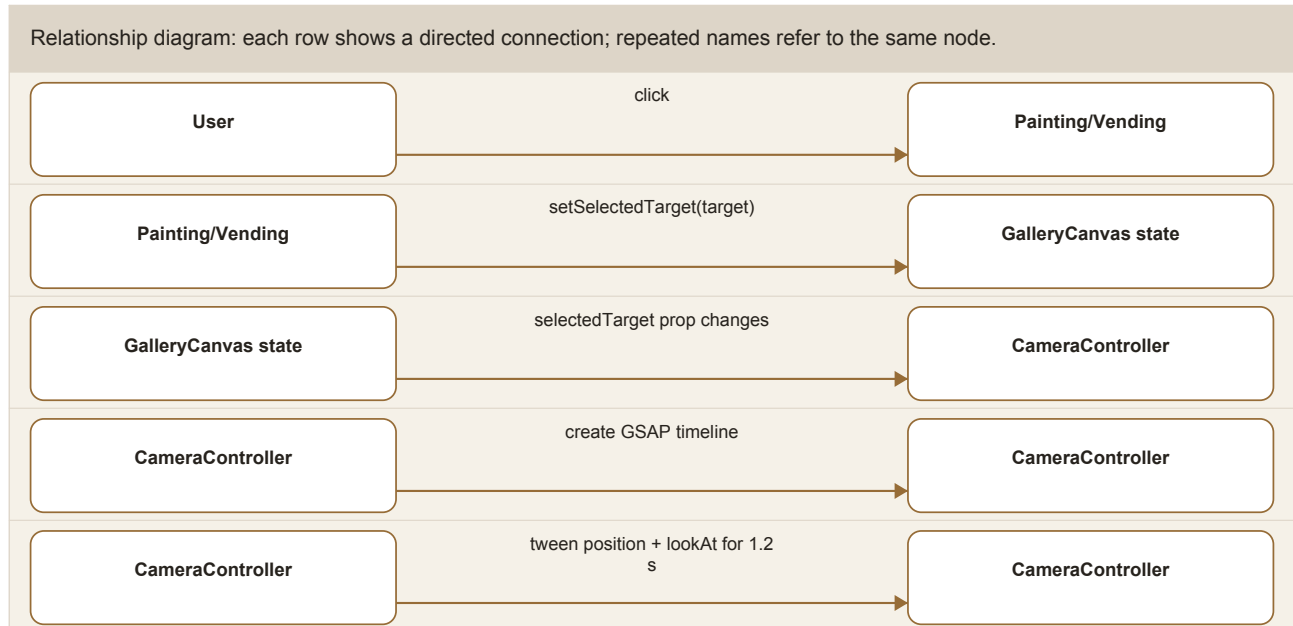

Two camera values animate simultaneously:

1. `camera.position` moves toward the object's `cameraTarget`;
2. a `lookAt` vector moves toward the object center.

TSX

```

timeline
  .to(camera.position, { x, y, z }, 0)
  .to(lookAt, { x, y, z }, 0);

```

The timeline position argument `0` starts both tweens at the same time. `power2.inOut` accelerates gently at the beginning and decelerates near the destination.

On every update:

TSX

```

camera.lookAt(lookAt);
camera.updateProjectionMatrix();
invalidate();

```

The `timeline.kill()` cleanup prevents an old tween from continuing if the user selects another object quickly.

When selection is `null`, destination becomes `HOME_POSITION` and focus becomes `HOME_LOOK_AT`; the same mechanism returns the camera home.

Both values now come from `galleryLayout.ts`:

TSX

```
export const HOME_POSITION = [0, 2.7, 6.5] as const;
export const HOME_LOOK_AT = [0, 2.65, -7.86] as const;
```

GalleryCanvas uses that same `HOME_POSITION` for the initial camera. `CameraController` imports it for `Back`, preventing the initial and return positions from diverging through duplicated constants.

16. Step 9 - Loading the vending machine GLB

GLB is glTF's binary container. One file can include a mesh hierarchy, PBR materials, textures, cameras, animations, and metadata.

TSX

```
const { scene } = useGLTF(MODEL_PATH);
<Clone object={scene} castShadow receiveShadow />
```

Why `Clone`? A Three.js object should not be attached to more than one parent. Cloning gives a safe instance if the model is reused later.

TSX

```
<group
  position={([...position]}
  rotation={[0, Math.PI + Math.PI / 5, 0]}
  scale={MODEL_SCALE}
>
```

The group is the transform root. Model, label, hitbox, and form all use the same local coordinate space. Materials and textures are embedded in the GLB, while scene lighting determines how clearly its design appears.

The current model is by [RasenDan](#) on Sketchfab and licensed under CC BY 4.0. A permanent model credit link is therefore displayed in the UI.

17. Step 10 - Invisible keypad hitbox

The model does not need to be split for a simple interaction. A transparent mesh can sit in front of the keypad:

TSX


```
const KEYPAD_HITBOX = {
  position: [-0.35, 0.26, -0.47],
  size: [0.17, 0.27, 0.005],
} as const;
```

TSX

```
<mesh position={([...KEYPAD_HITBOX.position]} onClick={handleKeypadClick}>
  <boxGeometry args={([...KEYPAD_HITBOX.size]} />
  <meshBasicMaterial
    transparent
    opacity={0}
    depthWrite={false}
    colorWrite={false}
  />
  {keypadHovered && <Edges color="#ff3b30" lineWidth={2.5} />}
</mesh>
```

Even without visible color, the geometry still participates in raycasting. `colorWrite={false}` prevents it from writing color, while `depthWrite={false}` prevents it from occluding other objects in the depth buffer.

The hitbox is only rendered after the vending machine is selected. This creates a two-stage flow:

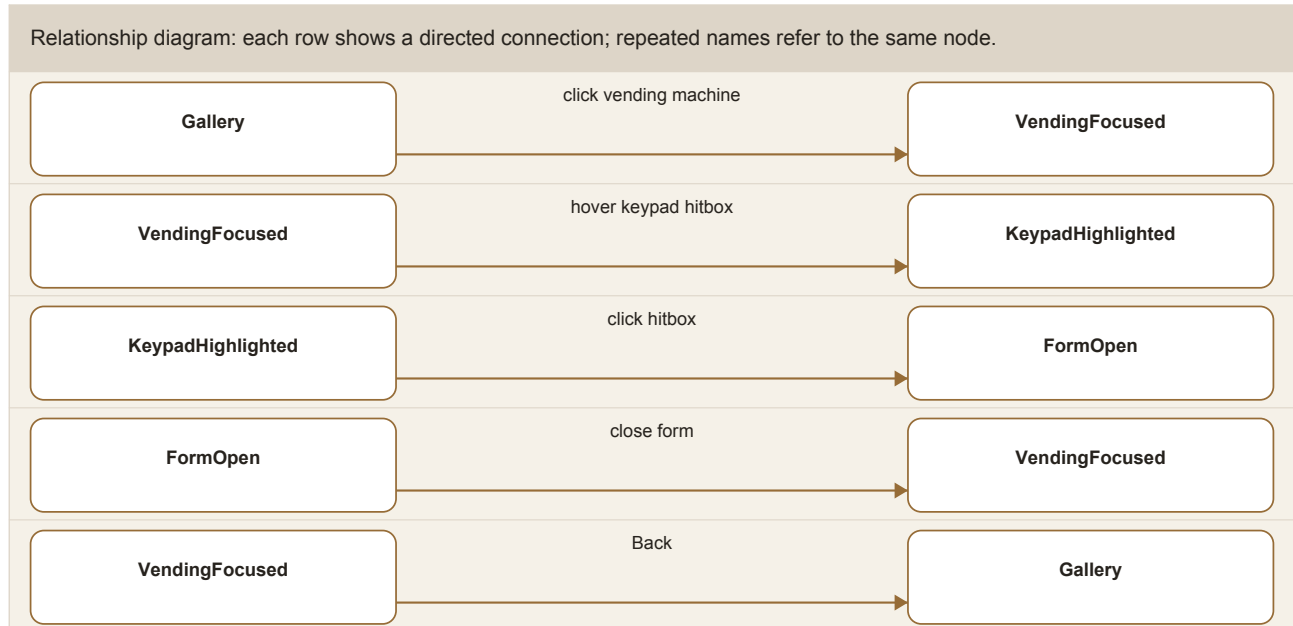

`Edges` appears only on hover, providing an affordance for the clickable area. The click handler logs the object name, world point, and raycast UV for debugging.

Why did the hitbox position drift?

Hitbox values live in the GLB group's local coordinates. That group is rotated and scaled, so “move left” on screen does not always mean decreasing local X. A safe debugging workflow is:

1. temporarily render the material at 0.2 opacity;
2. use a bright color and `Edges`;
3. change one axis at a time in small increments;
4. inspect from the focused camera, not only from overview;
5. restore opacity to 0 after calibration.

If every button needs a unique action, choose one of two approaches:

- create multiple small hitboxes carrying labels such as A, 1, and 2;
- name button meshes in Blender and retrieve nodes by `name` from the `useGLTF` result.

The model does not need to be split into multiple files. Well-named nodes inside one GLB are usually enough.

18. Step 11 - HTML form inside the scene

The vending form is rendered through Drei `<Html>`:

TSX

```

<Html
  center
  position={[0, 0.13, -0.78]}
  distanceFactor={4}
  zIndexRange={[100, 0]}
  style={{ pointerEvents: "auto" }}
>

```

`pointerEvents: "auto"` matters because informational popovers use `none`, while the form must accept input. Form events are stopped so button clicks do not reach the 3D group behind it.

`handleSubmit:`

1. prevents a browser reload;
2. trims whitespace;
3. normalizes the code to uppercase;
4. displays a local success message.

The current submit behavior is a UI simulation; it does not call a backend or dispense a virtual product yet.

19. Step 12 - Overlay CSS

`globals.css` handles three categories:

1. reset and full-screen layout;
2. global UI such as Back and model credit;
3. elements created by Drei `<Html>`, including painting popovers and the vending form.

The main visual pattern uses a dark translucent surface:

CSS

```
background: rgb(17 15 13 / 30%);
backdrop-filter: blur(16px);
```

The pieces have different jobs:

- background alpha makes the panel translucent;
- backdrop filter blurs the scene behind the panel;
- box shadow separates the panel from the artwork;
- `z-index` controls DOM order, not WebGL mesh order.

The `prefers-reduced-motion` media query disables CSS overlay animations and transitions. The GSAP camera tween and `useFrame` hover scale do not yet follow this preference. In the brighter room, `.model-credit` now uses a 65% dark background, 90% light text, padding, and rounded corners to keep attribution legible.

20. Complete interaction flow

Relationship diagram: each row shows a directed connection; repeated names refer to the same node.



21. Step 13 - Multi-room navigation and portals

Version 1.2 keeps one <Canvas> alive and swaps the scene configuration inside it. This preserves the renderer, R3F context, and event system. Room I contains the main collection and vending machine. Room II uses a soft sage palette, different sunlight intensity, and a rearrangement of the same three artwork textures.

Room registry

`galleryRooms.ts` separates room identity and visual themes from renderer components:

TSX

```
export type GalleryRoomId = "main" | "studio";

export const GALLERY_ROOMS = {
  main: {
    title: "Room I · Imagination Gallery",
    nextRoom: "studio",
    skyColor: "#d5e7f2",
    sunlight: 3.2,
    hasVending: true,
  },
  studio: {
    title: "Room II · Quiet Gallery",
    nextRoom: "main",
    wallColor: "#b9c9c0",
    sunlight: 2.2,
    hasVending: false,
  },
} satisfies Record<GalleryRoomId, RoomDefinition>;
```

`satisfies` verifies every configuration while preserving literal types. `nextRoom` can only reference a valid `GalleryRoomId`, so TypeScript catches destination typos before the browser runs.

Portal as an interactive object

`RoomPortal.tsx` places a thin `boxGeometry` over the opening in the right wall. A transparent material can still receive raycasts. On hover, a low opacity and `Edges` reveal the boundary. The portal also supplies a `Drei <Html>` button so keyboard users can activate it with Tab and Enter.

TSX


```
<mesh
  position={[4.87, 1.75, -7]}
  rotation={[0, -Math.PI / 2, 0]}
  onClick={() => onEnter()}
  onPointerEnter={() => setHovered(true)}
>
  <boxGeometry args={[1.8, 3.4, 0.025]} />
  <meshBasicMaterial transparent opacity={hovered ? 0.16 : 0.025} />
  {hovered && <Edges color="#d8b77a" />}
</mesh>
```


The hitbox follows the passage plane rather than covering the whole wall. A `disabled` flag removes interaction during transitions so a single navigation cannot be started twice.

Transition state machine

Navigation does not rely on a guessed timeout. The camera timeline's `onArrive` callback is the signal that the approach has finished:

Relationship diagram: each row shows a directed connection; repeated names refer to the same node.

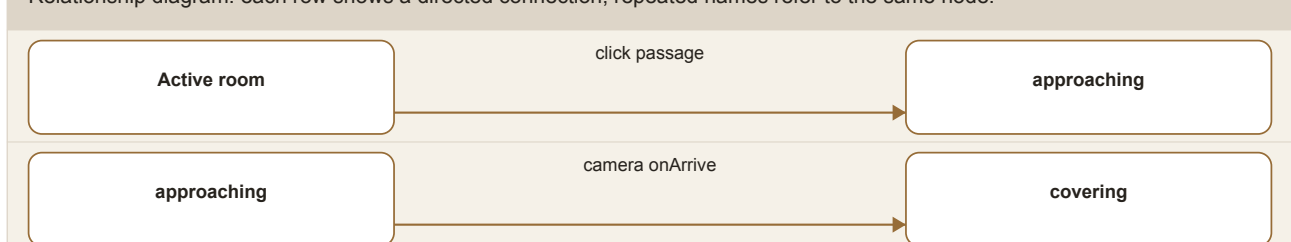

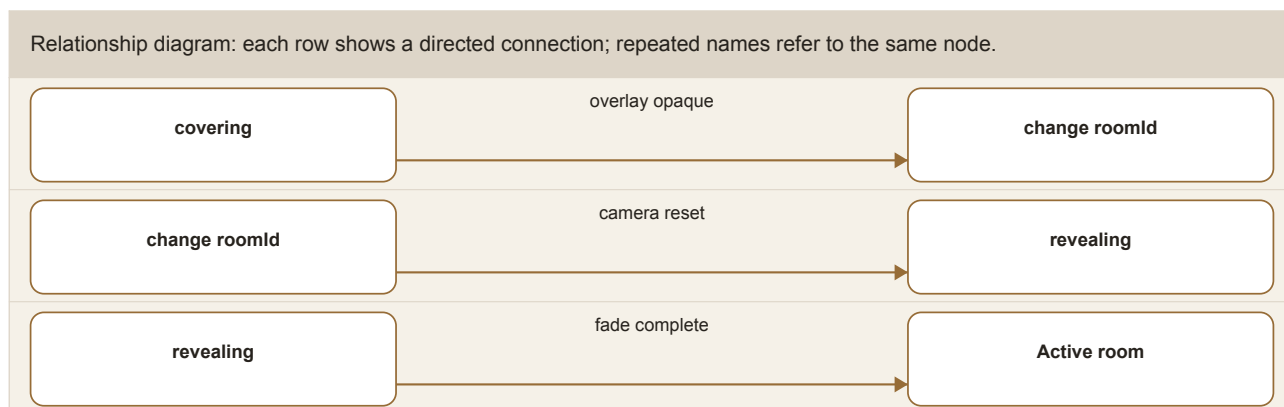

Responsibilities are sequenced as follows:

1. `handleEnterRoom()` points the camera at `PASSAGE_TARGET` and enters `approaching`.
2. `CameraController` runs the 1.2-second tween and invokes `onArrive`.
3. `GalleryCanvas` fades the black overlay in for 0.4 seconds during `covering`.
4. Once fully covered, it changes `roomId`, resets selection and the panel, then enters `revealing`.
5. `CameraController` uses `useLayoutEffect` to restore `HOME_POSITION` before the overlay fades out for 0.4 seconds.

The scene receives `key={roomId}`. A new ID causes React to remount the room subtree, preventing local hover and form state from leaking into the next room. A ref-based `transitionLock` closes the window before React state updates, while `inert` disables DOM interaction across the viewport. `isolation: isolate` keeps the transition cover above all Drei HTML.

This implementation swaps scene configurations; it does not render two physically connected buildings. Free movement, collision, reload persistence, and room-specific home cameras are not implemented yet. That constraint keeps this first version light and testable.

Adding a third room

1. Add its ID to `GalleryRoomId` and its object to `GALLERY_ROOMS`.
2. Make every `nextRoom` destination valid.
3. Add the room's artwork selection in `GalleryScene.tsx`.
4. If geometry or home cameras differ, move those choices into room configuration.
5. Test rapid clicks, Back, both portal directions, painting focus, keyboard use, and mobile layout.

22. File-by-file reference

`app/page.tsx`

- Entry for route `/`.
- Provides the semantic `<main>` landmark.
- Owns no state or WebGL implementation detail.

`app/layout.tsx`

- App Router root document.
- Imports `globals.css`.
- Defines metadata and document language.

`app/globals.css`

- Locks the application to the full viewport.
- Styles DOM overlays.
- Provides hover/focus states and reduced motion.
- Does not define Three.js materials or geometry.

`GalleryCanvas.tsx`

- Main client boundary.
- Creates the WebGL Canvas and initial camera.
- Owns selection, vending panel, `roomId`, and transition phase.
- Sequences approach, fade, room swap, reset, and reveal.
- Renders Back, the room label, transition cover, and attribution.

`galleryRooms.ts`

- Defines `GalleryRoomId`, both room configurations, and `PASSAGE_TARGET`.
- Stores titles, subtitles, destinations, colors, lighting, and vending availability.
- Makes room additions data-driven and type-safe.

`RoomPortal.tsx`

- Adds the transparent hitbox to the right-hand passage.
- Shows a hover outline and an accessible HTML button.
- Reports navigation intent without mutating room state itself.

`galleryLayout.ts`

- Exports `GALLERY_ROOM`, `HOME_POSITION`, and `HOME_LOOK_AT`.
- Consumed by `GalleryRoom`, `GalleryCanvas`, and `CameraController`.
- Does not yet contain artwork coordinates or every building detail.

`GalleryRoom.tsx`

- `RoomBoxProps` and `RoomBox` share the box geometry/material pattern.
- Composes the floor, walls, right alcove, roof wings, skylight beams, trim, and grille.
- Paired loops create symmetry; the slat loop creates the grille.
- Owns no selection state or interaction handlers.

`GalleryScene.tsx`

- Selects painting data, vending target, room theme, and lighting from the active room.
- Composes all 3D objects.
- Receives callbacks instead of owning selection.
- Acts as the 3D composition root.

`Painting.tsx`

- Loads a texture.
- Creates frame and image plane.
- Owns local hover state.

- Reports selection to the parent.
- Renders overview and focused popovers.

CameraController.tsx

- Renders no geometry (`return null`).
- Watches `selectedTarget` changes.
- Animates camera position and look-at vector.
- Calls `onArrive` and resets the camera when `roomId` changes.
- Cleans up stale timelines.

VendingMachine.tsx

- Loads and clones the GLB.
- Manages model and hitbox hover.
- Displays a simple label.
- Adds an invisible hitbox without editing the GLB.
- Renders a DOM form attached to a 3D point.

23. Common problems and diagnosis

Texture is black or missing

- Use a root-relative path such as `/paintings/painting-1.jpg`.
- Confirm the file is under `public/paintings`.
- Check the Network tab for a 404.
- Ensure a light exists when using `meshStandardMaterial`.
- Temporarily try `meshBasicMaterial` to distinguish texture and lighting problems.

Frame flickers

The common cause is z-fighting. Separate the image plane from its backing or build a real frame geometry with an opening. Avoid coplanar surfaces.

GLB appears dark or plain

- Confirm textures are embedded or accompanying `.bin` and image files are present.
- Add a light aimed at the model.
- Check texture color space and materials.
- Do not accidentally replace the GLB materials.

The hitbox cannot be clicked

- Confirm its geometry is slightly in front of the model surface.
- Confirm `selected` is true so the hitbox is rendered.
- Look for another object catching the ray first.
- Temporarily show opacity and `Edges` while calibrating.
- Log `event.object.name` and `event.point`.

<Html> UI is clipped

- Do not anchor too close to a viewport edge.

- Use different positions for overview and focused modes.
- Adjust `distanceFactor`.
- For mission-critical UI that must always remain visible, consider a fixed DOM overlay outside Canvas.

Dev server keeps reconnecting

- Avoid running `next build` against the same `.next` directory while `next dev` is active.
- Stop stale processes and restart `yarn dev`.
- Inspect the first compilation error in the terminal instead of only the browser reconnect message.

A room transition stalls or runs twice

- Ensure only the active camera timeline invokes `onArrive`.
- Kill the GSAP timeline during cleanup.
- Keep `transitionLock`; React state alone leaves a same-frame double-click window.
- Let completion callbacks advance both `covering` and `revealing`.
- Confirm `nextRoom` references an ID in `GALLERY_ROOMS`.

24. Performance and production quality

Already implemented:

- `frameloop="demand"` for a mostly static scene;
- bounded DPR to control pixel cost;
- texture and GLB preload;
- GSAP timeline cleanup;
- one Canvas for every room, with the old scene unmounted on room swap;
- input locking and an inert viewport during transitions;
- separate data and components;
- reduced-motion support for CSS overlays;
- type-safe tuples and focus-target contract.

Recommended next improvements:

- compress textures to WebP/AVIF or KTX2;
- compress GLB geometry with Draco/Meshopt;
- use a controlled environment map;
- add loading progress and an error boundary;
- test keyboard navigation and mobile layout;
- move artwork data into JSON or a CMS;
- provide a fallback when WebGL is unavailable;
- audit every asset license.

25. Adding a painting

1. Put the image in `public/paintings`.
2. Add an item to the `paintings` array.
3. Set `position` and `rotation` for its wall.
4. Set the camera position about 2-3 units in front of the plane.

5. Add preload if appropriate.
6. Test overview, hover, focus, popover, and Back.

Example:

TSX

```
{
  id: "new-artwork",
  src: "/paintings/new-artwork.jpg",
  title: "New title",
  description: "A short description.",
  price: 12_000_000,
  position: [0, 2.45, -7.86],
  rotation: [0, 0, 0],
  size: [1.8, 2.4],
  cameraTarget: [0, 2.45, -4.86],
}
```

26. Building individual vending buttons

To accept direct keypad input, replace the large hitbox with a grid of small hitboxes:

TSX

```
const KEYS = [
  { label: "A", position: [-0.04, 0.10, 0] },
  { label: "1", position: [0.00, 0.10, 0] },
  { label: "2", position: [0.04, 0.10, 0] },
];
```

Render each key relative to a `<group position={KEYPAD_ORIGIN}>`. A click appends its character to the `code` state. The origin group lets the whole keypad move without recalculating every key.

For higher precision:

1. open the GLB in Blender;
2. name button meshes, for example `Key_A` and `Key_1`;
3. export a single GLB;
4. retrieve named nodes from `useGLTF`;
5. attach handlers or hitboxes to the relevant nodes.

27. Learning exercises

1. Add skylight glazing without blocking the camera; test transparency and shadows.
2. Add a sculpture GLB in the room center.
3. Change spotlight emphasis with selection.
4. Make the keypad populate the form without a keyboard.
5. Validate codes against a product catalog.
6. Create a two-stage camera path: approach, then frame.
7. Add a loading screen with `Drei useProgress`.
8. Move artwork metadata into JSON.
9. Add Room III with its own theme, collection, and portal route.

28. Short glossary

Term	Meaning
Scene	Root container of the 3D world
Scene graph	Parent-child hierarchy of all 3D objects
Camera	Viewpoint that projects the world onto the screen
Renderer	System that draws a scene from a camera into a canvas
Geometry	Shape and vertices of an object
Material	How a surface reacts to light and color
Mesh	Geometry and material combined
Texture	Image/data mapped onto a surface
UV	2D coordinates on geometry used for texture mapping
Raycasting	Casting a ray from the pointer to find intersected objects
GLB/gITF	Exchange format for 3D scenes and assets
PBR	Physically based material model
Z-fighting	Flicker caused by surfaces competing for the same depth
Local space	Coordinates relative to a parent
World space	Final coordinates relative to the scene root
Tween	Interpolation from a start value to a destination over time
Invalidate	Requesting a new R3F frame in demand mode
State machine	Explicit phases and the transitions allowed between them
Inert	DOM state that disables focus and interaction for a subtree

29. Mental model summary

Once the following flow is clear, you have the main foundation of the project. The next stage is not merely adding features; it is strengthening the data model, accessibility, asset pipeline, and interaction testing.

TEXT

Object data defines positions and camera destinations.

↓

GalleryScene constructs the scene graph.

↓

R3F translates JSX into Three.js objects.

↓

The pointer is raycast against meshes and hitboxes.

↓

Selection is stored in GalleryCanvas.

↓

CameraController tweens the camera with GSAP.

↓

Portal arrival triggers a fade and roomId swap.

↓

The new room scene mounts and the camera resets.

↓

Drei Html attaches DOM UI to 3D points.