


Token scheduling during forward finetuning of mini-batch A

- Inference token
- $r_{x,y}$ The y-th token of the x-th request
- s Sliding windows size
- Forward finetuning token
- $r_{A,y}$ The y-th token of mini-batch A

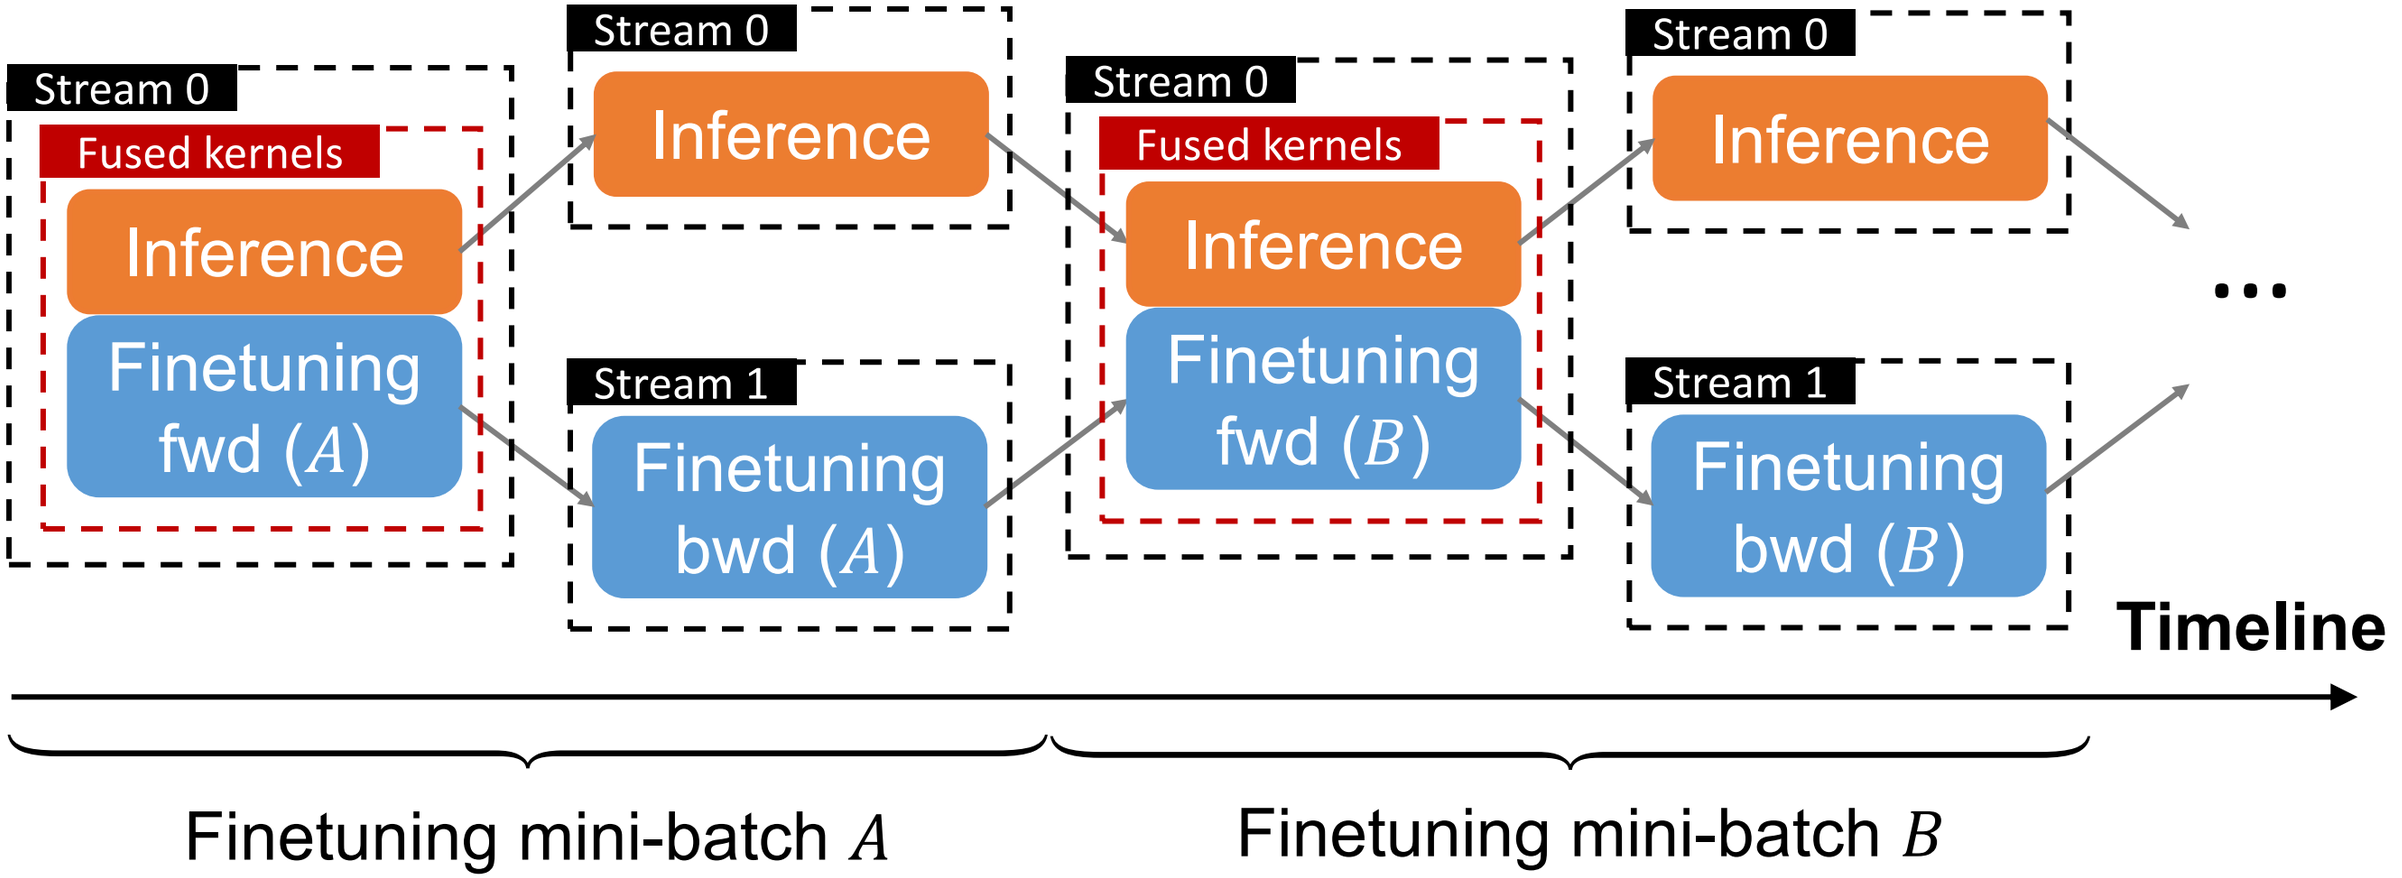