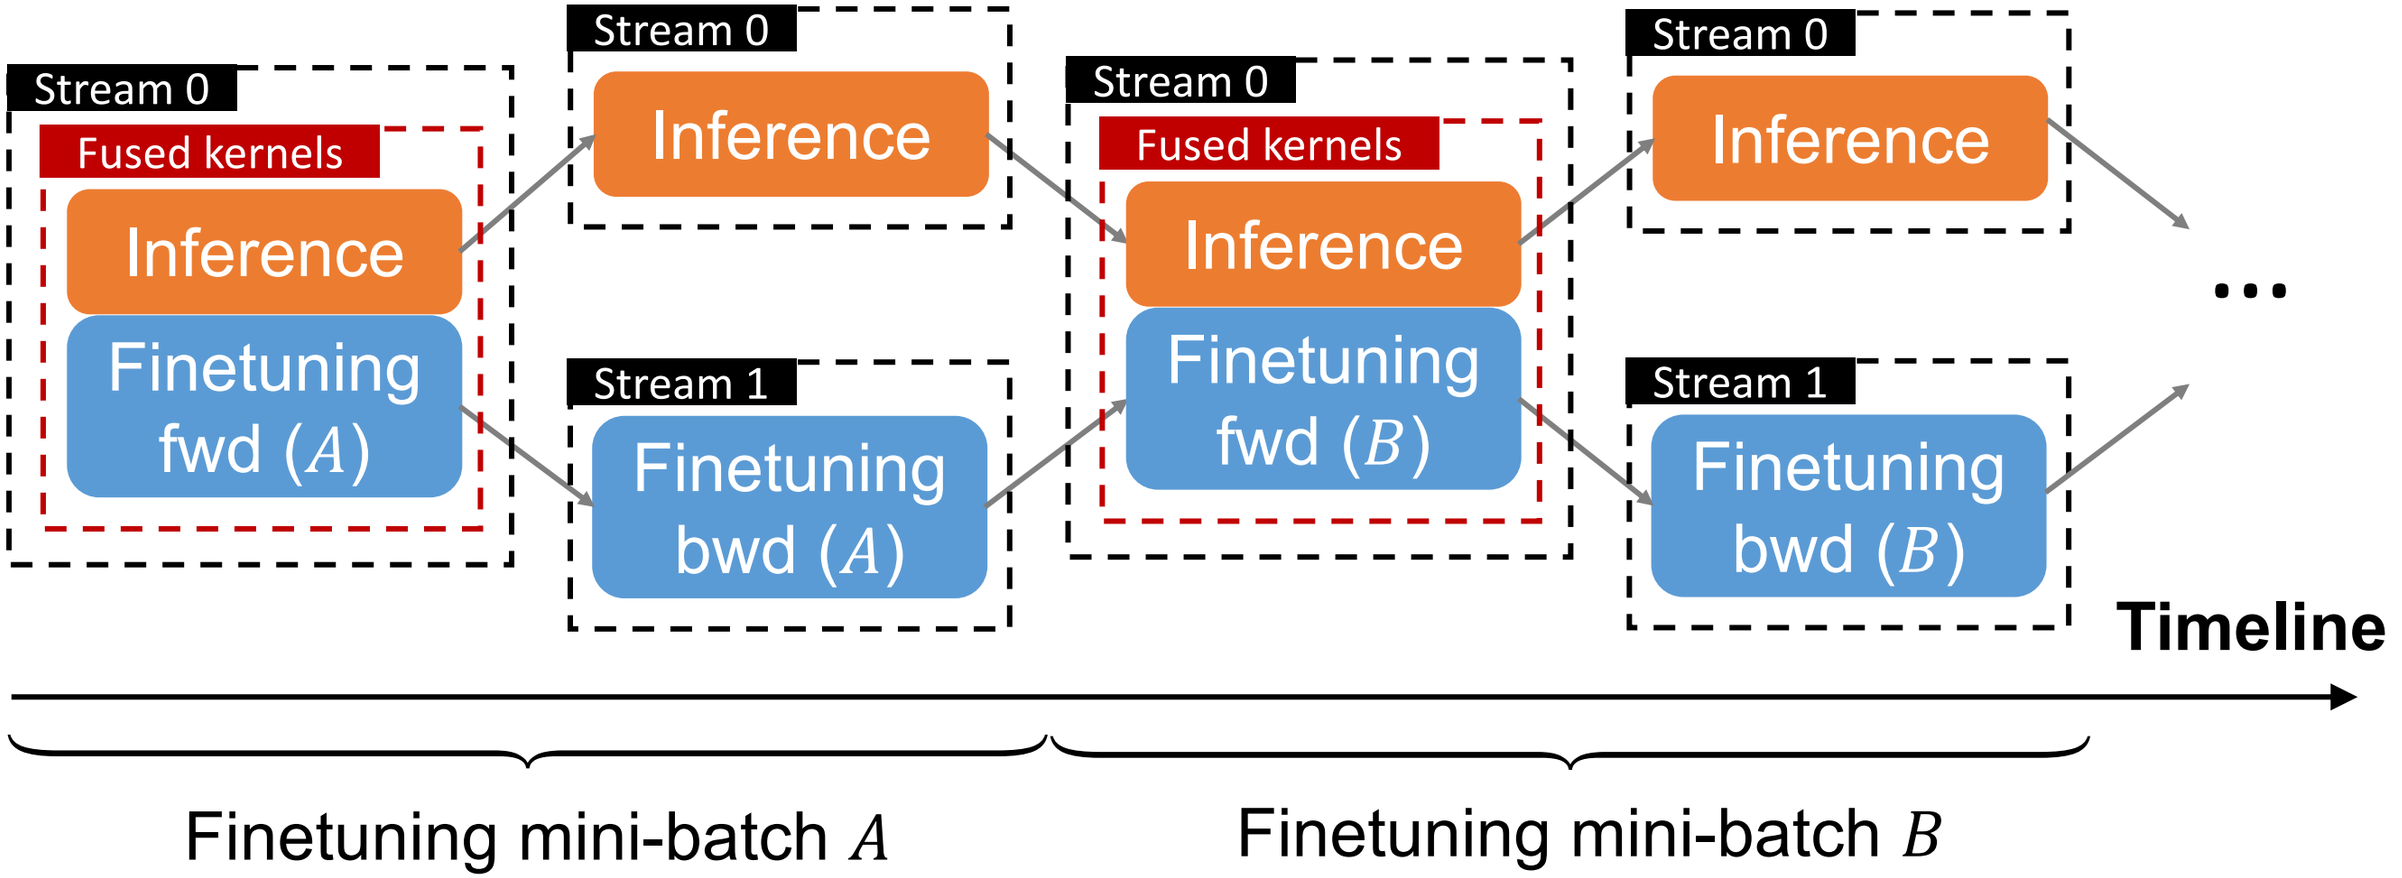


Token scheduling during forward finetuning of mini-batch A

Inference token

$r_{x,y}$ The y-th token of the x-th request

s Sliding windows size

Forward finetuning token

$r_{A,y}$ The y-th token of mini-batch A

