```
vamsi@Vamsi: ~/challange3
vamsi@Vamsi:~$ mkdir challange3
mkdir: challange3: File exists
vamsi@Vamsi:~$ cd challange3
vamsi@Vamsi:~/challange3$ nano program3.c
vamsi@Vamsi:~/challange3$ gcc program3.c
program3.c: In function 'main':
program3.c:7:7: error: expected ';' before 'float'
    7 | int ct
      |       ^
      |       ;
    8 | float pa, d;
      | ~~~~~
program3.c:15:14: error: 'ct' undeclared (first use in this function)
   15 | scanf("%d", &ct);
      |              ^~
program3.c:15:14: note: each undeclared identifier is reported only once for each function it appears in
program3.c:37:13: error: expected ';' before 'aad'
   37 | da = pa * dr
      |             ^
      |             ;
   38 | aad = pa - da
      | ~~~
program3.c:41:1: error: 'else' without a previous 'if'
   41 | else if (d <= 15)
      | ^~~~
vamsi@Vamsi:~/challange3$ nano program3.c
vamsi@Vamsi:~/challange3$ gcc program3.c
vamsi@Vamsi:~/challange3$ nano program3.c
vamsi@Vamsi:~/challange3$ gcc program3.c
vamsi@Vamsi:~/challange3$ ./a.out
Enter purchase amount: 2000
Enter customer type: 1
Enter delivery d in km: 5

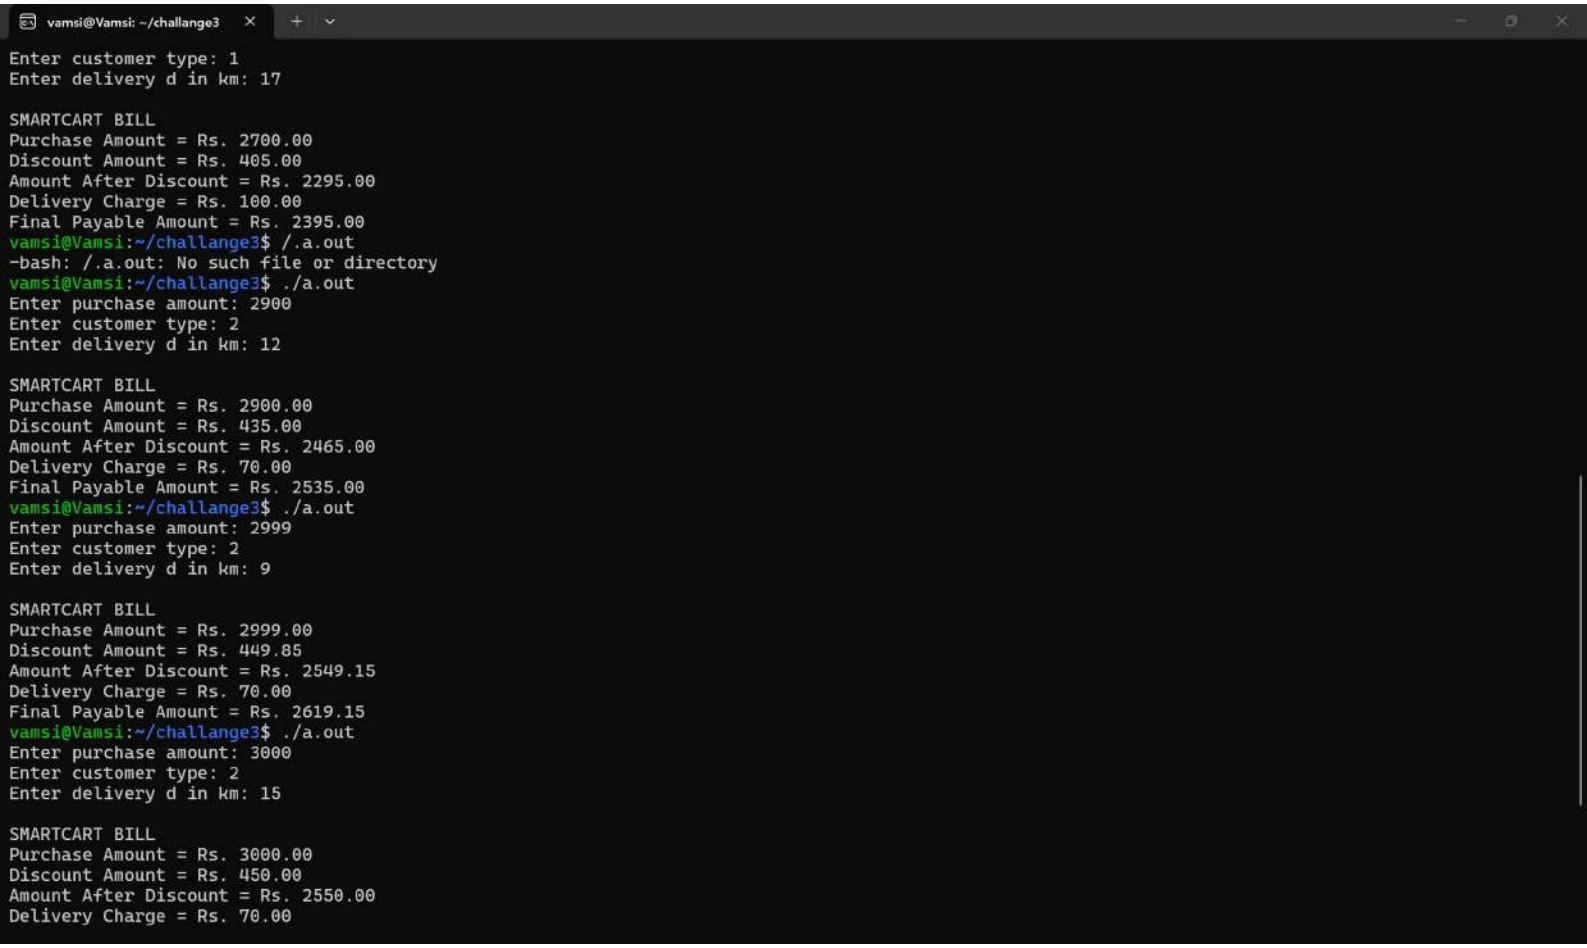
SMARTCART BILL
Purchase Amount = Rs. 2000.00
Discount Amount = Rs. 300.00
Amount After Discount = Rs. 1700.00
Delivery Charge = Rs. 40.00
Final Payable Amount = Rs. 1740.00
vamsi@Vamsi:~/challange3$ ./a.out
Enter purchase amount: 2500
Enter customer type: 1
```

```
vamsi@Vamsi: ~/challange3
      |  ^~~~~
vamsi@Vamsi:~/challange3$ nano program3.c
vamsi@Vamsi:~/challange3$ gcc program3.c
vamsi@Vamsi:~/challange3$ nano program3.c
vamsi@Vamsi:~/challange3$ gcc program3.c
vamsi@Vamsi:~/challange3$ ./a.out
Enter purchase amount: 2000
Enter customer type: 1
Enter delivery d in km: 5

SMARTCART BILL
Purchase Amount = Rs. 2000.00
Discount Amount = Rs. 300.00
Amount After Discount = Rs. 1700.00
Delivery Charge = Rs. 40.00
Final Payable Amount = Rs. 1740.00
vamsi@Vamsi:~/challange3$ ./a.out
Enter purchase amount: 2500
Enter customer type: 1
Enter delivery d in km: 10

SMARTCART BILL
Purchase Amount = Rs. 2500.00
Discount Amount = Rs. 375.00
Amount After Discount = Rs. 2125.00
Delivery Charge = Rs. 70.00
Final Payable Amount = Rs. 2195.00
vamsi@Vamsi:~/challange3$ ./a.out
Enter purchase amount: 2700
Enter customer type: 1
Enter delivery d in km: 17

SMARTCART BILL
Purchase Amount = Rs. 2700.00
Discount Amount = Rs. 405.00
Amount After Discount = Rs. 2295.00
Delivery Charge = Rs. 100.00
Final Payable Amount = Rs. 2395.00
vamsi@Vamsi:~/challange3$ /.a.out
-bash: /.a.out: No such file or directory
vamsi@Vamsi:~/challange3$ ./a.out
Enter purchase amount: 2900
Enter customer type: 2
```


vamsi@Vamsi: ~/challange3
Enter customer type: 1
Enter delivery d in km: 17
SMARTCART BILL
Purchase Amount = Rs. 2700.00
Discount Amount = Rs. 405.00
Amount After Discount = Rs. 2295.00
Delivery Charge = Rs. 100.00
Final Payable Amount = Rs. 2395.00
vamsi@Vamsi:~/challange3$ /.a.out
-bash: /.a.out: No such file or directory
vamsi@Vamsi:~/challange3$ ./a.out
Enter purchase amount: 2900
Enter customer type: 2
Enter delivery d in km: 12
SMARTCART BILL
Purchase Amount = Rs. 2900.00
Discount Amount = Rs. 435.00
Amount After Discount = Rs. 2465.00
Delivery Charge = Rs. 70.00
Final Payable Amount = Rs. 2535.00
vamsi@Vamsi:~/challange3$ ./a.out
Enter purchase amount: 2999
Enter customer type: 2
Enter delivery d in km: 9
SMARTCART BILL
Purchase Amount = Rs. 2999.00
Discount Amount = Rs. 449.85
Amount After Discount = Rs. 2549.15
Delivery Charge = Rs. 70.00
Final Payable Amount = Rs. 2619.15
vamsi@Vamsi:~/challange3$ ./a.out
Enter purchase amount: 3000
Enter customer type: 2
Enter delivery d in km: 15
SMARTCART BILL
Purchase Amount = Rs. 3000.00
Discount Amount = Rs. 450.00
Amount After Discount = Rs. 2550.00
Delivery Charge = Rs. 70.00

vamsi@Vamsi: ~/challange3

GNU nano 8.7.1 program3.c

```
//name:gollapali kasi venkata naga karthik
//programe:to caluculate the purchases of a student buyinf from an online store
//date:10/10/2026
#include<stdio.h>
int main()
{
int ct;
float pa, d;
float dr, da;
float aad, dc;
float fa;
printf("Enter purchase amount: ");
scanf("%f", &pa);
printf("Enter customer type: ");
scanf("%d", &ct);
printf("Enter delivery d in km: ");
scanf("%f", &d);
if (pa < 0 || d < 0)
{
printf("Input is invalid\n");
return 0;
}
if (ct = 1 && pa >= 2000)
dr = 0.15;
else if (ct = 1 && pa < 2000)
dr = 0.10;
else if (ct = 2 && pa >= 3000)
dr = 0.08;
else if (ct = 2 && pa < 3000)
dr = 0.00;
else
{
printf("customer is invalid\n");
return 0;
}

da = pa * dr;
aad = pa - da;
if (d <= 5)
```

[Read 53 lines]

^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute ^C Location M-U Undo M-A Set Mark M-] To Bracket
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line M-E Redo M-6 Copy ^B Where Was

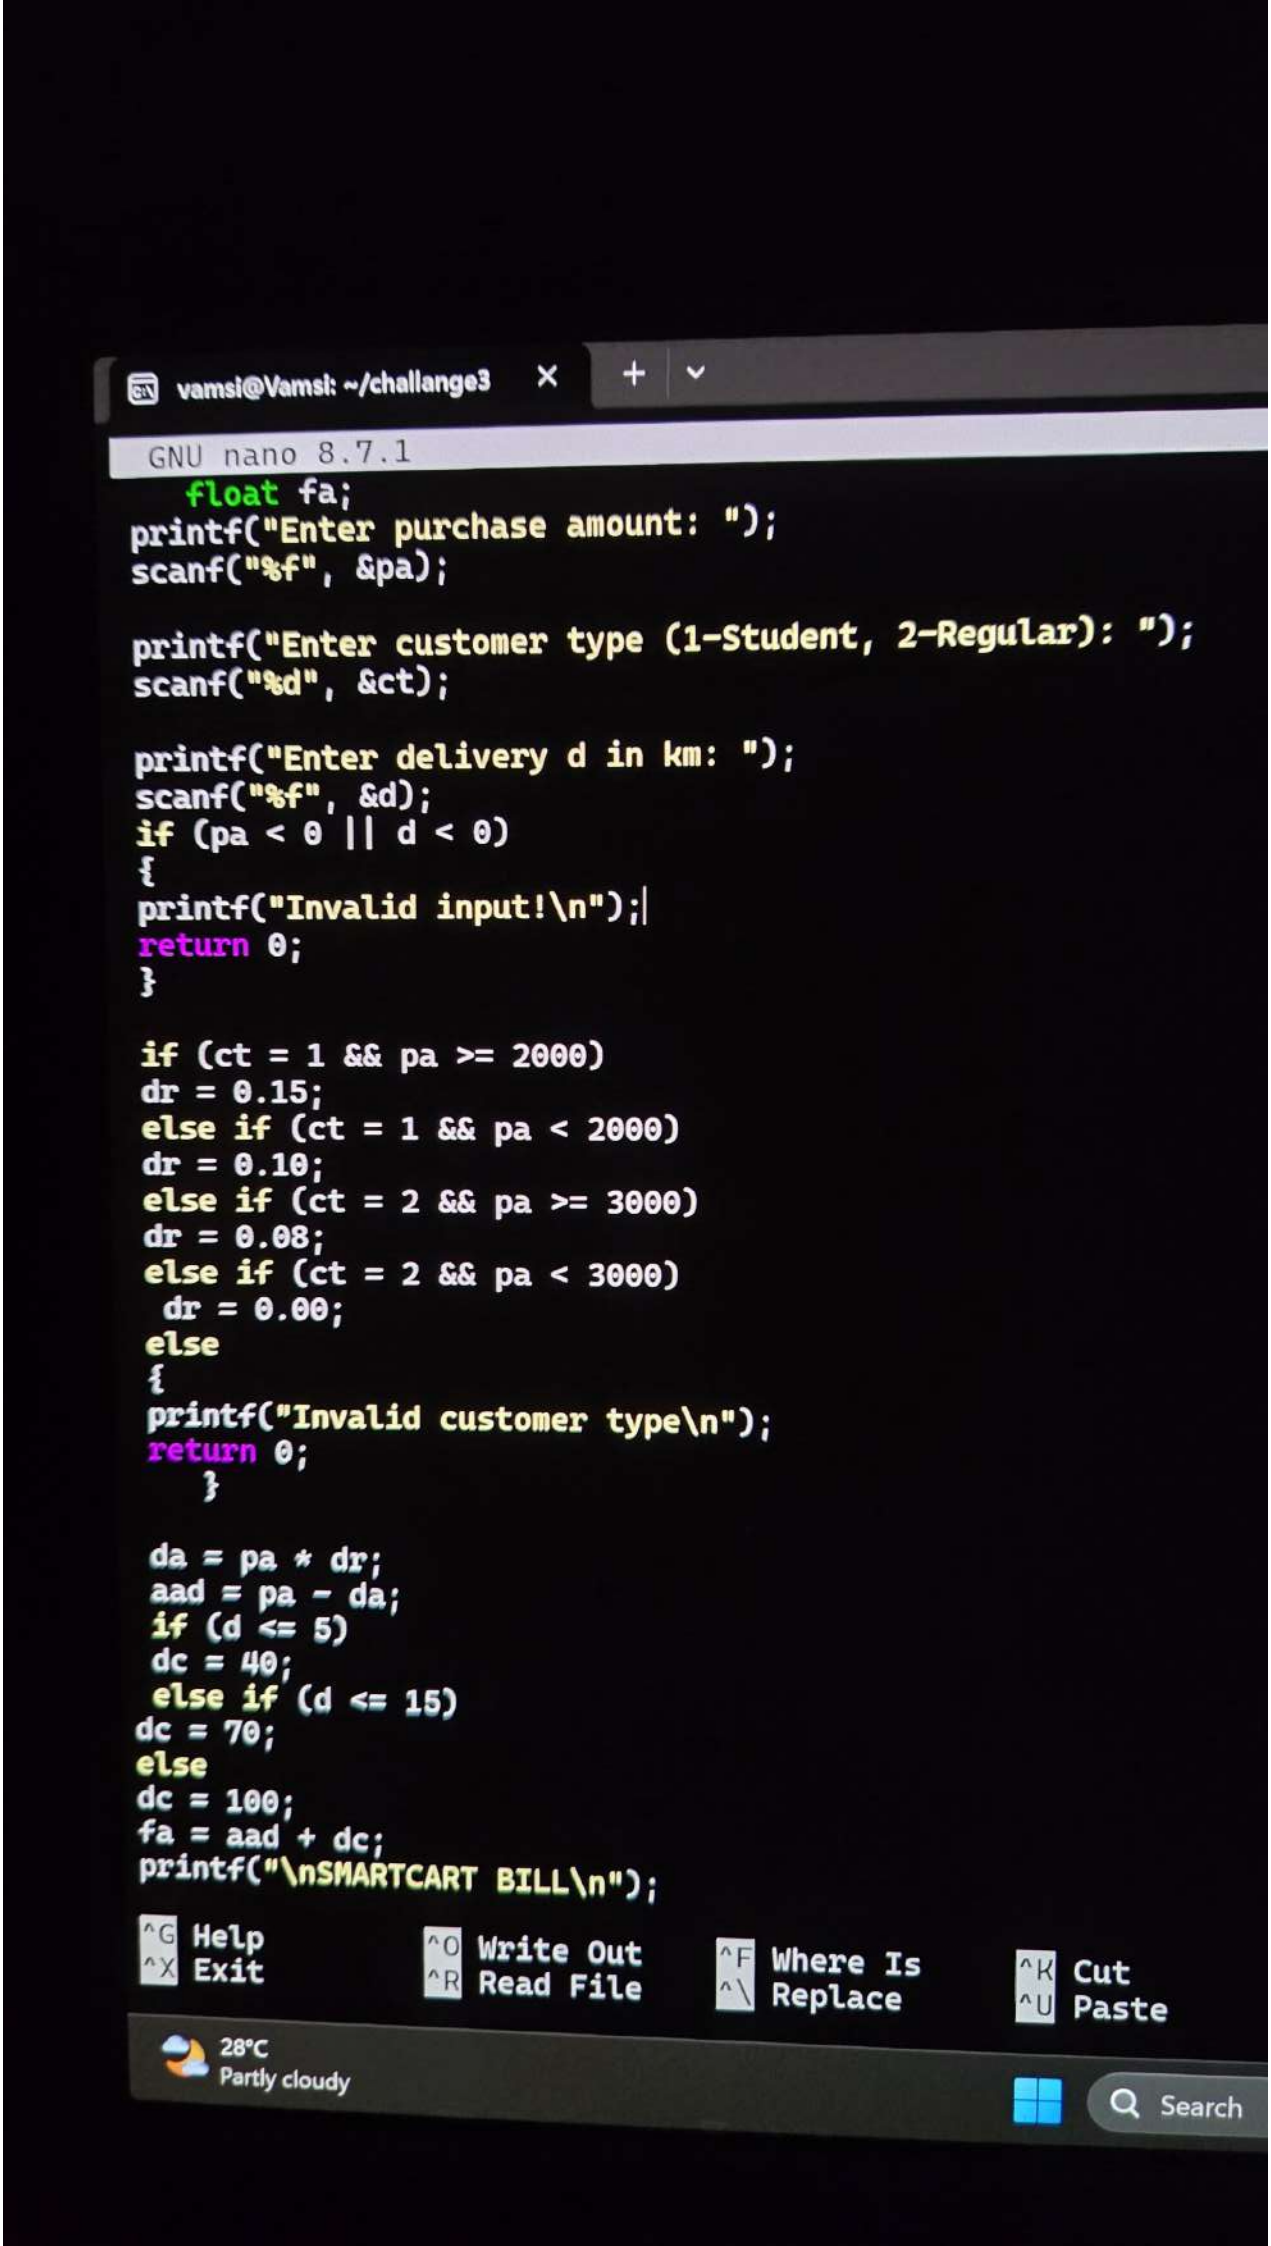
vamsi@Vamsi: ~/challange3

GNU nano 8.7.1 program3.c

```
printf("Enter delivery d in km: ");
scanf("%f", &d);
if (pa < 0 || d < 0)
{
printf("Input is invalid\n");
return 0;
}
if (ct = 1 && pa >= 2000)
dr = 0.15;
else if (ct = 1 && pa < 2000)
dr = 0.10;
else if (ct = 2 && pa >= 3000)
dr = 0.08;
else if (ct = 2 && pa < 3000)
dr = 0.00;
else
{
printf("customer is invalid\n");
return 0;
}

da = pa * dr;
aad = pa - da;
if (d <= 5)
dc = 40;
else if (d <= 15)
dc = 70;
else
dc = 100;
fa = aad + dc;
printf("\nSMARTCART BILL\n");
printf("Purchase Amount = Rs. %.2f\n", pa);
printf("Discount Amount = Rs. %.2f\n", da);
printf("Amount After Discount = Rs. %.2f\n",aad);
printf("Delivery Charge = Rs. %.2f\n", dc);
printf("Final Payable Amount = Rs. %.2f\n", fa);
return 0;
}
```

^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute ^C Location M-U Undo M-A Set Mark M-] To Bracket
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line M-E Redo M-6 Copy ^B Where Was


vamsi@Vamsi: ~/challange3
GNU nano 8.7.1
float fa;
printf("Enter purchase amount: ");
scanf("%f", &pa);
printf("Enter customer type (1-Student, 2-Regular): ");
scanf("%d", &ct);
printf("Enter delivery d in km: ");
scanf("%f", &d);
if (pa < 0 || d < 0)
{
printf("Invalid input!\n");
return 0;
}
if (ct = 1 && pa >= 2000)
dr = 0.15;
else if (ct = 1 && pa < 2000)
dr = 0.10;
else if (ct = 2 && pa >= 3000)
dr = 0.08;
else if (ct = 2 && pa < 3000)
dr = 0.00;
else
{
printf("Invalid customer type\n");
return 0;
}
da = pa * dr;
aad = pa - da;
if (d <= 5)
dc = 40;
else if (d <= 15)
dc = 70;
else
dc = 100;
fa = aad + dc;
printf("\nSMARTCART BILL\n");
^G Help
^X Exit
^O Write Out
^R Read File
^F Where Is
^\ Replace
^K Cut
^U Paste
28°C
Partly cloudy
Search