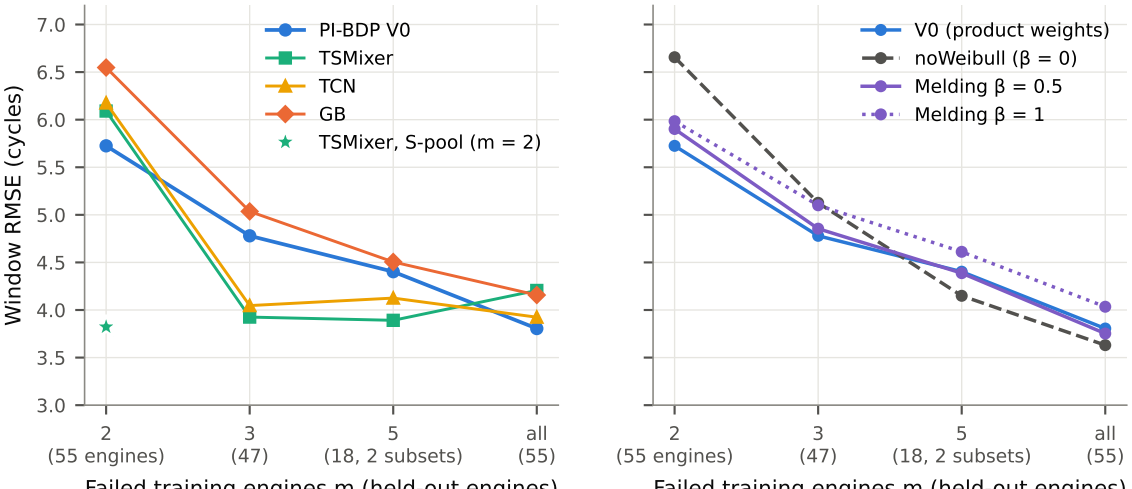
(a) PI-BDP vs data-driven models
Window RMSE (cycles)
7.0
6.5
6.0
5.5
5.0
4.5
4.0
3.5
3.0
PI-BDP V0
TSMixer
TCN
GB
TSMixer, S-pool (m = 2)
2
(55 engines)
3
(47)
5
(18, 2 subsets)
all
(55)
Failed training engines m (held-out engines)
(b) PI-BDP re-weighting variants
V0 (product weights)
noWeibull (β = 0)
Melding β = 0.5
Melding β = 1
2
(55 engines)
3
(47)
5
(18, 2 subsets)
all
(55)
Failed training engines m (held-out engines)