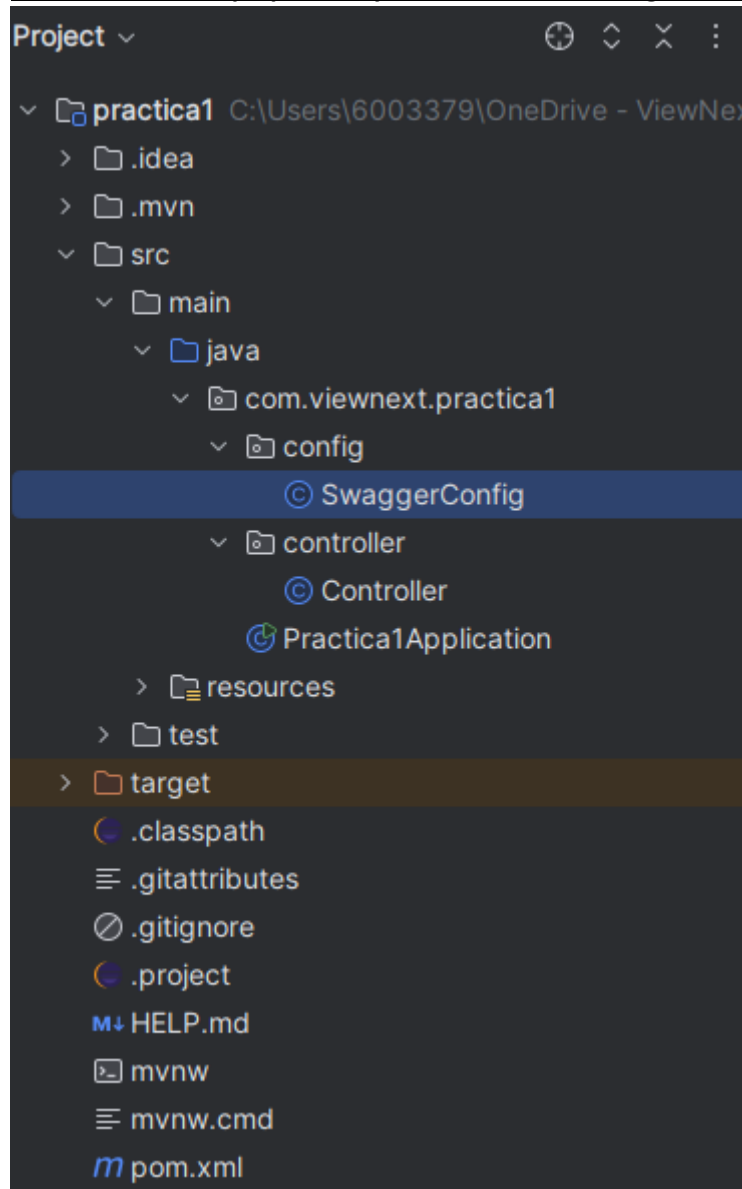

Practica 1.2 Uso de Swagger (Open Api)

Paso 1 - Declaramos dependencias en pom.xml para uso de librerías:

```
<dependency>
  <groupId>org.springdoc</groupId>
  <artifactId>springdoc-openapi-starter-webmvc-ui</artifactId>
  <version>2.1.0</version>
</dependency>
```

Se añade la dependencia y se actualizan las dependencias Maven

Paso 2 – Creamos paquetería y añadimos clase configuración Swagger:



Implementamos la configuración de Swagger con etiquetas y creamos el Bean Open API para usar el objeto cuando sea necesario

```
package com.viewnext.practical.config;

import io.swagger.v3.oas.models.OpenAPI;
import io.swagger.v3.oas.models.info.Contact;
import io.swagger.v3.oas.models.info.Info;
import io.swagger.v3.oas.models.info.License;
import org.springframework.context.annotation.Bean;
import org.springframework.context.annotation.Configuration;

@Configuration
public class SwaggerConfig {

    @Bean
    public OpenAPI customOpenAPI() {
        return new OpenAPI().info(
            new Info().title("Practica 1.2").description("Ejercicio Practica 1.2 viewnext").version("2.0").contact(
                new Contact().name("Javier Arias Rodriguez").url("url").email("javier.arias@viewnext.com"))
            .license(new License().name("LICENSE").url("LICENSE URL")));
    }
}
```

Paso 3 – Testeamos que Swagger funcione correctamente documentando la API correctamente:

The screenshot displays the Swagger UI interface. At the top, the Swagger logo is visible on the left, and a search bar contains the text '/v3/api-docs' with an 'Explore' button to its right. Below this, the main header shows 'Practica 1.2' in large bold text, followed by '2.0' and 'OAS3' in smaller text. Underneath, there is a link to '/v3/api-docs' and a description: 'Ejercicio Practica 1.2 viewnext'. Further down, there are links for 'Javier Arias Rodriguez - Website', 'Send email to Javier Arias Rodriguez', and 'LICENSE'. A 'Servers' section shows a dropdown menu with the selected server 'http://localhost:8080 - Generated server url'. At the bottom, a 'controller' section is expanded, showing a dropdown menu with the selected method 'GET' and path '/ho1a'.

controller

GET /hola

Parameters

No parameters

Responses

Code	Description	Links
200	OK Media type */* Controls Accept header. Example Value Schema string	No links

Responses

Curl

curl -X 'GET' \ 'http://localhost:8080/hola' \ -H 'accept: */*'

Request URL

http://localhost:8080/hola

Server response

Code	Details
200	Response body Hola Mundo! Response headers connection: keep-alive content-length: 11 content-type: text/plain; charset=UTF-8 date: Tue, 25 Feb 2025 09:13:10 GMT keep-alive: timeout=60

Responses

Code	Description	Links
200	OK	No links

Media type