


TP1 DOCKER


Alumno: Romero Gonzalo Lionel

Ejercicio 1: Crear una imagen Docker Se necesita crear un archivo HTML para luego usar en una imagen Docker que ejecute una aplicación web que muestre un mensaje al acceder vía el puerto 8081 de su navegador web (use <http://127.0.0.1:8081>).

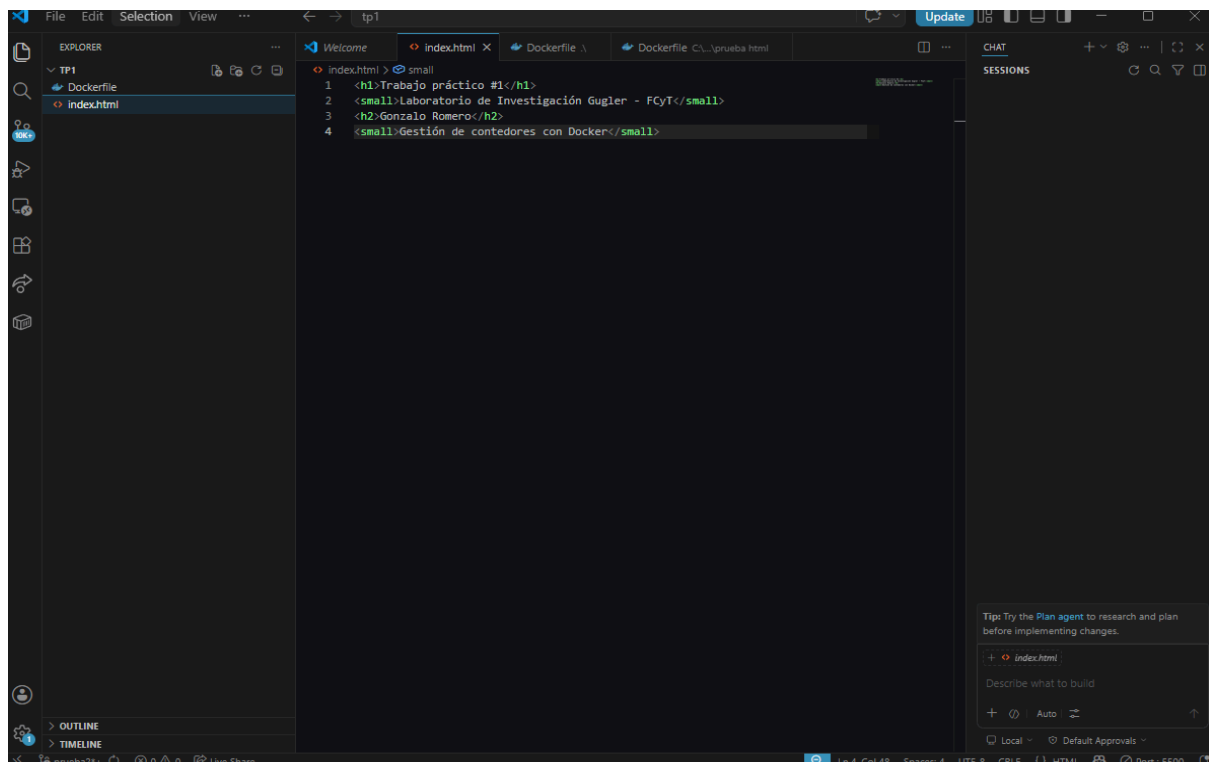

Ejercicio 2: Dockerfile

Genere un archivo Dockerfile para poder obtener una imagen que permita desplegar este contenido generado en el ejercicio 1. Use la última versión de nginx

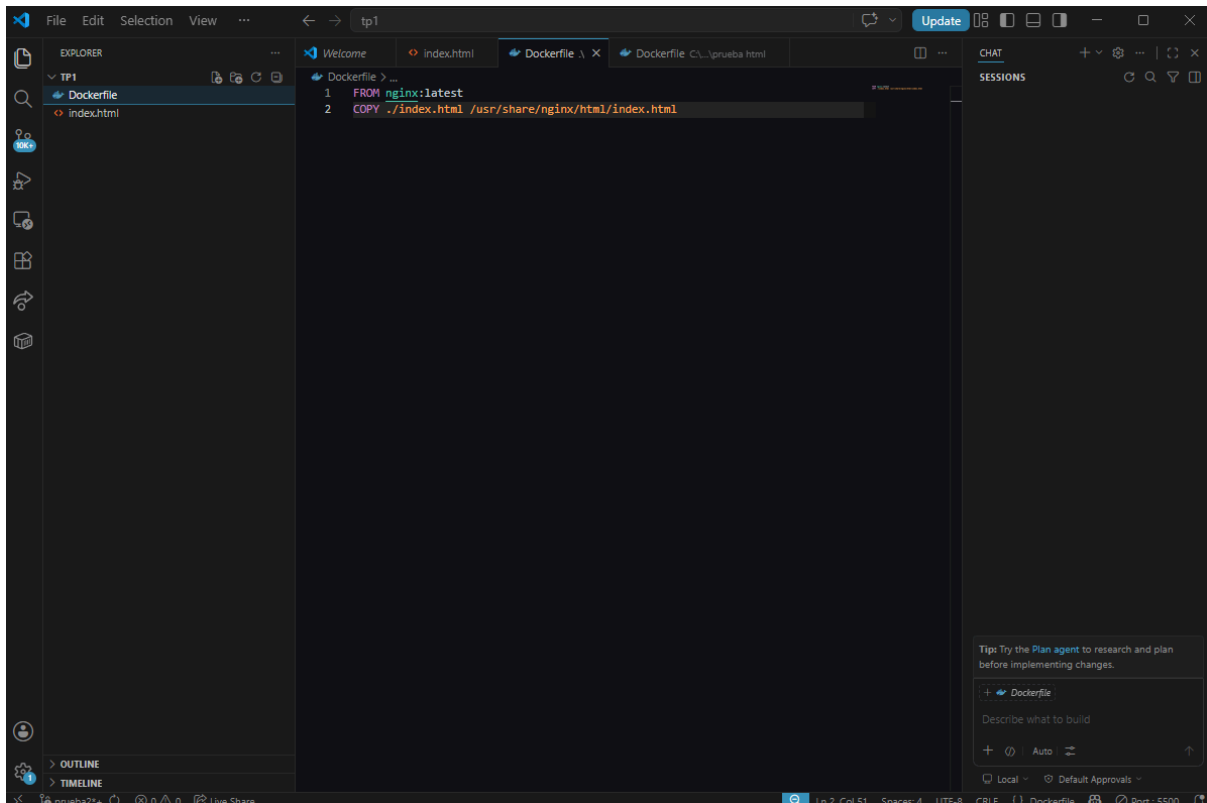

Ejercicio 3: Construya la imagen nginx

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker build -t tp1:1.0 .
[+] Building 12.1s (7/7) FINISHED
=> [internal] load build definition from Dockerfile
=> => transferring dockerfile: 106B
=> [internal] load metadata for docker.io/library/nginx:latest
=> [internal] load .dockerignore
=> => transferring context: 2B
=> [internal] load build context
=> => transferring context: 203B
=> [1/2] FROM docker.io/library/nginx:latest@sha256:5aca99593157f4ae539a5dec1092a0ad8762f8e2eb
=> => resolve docker.io/library/nginx:latest@sha256:5aca99593157f4ae539a5dec1092a0ad8762f8e2eb
=> => sha256:45381ecb0e2f57bc356fba7bca792013750edff8d0bf00c07ac2c7f1f0786aee 1.21kB / 1.21kB 0.4s
=> => sha256:13fd728be9eb1209aaccfb92774f28b57314202bfd8fde3c54179b84d60907d7 1.40kB / 1.40kB 0.4s
=> => sha256:7f8b1a2b17d83cb2af2014ba3d9841933a83f729eef67c5d73dd6a47263bbec 404B / 404B 0.5s
=> => sha256:b4a248c845e558f875ac57f77d4498bb33110085b63ec15e966d186a939c94a0 955B / 955B 0.5s
=> => sha256:5431d0092ffdcf1729150a2100fae1197ae414486b76bba246fe659a1b4a9b4e 628B / 628B 0.2s
=> => sha256:830625e1ac85a8c72dd41b1403ea8210c7441aba69b752537d9a8a1b93ac87a 33.31MB / 33.31MB 2.6s
=> => sha256:5b4d6ff92fc4e14e911b7753c954fac965d48c40fe1075758d284148ccace97 29.78MB / 29.78MB 2.5s
=> => extracting sha256:5b4d6ff92fc4e14e911b7753c954fac965d48c40fe1075758d284148ccace970 1.1s
=> => extracting sha256:830625e1ac85a8c72dd41b1403ea8210c7441aba69b752537d9a8a1b93ac87af 0.8s
=> => extracting sha256:5431d0092ffdcf1729150a2100fae1197ae414486b76bba246fe659a1b4a9b4e 0.1s
=> => extracting sha256:b4a248c845e558f875ac57f77d4498bb33110085b63ec15e966d186a939c94a0 0.1s
=> => extracting sha256:7f8b1a2b17d83cb2af2014ba3d9841933a83f729eef67c5d73dd6a47263bbec 0.1s
=> => extracting sha256:45381ecb0e2f57bc356fba7bca792013750edff8d0bf00c07ac2c7f1f0786aee 0.1s
=> => extracting sha256:13fd728be9eb1209aaccfb92774f28b57314202bfd8fde3c54179b84d60907d7 0.1s
=> [2/2] COPY ./index.html /usr/share/nginx/html/index.html
=> => exporting to image
=> => exporting layers
=> => exporting manifest sha256:703146210e9d9585e30d836bb12a973e1ee2dea702da60b8d9a505b2913e45 0.1s
=> => exporting config sha256:7465074c6919e19a57e1daf8c9e57bbcccb1c6b180ae91bf2f30eab55449153b 0.1s
=> => exporting attestation manifest sha256:9a1821bea73f19eabdedad5d76b749d7acefdc0a9aa6c1cb73 0.1s
=> => exporting manifest list sha256:72162d6ae2b30f95db27ea6685e9af38d9ddbb262d7420ab8208487f9 0.1s
=> => naming to docker.io/library/tp1:1.0
=> => unpacking to docker.io/library/tp1:1.0 0.1s
```

Ejercicio 4: Ejecución

Ejecute la imagen contruida y visualice la información en su navegador web. Use como nombre del contenedor: tpuno-web

corro la imagen:

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker run -d -p 8081:80 tp1:1.0
995cc67ec5fc3f3a93aad0938d9eafea24dd8d14b45707fb2aef9ac2c32322a8
```

así se ve en <http://127.0.0.1:8081>:



Le pongo como nombre tpuno-web al contenedor:

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS        PORTS                               NAMES
981e9f75ccd9   tp1:1.0   "/docker-entrypoint..." 7 minutes ago  Up 7 minutes  0.0.0.0:8081->80/tcp, [::]:8081->80/tcp  wonderful_meitner

C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker rename 981e9f75ccd9 tpuno-web
```

Ejercicio 5: Detener

Detenga el contenedor y verifique que pasa en el navegador web


Lo detengo:

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS        PORTS                               NAMES
981e9f75ccd9   tp1:1.0   "/docker-entrypoint..." 23 minutes ago Up About a minute  0.0.0.0:8081->80/tcp, [::]:8081->80/tcp  tpuno-web

C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker stop tpuno-web
tpuno-web

C:\Users\Gonza\Desktop\tps\DOCKER\tp1>
```

Ahora en el navegador web sale esto:

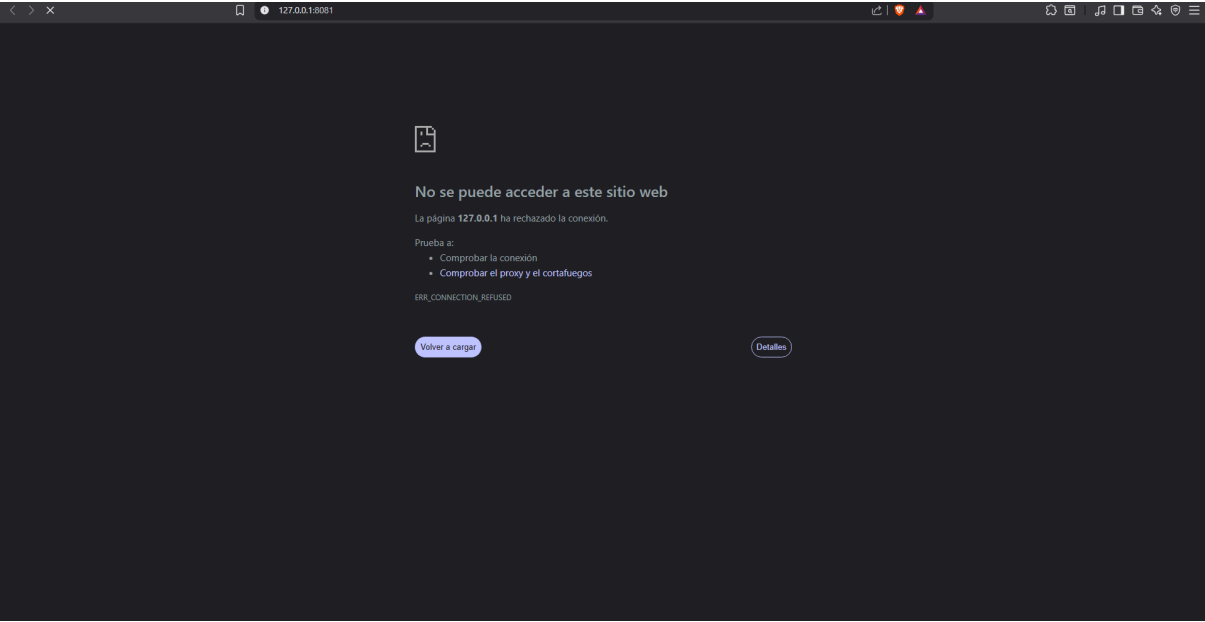

Ejercicio 6: Listar

Liste todos los contenedores del sistema:

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker ps -a
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
995cc67ec5fc	tp1:1.0	"/docker-entrypoint..."	6 minutes ago	Exited (0) 3 minutes ago		romantic_einstein
981e9f75ccd9	tp1:1.0	"/docker-entrypoint..."	17 minutes ago	Exited (0) 7 minutes ago		tpuno-web

Ejercicio 7: Reinicio

Inicie nuevamente el contenedor y visualice en el navegador web

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker start tpuno-web
tpuno-web

C:\Users\Gonza\Desktop\tps\DOCKER\tp1>
```

Ejercicio 8: Borrado

Detenga y elimine el contenedor tpuno-web . Muestre el listado de todos los contenedores

Lo detengo:

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker stop tpuno-web
tpuno-web
```

Lo elimino:

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker rm tpuno-web
tpuno-web
```

Se listan todos los contenedores:

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS          NAMES
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>
```

Ejercicio 9: Qué cambios necesita hacer para poder ejecutar la misma imagen pero en el puerto 8081 y poder visualizar en el navegador web?

Para cambiar el puerto tengo que usar el mismo comando (docker run -d -p 8081:80 tp1:1.0), pero en 8081:80, si quisiese cambiar el puerto (que en este caso ya está en 8081) tendría que cambiar la parte en donde dice 8081 por, por ejemplo 8081 (si quisiese que se abra en el puerto 8082).

Ejercicio 10: Registros

Muestre los registros de logs del contenedor que ha ejecutado en el puerto 8081

```
C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker run -d -p 8081:80 --name tpuno-web tp1:1.0
f8a0c01be06f122a8e1a3d9eb59ba892601e5e92d853ab102687e2cfca7e02d

C:\Users\Gonza\Desktop\tps\DOCKER\tp1>docker logs tpuno-web
/docker-entrypoint.sh: /docker-entrypoint.d/ is not empty, will attempt to perform configuration
/docker-entrypoint.sh: Looking for shell scripts in /docker-entrypoint.d/
/docker-entrypoint.sh: Launching /docker-entrypoint.d/10-listen-on-ipv6-by-default.sh
10-listen-on-ipv6-by-default.sh: info: Getting the checksum of /etc/nginx/conf.d/default.conf
10-listen-on-ipv6-by-default.sh: info: Enabled listen on IPv6 in /etc/nginx/conf.d/default.conf
/docker-entrypoint.sh: Sourcing /docker-entrypoint.d/15-local-resolvers.envsh
/docker-entrypoint.sh: Launching /docker-entrypoint.d/20-envsubst-on-templates.sh
/docker-entrypoint.sh: Launching /docker-entrypoint.d/30-tune-worker-processes.sh
/docker-entrypoint.sh: Configuration complete; ready for start up
2026/05/23 14:21:35 [notice] 1#1: using the "epoll" event method
2026/05/23 14:21:35 [notice] 1#1: nginx/1.31.1
2026/05/23 14:21:35 [notice] 1#1: built by gcc 14.2.0 (Debian 14.2.0-19)
2026/05/23 14:21:35 [notice] 1#1: OS: Linux 6.6.87.2-microsoft-standard-WSL2
2026/05/23 14:21:35 [notice] 1#1: getrlimit(RLIMIT_NOFILE): 1048576:1048576
2026/05/23 14:21:35 [notice] 1#1: start worker processes
2026/05/23 14:21:35 [notice] 1#1: start worker process 29
2026/05/23 14:21:35 [notice] 1#1: start worker process 30
2026/05/23 14:21:35 [notice] 1#1: start worker process 31
2026/05/23 14:21:35 [notice] 1#1: start worker process 32
2026/05/23 14:21:35 [notice] 1#1: start worker process 33
2026/05/23 14:21:35 [notice] 1#1: start worker process 34
2026/05/23 14:21:35 [notice] 1#1: start worker process 35
2026/05/23 14:21:35 [notice] 1#1: start worker process 36
2026/05/23 14:21:35 [notice] 1#1: start worker process 37
2026/05/23 14:21:35 [notice] 1#1: start worker process 38
2026/05/23 14:21:35 [notice] 1#1: start worker process 39
2026/05/23 14:21:35 [notice] 1#1: start worker process 40
```