


ak09916_init

icm20948_init

i2c_init

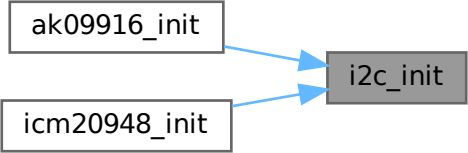

```
graph LR; ak09916_init[ak09916_init] --> i2c_init[i2c_init]; icm20948_init[icm20948_init] --> i2c_init[i2c_init];
```

The diagram illustrates a dependency or initialization flow. Two white rectangular boxes on the left, labeled 'ak09916_init' and 'icm20948_init', have blue arrows pointing to a single gray rectangular box on the right labeled 'i2c_init'. This suggests that both 'ak09916_init' and 'icm20948_init' rely on or call 'i2c_init'.