



Computational cost of Hungarian record matching

(a) Runtime vs n

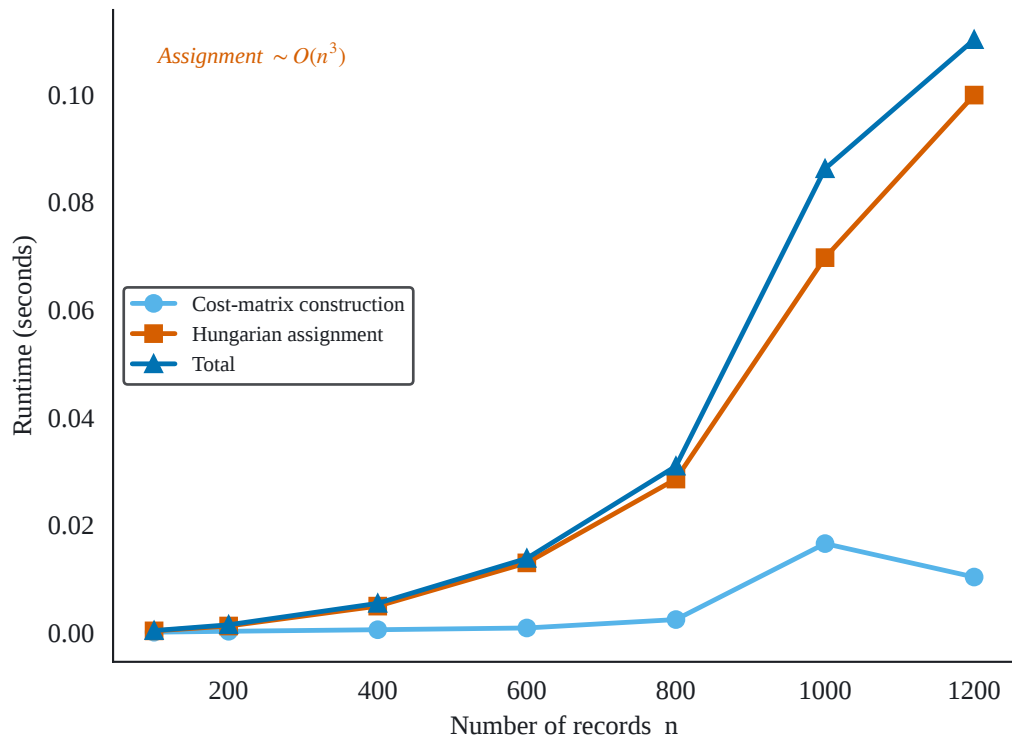

(b) Memory vs n

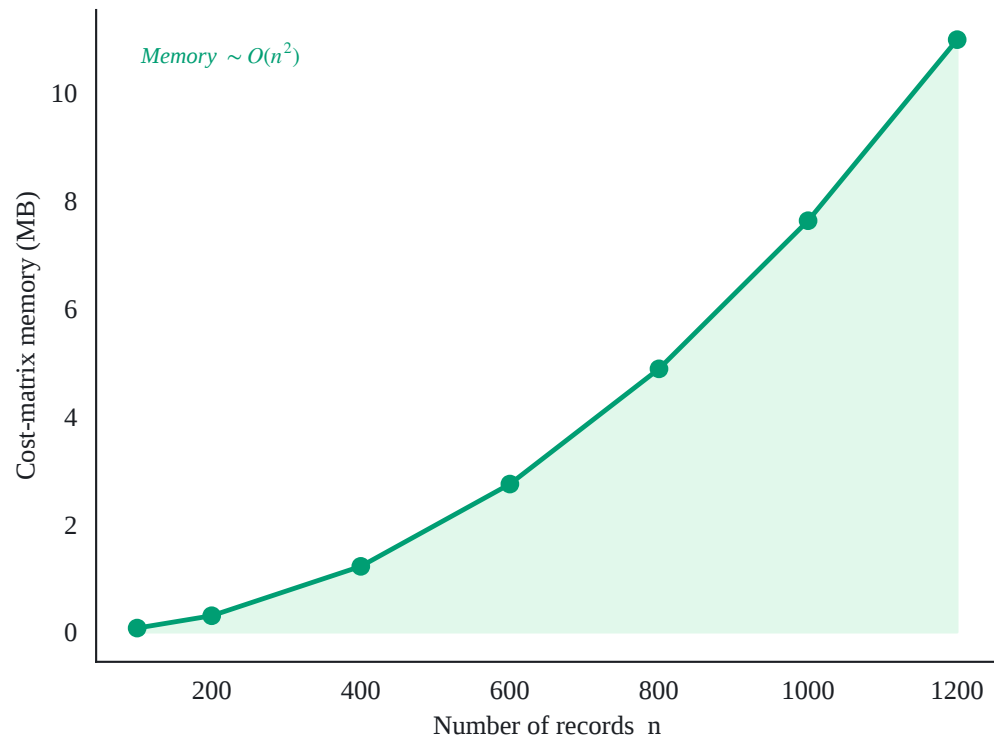

Timing on synthetic $n \times n$ cosine cost matrices ($d = 20$ features); justifies protocol subsampling on large tables.