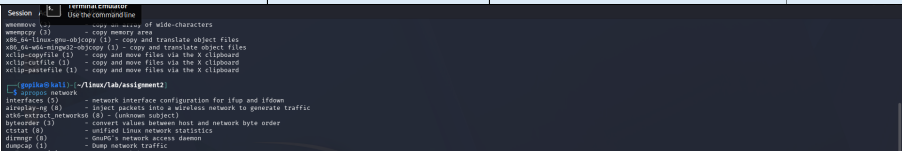


LAB 2 ASSIGNMENT

Getting Help Using Linux Commands

1. Getting Help

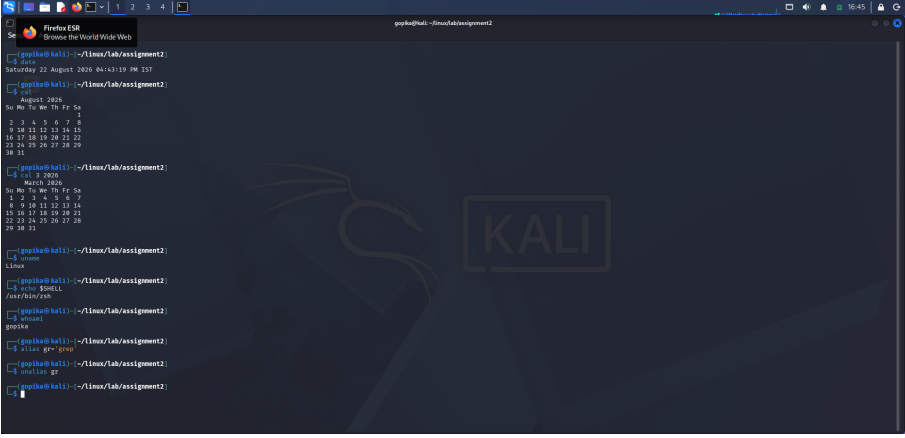
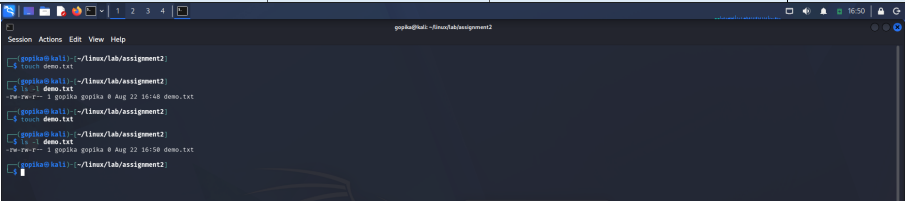
No.	Task	Command Name	Syntax	Example
1	To get manual page for the known command	man	man <command>	man ls
				
2	To get manual page for the unknown command	apropos	apropos [keyword]	apropos copy
				
3	To know the source file binary, is used with a command/program name	whereis	whereis <command>	whereis ls, whereis python, whereis gcc, whereis bash, whereis mkdir

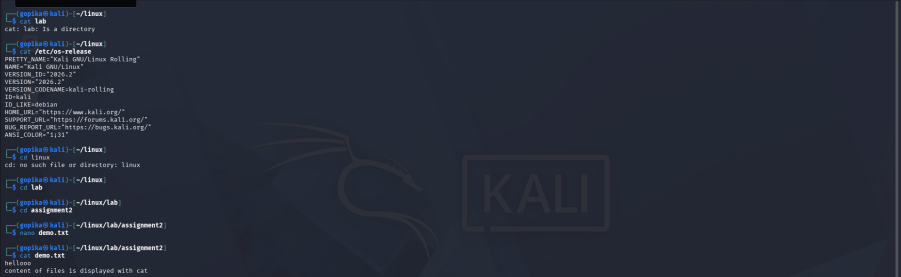
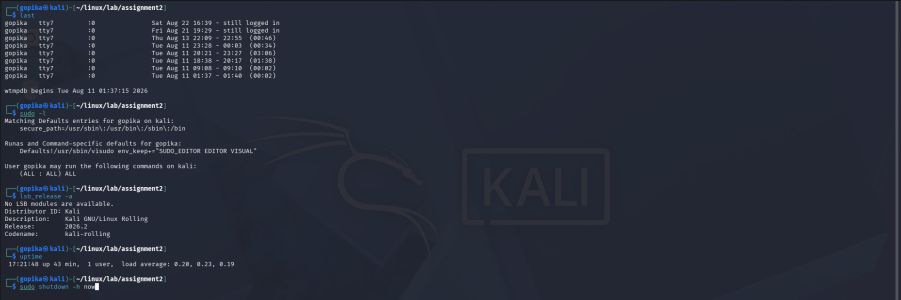



Command	Purpose	Example	What you get
whatis	Gives a one-line description	whatis ls	Short meaning of ls
man	Gives the complete manual/documentation	man ls	Detailed usage, options, description, etc.
help	Gives help for Bash built-in commands	help cd	Syntax and information about Bash's cd

2. Basic Commands

No.	Task	Command Name	Syntax	Example
1	To know today's date	date	date	date
2	To print calendar	cal	cal [month] [year]	cal 3 2026
3	To print kernel version	uname	uname -r	uname -r
4	To print default shell	echo	echo \$SHELL	echo \$SHELL
5	To print currently logged in user	whoami	whoami	whoami
6	To create shortcut for command	alias	alias name='command'	alias l='ls -l'
7	To delete shortcut	unalias	unalias name	unalias l

				
8	create an empty file or update the times-tamp of an existing file.	touch	touch <file>	touch -m time2.txt
				
9	To create empty files	touch	touch file1 file2	touch lab2.txt lab2.c
10	To clear the screen	clear	clear	clear
11	to check how much disk space files and directories are using.	du	du [options] [path]	du -sh /home .
12	To know free space in the system	df	df [options]	df -h
				
13	to display, combine, and manipulate the contents of one or more files and information on Linux distribution and release.	cat /etc/os-release	cat /etc/os-release	cat /etc/os-release

				
14	To show login history	last	last	last
15	To check the current user privileges	sudo	sudo -l	sudo -l
16	To find about the Linux release	lsb_release	lsb_release -a	lsb_release -a
17	To check system uptime	uptime	uptime	uptime
18	To shutdown	shutdown	sudo shutdown -h now	sudo shutdown -h now
				
19	To restart	reboot	sudo reboot	sudo reboot
				

14	To show login history	<code>last</code>	<code>last</code>	<code>last</code>
15	To check the current user privileges	<code>sudo</code>	<code>sudo -l</code>	<code>sudo -l</code>
16	To find about the Linux release	<code>lsb_release</code>	<code>lsb_release -a</code>	<code>lsb_release -a</code>
17	To check system up-time	<code>uptime</code>	<code>uptime</code>	<code>uptime</code>
18	To shutdown	<code>shutdown</code>	<code>sudo shutdown -h now</code>	<code>sudo shutdown -h now</code>

```
[root@goatkali ~]# ./linux/tls/assignment2
$ ls -l
goatka tty?    10      Sat Aug 22 18:19:  still logged in
goatka tty?    10      Fri Aug 22 19:29: still logged in
goatka tty?    10      Thu Aug 12 22:48: 22:55 (00:04)
goatka tty?    10      Tue Aug 11 23:28: 00:40 (00:04)
goatka tty?    10      Tue Aug 11 23:13: 23:27 (01:06)
goatka tty?    10      Tue Aug 11 18:58: 20:17 (01:00)
goatka tty?    10      Tue Aug 11 00:08: 00:18 (00:02)
goatka tty?    10      Tue Aug 11 01:17: 01:40 (00:02)

wtmpd begins Tue Aug 11 01:17:15 2026

[root@goatkali ~]# ./linux/tls/assignment2
$ ls -l
Matching Defaults entries for goatka on kali:
secure_path=/usr/sbin:/usr/bin:/sbin:/bin

Romas and Command-specific defaults for goatka:
Defaults/usr/sbin/vimudo wmv_keep=""SUDO_EDITOR EDITOR VISUAL"


User goatka may run the following commands on kali:
(ALL) ALL ALL

[root@goatkali ~]# ./linux/tls/assignment2
$ cat /etc/passwd | grep root
No LSB modules are available.
Distributor ID: Kali
Description: kali GNU/Linux Rolling
Release: 2020.2
Codename: kali-rolling

[root@goatkali ~]# ./linux/tls/assignment2
$ ps aux
17:21:48 up 43 min, 1 user, load average: 0.29, 0.23, 0.19

[root@goatkali ~]# ./linux/tls/assignment2
$ sudo shutdown -h now
```

19	To restart	reboot	sudo reboot	sudo reboot
----	------------	--------	-------------	-------------



The screenshot shows a terminal window titled "pysha@kali - /home/pysha/assignment2". The prompt is "pysha@kali". The user enters "ssh zshai". The terminal shows the output: "zshai@kali:~\$". This indicates a successful SSH connection to the Kali Linux machine.

4	Alternate command to cd	pushd	pushd <directory>	pushd Lab2
5	To go back to the previous directory	cd -	cd -	cd -
6	To go to the root directory	cd	cd /	cd /

```

(gopika@kali)-[/home]
$ cd ~
(gopika@kali)-[~]
$ cd ..
(gopika@kali)-[/home]
$ cd ~
(gopika@kali)-[~]
$ cd linux/lab/assignment2
(gopika@kali)-[~/linux/lab/assignment2]
$ cd ..
(gopika@kali)-[~/linux/lab]
$ pushd assignment2
~/linux/lab/assignment2 ~/linux/lab
(gopika@kali)-[~/linux/lab/assignment2]
$ cd -
~/linux/lab
(gopika@kali)-[~/linux/lab]
$ cd /
(gopika@kali)-[/]
$

```

4. File System

No.	Task	Syntax	Command
1	Displays used and available disk space.	df	df
2	Displays disk space in a human-readable format such as MB and GB.	df -h [path]	df -h .
3	Displays disk space information along with the filesystem type.	df -T [path]	df -T .
4	Displays disk space information only for the specified filesystem type.	df -t [type]	df -t tmpfs
5	Displays information about all filesystems.	df -a [path]	df -a .
6	Displays inode usage and available inodes.	df -i [path]	df -i .

```

(gopika@kali)-[/]
$ df
Filesystem      1K-blocks    Used Available Use% Mounted on
udev            972828        0   972828    0% /dev
tmpfs           201664        992   200672    1% /run
/dev/sda1       19353424 15336548  3008444   84% /
tmpfs           1008300         4   1008296    1% /dev/shm
none            1024          0    1024    0% /run/credentials/systemd-journald.service
tmpfs           1008304        48   1008256    1% /tmp
none            1024          0    1024    0% /run/credentials/getty@tty1.service
tmpfs           201660        108   201552    1% /run/user/1000

(gopika@kali)-[/]
$ df -h
Filesystem      Size  Used Avail Use% Mounted on
udev            951M     0  951M   0% /dev
tmpfs           197M   992K  196M   1% /run
/dev/sda1       19G    15G   2.9G  84% /
tmpfs           985M   4.0K  985M   1% /dev/shm
none            1.0M     0   1.0M   0% /run/credentials/systemd-journald.service
tmpfs           985M   60K  985M   1% /tmp
none            1.0M     0   1.0M   0% /run/credentials/getty@tty1.service
tmpfs           197M  108K  197M   1% /run/user/1000

(gopika@kali)-[/]
$ df -T
Filesystem      Type      1K-blocks    Used Available Use% Mounted on
udev            devtmpfs   972828        0   972828    0% /dev
tmpfs           tmpfs      201664        992   200672    1% /run
/dev/sda1       ext4       19353424 15336548  3008444   84% /
tmpfs           tmpfs      1008300         4   1008296    1% /dev/shm
none            tmpfs      1024          0    1024    0% /run/credentials/systemd-journald.service
tmpfs           tmpfs      1008304        48   1008236    1% /tmp
none            tmpfs      1024          0    1024    0% /run/credentials/getty@tty1.service
tmpfs           tmpfs      201660        108   201552    1% /run/user/1000

(gopika@kali)-[/]
$ df -t tmpfs
Filesystem      1K-blocks    Used Available Use% Mounted on
tmpfs           201664        992   200672    1% /run
tmpfs           1008300         4   1008296    1% /dev/shm
none            1024          0    1024    0% /run/credentials/systemd-journald.service
tmpfs           1008304        76   1008228    1% /tmp
none            1024          0    1024    0% /run/credentials/getty@tty1.service
tmpfs           201660        108   201552    1% /run/user/1000

(gopika@kali)-[/]
$ df -l

```

5. Globbing

Create a dedicated practice directory containing sample files such as:

index.html, login.html, admin.htm, report.txt, access.log, error.log,
user1.txt, user2.log, file123, backup1.html, backup2.txt

Use globbing patterns wherever possible, rather than specifying filenames individually.

No.	Task	Pattern
1	List all files ending in .html.	ls *.html
2	List all files other than .html files using extended globbing.	ls * grep -v '\.html\$'
3	List filenames containing at least one numeric digit.	ls *[0-9]*
4	List files whose names begin with user followed by a single digit.	ls user[0-9].*
5	List files ending in either .txt or .log using a single extended glob pattern.	ls +(*.txt *.log)

6	List files that do not end in .txt or .log.	<code>ls *.{txt,log}</code>
7	List files beginning with either access or error using extended globbing.	<code>ls {access*,error*}</code>
8	List .html files whose filenames contain a numeric digit.	<code>ls *[0-9]*.html</code>
<pre> (gopika@kali)-[~/linux/lab/assignment2] \$ touch index.html login.html admin.htm report.txt access.log error.log user1.txt use backup2.txt (gopika@kali)-[~/linux/lab/assignment2] \$ ls *.html backup1.html index.html login.html (gopika@kali)-[~/linux/lab/assignment2] \$ ls ^*.html access.log backup2.txt demo2.txt demo.txt file123 test.txt user2.log admin.htm demo1.txt demo3.txt error.log report.txt user1.txt (gopika@kali)-[~/linux/lab/assignment2] \$ ls *[0-9]* backup1.html backup2.txt demo1.txt demo2.txt demo3.txt file123 user1.txt user2.1 (gopika@kali)-[~/linux/lab/assignment2] \$ ls user[0-9].* user1.txt user2.log (gopika@kali)-[~/linux/lab/assignment2] \$ ls +(*.txt *.log) ls: cannot access '+(*.txt *.log)': No such file or directory (gopika@kali)-[~/linux/lab/assignment2] \$ ls *(.txt .log) access.log demo1.txt demo3.txt error.log test.txt user2.log backup2.txt demo2.txt demo.txt report.txt user1.txt </pre>		
<pre> (gopika@kali)-[~/linux/lab/assignment2] \$ ls ^*(.txt log) admin.htm backup1.html file123 index.html login.html (gopika@kali)-[~/linux/lab/assignment2] \$ ls (access error)* access.log error.log (gopika@kali)-[~/linux/lab/assignment2] \$ ls *[0-9]*.html backup1.html (gopika@kali)-[~/linux/lab/assignment2] \$ ls !(*.html) </pre>		

Basic Globbing vs Extended Globbing

Feature	Basic Globbing	Extended Globbing
Purpose	Simple file matching	Advanced file matching
Common symbols	<code>*, ?, []</code>	<code>^, (), </code>
Example	<code>ls *.txt</code>	<code>ls ^*.txt</code>
Meaning	Lists .txt files	Excludes .txt files

Enable needed?	No	Yes, in zsh: setopt extended_glob
----------------	----	-----------------------------------

6. Extended Globbing

1. Assume a directory contains:

access.log, error.log, auth.log, auth.log.1, auth.log.2,
system.log, notes.txt

No.	Task	Pattern
1	Write an extended glob pattern that selects only access.log, error.log, and auth.log.	ls @(access.log error.log auth.log)
2	Select all files except notes.txt.	ls !(notes.txt)
3	Select files named either auth.log.1 or auth.log.2 using pattern matching rather than writing both complete file-names separately.	ls auth.log.@(1 2)

```
(gopika@kali)~ /linux/lab/assignment2/ex-glob
$ ls
access.log, auth.log, auth.log.1, auth.log.2, auth.log.2,system.log, error.log, notes.txt

(gopika@kali)~ /linux/lab/assignment2/ex-glob
$ ls @(access|error|auth).log
ls: cannot access '@(access|error|auth).log': No such file or directory

(gopika@kali)~ /linux/lab/assignment2/ex-glob
$ ls -lb
total 0
-rw-rw-r-- 1 gopika gopika 0 Aug 25 11:07 access.log,
-rw-rw-r-- 1 gopika gopika 0 Aug 25 11:07 auth.log,
-rw-rw-r-- 1 gopika gopika 0 Aug 25 11:07 auth.log.1,
-rw-rw-r-- 1 gopika gopika 0 Aug 25 11:07 auth.log.2,
-rw-rw-r-- 1 gopika gopika 0 Aug 25 11:07 auth.log.2,system.log,
-rw-rw-r-- 1 gopika gopika 0 Aug 25 11:07 error.log,
-rw-rw-r-- 1 gopika gopika 0 Aug 25 11:07 notes.txt

(gopika@kali)~ /linux/lab/assignment2/ex-glob
$ ls -d -- @(access|error|auth).log*
access.log, auth.log, auth.log.1, auth.log.2, auth.log.2,system.log, error.log,

(gopika@kali)~ /linux/lab/assignment2/ex-glob
$ ls @(access|error|auth).log*
access.log, auth.log, auth.log.1, auth.log.2, auth.log.2,system.log, error.log,

(gopika@kali)~ /linux/lab/assignment2/ex-glob
$ mv access.log, access.log

(gopika@kali)~ /linux/lab/assignment2/ex-glob
$ ls @(access).log
access.log

(gopika@kali)~ /linux/lab/assignment2/ex-glob
$
```

```

(gopika@kali)-[~/linux/lab/assignment2/ex-glob]
$ ls !(notes.txt)
access.log auth.log, auth.log.1, auth.log.2, auth.log.2,system.log, error.log,

(gopika@kali)-[~/linux/lab/assignment2/ex-glob]
$ ls auth.log.@(1|2)
ls: cannot access 'auth.log.@(1|2)': No such file or directory

(gopika@kali)-[~/linux/lab/assignment2/ex-glob]
$ ls auth.log.@(1|2),
auth.log.1, auth.log.2,

(gopika@kali)-[~/linux/lab/assignment2/ex-glob]
$ ls auth.log.@(1|2)*
auth.log.1, auth.log.2, auth.log.2,system.log,

(gopika@kali)-[~/linux/lab/assignment2/ex-glob]
$

```

2. Given the files:

malware1.log, malware2.log, malwareA.log, malware_report.txt, normal.log

No.	Task	Pattern
4	Construct a glob pattern that identifies .log files whose names start with malware and contain a numeric character.	ls malware*[0-9]*.log
	<pre> (gopika@kali)-[~/linux/lab/assignment2/ex-glob] \$ touch malware1.log malware2.log malwareA.log malware_report.txt normal.log (gopika@kali)-[~/linux/lab/assignment2/ex-glob] \$ ls access.log auth.log.2, malware malware2.log malwareA.log report.txt auth.log, auth.log.2,system.log, malware1.log malware2.log, normal.log report.txt, auth.log.1, error.log, malware1.log, malwareA.log notes.txt (gopika@kali)-[~/linux/lab/assignment2/ex-glob] \$ ls malware*[0-9].log malware1.log malware2.log </pre>	

3. Given:

failed_login.log, successful_login.log, login_backup.log,

login.txt, firewall.log

No.	Task	Pattern
5	Use extended globbing to select .log files containing either failed_login or successful_login.	ls @(failed_login successful_login).log
6	Construct a pattern that lists all .log files except firewall.log.	ls !(@(firewall.log))

```

(gopika@kali) ~/linux/lab/assignment2/ex-glob
$ touch failed_login.log successful_login.log login_backup.log login.txt firewall.log
(gopika@kali) ~/linux/lab/assignment2/ex-glob
$ ls @{failed_login|successful_login}.log
failed_login.log successful_login.log
(gopika@kali) ~/linux/lab/assignment2/ex-glob
$ ls !@{firewall.log}
access.log auth.log.2,system.log login_backup.log malware1.log malwareA.log report.txt
auth.log error.log login_backup.log malware1.log malwareA.log report.txt
auth.log.1 failed_login.log login.txt malware2.log normal.log successful_login.log
auth.log.2 failed_login.log malware malware2.log notes.txt
(gopika@kali) ~/linux/lab/assignment2/ex-glob
$

```

7. Filters

No.	Task	Command
1	Display the first 10 entries of login.log.	head -n 10 login.log
2	Display the first 5 entries of access.log.	head -n 5 access.log
3	Display the first 15 security events from security.log.	head -n 15 security.log
4	Display the first 20 events recorded in incident.log.	head -n 20 incident.log
5	Display only the first entry in login.log.	head -n 1 login.log
6	Display the first 25 web requests recorded in access.log.	head -n 25 access.log
7	Display the last 10 entries of login.log.	tail -n 10 login.log
8	Display the last 5 entries of access.log.	tail -n 5 access.log
9	Display the 20 most recent security events from security.log.	tail -n 20 security.log
10	Display the 25 most recent events from incident.log.	tail -n 25 incident.log
11	Display only the last entry in security.log.	tail -n 1 security.log
12	Display the last 50 events recorded in incident.log.	tail -n 50 incident.log
13	Display the contents of login.log starting from line 41 until the end of the file.	tail -n +41 login.log

14	Display the contents of <code>security.log</code> starting from line 101 until the end of the file.	<code>tail -n +101 security.log</code>
15	Find the total number of lines in <code>login.log</code> .	<code>wc -l login.log</code>
16	Find the total number of lines in <code>access.log</code> .	<code>wc -l access.log</code>
17	Find the total number of security events in <code>security.log</code> .	<code>wc -l security.log</code>
18	Determine the total number of events recorded in <code>incident.log</code> .	<code>wc -l incident.log</code>
19	Count the number of words in <code>login.log</code> .	<code>wc -w login.log</code>
20	Count the number of bytes in <code>security.log</code> .	<code>wc -c security.log</code>
21	Display the line, word, and byte counts of <code>access.log</code> .	<code>wc -l -w -c access.log</code>
22	Find the line counts of all four <code>.log</code> files using a single <code>wc</code> command.	<code>wc -l *.log</code>
23	Display the first 20 entries of <code>login.log</code> and, from those entries, display only the last 5.	<code>head -n 20 login.log tail -n 5</code>
24	Display the last 20 entries of <code>login.log</code> and, from those entries, display only the first 5.	<code>tail -n 20 login.log head -n 5</code>
25	Display the first 30 entries of <code>access.log</code> and then display only the last 10 entries from that output.	<code>head -n 30 access.log tail -n 10</code>
26	Display the last 30 entries of <code>access.log</code> and then display only the first 10 entries.	<code>tail -n 30 access.log head -n 10</code>
27	Display the first 50 events from <code>security.log</code> and then display the last 10 events from those 50.	<code>head -n 50 security.log tail -n 10</code>
28	Display the first 50 events from <code>security.log</code> and then display the first 10 events from those 50.	<code>tail -n 50 security.log head -n 10</code>
29	Display entries from line 11 to line 20 of <code>login.log</code> .	<code>tail -n +11 login.log head -n 10</code>

30	Display entries from line 21 to line 30 of <code>login.log</code> .	<code>tail -n +21 login.log head -n 10</code>
31	Display entries from line 11 to line 20 of <code>access.log</code> .	<code>tail -n +11 access.log head -n 10</code>
32	Display entries from line 31 to line 40 of <code>access.log</code> .	<code>tail -n +31 access.log head -n 10</code>
33	Display security events from line 21 to line 30 of <code>security.log</code> .	<code>tail -n +21 security.log head -n 10</code>
34	Display security events from line 51 to line 60 of <code>security.log</code> .	<code>tail -n +51 security.log head -n 10</code>
35	Display incident events from line 101 to line 110 of <code>incident.log</code> .	<code>tail -n +101 incident.log head -n 10</code>
36	Display incident events from line 201 to line 220 of <code>incident.log</code> .	<code>tail -n +201 incident.log head -n 20</code>
37	Display incident events from line 491 to line 500 of <code>incident.log</code> .	<code>tail -n +491 incident.log head -n 10</code>
38	Take the first 20 entries of <code>login.log</code> and count how many lines are displayed.	<code>head -n 20 login.log wc -l</code>
39	Take the last 15 entries of <code>access.log</code> and count how many lines are displayed.	<code>tail -n 15 access.log wc -l</code>
40	Take the first 50 entries of <code>security.log</code> and count the number of words in those entries.	<code>head -n 50 security.log wc -w</code>
41	Take the last 25 entries of <code>security.log</code> and count the number of lines.	<code>tail -n 25 security.log wc -l</code>
42	Extract lines 21–30 from <code>login.log</code> and count the number of extracted lines.	<code>tail -n +21 login.log head -n 10 wc -l</code>
43	Extract lines 51–60 from <code>access.log</code> and count the number of extracted lines.	<code>tail -n +51 access.log head -n 10 wc -l</code>

44	Extract events 101–150 from incident.log and count how many events are displayed.	tail -n +101 incident.log head -n 50 wc -l
45	Display the first 100 events from incident.log, take the last 20 events from that output, and count the number of lines.	head -n 100 incident.log tail -n 20 wc -l
<pre> (gopika@kali)~/linux/lab/assignment2 \$ cd filters (gopika@kali)~/linux/lab/assignment2/filters \$ nano login.log (gopika@kali)~/linux/lab/assignment2/filters \$ nano access.log (gopika@kali)~/linux/lab/assignment2/filters \$ head -n 5 login.log Login event 01 - admin logged in Login event 02 - alice logged in Login event 03 - bob logged in Login event 04 - charlie logged in Login event 05 - admin logged out (gopika@kali)~/linux/lab/assignment2/filters \$ tail -n 5 login.log Login event 16 - charlie logged out Login event 17 - admin logged in Login event 18 - alice logged out Login event 19 - bob logged in Login event 20 - charlie logged in (gopika@kali)~/linux/lab/assignment2/filters \$ wc -w login.log 140 login.log (gopika@kali)~/linux/lab/assignment2/filters \$ wc -l login.log 20 login.log (gopika@kali)~/linux/lab/assignment2/filters \$ w 12:04:45 up 1:12, 1 user, load average: 0.02, 0.13, 0.16 USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT (gopika@kali)~/linux/lab/assignment2/filters \$ wc -c login.log 666 login.log (gopika@kali)~/linux/lab/assignment2/filters \$ wc -l *.log 20 access.log 20 login.log 40 total </pre>		
<pre> (gopika@kali)~/linux/lab/assignment2/filters \$ echo "Takes the first 10 lines, then displays the last 5 of those 10." Takes the first 10 lines, then displays the last 5 of those 10. (gopika@kali)~/linux/lab/assignment2/filters \$ head -n 10 login.log tail -n 5 Login event 06 - alice logged out Login event 07 - bob logged in Login event 08 - charlie logged in Login event 09 - admin logged in Login event 10 - alice logged in (gopika@kali)~/linux/lab/assignment2/filters \$ echo "Display incident events from line 4 to line 10 of incident.log." > head -n 10 login.log tail -n 5^C (gopika@kali)~/linux/lab/assignment2/filters \$ echo "Display incident events from line 4 to line 10 of incident.log." > ^C (gopika@kali)~/linux/lab/assignment2/filters \$ tail -n +4 login.log head -n 7 Login event 04 - charlie logged in Login event 05 - admin logged out Login event 06 - alice logged out Login event 07 - bob logged in Login event 08 - charlie logged in Login event 09 - admin logged in Login event 10 - alice logged in (gopika@kali)~/linux/lab/assignment2/filters \$ tail -n +4 login.log head -n 7 nl -ba 1 Login event 04 - charlie logged in 2 Login event 05 - admin logged out 3 Login event 06 - alice logged out 4 Login event 07 - bob logged in 5 Login event 08 - charlie logged in 6 Login event 09 - admin logged in 7 Login event 10 - alice logged in </pre>		

```
(gopika@kali)-[~/linux/lab/assignment2/filters]
$ sed -n '4,10p' login.log
Login event 04 - charlie logged in
Login event 05 - admin logged out
Login event 06 - alice logged out
Login event 07 - bob logged in
Login event 08 - charlie logged in
Login event 09 - admin logged in
Login event 10 - alice logged in

(gopika@kali)-[~/linux/lab/assignment2/filters]
$ nl -ba login.log | sed -n '4,10p'
 4 Login event 04 - charlie logged in
 5 Login event 05 - admin logged out
 6 Login event 06 - alice logged out
 7 Login event 07 - bob logged in
 8 Login event 08 - charlie logged in
 9 Login event 09 - admin logged in
10 Login event 10 - alice logged in

(gopika@kali)-[~/linux/lab/assignment2/filters]
$ echo "[200-nl (number lines) is a Linux command used to display the contents of a file or command output with line numbers.
>
> -b a
>
> The option -b a means number all lines, including blank lines.-"
nl (number lines) is a Linux command used to display the contents of a file or command output with line numbers.
-b a
The option -b a means number all lines, including blank lines.-

(gopika@kali)-[~/linux/lab/assignment2/filters]
$
```