


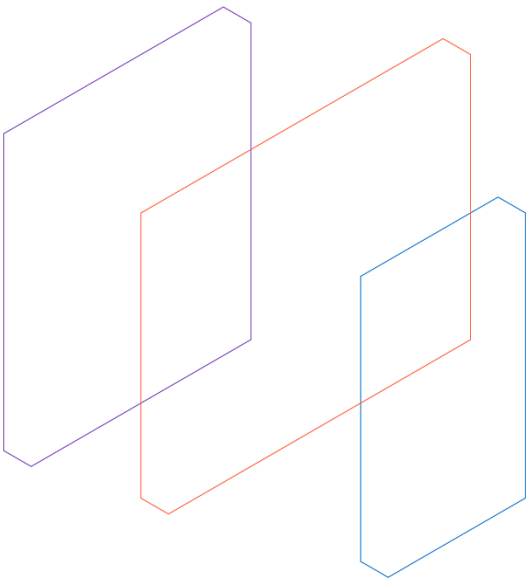

Tamm Actual Driver Service

INTEGRATION GUIDE

Date	2026-04-19
Version	0.3
Document Privacy	Confidential

Table of Contents

Introduction.....	2
1.1 Purpose	2
1.2 Scope.....	2
1.3 Definitions.....	2
Authentication.....	3
Business Scenarios	3
1.0 Actual Driver Addition.....	3
1.1 Verify vehicle plate	3
1.2 Verify Addition	4
1.3 Final submit	7
2.0 Actual Driver Cancel.....	8
2.1 Verify Cancel Actual Driver.....	9
2.2 Do removal actual driver	10
3.0 Actual Driver Resend OTP.....	10
3.1 Retry sending an OTP	11
Appendix.....	11
Service Configuration.....	11
Error Codes.....	12
Plate Dto.....	12
Plate Types.....	12
Types... ..	12
Business validation errors and messages.....	13
FAQs.....	15
Service configuration information:.....	16

Introduction

1.1 Purpose

This document provides a detailed description of the Actual driver's APIs, including their resources and request/response parameters. Sample requests and responses are included. The main objective of this document is to guide clients on how to properly use the APIs.

1.2 Scope

The document mainly focuses on the APIs available for Actual driver of vehicles and the parameters required invoking these web services.

1.3 Definitions

Acronym or Abbreviation	Definition
NIC	National Information Center
NIN	National Identification Number
OTP	One Time Password
URL	Uniform Resource Locator
HTTP	Hyper Text Transfer Protocol
MOI	Ministry of Interior

Authentication


Please refer to the *Profile Management Integration Guide* or the *Integrators Integration Guide* in case you are an integrator.

Business Scenarios

1.0 Actual Driver Addition

The API consists of Three Steps:

1. Verify vehicle using plate number.
2. Verify addition and assigned National Id, Birth Year and mobile number
3. Do issue actual driver using OTP validation

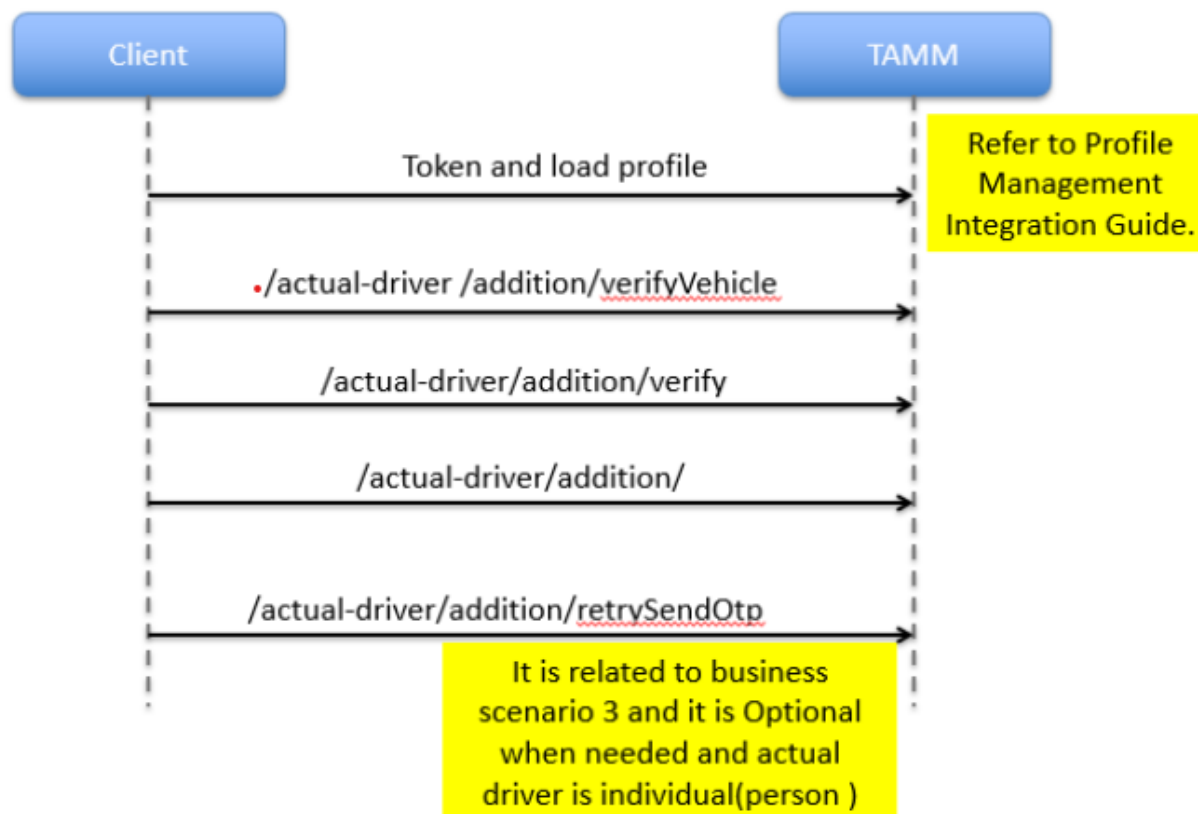

1.1 Verify vehicle plate

The main function of this API is to validate vehicles by passing plate information.

URL

Name	Example
URL	{{baseUrl}}/api/v1/ actual-driver/addition/verifyVehicle
HTTP Method	POST
Content-Type	application/json
Steps	This operation represents Step 1 of 3 in a mandatory sequential workflow.

Service Input

Name	Type	Description	Example	Required
X-Integrator-User-Id	Long Request Header	Ref appendix FAQs	7124	Yes
plateDto	JSON Object	Vehicle plate information Ref appendix Plate Dto	{ "text1": "ب", "text2": "ب", "text3": "ب", "number": 2222, "type": { "code": 1 } }	Yes

Example: verify vehicle using plate number

Request	<pre>{ "plateDto": { "text1": "د", "text2": "ع", "text3": "د", "number": 1946, "type": { "code": 1 } } }</pre>
---------	--

1.2 Verify Addition

The main function of this API is to validate either an individual using the person's National ID Or company using a valid MOI number, along with either a sponsored resident (Iqama) ID or a vehicle plate number for cross-validation.

An OTP is being sent if verification succeeds. The OTP should be included in the subsequent Request.

Name	Example
URL	{{baseUrl}}/api/v1/actual-driver/addition/verify
HTTP Method	POST
Content-Type	application/json
Steps	Step 1 is a prerequisite and must be invoked before Step 2.

Service Input

Name	Type	Description	Example	Required
X-Conversation-Id	String Request Header	Ref appendix FAQs	"741a319f48e6aaf7"	Yes
X-Integrator-User-Id	Long Request Header	Ref appendix FAQs	7124	Yes
Type	Integer	2. Company 3. Individual Ref appendix Types	2	Yes
idNumber	String	Company (Moi number) or Individual number (National id or iqama number)	"7001462725"	Yes
birthYear	Integer	Individual birth year YYYY format	1958	Conditional When Type=3
crossValidationBy	Integer	crossValidationBy 1: Sponsored ID, 2: Plate Number of Owned Car	1	Conditional When Type=2
crossValidationPlateDto	Json Object	Vehicle plate detail Ref appendix Plate Dto	Json Object { "text1":""," "text2":"","	Conditional When

			<pre> "text3":""," "type":{ "code":1 } }, </pre>	Type=2 and crossValidationBy=2)
residen-tIqamald	String	Resident Iqama number	2108824836	Condi-tional When Type=2 and crossVali-da-tionBy=1
mo-bileNumber	String	Registered local mobile number, start with 5	"558526036"	Yes

1. Example: API validate for an individual using the person's National ID

Request	<pre> { "idNumber": "1186266738", "birthYear": 1958, "type": 3, "mobileNumber": "55555555" } </pre>
---------	---

2. Example: API validate for Company using valid MOI along with sponsored resident (Iqama)

Request	<pre> { "idNumber": "7012703406", "type": 2, "crossValidationBy": 1, "crossValidationPlateDto": null, "residentIqamaId": "2108824836", "mobileNumber": "55555555" } </pre>
---------	--

3. Example: API validate for Company using valid MOI along with vehicle plate number for cross-validation.

Request	<pre> { "idNumber": "7001462725", "type": 2, "crossValidationBy": 2, </pre>
---------	---

```

"crossValidationPlateDto": {
  "text1": "د",
  "text2": "ع",
  "text3": "س",
  "number": "117",
  "type": {
    "code": 1
  }
},
"mobileNumber": "55555555"
}

```

1.3 Final submit

The main function of this API is to do add actual driver using OTP validation.

Name	Example
URL	{{baseUrl}}/api/v1/actual-driver/addition/
HTTP Method	POST
Content-Type	application/json
Steps	This Step 3 of 3 in a sequential workflow.

Service Input

Name	Type	Description	Example	Required
X-Conversa- tion-Id	String Request Header	Ref appendix FAQs	"741a319f48e 6aaf7"	Yes
X-Integrator- User-Id	Long Request Header	Ref appendix FAQs	7124	Yes
otp	Json Object When Type=3, actual otp { "otp":1234 } When Type=2 { "otp": null }	OTP sent to authorized per- son mobile number regis- tered in Ab- sher.	{ "otp":1234 }	Conditional When Type 3

Example: Do actual driver when it is type 3 (Individual)

Request	{ "otp": "1234" }
Response	{ "referenceNumber": 50000490855 }

Example: Do Issue actual driver when type 2 (Company), no OTP require


Request	{ "otp": null }
Response	{ "referenceNumber": 50000490855 }

2.0 Actual Driver Cancel

The main function of this API is to cancel actual driver using given plate number.

The API consists of Three Steps:

1. Verify vehicle using plate number.
2. Do removal of actual driver.

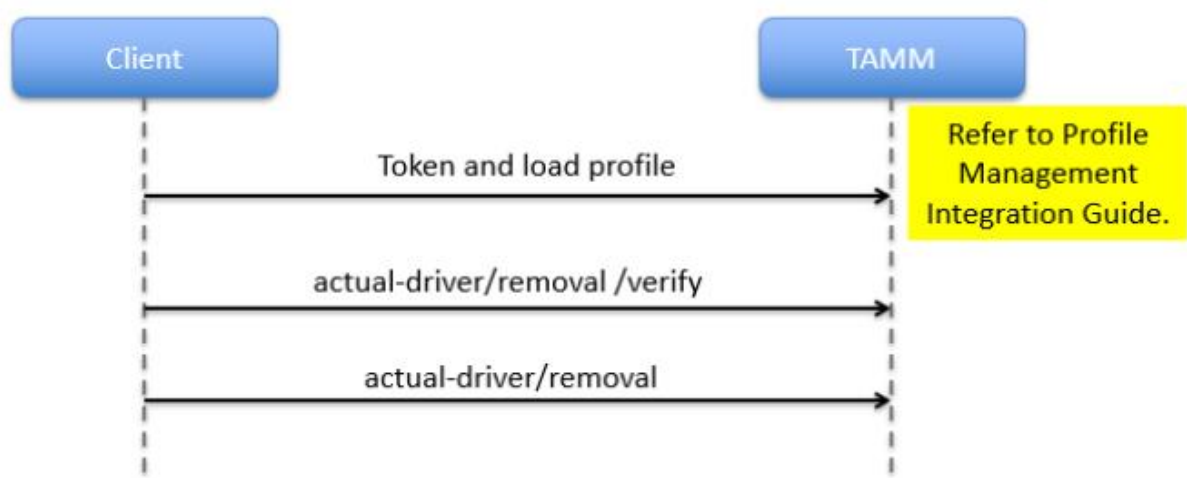

2.1 Verify Cancel Actual Driver

URL

Name	Example
URL	{{baseUrl}}/api/v1/actual-driver/removal /verify
HTTP Method	POST
Content-Type	application/json
Steps	This operation represents Step 1 of 2 in a sequential workflow.

Service Input

Name	Type	Description	Example	Required
X-Integrator-User-Id	Integer	Ref appendix FAQs	7124	Yes Request Header
plateDto	Json Object	Vehicle plate details Ref appendix Plate Dto	{ "text1": "ب", "text2": "ب", "text3": "ب", "number": 2222, "type": { "code": 1 } }	Yes

Example: Verify vehicle for cancel actual driver

Request	<pre>{ "plateDto": { "text1": "د", "text2": "ع", "text3": "د", "number": 1946, "type": { "code": 1 } } }</pre>
---------	--

2.2 Do removal actual driver

Name	Example
URL	{{baseUrl}}/api/v1/actual-driver/removal/?moveVehicleToCurrentBranch={}
HTTP Method	DELETE
Content-Type	application/json
Steps	Step 1 is a prerequisite and recommended to be invoked before Step 2.

URL

Service Input

Name	Type	Description	Example	Required
X-Integrator-User-Id	Integer	Ref appendix FAQs	7124	Yes Request Header
X-Conversation-Id	String	Ref appendix FAQs	"741a319f48e6aaf7"	Yes Request Header
MoveVehicleToCurrent-Branch	Boolean	Move vehicle to the current branch True/False	False	Yes Request Parameter

Example: Do remove actual driver

Request	{{baseUrl}}/api/v1/actual-driver/removal/?moveVehicleToCurrentBranch=false
Response	HTTP Status code 200

3.0 Actual Driver Resend OTP

The main function of this API is to retry sending OTP after 2 minutes

3.1 Retry sending an OTP

Name	Example
URL	{{baseUrl}}/api/v1/actual-driver/addition/retrySendOtp
HTTP Method	GET
Content-Type	application/json

URL

Service Input

Name	Type	Description	Example	Required
X-Integrator-User-Id	Integer	Ref appendix FAQs	7124	Yes Request Header
X-Conversation-Id	String	Ref appendix FAQs	"741a319f48e6aa f7"	Yes Request Header

Example

Request	{{baseUrl}}/api/v1/actual-driver/addition/retrySendOtp
Response	HTTP Status code 200

Appendix

Service Configuration

Name	Staging	Production
baseUrl	https://tamm-qa-api.apps.devocp4.elm.sa	https://tamm.api.elm.sa
Idp	https://idp.apps.devocp4.elm.sa/	https://idp.elm.sa
Idp Realm	Tamm-QA	Tamm

Error Codes

Name	Type	Description
400	Business Error	Business error message translated in Arabic and English
500	System error	"Generic error occurred" or "حدث خطأ أثناء تنفيذ طلبك"
401	Unauthorized	It occurs when token is not valid, incorrect, or expired.
403	Forbidden	Token is valid, but selected user id (X-Integrator-User-Id) does not have the authority to access the service.

Plate Dto

JSON Object Name	Json Object Value	Mandatory	example
plateDto	<pre>{ "text1": "ر", "text2": "ح", "text3": "ب", "number": 100, "type": { "code": 1 } }</pre>	text1: Yes number: Yes type: Yes code: Yes	

Plate Types

Plate Code	English Name	Arabic Name
1	Private Car	خاص
2	Public Transport	نقل عام
3	Private Transport	نقل خاص
10	Morotbike	دراجة آلية

Types

Code	Name
2	COMPANY
3	INDIVIDUAL

Business validation errors and messages.

This is a set of validations, not all of them and we recommend it does not depend on the message description since it might change in future. But the list is only for consideration to be familiar with the validation that exists in the system.


Validation	Operation	Error detail
Vehicle Owner Verification	Add (Step 1)	{ "status": 400, "timestamp": "2026-04-07T15:16:08.664793870Z", "message": { "ar": "عذراً المركبه ليست مملوكة للشركة، نأمل التأكد من إدخال بيانات ونوع المركبة بالشكل الصحيح", "en": "vehicle is not owned by company. Please make sure to enter vehicle data correctly."}, "traceld": "8ba3cdc59f23a81e", "errors": null }
Vehicle's data validation	Add (Step 1)	{ "status": 400, "timestamp": "2026-04-07T15:22:42.590620894Z", "message": { "ar": "لم يتم العثور على مركبة بالمعلومات المدخلة", "en": "No vehicle is found with the entered information"}, "traceld": "0297948567bda62a", "errors": null }
X-Conversation-Id incorrect or expired validation	Add (Step 2, Step3)	{ "status": 400, "timestamp": "2026-04-07T16:12:39.130289896Z", "message": { "ar": "إنتهى الوقت المحدد للعملية، برجاء معاودة العمليه مره أخرى", "en": "The specified time for the process has expired, please start the process again"}, "traceld": "2750d99d266104f3", "errors": null }
X-Integrator-User-Id validation of user.id (load profile)	Add (Step1, Step2, Step3)	{ "status": 403, "timestamp": "2026-04-07T16:13:40.937336813Z", "message": { "ar": "المستخدم لايمكك الصلاحيه", "en": "Access is denied"}, "traceld": "990b4d9a22926bc3", "errors": null }
idNumber and residen-tlqamald validation	Add (Step 2)	{ "status": 400, "timestamp": "2026-04-08T04:30:07.661207681Z", "message": { "ar": "الرجاء التأكد من رقم الإقامة للمكفول التابع للشركة", "en": "Please make sure you entered the correct lqama ID"}, "traceld": "2750d99d266104f3", "errors": null }

		<pre> }, "traceld": "d992c7768da730c2", "errors": null } </pre>
Vehicle's data validation	Add (Step 1, Step2)	<pre> { "status": 500, "timestamp": "2026-04-08T04:32:48.338524736Z", "message": { "ar": "خطأ من المركز: The entered vehicle plate data is incorrect", "en": "Nic Error: The entered vehicle plate data is incorrect" }, "traceld": "7ad2547f71c9c9d4", "errors": null } </pre>
idNumber and birthYear validation	Add (Step 2)	<pre> { "status": 400, "timestamp": "2026-04-08T04:43:36.327950984Z", "message": { "ar": "الرجاء التأكد من ادخال رقم الهوية وسنة الميلاد بشكل صحيح", "en": "Please make sure you entered the correct ID and Year of birth" }, "traceld": "7325ac74c2684a33", "errors": null } </pre>
idNumber's validation	Add (Step 2)	<pre> { "status": 400, "timestamp": "2026-04-08T04:49:17.107748607Z", "message": { "ar": "لم يتم العثور على الشخص بالمعلومات المدخلة", "en": "No person is found with the entered information" }, "traceld": "d79af4efa7344392", "errors": null } </pre>
idNumber validation from NIC	Add (Step 2)	<pre> { "status": 500, "timestamp": "2026-04-08T04:44:28.276138083Z", "message": { "ar": "خطأ من المركز: Invalid Person ID", "en": "Nic Error: Invalid Person ID" }, "traceld": "d482f184d19c6ee4", "errors": null } </pre>
idNumber's validation , when person no alive (Death)	Add (Step2)	<pre> { "status": 400, "timestamp": "2026-04-08T05:03:18.444259345Z", "message": { "ar": "لا يمكن اكمال هذا الاجراء ، الرجاء مراجعة الإدارة العامة للمرور", "en": "This action cannot be completed please check with the Traffic Department" }, "traceld": "d4babceef34eaf09", "errors": null } </pre>

idNumber's driving license validation	Add (Step 2)	{ "status": 400, "timestamp": "2026-04-08T04:45:15.698026107Z", "message": { "ar": "لا يوجد رخصة قيادة", "en": "no driving license found" }, "traceId": "adb7e450d8133db5", "errors": null }
OTP validation	Add (Step 3)	{ "status": 400, "timestamp": "2026-04-08T05:02:23.342045037Z", "message": { "ar": "الرجاء التأكد من صحة رمز التحقق المدخل", "en": "Please enter a valid verification code" }, "traceId": "2c42b16c378c1a6d", "errors": null }

FAQs

Key (What does it mean?)	Explanation
X-Integrator-User-Id	X-Integrator-User-ID is a required header that carries the user identifier of the ELM client. This value is utilized by backend services during the internal validation process to ensure request authenticity and proper access handling, For more details, please refer to the Profile Management Integration Guide or the Integrators Integration Guide in case you are an integrator
X-Conversation-Id	Uniquely identifies and correlates multiple API calls that belong to the same transaction or process. Note: Retrieve id value from response of first Step and use this value in the next API call as part of the header request with key(X-Conversation-Id), Its expiry in 30 minutes.
Service Pricing	Please refer to the link https://tamm.sa/public/landing/transactions-fee

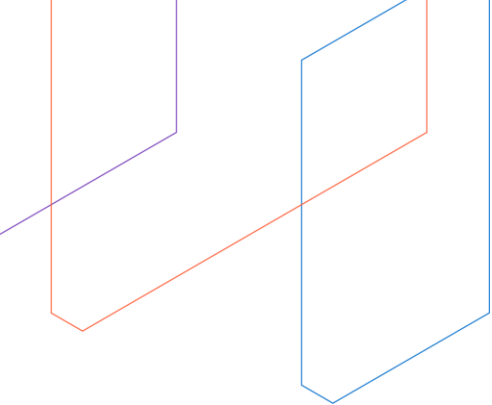

Service configuration information:

This is set of system-level configuration properties used internally. These may be adjusted based on operational, security, or regulatory requirements.

Configuration	Description
OTP expiry time	The One-Time Password (OTP) sent to the user's registered mobile number through the Absher service is valid for only two minutes (120 seconds).
Max verification attempts (OTP)	5 attempts
Max resends reties (OTP)	3 times