

API Documentation

API Documentation

May 13, 2007

Contents

Contents	1
1 Package z3c.sqlalchemy	3
1.1 Modules	3
2 Module z3c.sqlalchemy.base	4
2.1 Variables	4
2.2 Class SynchronizedThreadCache	4
2.2.1 Methods	4
2.2.2 Properties	5
2.3 Class BaseWrapper	5
2.3.1 Methods	5
2.3.2 Properties	6
2.3.3 Class Variables	6
2.4 Class SessionDataManager	7
2.4.1 Methods	7
2.4.2 Properties	8
2.4.3 Class Variables	8
2.5 Class ConnectionDataManager	8
2.5.1 Methods	9
2.5.2 Properties	10
2.5.3 Class Variables	10
2.6 Class ZopeBaseWrapper	10
2.6.1 Methods	10
2.6.2 Properties	11
2.6.3 Class Variables	12
3 Module z3c.sqlalchemy.interfaces	13
3.1 Class ISQLAlchemyWrapper	13
3.1.1 Methods	13
3.1.2 Class Variables	13
3.2 Class IModelProvider	14
3.2.1 Methods	14
3.2.2 Class Variables	14
3.3 Class IModel	14
3.3.1 Methods	15
3.3.2 Class Variables	15

4	Module <code>z3c.sqlalchemy.mapper</code>	16
4.1	Class <code>MappedClassBase</code>	16
4.1.1	Methods	16
4.1.2	Properties	17
4.1.3	Class Variables	17
4.2	Class <code>MapperFactory</code>	17
4.2.1	Methods	17
4.2.2	Properties	18
4.3	Class <code>LazyMapperCollection</code>	19
4.3.1	Methods	19
4.3.2	Properties	22
5	Module <code>z3c.sqlalchemy.model</code>	23
5.1	Class <code>Model</code>	23
5.1.1	Methods	23
5.1.2	Properties	27
5.1.3	Class Variables	27
6	Module <code>z3c.sqlalchemy.postgres</code>	28
6.1	Class <code>PostgresMixin</code>	28
6.1.1	Methods	28
6.1.2	Properties	29
6.1.3	Class Variables	29
6.2	Class <code>PythonPostgresWrapper</code>	29
6.2.1	Methods	29
6.2.2	Properties	31
6.2.3	Class Variables	31
6.3	Class <code>ZopePostgresWrapper</code>	31
6.3.1	Methods	31
6.3.2	Properties	33
6.3.3	Class Variables	33
7	Module <code>z3c.sqlalchemy.test</code>	34
7.1	Variables	34
7.2	Class <code>HierarchyNode</code>	34
7.2.1	Methods	34
7.2.2	Properties	35
7.2.3	Class Variables	35
7.3	Class <code>HierarchyNode</code>	37
7.3.1	Methods	37
7.3.2	Properties	38
7.3.3	Class Variables	38
8	Package <code>z3c.sqlalchemy.tests</code>	40
8.1	Modules	40
9	Module <code>z3c.sqlalchemy.tests.testSQLAlchemy</code>	41
9.1	Functions	41
9.2	Class <code>WrapperTests</code>	41
9.2.1	Methods	41
9.2.2	Properties	45
10	Module <code>z3c.sqlalchemy.util</code>	46
10.1	Functions	46

Index**48**

1 Package z3c.sqlalchemy

1.1 Modules

- **base** (*Section 2, p. 4*)
- **interfaces** (*Section 3, p. 13*)
- **mapper**: Utility methods for SQLAlchemy
(*Section 4, p. 16*)
- **model**: Optional Model support
(*Section 5, p. 23*)
- **postgres** (*Section 6, p. 28*)
- **test** (*Section 7, p. 34*)
- **tests** (*Section 8, p. 40*)
 - **testSQLAlchemy**: Tests, tests, tests.....
(*Section 9, p. 41*)
- **util**: Some helper methods
(*Section 10, p. 46*)

2 Module *z3c.sqlalchemy.base*

2.1 Variables

Name	Description
<code>session_cache</code>	Value: <z3c.sqlalchemy.base.SynchronizedThreadCache object at 0x...>
<code>connection_cache</code>	Value: <z3c.sqlalchemy.base.SynchronizedThreadCache object at 0x...>

2.2 Class *SynchronizedThreadCache*

object —
 z3c.sqlalchemy.base.SynchronizedThreadCache

2.2.1 Methods

`__init__(self)`
`x.__init__(...)` initializes x; see `x.__class__.__doc__` for signature
 Overrides: `object.__init__` `extit`(inherited documentation)

`set(self, **kw)`

`get(self, *names)`

`__delattr__(...)`
`x.__delattr__('name')` <==> `del x.name`

`__getattr__(...)`
`x.__getattr__('name')` <==> `x.name`

`__hash__(x)`
`hash(x)`

`__new__(T, S, ...)`
Return Value
 a new object with type S, a subtype of T

`__reduce__(...)`
 helper for pickle

<code>__reduce_ex__(...)</code>
helper for pickle

<code>__repr__(x)</code>
repr(x)

<code>__setattr__(...)</code>
x.__setattr__('name', value) <==> x.name = value

<code>__str__(x)</code>
str(x)

2.2.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute '.__class__' of 'object' objects>

2.3 Class BaseWrapper

```

object └─
        z3c.sqlalchemy.base.BaseWrapper
  
```

Known Subclasses: z3c.sqlalchemy.base.ZopeBaseWrapper, z3c.sqlalchemy.postgres.PythonPostgresWrapper

2.3.1 Methods

<code>__delattr__(...)</code>
x.__delattr__('name') <==> del x.name

<code>__getattrattribute__(...)</code>
x.__getattrattribute__('name') <==> x.name

<code>__hash__(x)</code>
hash(x)

<code>__init__(self, dsn, model=None, **kw)</code>
'dsn' - a RFC-1738-style connection string
'model' - optional instance of model.Model
'kw' - optional keyword arguments passed to create_engine()
Overrides: object.__init__

__new__(*T, S, ...*)**Return Value**a new object with type *S*, a subtype of *T***__providedBy__**(...)

Object Specification Descriptor

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(*x*)repr(*x*)**__setattr__**(...)*x*.__setattr__('name', value) <==> *x*.name = value**__str__**(*x*)str(*x*)**getMapper**(*self, tablename, schema='public'*)**getMappers**(*self, *names*)**registerMapper**(*self, mapper, name*)

2.3.2 Properties


Name	Description
<code>__class__</code>	Value: <attribute ' <code>__class__</code> ' of 'object' objects>
<code>engine</code>	Value: <property object at 0x2b999e2f0c80>
<code>metadata</code>	Value: <property object at 0x2b999e2f0be0>
<code>model</code>	Value: <property object at 0x2b999e2f0cd0>
<code>session</code>	Value: <property object at 0x2b999e2f0c30>

2.3.3 Class Variables

continued on next page

Name	Description
Name	Description
<code>__implemented__</code>	Value: <implementedBy z3c.sqlalchemy.base.BaseWrapper>
<code>__provides__</code>	Value: <zope.interface.declarations.ClassProvides object at 0x2b...

2.4 Class SessionDataManager

object  **z3c.sqlalchemy.base.SessionDataManager**

Wraps session into transaction context of Zope

2.4.1 Methods

`__init__(self, session)`
`x.__init__(...)` initializes `x`; see `x.__class__.__doc__` for signature
 Overrides: `object.__init__` `exitit`(inherited documentation)

`abort(self, trans)`

`commit(self, trans)`

`tpc_begin(self, trans)`

`tpc_vote(self, trans)`

`tpc_finish(self, trans)`

`tpc_abort(self, trans)`

`sortKey(self)`

`__delattr__(...)`
`x.__delattr__('name')` <==> `del x.name`

`__getattr__(...)`
`x.__getattr__('name')` <==> `x.name`

`__hash__(x)`
`hash(x)`

__new__(*T*, *S*, ...)**Return Value**a new object with type *S*, a subtype of *T***__providedBy__**(...)

Object Specification Descriptor

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(*x*)repr(*x*)**__setattr__**(...)*x*.__setattr__('name', value) <==> *x*.name = value**__str__**(*x*)str(*x*)

2.4.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute <code>'__class__'</code> of <code>'object'</code> objects>

2.4.3 Class Variables

Name	Description
<code>__implemented__</code>	Value: <implementedBy <code>z3c.sqlalchemy.base.SessionDataManager</code> >
<code>__provides__</code>	Value: < <code>zope.interface.declarations.ClassProvides</code> object at 0x2b...

2.5 Class *ConnectionDataManager*

object

`z3c.sqlalchemy.base.ConnectionDataManager`

Wraps connection into transaction context of Zope

2.5.1 Methods

`__init__(self, connection)`
`x.__init__(...)` initializes `x`; see `x.__class__.__doc__` for signature
 Overrides: `object.__init__` `exitit`(inherited documentation)

`abort(self, trans)`

`commit(self, trans)`

`tpc_begin(self, trans)`

`tpc_vote(self, trans)`

`tpc_finish(self, trans)`

`tpc_abort(self, trans)`

`sortKey(self)`

`__delattr__(...)`
`x.__delattr__('name')` \iff `del x.name`

`__getattr__(...)`
`x.__getattr__('name')` \iff `x.name`

`__hash__(x)`
`hash(x)`

`__new__(T, S, ...)`
Return Value
 a new object with type `S`, a subtype of `T`

`__providedBy__(...)`
 Object Specification Descriptor

`__reduce__(...)`
 helper for pickle

`__reduce_ex__(...)`
 helper for pickle

__repr__(*x*)

repr(*x*)

__setattr__(...)

x.__setattr__('name', value) <==> *x*.name = value

__str__(*x*)

str(*x*)


2.5.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute <code>'__class__'</code> of <code>'object'</code> objects>

2.5.3 Class Variables

Name	Description
<code>__implemented__</code>	Value: <implementedBy z3c.sqlalchemy.base.ConnectionDataManager>
<code>__provides__</code>	Value: <zope.interface.declarations.ClassProvides object at 0x2b...

2.6 Class ZopeBaseWrapper

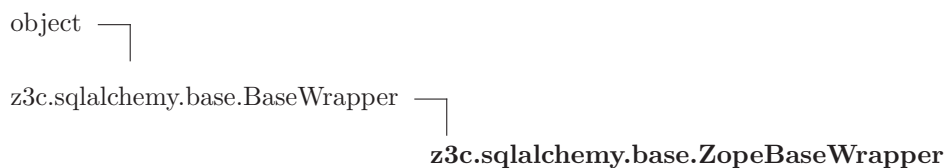

Known Subclasses: z3c.sqlalchemy.postgres.ZopePostgresWrapper

A wrapper to be used from within Zope. It connects the session with the transaction management of Zope.

2.6.1 Methods

__delattr__(...)

x.__delattr__('name') <==> del *x*.name

__getattr__(...)

x.__getattr__('name') <==> *x*.name

__hash__(*x*)

hash(x)

__init__(*self*, *dsn*, *model*=None, ***kw*)

'dsn' - a RFC-1738-style connection string

'model' - optional instance of model.Model

'kw' - optional keyword arguments passed to create_engine()

Overrides: object.__init__

__new__(*T*, *S*, ...)**Return Value**a new object with type *S*, a subtype of *T***__providedBy__**(...)

Object Specification Descriptor

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(*x*)

repr(x)

__setattr__(...)

x.__setattr__('name', value) <==> x.name = value

__str__(*x*)

str(x)

getMapper(*self*, *tablename*, *schema*='public')**getMappers**(*self*, **names*)**registerMapper**(*self*, *mapper*, *name*)

2.6.2 Properties

Name	Description
__class__	Value: <attribute <code>'__class__'</code> of <code>'object'</code> objects>

continued on next page


Name	Description
connection	Value: <property object at 0x2b999e3060f0>
engine	Value: <property object at 0x2b999e2f0c80>
metadata	Value: <property object at 0x2b999e2f0be0>
model	Value: <property object at 0x2b999e2f0cd0>
session	Value: <property object at 0x2b999e3060a0>

2.6.3 Class Variables

Name	Description
__implemented__	Value: <implementedBy z3c.sqlalchemy.base.BaseWrapper>
__provides__	Value: <zope.interface.declarations.ClassProvides object at 0x2b...

3 Module `z3c.sqlalchemy.interfaces`

3.1 Class `ISQLAlchemyWrapper`



A `SQLAlchemyWrapper` wraps `sqlalchemy` and deals with connection and transaction handling.

3.1.1 Methods

<code>registerMapper</code> (<i>mapper</i> , <i>name</i>)
register your own mapper under a custom name
<code>getMapper</code> (<i>tablename</i> , <i>schema</i> ='public')
return a mapper class for a table given by its 'tablename' and an optional 'schema' name
<code>getMappers</code> (* <i>tablenames</i>)
return a sequence of mapper classes for a given list of table names. ATT: Schema support?

3.1.2 Class Variables

Name	Description
<code>dsn</code>	Value: <code>TextLine(title= u'A RFC-1738 style connection string', re...</code>
<code>dbname</code>	Value: <code>TextLine(title= u'Database name', required= True)</code>
<code>host</code>	Value: <code>TextLine(title= u'Hostname of database', required= True)</code>
<code>port</code>	Value: <code>Int(title= u'Port of database', required= True)</code>
<code>username</code>	Value: <code>TextLine(title= u'Database user', required= True)</code>
<code>password</code>	Value: <code>TextLine(title= u'Password of database user', required= T...</code>
<code>echo</code>	Value: <code>Bool(title= u'Echo all SQL statements to the console', re...</code>
<code>__bases__</code>	Value: (<code><InterfaceClass zope.interface.Interface></code>)
<code>__identifier__</code>	Value: <code>'z3c.sqlalchemy.interfaces.ISQLAlchemyWrapper'</code>
<code>__iro__</code>	Value: (<code><InterfaceClass z3c.sqlalchemy.interfaces.ISQLAlchemyWra...</code>
<code>__name__</code>	Value: <code>'ISQLAlchemyWrapper'</code>
<code>__sro__</code>	Value: (<code><InterfaceClass z3c.sqlalchemy.interfaces.ISQLAlchemyWra...</code>

continued on next page

Name	Description
dependents	Value: <WeakKeyDictionary at 47938783850792>

3.2 Class IModelProvider

zope.interface.Interface —
z3c.sqlalchemy.interfaces.IModelProvider

A model providers provides information about the tables to be used and the mapper classes.

3.2.1 Methods

getModel(metadata=None)
The model is described as an ordered dictionary. The entries are (tablename, some_dict) where 'some_dict' is a dictionary containing a key 'table' referencing a Table() instance and an optional key 'relationships' referencing a sequence of related table names. An optional mapper class can be specified through the 'class' key (otherwise a default mapper class will be autogenerated).

3.2.2 Class Variables

Name	Description
__bases__	Value: (<InterfaceClass zope.interface.Interface>)
__identifier__	Value: 'z3c.sqlalchemy.interfaces.IModelProvider'
__iro__	Value: (<InterfaceClass z3c.sqlalchemy.interfaces.IModelProvider...
__name__	Value: 'IModelProvider'
__sro__	Value: (<InterfaceClass z3c.sqlalchemy.interfaces.IModelProvider...
dependents	Value: <WeakKeyDictionary at 47938783850720>

3.3 Class IModel

zope.interface.Interface —
z3c.sqlalchemy.interfaces.IModel

A model represents a configuration hint for SQLAlchemy wrapper instances in order to deliver mappers for a given name.

3.3.1 Methods

add(name, table=None, mapper_class=None, relations=None, autodetect_relations=False, table_name=None)

'name' – name of table (no schema support so far!)

'table' – a sqlalchemy.Table instance (None, for autoloading)

'mapper_class' – an optional class to be used as mapper class for 'table'

'relations' – an optional list of table names referencing 'table'. This is used for auto-constructing the relation properties of the mapper class.

'autodetect_relations' – try to autodetect the relationships between tables and auto-construct the relation properties of the mapper if 'relations' is omitted (set to None)

'table_name' – optional full name of a table (e.g. 'someschema.sometable') if you want to use 'name' as alias for the table.

items()

return items in insertion order

3.3.2 Class Variables

Name	Description
<code>__bases__</code>	Value: (<InterfaceClass zope.interface.Interface>)
<code>__identifier__</code>	Value: 'z3c.sqlalchemy.interfaces.IModel'
<code>__iro__</code>	Value: (<InterfaceClass z3c.sqlalchemy.interfaces.IModel>, <Inte...
<code>__name__</code>	Value: 'IModel'
<code>__sro__</code>	Value: (<InterfaceClass z3c.sqlalchemy.interfaces.IModel>, <Inte...
<code>dependents</code>	Value: <WeakKeyDictionary at 47938783851008>

4 Module `z3c.sqlalchemy.mapper`

Utility methods for SQLAlchemy

4.1 Class `MappedClassBase`



Known Subclasses: `z3c.sqlalchemy.test.HierarchyNode`

base class for all mapped classes

4.1.1 Methods

`__init__(self, **kw)`

accepts keywords arguments used for initialization of mapped attributes/columns.

Overrides: `object.__init__`

`clone(self)`

Create a pristine copy. Use this method if you need to reinsert a copy of the current mapper instance back into the database.

`getMapper(self, name)`

Return a mapper associated with the current mapper. If this mapper represents a table A having a relationship to table B then the mapper for B can be obtained through `self.getMapper('B')`. This method is useful if you don't want to pass the wrapper around this the wrapper is officially the only way to get hold of a mapper by name. See also http://groups.google.com/group/sqlalchemy/browse_thread/thread/18fb2e2818bdc032/5c2dfd71679925cb#5c2dfd71679925cb

`__delattr__(...)`

`x.__delattr__('name') <==> del x.name`

`__getattr__(...)`

`x.__getattr__('name') <==> x.name`

`__hash__(x)`

`hash(x)`

`__new__(T, S, ...)`

Return Value
a new object with type S, a subtype of T

<code>__reduce__(...)</code>
helper for pickle

<code>__reduce_ex__(...)</code>
helper for pickle

<code>__repr__(x)</code>
<code>repr(x)</code>

<code>__setattr__(...)</code>
<code>x.__setattr__('name', value) <==> x.name = value</code>

<code>__str__(x)</code>
<code>str(x)</code>


4.1.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute <code>'__class__'</code> of <code>'object'</code> objects>

4.1.3 Class Variables

Name	Description
<code>__allow_access_to_unprotected_subobjects__</code>	Value: 1

4.2 Class MapperFactory

object  `z3c.sqlalchemy.mapper.MapperFactory`

a factory for table and mapper objects

4.2.1 Methods

<code>__init__(self, metadata)</code>
<code>x.__init__(...)</code> initializes x; see <code>x.__class__.__doc__</code> for signature
Overrides: <code>object.__init__</code> <code>exitit</code> (inherited documentation)

__call__(self, table, properties={}, cls=None)

Returns a tuple (mapped_class, table_class). 'table' - sqlalchemy.Table to be mapped
 'properties' - dict containing additional informations about
 'cls' - (optional) class used as base for creating the mapper class (will be autogenerated if not available).

__delattr__(...)

x.__delattr__('name') <==> del x.name

__getattr__(...)

x.__getattr__('name') <==> x.name

__hash__(x)

hash(x)

__new__(T, S, ...)

Return Value

a new object with type S, a subtype of T

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(x)

repr(x)

__setattr__(...)

x.__setattr__('name', value) <==> x.name = value

__str__(x)

str(x)

4.2.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute <code>'__class__'</code> of <code>'object'</code> objects>

4.3 Class LazyMapperCollection



Implements a cache for table mappers

4.3.1 Methods

`__init__(self, wrapper)`
`x.__init__(...)` initializes `x`; see `x.__class__.__doc__` for signature
Return Value
 new empty dictionary
 Overrides: `dict.__init__` `exitit`(inherited documentation)

`getMapper(self, name, schema='public')`
 return a (cached) mapper class for a given table 'name'

`__cmp__(x, y)`
`cmp(x,y)`

`__contains__(D, k)`
Return Value
 True if `D` has a key `k`, else False

`__delattr__(...)`
`x.__delattr__('name') <==> del x.name`

`__delitem__(x, y)`
`del x[y]`

`__eq__(x, y)`
`x==y`

`__ge__(x, y)`
`x>=y`

`__getattr__(...)`
`x.__getattr__('name') <==> x.name`
 Overrides: `object.__getattr__`

__getitem__(*x*, *y*)

x[*y*]

__gt__(*x*, *y*)

x>*y*

__hash__(*x*)

hash(*x*)

Overrides: object.__hash__

__iter__(*x*)

iter(*x*)

__le__(*x*, *y*)

x<=*y*

__len__(*x*)

len(*x*)

__lt__(*x*, *y*)

x<*y*

__ne__(*x*, *y*)

x!=*y*

__new__(*T*, *S*, ...)

Return Value

a new object with type *S*, a subtype of *T*

Overrides: object.__new__

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(*x*)

repr(*x*)

Overrides: object.__repr__

__setattr__(...)

x.__setattr__('name', value) <==> x.name = value

__setitem__(x, i, y)

x[i]=y

__str__(x)

str(x)

clear(D)

Remove all items from D.

Return Value

None

copy(D)

Return Value

a shallow copy of D

fromkeys(dict, S, v=...)

v defaults to None.

Return Value

New dict with keys from S and values equal to v

get(D, k, d=...)

d defaults to None.

Return Value

D[k] if k in D, else d

has_key(D, k)

Return Value

True if D has a key k, else False

items(D)

Return Value

list of D's (key, value) pairs, as 2-tuples

iteritems(D)

Return Value

an iterator over the (key, value) items of D

iterkeys(D)

Return Value

an iterator over the keys of D

itervalues(*D*)**Return Value**an iterator over the values of *D***keys(*D*)****Return Value**list of *D*'s keys**pop(*D*, *k*, *d*=...)**If key is not found, *d* is returned if given, otherwise `KeyError` is raised**Return Value***v*, remove specified key and return the corresponding value**popitem(*D*)**2-tuple; but raise `KeyError` if *D* is empty**Return Value**(*k*, *v*), remove and return some (key, value) pair as a**setdefault(*D*, *k*, *d*=...)****Return Value***D*.get(*k*,*d*), also set *D*[*k*]=*d* if *k* not in *D***update(*D*, *E*, ***F*)**Update *D* from *E* and *F*: for *k* in *E*: *D*[*k*] = *E*[*k*] (if *E* has keys else: for (*k*, *v*) in *E*: *D*[*k*] = *v*) then: for *k* in *F*: *D*[*k*] = *F*[*k*]**Return Value**

None

values(*D*)**Return Value**list of *D*'s values


4.3.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute ' <code>__class__</code> ' of 'object' objects>

5 Module *z3c.sqlalchemy.model*

Optional Model support

5.1 Class Model

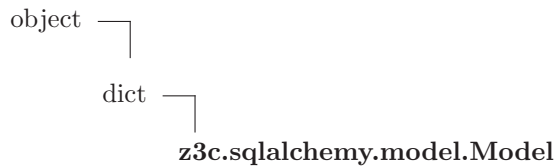

The Model is an optional helper class that can be passed to the constructor of a SQLAlchemy wrapper in order to provide hints for the mapper generation.

5.1.1 Methods

`__init__(self, *args)`

The constructor can be called with a series of dict. Each dict represents a single table and its data (see `add()` method).

Return Value

new empty dictionary

Overrides: `dict.__init__`

`add(self, name, table=None, mapper_class=None, relations=None, autodetect_relations=False, table_name=None)`

'name' – name of table (no schema support so far!)

'table' – a sqlalchemy.Table instance (None, for autoloading)

'mapper_class' – an optional class to be used as mapper class for 'table'

'relations' – an optional list of table names referencing 'table'. This is used for auto-constructing the relation properties of the mapper class.

'autodetect_relations' – try to autodetect the relationships between tables and auto-construct the relation properties of the mapper if 'relations' is omitted (set to None)

'table_name' – optional full name of a table (e.g. 'someschema.sometable') if you want to use 'name' as alias for the table.

`items(self)`

return items in insertion order

Return Value

list of D's (key, value) pairs, as 2-tuples

Overrides: `dict.items`

`__cmp__(x, y)`

`cmp(x,y)`

`__contains__`(*D*, *k*)

Return Value

True if *D* has a key *k*, else False

`__delattr__`(...)

`x.__delattr__('name') <==> del x.name`

`__delitem__`(*x*, *y*)

`del x[y]`

`__eq__`(*x*, *y*)

`x==y`

`__ge__`(*x*, *y*)

`x>=y`

`__getattr__`(...)

`x.__getattr__('name') <==> x.name`

Overrides: `object.__getattr__`

`__getitem__`(*x*, *y*)

`x[y]`

`__gt__`(*x*, *y*)

`x>y`

`__hash__`(*x*)

`hash(x)`

Overrides: `object.__hash__`

`__iter__`(*x*)

`iter(x)`

`__le__`(*x*, *y*)

`x<=y`

`__len__`(*x*)

`len(x)`

`__lt__`(*x*, *y*)

`x < y`

`__ne__`(*x*, *y*)

`x != y`

`__new__`(*T*, *S*, ...)

Return Value

a new object with type *S*, a subtype of *T*

Overrides: `object.__new__`

`__providedBy__`(...)

Object Specification Descriptor

`__reduce__`(...)

helper for pickle

`__reduce_ex__`(...)

helper for pickle

`__repr__`(*x*)

`repr(x)`

Overrides: `object.__repr__`

`__setattr__`(...)

`x.__setattr__('name', value) <==> x.name = value`

`__setitem__`(*x*, *i*, *y*)

`x[i]=y`

`__str__`(*x*)

`str(x)`

`clear`(*D*)

Remove all items from *D*.

Return Value

None

`copy`(*D*)

Return Value

a shallow copy of *D*

fromkeys(*dict*, *S*, *v*=...)

v defaults to None.**Return Value**New dict with keys from *S* and values equal to *v*

get(*D*, *k*, *d*=...)

d defaults to None.**Return Value***D*[*k*] if *k* in *D*, else *d*

has_key(*D*, *k*)**Return Value**True if *D* has a key *k*, else False

iteritems(*D*)**Return Value**an iterator over the (key, value) items of *D*

iterkeys(*D*)**Return Value**an iterator over the keys of *D*

itervalues(*D*)**Return Value**an iterator over the values of *D*

keys(*D*)**Return Value**list of *D*'s keys

pop(*D*, *k*, *d*=...)

If key is not found, *d* is returned if given, otherwise `KeyError` is raised**Return Value***v*, remove specified key and return the corresponding value

popitem(*D*)

2-tuple; but raise `KeyError` if *D* is empty**Return Value**

(k, v), remove and return some (key, value) pair as a

setdefault(*D*, *k*, *d*=...)**Return Value***D*.get(*k*,*d*), also set *D*[*k*]=*d* if *k* not in *D*

update(*D*, *E*, *******F*)

Update *D* from *E* and *F*: for *k* in *E*: *D*[*k*] = *E*[*k*] (if *E* has keys else: for (*k*, *v*) in *E*: *D*[*k*] = *v*) then: for *k* in *F*: *D*[*k*] = *F*[*k*]

Return Value

None

values(*D*)

Return Value

list of *D*'s values

5.1.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute ' <code>__class__</code> ' of 'object' objects>

5.1.3 Class Variables

Name	Description
<code>__implemented__</code>	Value: <implementedBy <code>z3c.sqlalchemy.model.Model</code> >
<code>__provides__</code>	Value: < <code>zope.interface.declarations.ClassProvides</code> object at 0x2b...>

6 Module `z3c.sqlalchemy.postgres`

6.1 Class `PostgresMixin`

object 
`z3c.sqlalchemy.postgres.PostgresMixin`

Known Subclasses: `z3c.sqlalchemy.postgres.PythonPostgresWrapper`, `z3c.sqlalchemy.postgres.ZopePostgresWrapper`
 Mixin class for Postgres aspects

6.1.1 Methods

`findDependentTables(self, schema='public', ignoreErrors=False)`

Returns a mapping `tablename -> [list of referencing table(names)]`. ATT: this method is specific to Postgres databases! ATT: This method is limited to a particular schema.

`__delattr__(...)`

`x.__delattr__('name') <==> del x.name`

`__getattr__(...)`

`x.__getattr__('name') <==> x.name`

`__hash__(x)`

`hash(x)`

`__init__(...)`

`x.__init__(...)` initializes `x`; see `x.__class__.__doc__` for signature

`__new__(T, S, ...)`

Return Value

a new object with type `S`, a subtype of `T`

`__providedBy__(...)`

Object Specification Descriptor

`__reduce__(...)`

helper for pickle

`__reduce_ex__(...)`

helper for pickle

`__repr__(x)``repr(x)``__setattr__(...)``x.__setattr__('name', value) <==> x.name = value``__str__(x)``str(x)`


6.1.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute <code>'__class__'</code> of <code>'object'</code> objects>

6.1.3 Class Variables

Name	Description
<code>__implemented__</code>	Value: <implementedBy z3c.sqlalchemy.postgres.PostgresMixin>
<code>__provides__</code>	Value: <zope.interface.declarations.ClassProvides object at 0x2b...>

6.2 Class PythonPostgresWrapper

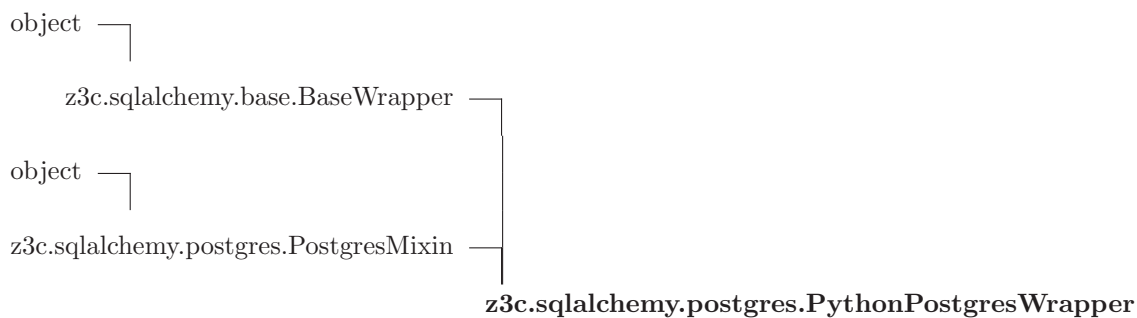

Wrapper to be used with Python with extended Postgres functionality.

6.2.1 Methods

`__delattr__(...)``x.__delattr__('name') <==> del x.name`

__getattr__(...) $x._\text{getattr__}(\text{'name'}) \iff x.\text{name}$ **__hash__**(*x*)hash(*x*)**__init__**(*self*, *dsn*, *model*=None, ****kw**)

'dsn' - a RFC-1738-style connection string

'model' - optional instance of model.Model

'kw' - optional keyword arguments passed to create_engine()

Overrides: object.__init__

__new__(*T*, *S*, ...)**Return Value**a new object with type *S*, a subtype of *T***__providedBy__**(...)

Object Specification Descriptor

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(*x*)repr(*x*)**__setattr__**(...) $x._\text{setattr__}(\text{'name'}, \text{value}) \iff x.\text{name} = \text{value}$ **__str__**(*x*)str(*x*)**findDependentTables**(*self*, *schema*='public', *ignoreErrors*=False)

Returns a mapping tablename -> [list of referencing table(names)]. ATT: this method is specific to Postgres databases! ATT: This method is limited to a particular schema.

getMapper(*self*, *tablename*, *schema*='public')**getMappers**(*self*, ***names**)

<code>registerMapper(<i>self</i>, <i>mapper</i>, <i>name</i>)</code>
--


6.2.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute ' <code>__class__</code> ' of 'object' objects>
<code>engine</code>	Value: <property object at 0x2b999e2f0c80>
<code>metadata</code>	Value: <property object at 0x2b999e2f0be0>
<code>model</code>	Value: <property object at 0x2b999e2f0cd0>
<code>session</code>	Value: <property object at 0x2b999e2f0c30>

6.2.3 Class Variables

Name	Description
<code>__implemented__</code>	Value: <implementedBy z3c.sqlalchemy.base.BaseWrapper>
<code>__provides__</code>	Value: <zope.interface.declarations.ClassProvides object at 0x2b...

6.3 Class ZopePostgresWrapper

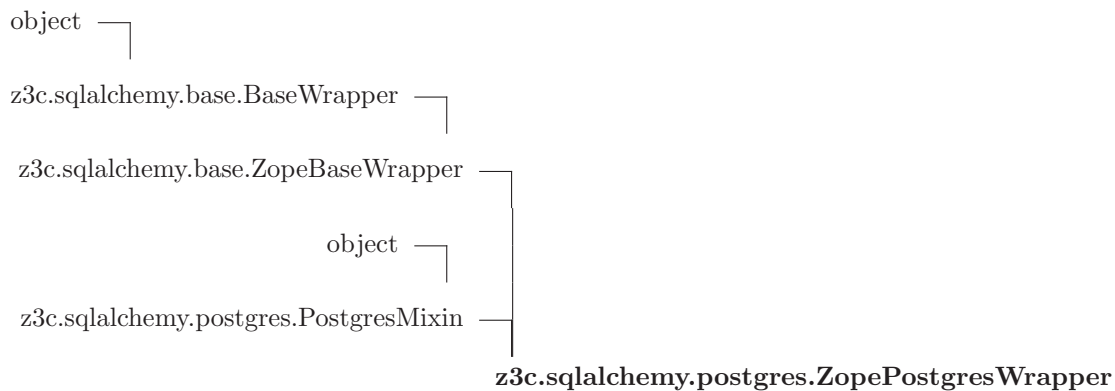

A wrapper to be used from within Zope. It connects the session with the transaction management of Zope.

6.3.1 Methods

<code>__delattr__(...)</code>
<code>x.__delattr__('name') <==> del x.name</code>

<code>__getattr__(...)</code>
<code>x.__getattr__('name') <==> x.name</code>

__hash__(*x*)

hash(x)

__init__(*self*, *dsn*, *model*=None, ***kw*)

'dsn' - a RFC-1738-style connection string

'model' - optional instance of model.Model

'kw' - optional keyword arguments passed to create_engine()

Overrides: object.__init__

__new__(*T*, *S*, ...)**Return Value**a new object with type *S*, a subtype of *T***__providedBy__**(...)

Object Specification Descriptor

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(*x*)

repr(x)

__setattr__(...)

x.__setattr__('name', value) <==> x.name = value

__str__(*x*)

str(x)

findDependentTables(*self*, *schema*='public', *ignoreErrors*=False)

Returns a mapping tablename -> [list of referencing table(names)]. ATT: this method is specific to Postgres databases! ATT: This method is limited to a particular schema.

getMapper(*self*, *tablename*, *schema*='public')**getMappers**(*self*, **names*)**registerMapper**(*self*, *mapper*, *name*)

6.3.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute <code>'__class__'</code> of <code>'object'</code> objects>
<code>connection</code>	Value: <property object at 0x2b999e3060f0>
<code>engine</code>	Value: <property object at 0x2b999e2f0c80>
<code>metadata</code>	Value: <property object at 0x2b999e2f0be0>
<code>model</code>	Value: <property object at 0x2b999e2f0cd0>
<code>session</code>	Value: <property object at 0x2b999e3060a0>

6.3.3 Class Variables


Name	Description
<code>__implemented__</code>	Value: <implementedBy z3c.sqlalchemy.base.BaseWrapper>
<code>__provides__</code>	Value: <zope.interface.declarations.ClassProvides object at 0x2b...

7 Module z3c.sqlalchemy.test

7.1 Variables

Name	Description
dsn	Value: 'postgres://postgres:postgres@cmsdb/Toolbox2Test'
e	Value: create_engine(dsn)
metadata	Value: BoundMetaData()
HierarchyTable	Value: Table('hierarchy', BoundMetaData(), Column(u'id', PGInteger(...
m	Value: {'hierarchy': {'name': 'hierarchy', 'autodetect_relations'...
wrapper	Value: <z3c.sqlalchemy.postgres.PythonPostgresWrapper object at ...
session	Value: wrapper.session
rows	Value: [<z3c.sqlalchemy.test.HierarchyNode object at 0x2b999e7ea...
EXT_PASS	Value: <object object at 0x2b999b4ea090>
NULLTYPE	Value: NullTypeEngine()
default_metadata	Value: DynamicMetaData()
func	Value: <sqlalchemy.sql._FunctionGateway object at 0x2b999d8982d0>

7.2 Class HierarchyNode

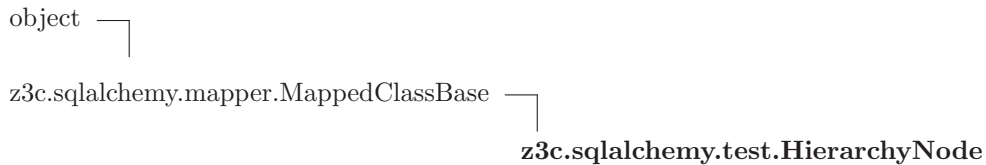

7.2.1 Methods

`__delattr__(...)`

`x.__delattr__('name') <==> del x.name`

`__getattr__(...)`

`x.__getattr__('name') <==> x.name`

`__hash__(x)`

`hash(x)`

__init__(*self*, **args*, ***kwargs*)

accepts keywords arguments used for initialization of mapped attributes/columns.

Overrides: z3c.sqlalchemy.mapper.MappedClassBase.__init__

__new__(*T*, *S*, ...)

Return Value

a new object with type *S*, a subtype of *T*

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(*x*)

repr(*x*)

__setattr__(...)

x.__setattr__('name', value) <==> *x*.name = value

__str__(*x*)

str(*x*)

clone(*self*)

Create a pristine copy. Use this method if you need to reinsert a copy of the current mapper instance back into the database.

getMapper(*self*, *name*)

Return a mapper associated with the current mapper. If this mapper represents a table A having a relationship to table B then the mapper for B can be obtained through self.getMapper('B'). This method is useful if you don't want to pass

the wrapper around this the wrapper is officially the only way to get hold of a mapper by name. See also http://groups.google.com/group/sqlalchemy/browse_thread/thread/18fb2e2818bdc032/5c2dfd71679925cb#5c2dfd71679925cb


7.2.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute ' <code>__class__</code> ' of 'object' objects>

7.2.3 Class Variables

Name	Description
<code>__allow_access_to_unprotected_subobjects__</code>	Value: 1
<code>aedat</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>benutzer</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>bezeichnung</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>c</code>	Value: <sqlalchemy.orm.mapper.LOrderedProp object at 0x2b999e7de...
<code>children</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>comment</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>deleted</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>id</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>idhierarchy_share</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>idprodukt</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>linkindex</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>neudat</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>parent</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>parentid</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>pos</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>produktkuerzel</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>show_gattung_in_bauplan</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>sortierung</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>sorting</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
<code>visible</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...

7.3 Class HierarchyNode

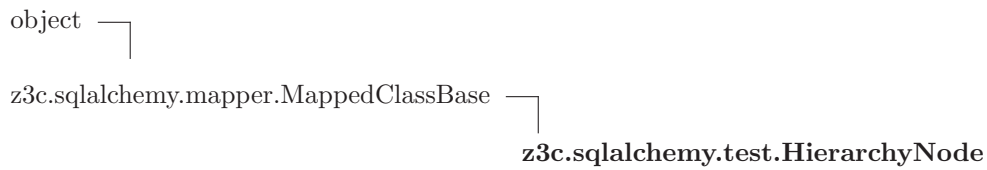

7.3.1 Methods

__delattr__(...)

x.__delattr__('name') <==> del x.name

__getattr__(...)

x.__getattr__('name') <==> x.name

__hash__(x)

hash(x)

__init__(self, *args, **kwargs)

accepts keywords arguments used for initialization of mapped attributes/columns.

Overrides: z3c.sqlalchemy.mapper.MappedClassBase.__init__

__new__(T, S, ...)

Return Value

a new object with type S, a subtype of T

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(x)

repr(x)

__setattr__(...)

x.__setattr__('name', value) <==> x.name = value

__str__(x)

str(x)

clone(*self*)

Create a pristine copy. Use this method if you need to reinsert a copy of the current mapper instance back into the database.

getMapper(*self*, *name*)

Return a mapper associated with the current mapper. If this mapper represents a table A having a relationship to table B then the mapper for B can be obtained through `self.getMapper('B')`. This method is useful if you don't want to pass the wrapper around this the wrapper is officially the only way to get hold of a mapper by name. See also http://groups.google.com/group/sqlalchemy/browse_thread/thread/18fb2e2818bdc032/5c2dfd71679925cb#5c2dfd71679925cb

7.3.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute <code>'__class__'</code> of <code>'object'</code> objects>

7.3.3 Class Variables

Name	Description
<code>__allow_access_to_unprotected_subobjects__</code>	Value: 1
<code>aedat</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>benutzer</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>bezeichnung</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>c</code>	Value: <sqlalchemy.orm.mapper.LOrderedProp object at 0x2b999e7de...>
<code>children</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>comment</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>deleted</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>id</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>idhierarchy_share</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>idprodukt</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>linkindex</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>
<code>neudat</code>	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...>

continued on next page

Name	Description
parent	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
parentid	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
pos	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
produktkuerzel	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
show_gattung_in_bauplan	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
sortierung	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
sorting	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...
visible	Value: <sqlalchemy.orm.unitofwork.UOWProperty object at 0x2b999e...

8 Package `z3c.sqlalchemy.tests`

8.1 Modules

- **testSQLAlchemy**: Tests, tests, tests.....
(Section 9, p. 41)


9 Module `z3c.sqlalchemy.tests.testSQLAlchemy`

Tests, tests, tests.....

9.1 Functions

<code>test_suite()</code>

9.2 Class `WrapperTests`

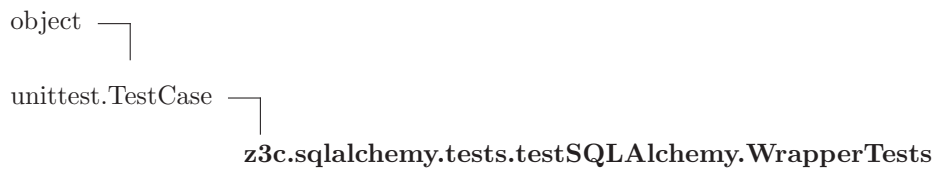

9.2.1 Methods

<code>setUp(self)</code> Hook method for setting up the test fixture before exercising it. Overrides: <code>unittest.TestCase.setUp</code> <code>exitit</code> (inherited documentation)

<code>testIFaceBaseWrapper(self)</code>
--

<code>testIFacePythonPostgres(self)</code>

<code>testIFaceZopePostgres(self)</code>

<code>testIModel(self)</code>

<code>testSimplePopulation(self)</code>
--

<code>testMapperWithCustomModel(self)</code>

<code>testCustomMapperClassWithWrongType(self)</code>
--

<code>testGetMappers(self)</code>
--

<code>testModelWeirdParameters(self)</code>
--

<code>testModelWeirdRelationsParameters(self)</code>

<code>testModelNonExistingTables(self)</code>
--

<code>testWrapperRegistration(self)</code>

testWrapperRegistrationFailing(*self*)

testWrapperDirectRegistration(*self*)

testMapperGetMapper(*self*)

__call__(*self*, **args*, ***kws*)

__delattr__(...)

x.__delattr__('name') <==> del x.name

__getattr__(...)

x.__getattr__('name') <==> x.name

__hash__(*x*)

hash(x)

__init__(*self*, *methodName*='runTest')

Create an instance of the class that will use the named test method when executed. Raises a ValueError if the instance does not have a method with the specified name.

Overrides: object.__init__

__new__(*T*, *S*, ...)

Return Value

a new object with type *S*, a subtype of *T*

__reduce__(...)

helper for pickle

__reduce_ex__(...)

helper for pickle

__repr__(*self*)

repr(x)

Overrides: object.__repr__ extit(inherited documentation)

__setattr__(...)

x.__setattr__('name', value) <==> x.name = value

__str__(*self*)

str(x)

Overrides: object.__str__ extit(inherited documentation)

assertAlmostEqual(*self*, *first*, *second*, *places*=7, *msg*=None)

Fail if the two objects are unequal as determined by their difference rounded to the given number of decimal places (default 7) and comparing to zero.

Note that decimal places (from zero) are usually not the same as significant digits (measured from the most significant digit).

assertAlmostEquals(*self*, *first*, *second*, *places*=7, *msg*=None)

Fail if the two objects are unequal as determined by their difference rounded to the given number of decimal places (default 7) and comparing to zero.

Note that decimal places (from zero) are usually not the same as significant digits (measured from the most significant digit).

assertEqual(*self*, *first*, *second*, *msg*=None)

Fail if the two objects are unequal as determined by the '==' operator.

assertEquals(*self*, *first*, *second*, *msg*=None)

Fail if the two objects are unequal as determined by the '==' operator.

assertFalse(*self*, *expr*, *msg*=None)

Fail the test if the expression is true.

assertNotAlmostEqual(*self*, *first*, *second*, *places*=7, *msg*=None)

Fail if the two objects are equal as determined by their difference rounded to the given number of decimal places (default 7) and comparing to zero.

Note that decimal places (from zero) are usually not the same as significant digits (measured from the most significant digit).

assertNotAlmostEquals(*self*, *first*, *second*, *places*=7, *msg*=None)

Fail if the two objects are equal as determined by their difference rounded to the given number of decimal places (default 7) and comparing to zero.

Note that decimal places (from zero) are usually not the same as significant digits (measured from the most significant digit).

assertNotEqual(*self*, *first*, *second*, *msg*=None)

Fail if the two objects are equal as determined by the '==' operator.

assertNotEquals(*self*, *first*, *second*, *msg*=None)

Fail if the two objects are equal as determined by the '==' operator.

assertRaises(*self*, *excClass*, *callableObj*, **args*, ***kwargs*)

Fail unless an exception of class *excClass* is thrown by *callableObj* when invoked with arguments *args* and keyword arguments *kwargs*. If a different type of exception is thrown, it will not be caught, and the test case will be deemed to have suffered an error, exactly as for an unexpected exception.

assertTrue(*self*, *expr*, *msg=None*)

Fail the test unless the expression is true.

assert_(*self*, *expr*, *msg=None*)

Fail the test unless the expression is true.

countTestCases(*self*)

debug(*self*)

Run the test without collecting errors in a `TestResult`

defaultTestResult(*self*)

fail(*self*, *msg=None*)

Fail immediately, with the given message.

failIf(*self*, *expr*, *msg=None*)

Fail the test if the expression is true.

failIfAlmostEqual(*self*, *first*, *second*, *places=7*, *msg=None*)

Fail if the two objects are equal as determined by their difference rounded to the given number of decimal places (default 7) and comparing to zero.
Note that decimal places (from zero) are usually not the same as significant digits (measured from the most significant digit).

failIfEqual(*self*, *first*, *second*, *msg=None*)

Fail if the two objects are equal as determined by the '==' operator.

failUnless(*self*, *expr*, *msg=None*)

Fail the test unless the expression is true.

failUnlessAlmostEqual(*self*, *first*, *second*, *places=7*, *msg=None*)

Fail if the two objects are unequal as determined by their difference rounded to the given number of decimal places (default 7) and comparing to zero.
Note that decimal places (from zero) are usually not the same as significant digits (measured from the most significant digit).

failUnlessEqual(*self*, *first*, *second*, *msg=None*)

Fail if the two objects are unequal as determined by the '==' operator.

failUnlessRaises(*self*, *excClass*, *callableObj*, **args*, ***kwargs*)

Fail unless an exception of class *excClass* is thrown by *callableObj* when invoked with arguments *args* and keyword arguments *kwargs*. If a different type of exception is thrown, it will not be caught, and the test case will be deemed to have suffered an error, exactly as for an unexpected exception.

id(*self*)

run(*self*, *result=None*)

shortDescription(*self*)

Returns a one-line description of the test, or None if no description has been provided. The default implementation of this method returns the first line of the specified test method's docstring.

tearDown(*self*)

Hook method for deconstructing the test fixture after testing it.

9.2.2 Properties

Name	Description
<code>__class__</code>	Value: <attribute <code>'__class__'</code> of <code>'object'</code> objects>

10 Module `z3c.sqlalchemy.util`

Some helper methods

10.1 Functions

createSAWrapper(*dsn*, *model*=None, *forZope*=False, *name*=None, ***kw*)

Convenience method to generate a wrapper for a DSN and a model. This method hides all database related magic from the user.

'dsn' - something like 'postgres://user:password@host/dbname'

'model' - None or an instance of `model.Model` or a string representing a named utility implementing `IModelProvider` or a method/callable returning an instance of `model.Model`.

'forZope' - set this to True in order to obtain a Zope-transaction-aware wrapper.

'name' can be set to register the wrapper automatically in order to avoid a dedicated `registerSAWrapper()` call.

createSQLAlchemyWrapper(*dsn*, *model*=None, *forZope*=False, *name*=None, ***kw*)

Convenience method to generate a wrapper for a DSN and a model. This method hides all database related magic from the user.

'dsn' - something like 'postgres://user:password@host/dbname'

'model' - None or an instance of `model.Model` or a string representing a named utility implementing `IModelProvider` or a method/callable returning an instance of `model.Model`.

'forZope' - set this to True in order to obtain a Zope-transaction-aware wrapper.

'name' can be set to register the wrapper automatically in order to avoid a dedicated `registerSAWrapper()` call.

registerSAWrapper(*wrapper*, *name*)

deferred registration of the wrapper as named utility

registerSQLAlchemyWrapper(*wrapper*, *name*)

deferred registration of the wrapper as named utility

getSAWrapper(*name*)

return a `SQLAlchemyWrapper` instance by name

getSQLAlchemyWrapper(*name*)

return a `SQLAlchemyWrapper` instance by name

allRegisteredSAWrappers()

return a dict containing information for all registered wrappers.

allRegisteredSQLAlchemyWrappers()

return a dict containing information for all registered wrappers.

allSAWrapperNames()

return list of all registered wrapper names

Index

- dict.__cmp__ (function), 19, 23
- dict.__contains__ (function), 19, 23
- dict.__delitem__ (function), 19, 24
- dict.__eq__ (function), 19, 24
- dict.__ge__ (function), 19, 24
- dict.__getitem__ (function), 19, 24
- dict.__gt__ (function), 20, 24
- dict.__iter__ (function), 20, 24
- dict.__le__ (function), 20, 24
- dict.__len__ (function), 20, 24
- dict.__lt__ (function), 20, 24
- dict.__ne__ (function), 20, 25
- dict.__setitem__ (function), 21, 25
- dict.clear (function), 21, 25
- dict.copy (function), 21, 25
- dict.fromkeys (function), 21, 25
- dict.get (function), 21, 26
- dict.has_key (function), 21, 26
- dict.items (function), 21
- dict.iteritems (function), 21, 26
- dict.iterkeys (function), 21, 26
- dict.itervalues (function), 21, 26
- dict.keys (function), 22, 26
- dict.pop (function), 22, 26
- dict.popitem (function), 22, 26
- dict.setdefault (function), 22, 26
- dict.update (function), 22, 26
- dict.values (function), 22, 27

- object.__delattr__ (function), 4, 5, 7, 9, 10, 16, 18, 19, 24, 28, 29, 31, 34, 37, 42
- object.__getattr__ (function), 4, 5, 7, 9, 10, 16, 18, 28, 29, 31, 34, 37, 42
- object.__hash__ (function), 4, 5, 7, 9, 10, 16, 18, 28, 30, 31, 34, 37, 42
- object.__init__ (function), 28
- object.__new__ (function), 4, 5, 7, 9, 11, 16, 18, 28, 30, 32, 35, 37, 42
- object.__reduce__ (function), 4, 6, 8, 9, 11, 16, 18, 20, 25, 28, 30, 32, 35, 37, 42
- object.__reduce_ex__ (function), 4, 6, 8, 9, 11, 17, 18, 20, 25, 28, 30, 32, 35, 37, 42
- object.__repr__ (function), 5, 6, 8, 9, 11, 17, 18, 28, 30, 32, 35, 37
- object.__setattr__ (function), 5, 6, 8, 10, 11, 17, 18, 20, 25, 29, 30, 32, 35, 37, 42
- object.__str__ (function), 5, 6, 8, 10, 11, 17, 18, 21, 25, 29, 30, 32, 35, 37

- unittest.TestCase.__call__ (function), 42
- unittest.TestCase.countTestCases (function), 44
- unittest.TestCase.debug (function), 44
- unittest.TestCase.defaultTestResult (function), 44
- unittest.TestCase.fail (function), 44
- unittest.TestCase.failIf (function), 43, 44
- unittest.TestCase.failIfAlmostEqual (function), 43, 44
- unittest.TestCase.failIfEqual (function), 43, 44
- unittest.TestCase.failUnless (function), 44
- unittest.TestCase.failUnlessAlmostEqual (function), 42–44
- unittest.TestCase.failUnlessEqual (function), 43, 44
- unittest.TestCase.failUnlessRaises (function), 43, 45
- unittest.TestCase.id (function), 45
- unittest.TestCase.run (function), 45
- unittest.TestCase.shortDescription (function), 45
- unittest.TestCase.tearDown (function), 45

- z3c (package)
 - z3c.sqlalchemy (package), 3
 - z3c.sqlalchemy.base (module), 4–12
 - z3c.sqlalchemy.interfaces (module), 13–15
 - z3c.sqlalchemy.mapper (module), 16–22
 - z3c.sqlalchemy.model (module), 23–27
 - z3c.sqlalchemy.postgres (module), 28–33
 - z3c.sqlalchemy.test (module), 34–39
 - z3c.sqlalchemy.tests (package), 40
 - z3c.sqlalchemy.util (module), 46–47