

Using 100-m Radio Telescope to Detect the 21-cm Signal During the Epoch of Reionization

SHIHAN GOU¹ AND YI MAO ¹

¹*Department of Astronomy, Tsinghua University*

ABSTRACT

Despite extensive efforts, direct observational constraints on the epoch of reionization (EoR) remain scarce, and our understanding of this pivotal cosmic era is correspondingly limited. The redshifted 21-cm line of neutral hydrogen constitutes the most direct probe of reionization, yet the Square Kilometre Array (SKA) is still under construction, thereby impeding progress in EoR studies. Here, we demonstrate that 100 m-class single-dish radio telescopes can be used to detect the 21-cm signal from the EoR and to impose stringent bounds on reionization model parameters. We employ the semi-numerical code 21cmFAST to generate three-dimensional light-cone simulations of the 21 cm brightness-temperature field, and we base our observational forecasts on these mock data. Given the angular resolution limited by the 100-m aperture, our analysis focuses on the one-dimensional (line-of-sight, LoS) power spectra of the history-mean-subtracted 21 cm signal. We find that, with a total integration time of 100 h, a cumulative signal-to-noise ratio (SNR) in excess of 5σ is achievable, rising to above 19σ for 1000 h of observations. These results indicate that the three 100 m-class radio telescopes currently under construction in China possess the capability to deliver the first statistically robust measurement of the LoS EoR 21-cm power spectrum well before the SKA becomes available.

Keywords: Galaxies (573) — Cosmology (343) — High Energy astrophysics (739) — Interstellar medium (847) — Stellar astronomy (1583) — Solar physics (1476)

1. INTRODUCTION

Test for the text divison.

2. A SHORT HISTORY OF AASTEX

LaTeX² is a document markup language that is particularly well suited for the publication of mathematical and scientific articles (L. Lamport 1994). LaTeX was written in 1985 by Leslie Lamport who based it on the TeX typesetting language which itself was created by Donald E. Knuth in 1978. In 1988 a suite of LaTeX macros were developed to investigate electronic submission and publication of AAS Journal articles (R. J. Hanisch & C. D. Biemesderfer 1989). Shortly afterwards, Chris Biemesderfer merged these macros and more into a LaTeX 2.08 style file called AASTeX. These early AASTeX versions introduced many common commands and practices that authors take for granted today. Substantial revisions were made by Lee Brotzman and Pierre Landau when the package was updated to v4.0. AASTeX v5.0, written in 1995 by Arthur Ogawa, upgraded to LaTeX 2e which uses the document class in lieu of a style file. Other improvements to version 5 included hypertext support, landscape deluxetables and improved figure support to facilitate electronic submission. AASTeX v5.2 was released in 2005 and introduced additional graphics support plus new mark up to identifier astronomical objects, datasets and facilities.

In 1996 Maxim Markevitch modified the AAS preprint style file, aaspp4.sty, to closely emulate the very tight, two column style of a typeset Astrophysical Journal article. The result was emulateapj.sty. A year later Alexey Vikhlinin took over development and maintenance³. In 2001 he converted emulateapj into a class file in LaTeX 2e and in 2003 Vikhlinin completely rewrote emulateapj based on the APS Journal's REVTeX class.

During this time emulateapj gained growing acceptance in the astronomical community as it filled an author need to obtain an approximate number of manuscript pages prior to submission for cost and length estimates. The tighter typeset also had the added advantage of saving paper when printing hard copies.

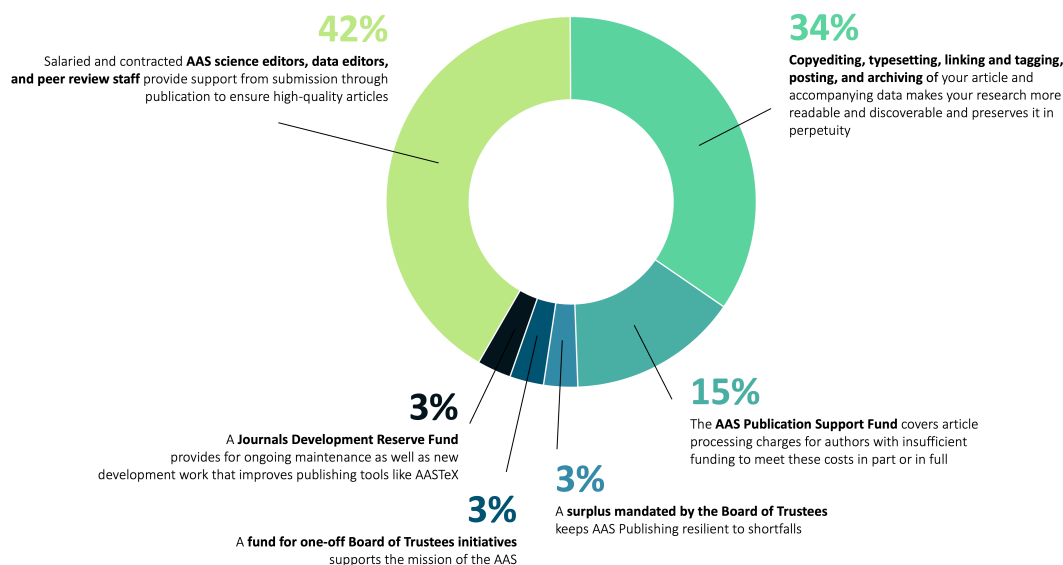


Figure 1. The AAS journals are operated as a nonprofit venture, and author charges fairly recapture costs for the services provided in the publishing process. The chart above breaks down the services that author charges go toward. The AAS Journals' Business Model is outlined in a 2023 post.

Even though author publication charges were no longer based on print pages⁴ the emulateapj class file proved to be extremely popular with AAS Journal authors. An analysis of submitted LaTeX manuscripts in 2015 revealed that ~30% either called emulateapj or had a commented emulateapj classfile call indicating it was used at some stage of the manuscript construction. Clearly authors wanted to have access to a tightly typeset version of the article when editing with co-authors and for preprint submissions.

² <http://www.latex-project.org/>

³ <https://hea-www.harvard.edu/~alexey/emulateapj/>

⁴ see Section B in the Appendix for more details about how current article costs are calculated. Figure 1 shows how author publication charges are currently spent.

When planning the next AAST_EX release the popularity of emulate_{apj} played an important roll in the decision to drop the old base code and adopt and modify emulate_{apj} for AAST_EX v6.+. Those changes brought AAST_EX inline with what the majority of authors were already using while still delivering new and improved features. AAST_EX v6.0 through v6.31 were developed by Amy Hendrickson⁵. The release dates for the AAST_EX6 versions were January 2016 (v6.0), October 2016 (v6.1), January 2018 (v6.2), June 2019 (v6.3), and March 2020 (v6.3.1), respectively.

AAST_EX's reliance on REVTeX, specifically v4-1, proved to be problematic when it was superseded in January 2019. Rather than continue with REVTeX v4-2 as the base package of AAST_EX, Aptara⁶ was hired to rewrite AAST_EX from scratch while keeping the core functionality in early 2024. This new version, v7.0, was released in January 2025. The first bug fix was release in May 2025 as v7.0.1. Users of v6.3.1 will have little difficulty migrating to this new version with the core difference being that an email address is required for each author in v7+.

The rest of this article provides information and examples on how to create your own AAS Journal manuscript with v7+. Special emphasis is placed on how to use the full potential of AAST_EX. Note that some of the examples are commented out in this latex manuscript. The next section describes the different manuscript styles available. Section 4 describes table and figure placement. Specific examples of different tables are provided, Section 4.1. Section 5 discusses how to properly highlight text added during revisions. The last section, 6, shows how to recognize software and external data as first class references in the manuscript bibliography. An appendix is included for additional information readers might find useful. More documentation is embedded in the comments of this LaTeX file and in the online documentation at <http://journals.aas.org/authors/aastex.html>.

3. MANUSCRIPT STYLES

The default style in AAST_EX v7+ is a tight single column style, e.g. 10 point font, single spaced. The single column style is very useful for articles with wide equations. It is also the easiest style to work with since figures and tables, see Section 4, will span the entire page, reducing the need for address float sizing.

To invoke a two column style similar to what is produced in the published PDF copy use:

```
\documentclass[twocolumn]{aastex7}.
```

Note that in the two column style figures and tables will only span one column unless specifically ordered across both with the “*” flag, e.g.

```
\begin{figure*} ... \end{figure*},
\begin{table*} ... \end{table*}, and
\begin{deluxetable*} ... \end{deluxetable*}.
```

This option is ignored in the `onecolumn` style.

All authors should have the `linenumbers` style included so that the compiled PDF has each row numbered in the left margin. Line numbering is mandatory as it helps reviewers quickly identify locations in the text.

The `anonymous` option will prevent the author and affiliations from being shown in the compiled pdf copy. This option allows the author to keep this critical information in the latex file but prevent the reviewer from seeing it during peer review if dual anonymous review (DAR) is requested. Likewise, acknowledgments and author contributions can also be hidden if placed in the `\begin{acknowledgments} ... \end{acknowledgments}` and `\begin{contribution} ... \end{contribution}` environments. The use of this option is highly recommended for PSJ submissions. Advice for anonymizing your manuscript for DAR is provided at <https://journals.aas.org/manuscript-preparation/#dar>.

Another reason to use the `\begin{acknowledgments} ... \end{acknowledgments}` and `\begin{contribution} ... \end{contribution}` environments is that the word counter in our peer review system will **not** count the contents of these environments. If authors put acknowledgments and contribution text in other locations, these words will be counted and authors may be overcharged on their author publication charges.

Multiple style options are allowed, e.g.

⁵ <https://www.texnology.com/about.htm>

⁶ <https://www.aptaracorp.com>

94 `\documentclass[linenumbers,trackchanges,anonymous]{aastex7}.`
 95

96 4. FLOATS

97 Floats are non-text items that generally cannot be split over a page. They also have captions and can be numbered
 98 for reference. Primarily these are figures and tables but authors can define their own. LaTeX tries to place a float
 99 where indicated in the manuscript but will move it later if there is not enough room at that location, hence the term
 100 “float”.

101 Authors are encouraged to embed their tables and figures within the text as they are mentioned. Editors and the
 102 vast majority of referees find it much easier to read a manuscript with embedded figures and tables.

103 Depending on the number of floats and the particular amount of text and equations present in a manuscript the
 104 ultimate location of any specific float can be hard to predict prior to compilation. It is recommended that authors
 105 **not** spend significant time trying to get float placement perfect for peer review. The AAS Journal’s publisher has
 106 sophisticated typesetting software that will produce the optimal layout during production.

107 Note that authors of Research Notes are only allowed one float, either one table or one figure.

108 For authors that do want to take the time to optimize the locations of their floats there are some techniques that can
 109 be used. The simplest solution is to place a float earlier in the text to get the position right but this option will break
 110 down if the manuscript is altered. A better method is to force LaTeX to place a float in a general area with the use of
 111 the optional `[placement specifier]` parameter for figures and tables. This parameter goes after `\begin{figure}`,
 112 `\begin{table}`, and `\begin{deluxetable}`. The main arguments the specifier takes are “h”, “t”, “b”, and “!”. These
 113 tell LaTeX to place the float here (or as close as possible to this location as possible), at the top of the page, and at
 114 the bottom of the page. The last argument, “!”, tells LaTeX to override its internal method of calculating the float
 115 position. A sequence of rules can be created by using multiple arguments. For example, `\begin{figure}[htb!]` tells
 116 LaTeX to try the current location first, then the top of the page and finally the bottom of the page without regard to
 117 what it thinks the proper position should be. Many of the tables and figures in this article use a placement specifier
 118 to set their positions.

119 Note that the LaTeX `tabular` environment is not a float. Only when a `tabular` is surrounded by `\begin{table}`
 120 ... `\end{table}` is it a true float and the rules and suggestions above apply.

121 In AASTeX all `deluxetables` are float tables and thus if they are longer than a page will spill off the bottom. Long
 122 `deluxetables` should begin with the `\startlongtable` command. This initiates a `longtable` environment. Authors
 123 might have to use `\clearpage` to isolate a long table or optimally place it within the surrounding text.

124 4.1. Tables

125 Tables can be constructed with LaTeX’s standard table environment or the AASTeX’s `deluxetable` environment.
 126 The `deluxetable` construct handles long tables better but has a larger overhead due to the greater amount of defined
 127 mark up used to set up and manipulate the table structure. The choice of which to use is up to the author. Examples
 128 of both environments are used in this manuscript.

129 Tables longer than 200 data lines and complex tables should only have a short example table with the full data set
 130 available in the machine readable format. The machine readable table will be available in the HTML version of the
 131 article with just a short example in the PDF. Authors are required to indicate in the table comments that the data
 132 is in machine readable format in the full article. Authors are encouraged to create their own machine readable tables
 133 using the online tool at <http://authortools.aas.org/MRT/upload.html>.

134 AASTeX v6 introduced five new table features that were designed to make table construction easier and the resulting
 135 display better for AAS Journal authors. The items are:

- 136 1. Declaring math mode in specific columns,
- 137 2. Column decimal alignment,
- 138 3. Automatic column header numbering,
- 139 4. Hiding columns, and
- 140 5. Splitting wide tables into two or three parts.

Table 1. Measurements of Emission Lines: two breaks

Model	Component	Shift	FWHM	Flux
		(km s ⁻¹)	(km s ⁻¹)	(10 ⁻¹⁷ erg s ⁻¹ cm ⁻²)
(1)	(2)	(3)	(4)	(5)
Model 1	BELs	-97.13	9117±38	1033±33
	IELs	-4049.123	1974±22	2495±30
	NELs	...	641±4	449±23
Model 2	BELs	-85	8991±41	988±29
	IELs	-51000	2025±26	2494±32
	NELs	52	637±10	477±17

N V	Si IV	C IV	Mg II	H γ
(6)	(7)	(8)	(9)	(10)
< 35	< 166	637±31	1951±26	991±30
< 42	< 109	995±186	83±30	75±23
< 6	< 9	—	275±18	150±11
< 24	< 173	623±28	1945±29	989±27
< 37	< 124	1005±190	72±28	72±21
< 4	< 8	—	278±17	153±10

H β	H α	He I	Pa γ
(11)	(12)	(13)	(14)
3502±42	20285±80	2025±116	1289±107
130±25	357±94	194±64	36±23
313±12	958±43	318±34	151±17
3498±37	20288±73	2047±143	1376±167
113±18	271±85	205±72	34±21
317±15	969±40	325±37	147±22

NOTE—This is an example of how to split a deluxetable. You can split any table with this command into two or three parts. The location of the split is given by the author based on the placement of the “B” indicators in the column identifier preamble. For more information please look at the new AASTeX instructions.

Full details on how to create each of these special table types are given in the guidelines at <http://journals.aas.org/authors/aastex.html>.

4.1.1. Extremely wide tables

Since the AAS Journals are now all electronic with no print version there is no reason why tables can not be as wide as authors need them to be. For wide tables, the full table will almost always be available in machine readable format with just an example in the article but how is an example created for a wide table?

There are two ways to create examples for wide tabular data sets. The first is to break a table into two or three components so that it flows down a page by invoking a new table type, splittabular or splitdeluxetable. Within these tables a new “B” column separator is introduced. Much like the vertical bar option, “|”, that produces a vertical table lines the new “B” separator indicates where to Break a table. Up to two “B”s may be included.

Table 1 shows how to split a wide deluxetable into three parts with the `\splitdeluxetable` command. The `\colnumbers` option is on to show how the automatic column numbering carries through the second table component.

The second way is to create a “descriptive” table instead. This type of table only provides information about the columns rather than the data itself. Table 2 shows an example of this type of table using the same columns as in

Table 2. Descriptive version of the "Measurements of Emission Lines" table

Number	Units	Label	Explanation
1	—	Model	Model identifier
2	—	Component	Component identifier
3	km s ⁻¹	Shift	Line shift
4	km s ⁻¹	FWHM	Line Full-Width at Half-Maximum
5	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	Ly α	Ly α line flux
6	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	N V	N V line flux
7	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	Si IV	Si IV line flux
8	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	C IV	C IV line flux
9	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	Mg II	Mg II line flux
10	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	H γ	H γ line flux
11	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	H β	H β line flux
12	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	H α	H α line flux
13	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	He I	He I line flux
14	10 ⁻¹⁷ erg s ⁻¹ cm ⁻²	Pa γ	Pa γ line flux

NOTE—Table 2 is published in its entirety in the electronic edition of the *Astrophysical Journal*. A portion is shown here for guidance regarding its form and content. The `\digitalasset` command highlights the Table title to visually indicate to the reader that there is data associated with this table.

Table 1. Since these types of tables always have a machine readable component, this table uses the `\digitalasset` command to highlight this fact.

4.2. Figures

Authors can include a wide number of different graphics with their articles. These range from general figures all authors are familiar with to new enhanced graphics that can only be fully experienced in HTML. The later include figure sets, animations and interactive figures. All enhanced graphics require a static two dimensional representation in the manuscript to serve as the example for the reader. All figures should include detailed and descriptive captions. These captions are absolutely critical for readers for whom the enhanced figure is inaccessible either due to a disability or offline access. This portion of the article provides examples for setting up all these types in with the latest version of AAST_{EX}.

4.3. General figures

AAST_{EX} has a `\plotone` command to display a figure consisting of one figure file. Figure 1 is an example which shows how AAS Publishing spends author publication charges. For a general figure consisting of two figure files the `\plottwo` command can be used to position the two image files side by side.

Both `\plotone` and `\plottwo` take a `\caption` and an optional `\figurenum` command to specify the figure number⁷. Each is based on the `graphicx` package command, `\includegraphics`. Authors are welcome to use `\includegraphics` along with its optional arguments that control the height, width, scale, and position angle of a file within the figure. More information on the full usage of `\includegraphics` can be found at https://en.wikibooks.org/wiki/LaTeX/Importing_Graphics#Including_graphics.

⁷ It is better to not use `\figurenum` and let LaTeX auto-increment all the figures. If you do use this command you need to mark all of them accordingly.

4.4. Enhanced graphics

Enhanced graphics have an example figure to serve as an example for the reader and the full graphical item available in the published HTML article. This includes Figure sets, animations, and interactive figures. The Astronomy Image Explorer (<http://www.astroexplorer.org/>) provides access to all the figures published in the AAS Journals since they offered an electronic version which was in the mid 1990s. You can filter image searches by specific terms, year, journal, or type. The type filter is particularly useful for finding all published enhanced graphics. As of August 2024 there are over 5600 videos, 2200 figure sets, and 200 interactive figures. The next sections describe how to include these types of graphics in your own manuscripts.

5. REVISION TRACKING AND COLOR HIGHLIGHTING

The `\added{<text>}` command should be used to highlight new text in bold for revised manuscripts. To activate this command, the `trackchanges` option must be used in the `\documentclass` call. When compiled this will produce the marked text in bold font. Take out the `trackchanges` option if you want the bold to disappear.

This text was specifically added to feature this reborn functionality. Notice how the bold goes away when you remove the 'trackfeatures' option.

6. SOFTWARE AND THIRD PARTY DATA REPOSITORY CITATIONS

The AAS Journals would like to encourage authors to change software and third party data repository references from the current standard of a footnote to a first class citation in the bibliography. As a bibliographic citation these important references will be more easily captured and credit will be given to the appropriate people.

The first step to making this happen is to have the data or software in a long term repository that has made these items available via a persistent identifier like a Digital Object Identifier (DOI). A list of repositories that satisfy this criteria plus each one's pros and cons are given at <https://github.com/AASJournals/Tutorials/tree/master/Repositories>.

In the bibliography the format for data or code follows this format:

author year, title, version, publisher, prefix:identifier

L. Corrales (2015) provides an example of how the citation in the article references the external code at <https://doi.org/10.5281/zenodo.15991>. Unfortunately, bibtex does not have specific bibtex entries for these types of references so the “@misc” type should be used. The Repository tutorial explains how to code the “@misc” type correctly. The most recent .bst file, aasjournalv7.bst, will output bibtex “@misc” type properly.

Authors can also use the website <https://www.doi2bib.org/> to create a BIBTeX entry for any DOI. Please check the output from this site carefully as its output is only as good as the DOI metadata. Some DOI creators do not provide enough metadata to construct an adequate citation.

ACKNOWLEDGMENTS

We thank all the people that have made this AASTeX what it is today. This includes but not limited to Bob Hanisch, Chris Biemesderfer, Lee Brotzman, Pierre Landau, Arthur Ogawa, Maxim Markevitch, Alexey Vikhlinin and Amy Hendrickson. Also special thanks to David Hogg and Daniel Foreman-Mackey for the new `modern` style design. Considerable help was provided via bug reports and hacks from numerous people including Patricio Cubillos, Alex Drlica-Wagner, Sean Lake, Michele Bannister, Peter Williams, Jonathan Gagne, Arthur Adams, Nicholas Wogan, Aaron Pearlman, Jeff Mangum, Mark Durre, Joel Ong, and Stephen Thorp.

AUTHOR CONTRIBUTIONS

All authors contributed equally to the Terra Mater collaboration.

Facilities: HST(STIS), Swift(XRT and UVOT), AAVSO, CTIO:1.3m, CTIO:1.5m, CXO

Software: astropy (Astropy Collaboration et al. 2013, 2018, 2022), Cloudy (G. J. Ferland et al. 2013), Source
Extractor (E. Bertin & S. Arnouts 1996)

APPENDIX

A. APPENDIX INFORMATION

Appendices can be broken into separate sections just like in the main text. The only difference is that each appendix section is indexed by a letter (A, B, C, etc.) instead of a number. Likewise numbered equations have the section letter appended. Here is an equation as an example.

$$I = \frac{1}{1 + d_1^{P(1+d_2)}} \quad (\text{A1})$$

Appendix tables and figures should not be numbered like equations. Instead they should continue the sequence from the main article body.

B. AUTHOR PUBLICATION CHARGES

In April 2011 the traditional way of calculating author charges based on the number of printed pages was changed. The reason for the change was due to a recognition of the growing number of article items that could not be represented in print. Now author charges are determined by a number of digital “quanta”. A single quantum is defined as 350 words, one figure, one table, and one digital asset. For the latter this includes machine readable tables, data behind a figure, figure sets, animations, and interactive figures. The current cost for the different quanta types is available at https://journals.aas.org/article-charges-and-copyright/#author_publication_charges. Authors may use the ApJL length calculator to get a rough estimate of the number of word and float quanta in their manuscript. The calculator is located at <https://authortools.aas.org/ApJL/betacountwords.html>.

C. ROTATING TABLES

To place a single page table in a landscape mode start the table portion with `\begin{rotatetable}` and end with `\end{rotatetable}`.

Tables that exceed a print page take a slightly different environment since both rotation and long table printing are required. In these cases start with `\begin{longrotatetable}` and end with `\end{longrotatetable}`. The `\movetabledown` command can be used to help center extremely wide, landscape tables. The command `\movetabledown=1in` will move any rotated table down 1 inch.

A handy “cheat sheet” that provides the necessary LaTeX to produce 17 different types of tables is available at http://journals.aas.org/authors/aastex/aasguide.html#table_cheat_sheet.

D. USING CHINESE, JAPANESE, AND KOREAN CHARACTERS

Authors have the option to include names in Chinese, Japanese, or Korean (CJK) characters in addition to the English name. The names will be displayed in parentheses after the English name. The way to do this in AASTeX is to use the CJK package available at <https://ctan.org/pkg/cjk?lang=en>. Further details on how to implement this and solutions for common problems, please go to <https://journals.aas.org/nonroman/>.

REFERENCES

- | | |
|--|--|
| <p>Astropy Collaboration, Robitaille, T. P., Tollerud, E. J.,
et al. 2013, A&A, 558, A33,
doi: 10.1051/0004-6361/201322068</p> <p>Astropy Collaboration, Price-Whelan, A. M., Sipőcz, B. M.,
et al. 2018, AJ, 156, 123, doi: 10.3847/1538-3881/aabc4f</p> | <p>Astropy Collaboration, Price-Whelan, A. M., Lim, P. L.,
et al. 2022, ApJ, 935, 167, doi: 10.3847/1538-4357/ac7c74</p> <p>Bertin, E., & Arnouts, S. 1996, A&AS, 117, 393,
doi: 10.1051/aas:1996164</p> <p>Corrales, L. 2015, ApJ, 805, 23,
doi: 10.1088/0004-637X/805/1/23</p> |
|--|--|

261 Ferland, G. J., Porter, R. L., van Hoof, P. A. M., et al.

262 2013, RMxAA, 49, 137. <https://arxiv.org/abs/1302.4485>

263 Hanisch, R. J., & Biemesderfer, C. D. 1989, in BAAS, 780

264 Lamport, L. 1994, LaTeX: A Document Preparation

265 System, 2nd edn. (Addison-Wesley Professional)