


Password Capturing

Wireshark can capture not only passwords but any type of information transmitted over the network: usernames, email addresses, personal information, etc. As long as we can capture network traffic, Wireshark can sniff passing passwords.

In sniffing can include passwords for various protocols such as HTTP, FTP, Telnet, etc. the captured data can be used to troubleshoot network problems, but can also be used maliciously to gain unauthorized access to sensitive information.

So, here we will see how we can capture the password using the Wireshark network capture analyzer. and see the outputs of the following steps.

Step 1: First of all, open your Wireshark tool in your window or in Linux virtual machine. and start capturing the network. suppose I am capturing my wireless fidelity.

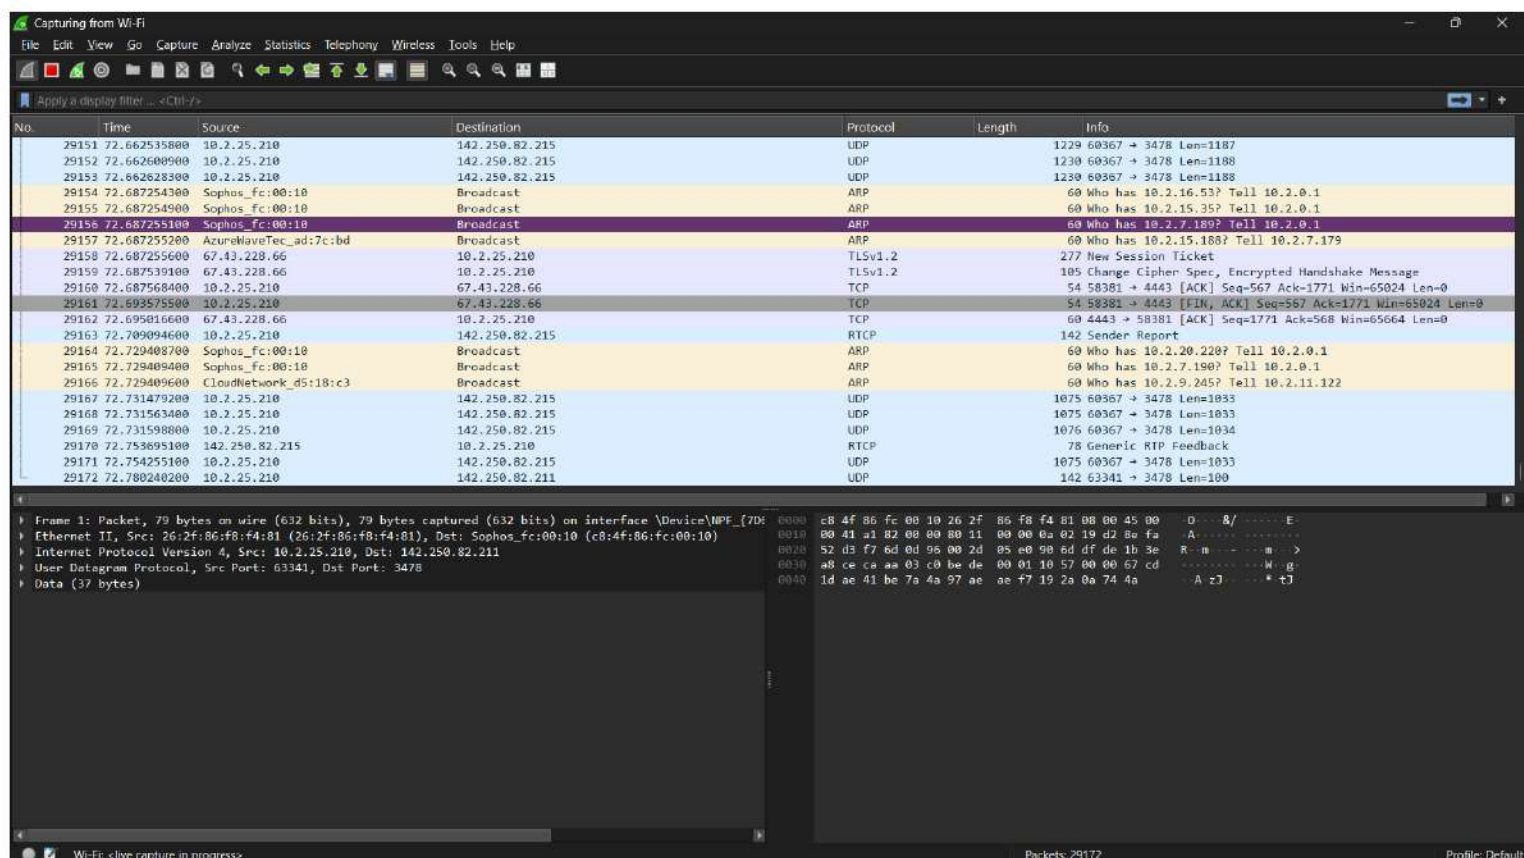


Step 2: After starting the packet capturing we will go to the website and login the credential on that website as you can see in the image.



Step 3: Now after completing the login credential we will go and capture the password in Wireshark. for that we have to use some filter that helps to find the login credential through the packet capturing.

Step 4: Wireshark has captured some packets but we specifically looking for HTTP packets. so in the display filter bar we use some command to find all the captured HTTP packets. as you can see in the below image the green bar where we apply the filter.
http

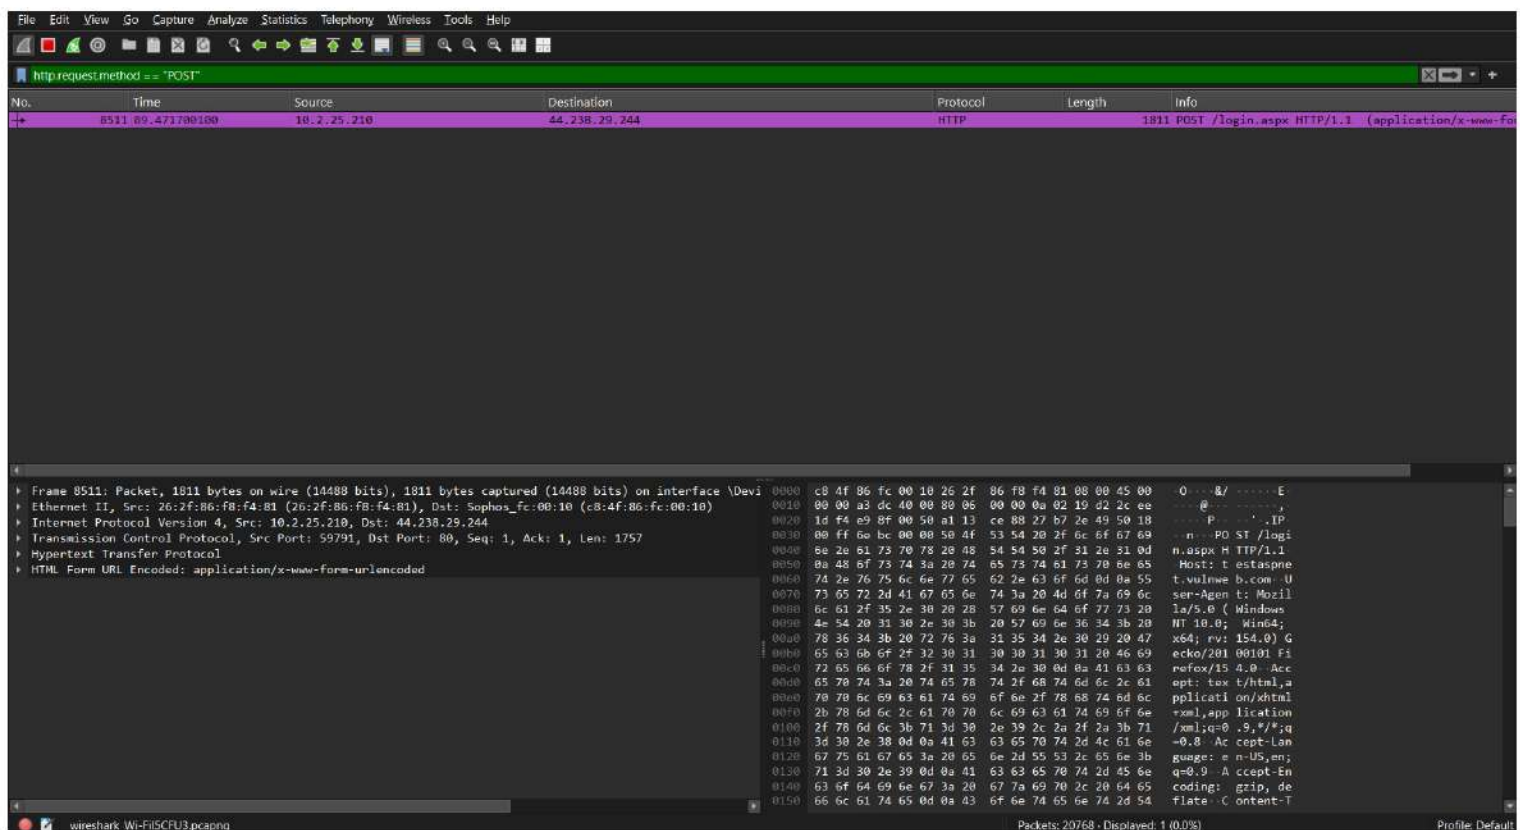


Step 5: So there are some HTTP packets are captured but we specifically looking for form data that the user submitted to the website. for that, we have a separate filter

As we know that there are main two methods used for submitting form data from web pages like login forms to the server. the methods are-

- GET
- POST

Step 6: So firstly for knowing the credential we use the first method and apply the filter for the GET methods as you can see below.

`http.request.method == "GET"`

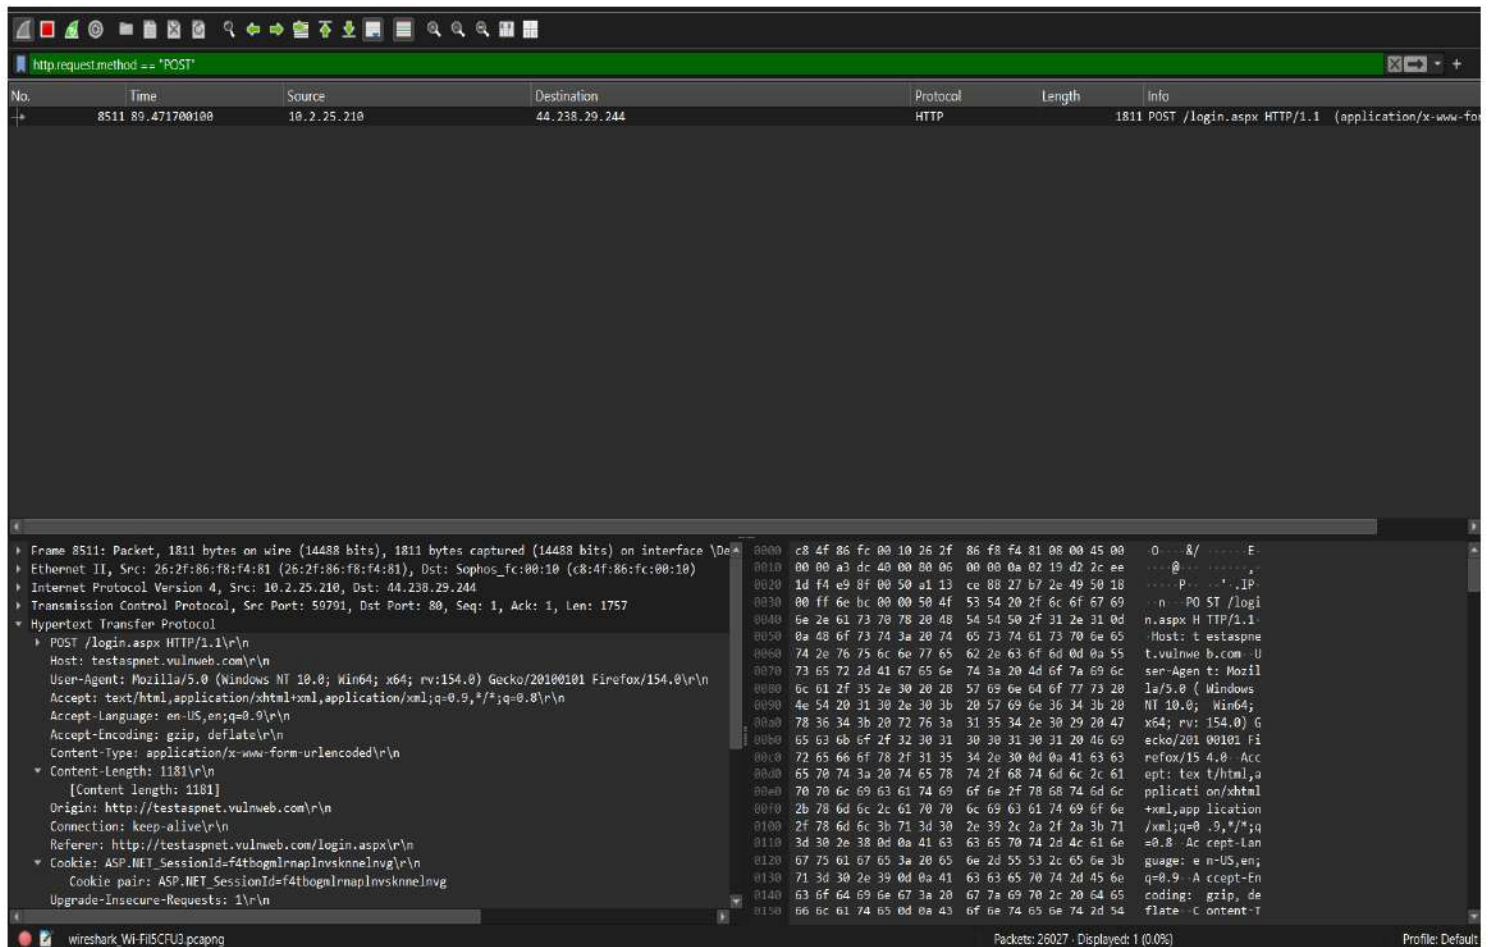

GET method

As you can see in the image there are two packets where the login page was requested with a GET request as well, but there is no form data submitted with a GET request.

Step 7: Now after checking the GET method if we didn't find the form data, then we will try the POST method for that we will apply the filter on Wireshark as you can see.

`http.request.method == "POST"`

The figure displays a Wireshark network traffic analysis. The top pane shows a single captured packet (No. 8511) at time 09.47.102100, originating from source IP 10.2.25.210 and destined for 44.239.29.244 via protocol HTTP. The middle pane details the packet's encapsulation layers: Ethernet II, Internet Protocol Version 4, Transmission Control Protocol (Port 59719), and Hypertext Transfer Protocol. The bottom pane provides a detailed view of the HTTP POST body, which is URL-encoded. The decoded form data includes fields such as username ('exp3'), event target, event generator, validation token, password ('987655'), CSRF token ('3456'), submit button name ('ok'), and the login action triggered by a Google button.

No.	Time	Source	Destination	Protocol	Length	Info
8511	09.47.102100	10.2.25.210	44.239.29.244	HTTP	1811	POST /login.aspx HTTP/1.1 (application/x-www-form-urlencoded)

```

Frame 8511: Packet, 1811 bytes on wire (14488 bits), 1811 bytes captured (14488 bits) on interface \Device\NPF_{09...}
Ethernet II, Src: 26:2f:86:ff:64:b1 (26:2f:86:ff:64:b1), Dst: Sophos_f0:e0:b0 (68:4f:86:fc:e0:b0)
Internet Protocol Version 4, Src: 10.2.25.210, Dst: 44.239.29.244
Transmission Control Protocol, Src Port: 59719, Dst Port: 80, Seq: 1, Ack: 1, Len: 1757
Hypertext Transfer Protocol
HTML Form URL Encoded: application/x-www-form-urlencoded
  > Form item: "uname" = "exp3"
  > Form item: "__EVENTTARGET" = ""
  > [Form item: "__EVENTTARGET" = "/wEPQWJkLTJyYjktZm9kaG99Kfg]mD2[022QWAgIBO2Q0B6R066E6I1IgaB6OGM0AotfoegIBO00B
  > Form item: "__EVENTSTATGENERATOR" = "02E39409"
  > [Form item: "__EVENTVALIDATION" = "/wEdAAmc/fECgIsLc6AhbSjykABllbet[IQXC!COKKKKlcAMlzjsyXKlI]0E0pL6dR
  > Form item: "btnuname" = "exp3"
  > Form item: "tbPassword" = "987655"
  > Form item: "tberpasstcode]" = "3456"
  > Form item: "btsubmit" = "ok"
  > Form item: "btngoogle" = "Login"
```

As you can see we have a packet with form data click on the packet with user info and the application URL encoded, and click on the down-

HTML form URL Encoded where the login credential is found. login credential as it is the same that we filed on the website in step 2.

Form item: "uname" = "exp3"

Form item: "pass" = "987655"